



UMTRCA Title II

Bluewater, New Mexico, Disposal Site

This fact sheet provides information about the Bluewater, New Mexico, Disposal Site. This site is managed by the U.S. Department of Energy Office of Legacy Management under Title II of the Uranium Mill Tailings Radiation Control Act of 1978.

Site Description and History

The Bluewater disposal site is in Cibola County, approximately 9 miles northwest of Grants, New Mexico. Anaconda Copper Company constructed the original carbonate-leach mill at the site in 1953 to process limestone uranium ore mined in the vicinity of the site. The mill had a production capacity of 300 tons of ore per day. An acid-leach mill was constructed in 1957 to process sandstone uranium ore from the Jackpile-Paguete mine, the largest open-pit uranium mine in North America, located north of Laguna Pueblo. The carbonate-leach mill closed in 1959, and production in the acid-leach mill was reduced for economic reasons. The acid-leach mill resumed full operations in 1967, and the capacity of the mill had increased to 6,000 tons of ore per day by 1978. Milling operations at the site ended on February 14, 1982. In 1977, the Anaconda Copper Company became a subsidiary of the Atlantic Richfield Company (ARCO).

Uranium-ore processing at the Bluewater mill produced radioactive tailings, a predominantly sandy material. The tailings were conveyed in slurry from the mill to two locations, depending on the milling method. The acid-leach tailings were segregated from the carbonate-leach tailings to prevent chemical reactions from occurring as a result of mixing acidic and basic compounds. Process water in the tailings slurry seeped into the underlying alluvial and bedrock (San Andres-Glorieta) aquifers and contaminated the groundwater; the main constituents of concern are molybdenum, selenium, and uranium.

ARCO began decommissioning the mill in 1989 and began site reclamation in 1991. By 1995, all mill tailings, contaminated soils, demolished mill structures, and contaminated vicinity property materials were encapsulated in six onsite disposal areas. These areas are the main tailings disposal cell; the carbonate tailings disposal cell; an asbestos




M:\LT5\111\0001\04\001\SO1838\SO183800.mxd JackR 6/21/2005 2:53:37 PM

Location of the Bluewater, New Mexico, Disposal Site

disposal area; a disposal area that contains a polychlorinated biphenyl (PCB) disposal cell; and two small landfills. More than 90 percent of the total tailings material is encapsulated in the main tailings disposal cell.

Regulatory Setting

Congress passed the Uranium Mill Tailings Radiation Control Act (UMTRCA) in 1978 (Public Law 95-604). The site is under the jurisdiction of Title II of UMTRCA, which applies to uranium mill sites that were under active U.S. Nuclear

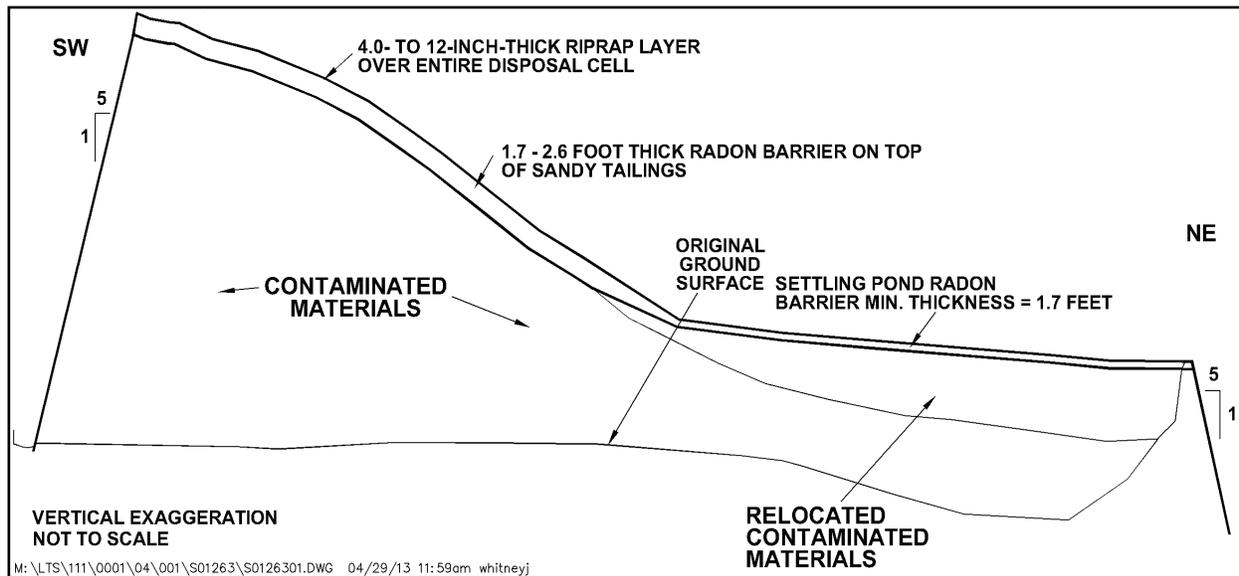

Southwest-Northeast Cross Section of the Main Tailings Disposal Cell at the Bluewater Disposal Site

Regulatory Commission (NRC) license when UMTRCA was enacted. Title II of the legislation specifies that after reclamation is completed, long-term custody of the site is the responsibility of either the federal government or the host state, at the option of the state. The State of New Mexico declined to become the long-term custodian, and the U.S. Department of Energy (DOE) assumed responsibility for the site.

Under Title II of UMTRCA, the licensee, ARCO, was responsible for remedial action. ARCO encapsulated the tailings and other materials in NRC-approved disposal cells and landfills on the site. NRC's cleanup and reclamation standards are codified in Title 10 *Code of Federal Regulations* (CFR), Part 40, Appendix A. These standards conform to U.S. Environmental Protection Agency (EPA) standards in 40 CFR 192. The site was included under the NRC general license for UMTRCA Title II sites (10 CFR 40.28) and transferred from ARCO to DOE for long-term custody in 1997.

Disposal Site

The site comprises 3,300 acres; about one-third of which (the southern and western parts) is covered by basalt flows that filled a former river valley and covered alluvial sediments that were present in the valley. The alluvial aquifer at the site is contained in the buried alluvium, which is covered by up to 130 feet of basalt. Much of the remainder of the site consists of sedimentary rock outcrops and large areas of wind-deposited fine-grained materials. The region around the disposal site is sparsely populated, and the main land use near the site is grazing. A barbed-wire perimeter fence encloses the entire site.

Compliance Strategy

Several years of active treatment by pumping contaminated groundwater from the aquifers produced no significant reduction in concentrations of molybdenum, selenium,

and uranium. In 1990, ARCO applied to NRC for alternate concentration limits (ACLs). ACLs may be adopted within specified areas when established maximum concentration limits are unattainable, providing the ACLs do not pose a present or potential future hazard to human health or the environment. NRC approved the application in 1996.

PCB-contaminated waste was discovered during reclamation of the mill. At the time of the discovery, no commercial waste disposal facility in the United States was licensed to accept radioactive waste contaminated with PCBs. These wastes were regulated under the Toxic Substances Control Act, which is under EPA's jurisdiction. ARCO proposed encapsulating the wastes onsite. After resolution of several issues, EPA agreed to issue a permit for the proposed disposal approach, provided that ARCO conducted groundwater monitoring and maintained the appropriate records. DOE concurred with the disposal subject to an indemnification agreement whereby ARCO agreed to cover future costs that may result from the PCB disposal.

The groundwater monitoring network consists of 19 wells located inside the site boundary. Samples are analyzed for PCBs, molybdenum, selenium, uranium, and other constituents.

Disposal Cell Design

The main tailings disposal cell, which includes the contiguous acid tailings and south bench disposal areas, covers about 354 acres and contains an estimated 23 million tons of tailings and other contaminated materials having a total activity of about 11,200 curies of radium-226. The cover of the main tailings disposal cell is a two-layer system designed to encapsulate and protect the contaminated materials. The cover consists of a low-permeability radon barrier (first layer placed over compacted tailings) and a rock (riprap) erosion protection layer.

The carbonate tailings disposal cell covers about 54 acres and contains an estimated 1.3 million tons of contaminated materials having a total activity of about 1,130 curies of radium-226. Layers of radon barrier material and riprap similar to those on the main disposal cell also cover the carbonate tailings disposal cell to protect the cover from erosion.

An asbestos-containing materials disposal cell covering about 2 acres is located contiguous to the south edge of the carbonate tailings cell. The materials in this cell consist of byproduct material and asbestos-containing plant building debris, and disposal was permitted by the State of New Mexico as a Special Waste. The cover consists of a layer of radon barrier material capped with a layer of soil/rock matrix that was seeded with native grasses.

Disposal Area No. 1, located south of the carbonate tailings disposal cell, covers about 11 acres and consists primarily of debris from decommissioning of the mill crushing and grading facilities and other reclamation activities. The cover consists of a layer of radon barrier material overlain by topsoil that was seeded with native grasses.

An interior cell covering less than an acre was constructed within Disposal Area No. 1 to contain the PCB-contaminated materials. These materials are sealed in 144 drums that had all internal voids filled with a soil cement mixture. The PCB cell is completely encapsulated (bottom, sides, and top) within a 3-foot-thick clay liner. Voids between the drums were also filled with a soil cement mixture to prevent subsidence. The cover of this interior cell has a layer of radon barrier material over the top clay liner, and is capped by a layer of riprap for erosion protection.

Two small landfills totaling about 2 acres are located east of the carbonate tailings disposal cell. These landfills were used during operations at the mill site to dispose of miscellaneous waste and byproduct material. Radon barrier material was placed on both landfills, and the top surfaces were covered with topsoil that was seeded with native grasses.

Legacy Management Activities

The DOE Office of Legacy Management (LM) manages the disposal site according to a site-specific Long-Term Surveillance Plan to ensure that the disposal cell systems continue to prevent release of contaminants to the environment. Under provisions of this plan, LM conducts annual inspections of the site to evaluate the condition of surface features, performs site maintenance as necessary, and monitors groundwater to verify the continued integrity of the disposal cells and to verify that contaminated groundwater does not migrate off the site.

Groundwater monitoring by LM demonstrates that contaminated groundwater in both aquifers has migrated off the site, and that this migration occurred during milling activities. Contaminants exceeding drinking water standards are uranium and selenium for the alluvial aquifer and uranium for the bedrock aquifer. Evaluation of groundwater data for the site and downgradient of the site indicates that no drinking water supply wells have contaminant concentrations above drinking water standards, and that the site-derived contamination does not pose a current or future risk for community water systems in the Grants-Bluewater valley. LM, in consultation with NRC, continues to evaluate offsite contamination to ensure safety of human health and the environment.

In accordance with 40 CFR 192.32, the disposal cells are designed to be effective for 1,000 years, to the extent reasonably achievable, and, in any case, for at least 200 years. However, the general license has no expiration date, and LM's responsibility for the safety and integrity of the site will last indefinitely.

Contacts

Site-specific documents related to the Bluewater disposal site are available on the LM website at <http://www.lm.doe.gov/bluewater/Sites.aspx>.

For more information about LM activities at the Bluewater disposal site, contact:

U.S. Department of Energy
Office of Legacy Management
2597 Legacy Way, Grand Junction, CO 81503

(970) 248-6070 (monitored continuously), or
(877) 695-5322 (toll-free)