

By acceptance of this article, the publisher or recipient acknowledges the U.S. Government's right to retain a nonexclusive, royalty-free license in and to any copyright covering the article.

NY 02-5

WASH-

RADIOLOGICAL SURVEY OF THE SEAWAY INDUSTRIAL PARK

W. D. Cottrell, R. W. Leggett and H. W. Dickson
Health Physics Division, Oak Ridge National Laboratory
Oak Ridge, Tennessee 37830

December 1976

CONTENTS

	<u>Page</u>
List of Tables	iv
List of Illustrations	v
Abstract	1
Introduction	1
Radiological Survey Techniques	3
Measurement of External Gamma and Beta-Gamma Radiation Levels	3
Measurement of Radium in the Soil	3
Measurement of Radioactivity in Surface Water	4
Survey Results	4
External Gamma and Beta-Gamma Radiation Levels	4
Results of Water and Mud Sample Analyses	5
Radium Concentrations in the Soil	6
Radon Emanation	7
Summary	9
References	11
Appendix I	33
Appendix II	39
Appendix III	45

LIST OF TABLES

1. Results of Water Sample Analyses
2. Radium Concentrations in the Soil
3. Concentrations of ^{238}U , ^{232}Th , ^{227}Ac and ^{40}K in Selected Samples

LIST OF ILLUSTRATIONS

1. Points on Area of Known Contamination at which Measurements were Taken (Area A)
2. Points on Area of Known Contamination at which Measurements were Taken (Areas B and C)
3. Locations and Radium Concentrations of Mud Samples
4. Locations of Water and Mud Samples
5. External Gamma Radiation Levels (in $\mu\text{R/hr}$) at 1 Meter above Surface (Area A)
6. External Gamma Radiation Levels (in $\mu\text{R/hr}$) 1 Meter above Surface (Areas B and C)
7. Areas of Elevated External Gamma Radiation
8. External Gamma Radiation Readings (in $\mu\text{R/hr}$) on 400-foot Grid
9. Beta-Gamma Readings at Surface (in $\mu\text{rad/hr}$)
10. External Gamma Radiation (in $\mu\text{R/hr}$) at the Surface on Area A
11. External Gamma Radiation Levels (in $\mu\text{R/hr}$) at the Surface on Areas B and C
12. Radium Concentrations Estimated from Loggings and Soil Sample Analyses (Area A)
13. Radium Concentrations Estimated from Loggings and Soil Sample Analyses (Areas B and C)
14. Relationship of Radium Concentration and Radon Emanation
15. Aerial Photograph of Seaway and Surrounding Area

RADIOLOGICAL SURVEY OF THE SEAWAY INDUSTRIAL PARK

W. D. Cottrell, R. W. Leggett and H. W. Dickson

ABSTRACT

The results of a radiological survey of the Seaway Industrial Park, Tonawanda, New York, are presented in this report. The site is adjacent to the former Haist property, which was used to receive residues from uranium processing during the period 1944-46. In 1974 approximately 6000 cubic yards of this residue was transported to Seaway, where it was used as land-fill. The survey was undertaken to determine the extent of the radiation on the Seaway property, as well as the extent of movement of radioactive residues by natural means such as surface run-off. The survey included measurement of: external gamma radiation on and near the site; beta-gamma radiation at the surface in the most contaminated areas; radium and uranium concentrations in the soil; concentrations of radium, uranium, and thorium in water samples collected from the drainage areas; and radium concentrations in mud samples taken from the drainage areas. The results indicate that the residues on the site do not pose any immediate health hazards. However, potential health hazards could result from some uses of the site. In particular, if buildings were to be built in certain areas on the site, significant concentrations of radon daughters could develop in the buildings.

INTRODUCTION

At the request of the Energy Research and Development Administration (ERDA), Oak Ridge Operations, a radiological survey was conducted in Tonawanda, New York, at the Seaway Industrial Park. Seaway is adjacent to the former Haist property, which was used to receive residue from uranium processing during the period 1944-1946. In 1974, approximately 6000 cubic yards of the residue, comprised essentially of low-grade uranium ore tailings, was excavated by Ashland Oil, Inc., the present owner of the former Haist property, and transported to the Seaway property. This residue now covers most of a 12-acre section of Seaway to a depth of less than 2 feet in most

places. The present survey was undertaken to determine the extent of the radiation on the Seaway property as well as the extent of the movement of radioactive residue from the property via natural means such as drainage.

The Seaway Industrial Park* covers approximately 100 acres, most of which has been used as a landfill for several years. It is located in a large industrial area and is several hundred yards from the nearest dwellings. Surface run-off from the property drains northward through an industrial zone and into the Niagara River at a point about a mile from Seaway. Normally surface run-off from the former Haist property also drains across Seaway and into the Niagara River. However, at present that run-off accumulates in a low area on Seaway, because drainage is impeded by culvert construction which has been left incomplete.

The radiological survey of the Seaway Industrial Park was conducted by three members of the Health Physics Division, Oak Ridge National Laboratory, during the period August 6-13, 1976. The survey consisted of (1) measurement of external gamma radiation at one meter above the surface on an approximate 400-foot grid covering the entire property; (2) measurement of external gamma radiation at the surface and at one meter above the surface on an approximate 100-foot grid in the region of known contamination; (3) measurement of beta-gamma contamination levels at the surface on the same grid; (4) measurement of gamma radiation at various depths in core holes dug throughout the region of known contamination; (5) collection of soil samples from some of the core holes for measurement of radium concentrations from all samples and for measurement of uranium and certain daughter products from selected samples; and (6) collection of water and mud samples along the drainage paths between the property and the Niagara River.

* A site description is given in Appendix IV.

RADIOLOGICAL SURVEY TECHNIQUES

Measurement of External Gamma and Beta-Gamma Radiation Levels

External gamma radiation levels were measured with scintillation survey meters which are described in Appendix I. Measurements were taken at the surface and at one meter above the surface ^{at} ~~on an~~ approximate 100-foot ^{intervals on a} grid in the region of known contamination, which is included in the areas A, B, and C shown in Figs. 1, 2, and 3. Beta-gamma surface readings were made on the 100-foot grid on area A using a Geiger-Muller survey meter (described in Appendix I).

Scintillation and Geiger-Muller survey meter measurements are indicative of the instantaneous exposure rate at the point of measurement. Errors result from the sensitivity of the instruments and from the fact that calibration of the instruments is performed under conditions which are not equivalent to all conditions encountered in the field. Hence, errors of $\pm 30\%$ or more are possible for individual readings.

Measurement of Radium in the Soil

Holes were drilled with a motorized drilling rig to depths of 6-12 feet at locations shown in Figs. 1 and 2. An auger with a 5-inch inside diameter was used for the drilling. Gamma radiation was measured at various depths in the core holes by lowering a scintillation probe inside the auger. This "logging" of the core holes was done as a first step in determining the depth of contamination in the soil.

Soil samples were collected, using a split-spoon sampler, at 60 of the locations shown in Figs. 1 and 2. In addition to random samples taken throughout the site, extra samples were collected in areas which were thought to have the most contaminated soils. The samples were packaged in plastic bags or bottles before being transported to Oak Ridge. The samples were then transported to the Bendix Field Engineering Corporation in Grand Junction, Colorado, where they were dried for 24 hours at 110°C and then pulverized to a particle

size of -35 mesh (500 μm). The samples were then returned to Oak Ridge where aliquots from each sample were transferred to plastic petri dishes, weighed, and counted using a Ge(Li) detector. The spectra obtained were analyzed by computer techniques. A description of the Ge(Li) detector and the soil counting techniques is given in Appendix II. Radium concentrations were determined for all the samples; in addition, ^{238}U , ^{232}Th , ^{227}Ac , and ^{40}K concentrations were determined for selected samples. Mud samples collected along the drainage area ^(see Fig 4) were treated as normal soil samples and were analyzed for radium content.

Measurement of Radioactivity in Surface Water

Water samples were collected from the drainage areas for determination of radium, uranium, and thorium content. These samples were taken at the locations shown in Fig. 4. The samples were counted at ORNL using radiochemical techniques.

SURVEY RESULTS

The radioactive residues had been placed in the areas A, B, and C indicated in Fig. 3. Apparently most of the residue was dumped in area A where it was spread and used as landfill. Areas B and C contained, for the most part, only small isolated piles of residue. There has been some erosion, principally from area A toward the north and northeast.

External Gamma and Beta-Gamma Radiation Levels

The average of external gamma radiation readings taken at one meter above the surface on the area of known contamination was about 36 $\mu\text{R/hr}$, with readings varying between 8 and 80 $\mu\text{R/hr}$ (see Figs. 5 and 6). Areas with highest external gamma radiation levels are shown in Fig. 7. Measurements made at 200-400 foot intervals on the remainder of the property are given in Fig. 8. Except for some drainage areas and a small region near the boundary of the former Haist property, external gamma radiation levels on the

part of the site excluding areas A, B, and C were in the range of 8-14 $\mu\text{R/hr}$, which is near the background level for the Tonawanda area.*

Continuous exposure to the highest external gamma radiation levels measured (80 $\mu\text{R/hr}$) would result in an integrated dose equivalent of approximately 670 mrem/yr. Exposure of 40 hours per week to an incremental exposure of 25 $\mu\text{R/hr}$ (the average external gamma radiation on areas A, B, and C minus the average background level for the area) would result in an integrated dose equivalent of approximately 50 mrem/yr. This is about half of the integrated dose equivalent which one receives over the period of a year from natural background external gamma radiation (assuming that background levels average 11-12 $\mu\text{R/hr}$).

Beta-gamma readings taken at the surface on area A are shown in Fig. 9. The distribution of the readings closely parallels the distribution of the external gamma radiation readings. Measurements averaged about 50 $\mu\text{rad/hr}$, with readings varying between 15 and 143 $\mu\text{rad/hr}$. The external gamma radiation measurements at the surface on area A (Fig. 10) averaged about 42 $\mu\text{R/hr}$, and the average of the external gamma radiation readings taken at the surface on areas B and C (Fig. 11) was approximately 37 $\mu\text{R/hr}$.

Results of Water and Mud Samples Analyses

The concentrations of radium in mud samples taken from the drainage paths leading from Ashland and Seaway to the Niagara River are given in Fig. 3. The highest concentration of radium, 26.4 pCi/g, was found on the Seaway property just north of area A. The radium concentration in a sample taken from point D (Fig. 3), about 500 meters north of area A, was 8.3 pCi/g. Point D is the intersection of two drains, one leading from area A on Seaway and the other leading from the former Haist Property. The low concentrations of radium found along the drain between D and the former Haist property suggest that most of the

* Background levels were measured in the Tonawanda area at locations distant enough from the residues to be uninfluenced by them. All background readings were near 11 $\mu\text{R/hr}$.

radium at point D had been carried from the residue on Seaway. At point E, about 800 meters north of point D along a drain leading to the Niagara River, the radium concentration in the mud was found to be less than 2 pCi/g.

The concentrations of uranium, radium, and thorium in water samples from Ashland and Seaway and from drainage paths leading to the Niagara River are given in Table 1, which also shows the maximum permissible concentrations (MPC's) in water for each isotope considered. Locations at which the samples were collected are shown in Fig. 4. In every water sample, the concentration of each isotope measured was several orders of magnitude below the MPC_w. ←

Radium Concentrations in the Soil

Concentrations of radium in soil samples collected on the site are given in Table 2; locations are shown in Figs. 1 and 2. A combination of soil sample analyses and scintillation probe "loggings" was used as shown in Figs. 12 and 13 to indicate the extent of the radium in the soil in areas A, B, and C. (The estimation of radium concentrations from scintillation probe readings is explained in Appendix III.) The notation $u(v-w)$ in Figs. 12 and 13 indicates an average of u pCi/g radium from a depth of v feet to a depth of w feet.

In most parts of areas A, B, and C the contaminated soil extends from the surface to a depth of 0.5-2.0 feet. The average of the radium concentrations in soil samples taken at a depth of 0-1 foot was about 15 pCi/g, and the average for depths of 1-2 feet was about 8 pCi/g. The highest concentration of radium found was 92.5 pCi/g in a sample taken from a small residue pile in area B.

Locations 81 and 82 are in an area containing some sediment which has eroded from area A. Samples from these locations showed radium concentrations as high as 40 pCi/g.

Concentrations of ^{238}U , ^{232}Th , ^{227}Ac , and ^{40}K found in randomly selected soil samples are listed in Table 3. The highest concentration of ^{238}U found in these samples was 62.6 pCi/g.

Radon Emanation

The average radon emanation at the surface can be estimated using Fig. 14 for an area in which the average radium concentration in the soil is known. As an illustration, the radon emanation from area A is estimated. Over most of this area, soil samples and scintillation probe readings indicated low concentrations of radium in the soil at depths of more than 3 feet. The average radium concentration at 0-1 foot was about 14 pCi/g, the average at 1-2 feet was about 8 pCi/g, and the average at 2-3 feet was about 4 pCi/g. The radon emanation rate would be higher if all radium at depths of 1-3 feet were at depths of 1-2 feet. Hence, a conservative estimate for the average radon emanation from area A can be obtained by estimating the radon emanation from 2 feet of tailings with a radium concentration of about 14 pCi/g. It is estimated (using Fig. 14) that radon would emanate at a rate of about 5 pCi/m² per second if the conservative assumption is made that the tailings are dry for most of the year.

At location 80P the average radium concentration at a depth of 0-2 feet was about 80 pCi/g. Hence, radon emanations at that point would be expected to be 25 pCi/m² per second or more, assuming dry conditions.

Figure 14 is based on a differential equation which describes the diffusion of radioactive gases through soils (see, for example, ref. 1). Hence, ideal conditions are assumed. Furthermore, errors are introduced in assumptions regarding soil type, moisture content,⁽²⁾ uniformity of radium in the soil, and uniformity of the depth of contamination. Estimates for individual locations may be in error by a factor of 5 or more; however, the average of estimates for several locations is expected to reflect the actual annual average within a factor of 2.

The residues deposited on areas B and C are much more unevenly distributed than residues in area A. However, since the average of radium concentrations in samples taken from B and C is less than twice the average for A and since the average depth of the residue would probably be less than 2 feet if the residue

were uniformly distributed, it is reasonable to assume that the average radon emanation rate from B and C is no more than twice the average emanation rate from A. Integrating the radon emanation function ($5 \text{ pCi/m}^2\text{-s}$ for A and $10 \text{ pCi/m}^2\text{-s}$ for B and C) over A, B, and C and dividing by the total area ($4.8 \times 10^4 \text{ m}^2$) yields an estimated average radon emanation rate of less than 6 pCi/m^2 per second for areas A, B, and C. This is roughly 14 times the average world-wide radon emanation rate which is reported to be 0.43 pCi/m^2 per second.⁽³⁾

The radon concentration C in the first story of a building which is built on contaminated soil can be estimated from the equation

$$C = \frac{J}{(\lambda_R + \lambda_V) h}$$

where J is the emanation rate of the radon from the soil, h is the height of the ceiling, $\lambda_R = 2.1 \times 10^{-6} \text{ s}^{-1}$ (the radioactive decay constant for radon), and λ_V is the air exchange rate in the building. It is assumed in the equation that the floor is not a barrier to radon. For floors which act as barriers, the value of J should be adjusted accordingly. If we assume that the emanation rate J is 6 pCi/m^2 per second (the estimated average for the contaminated area), that $h = 3 \text{ m}$, and that there is one air exchange per hour in the building, then

$$C = \frac{6 \text{ pCi/m}^2\text{-s}}{(2.1 \times 10^{-6} \text{ s}^{-1} + 2.8 \times 10^{-4} \text{ s}^{-1}) 3 \text{ m}}$$

$$\cong 7.1 \times 10^3 \text{ pCi/m}^3 \cong 7 \text{ pCi/l.}$$

At the rate of one air exchange per hour, 1.0 pCi/l of radon would produce a radon-daughter concentration of approximately 0.005 WL^* at steady-state conditions,

assuming 56% equilibrium

* A working level (WL) is defined as any combination of radon daughters in one liter of air that will result in the ultimate emission of $1.3 \times 10^5 \text{ MeV}$ of alpha particle energy.

Hence, a radon emanation rate of 6 pCi/m^2 per second might lead to a radon-daughter concentration of about 0.04 WL . The maximum emanation rates on the site were estimated to be 25 pCi/m^2 per second or more, assuming that the tailings were dry. If dwellings were to be constructed in the areas of highest radon emanation, radon-daughter concentrations of 0.15 WL or greater could occur in these structures.

SUMMARY

Most of the radioactive residue on the Seaway property was spread over a 10-acre tract (area A) and extended from the surface to a depth of 0.5–2.0 feet in most places. In addition, there were several small isolated residue piles contained in a 2-acre region (areas B and C). The average radium concentration in soil samples taken from area A was about 10 pCi/g , and the average concentration in samples taken from B and C was about 18 pCi/g .

Mud samples taken from the drainage paths between the site and the Niagara River showed radium concentrations as high as 26.4 pCi/g . One soil sample taken from a low area on Seaway about 200 feet north of area A had a radium concentration of 40 pCi/g . Hence, it appears that the radioactive residue is being scattered somewhat by surface run-off, particularly from area A, which is at a much higher elevation than areas B and C.

Water samples taken on the site and in drainage paths leading from Seaway and the former Haist property to the Niagara River showed only small amounts of uranium, thorium, and radium. In every sample, the concentration of each isotope tested was well below the MPC_w for that isotope.

External gamma radiation levels on areas A, B, and C averaged about $36 \text{ } \mu\text{R/hr}$, with readings varying between 8 and $80 \text{ } \mu\text{R/hr}$. Except for a small drainage area near area A and a small region near the boundary of the former Haist property, external gamma radiation levels on the part of the site excluding areas A, B, and C were in the range of $8\text{--}14 \text{ } \mu\text{R/hr}$, which is near the background level for the Tonawanda area. Exposure of 40 hours per week to external gamma radiation of $25 \text{ } \mu\text{R/hr}$ (the average reading in areas A, B, and C minus the

the average background level) would lead to an integrated dose equivalent of approximately 50 mrem/yr. This is roughly half of the dose equivalent which one receives over the period of a year from natural background radiation.

The average radon emanation from the contaminated area is probably less than 14 times the average world-wide background level, and the contamination covers less than 13 acres. Hence, the radon emanation from the contaminated area is probably less than the radon emanation from 180 acres of land at average background levels. Since the site is in an industrial area, the population density surrounding the site is very low, and thus there are few people at risk. Hence, it appears that there are no distinct health hazards which result from atmospheric transport of radon from the site.

Potential health hazards could result from some uses of the site and the residues. Continuous exposure to the highest external gamma radiation levels measured would result in an integrated dose equivalent of approximately 670 mrem/yr. (The maximum allowable exposure to any individual in an unrestricted area is 500 mrem/yr.⁽⁴⁾) If a building were to be constructed in certain areas on the site, radon-daughter levels of 0.15 WL or higher could develop in the building; this would exceed the Surgeon General's guidelines for dwellings constructed on or with uranium mill tailings.⁽⁵⁾ If vegetables were grown in soil with radium concentrations of 90 pCi/g (the highest radium concentration measured), an individual eating 300 grams of these vegetables per day for a year would realize a dose commitment of roughly 1 rem to the bone and 750 mrem to the whole body.

ACKNOWLEDGEMENT

The authors wish to thank W. F. Fox and D. L. Anderson for their excellent technical assistance.

Document published as part of this report
LP-10-10-10-10-10

REFERENCES

1. M. V. J. Culot, H. G. Olson, and K. J. Schiager, Radon Progeny Control in Buildings, COO-2273-1, Colorado State University, Fort Collins, Colorado (May 1973).
2. J. A. Auxier, "Respiratory Exposure in Buildings Due to Radon Progeny," Health Phys. 31, 119-125 (1976).
3. M. H. Wilkening, W. E. Clements, and D. Stanley, "Radon 222 Flux Measurements in Widely Separated Regions," The Natural Radiation Environment II, CONF-720805-P2, pp. 717-730 (1972).
4. Standards for Protection Against Radiation, U. S. Code of Federal Regulations, Title 10, Part 20 (April 30, 1975).
5. Surgeon General's Report, Appendix A, Preliminary Findings, Radon Daughter Levels in Structures Constructed in Reclaimed Fluoride Phosphate Land, Office of Radiation Programs, U. S. Environmental Protection Agency (September 1975).

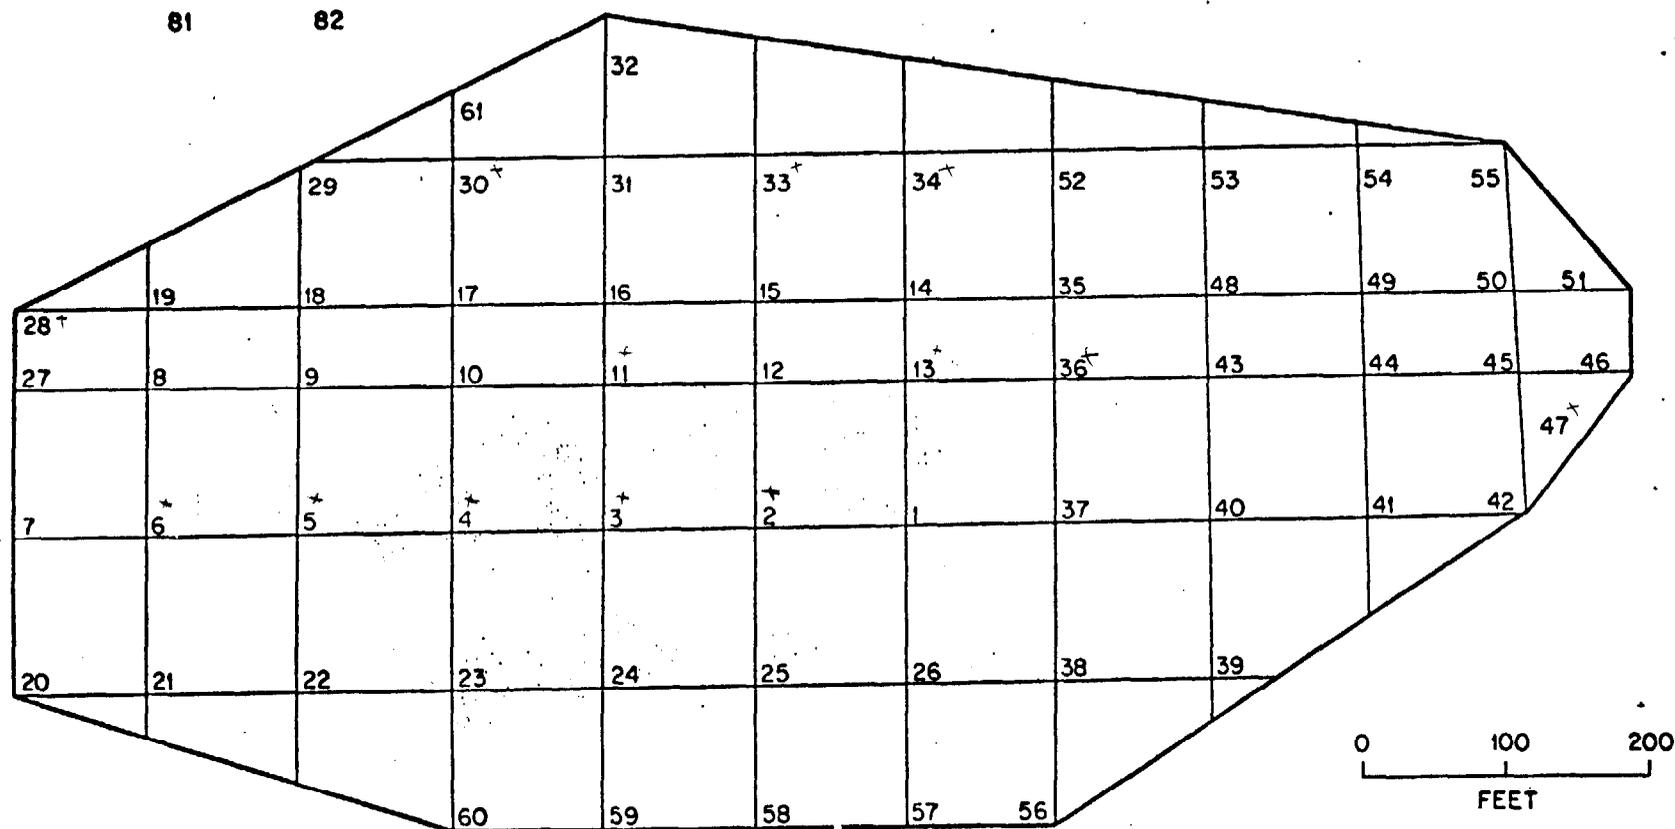


Figure 1. Points on Area of Known Contamination at which Measurements Were Taken (Area A).

ORNL-DWG 76-19879

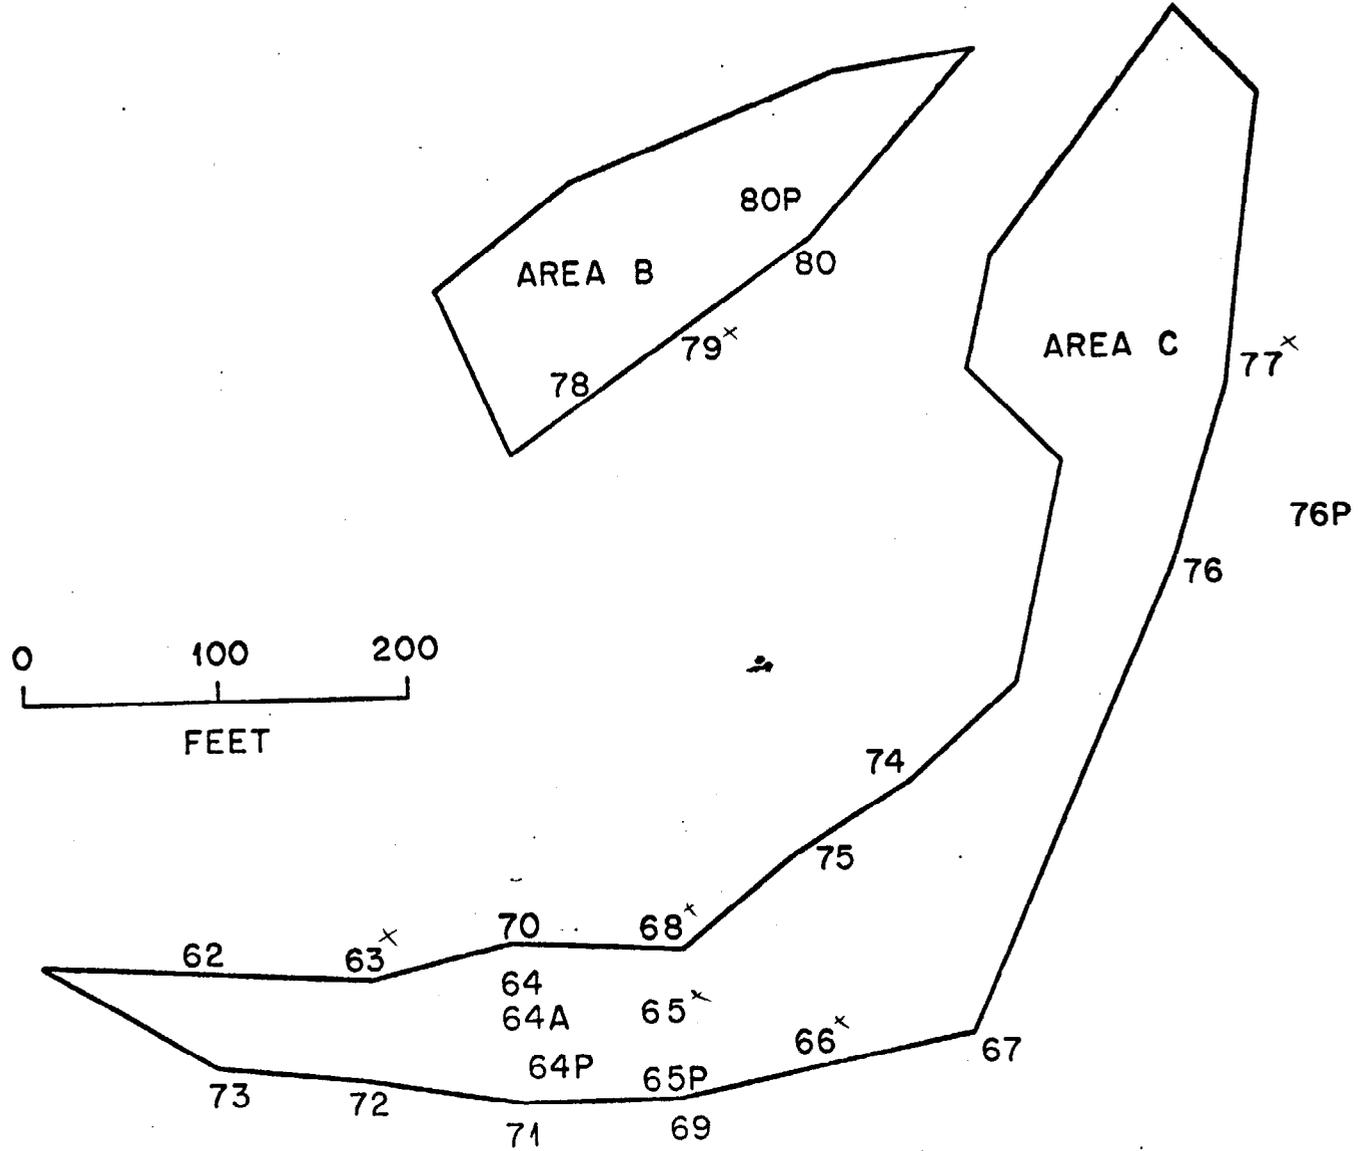


Figure 2. Points on Area of Known Contamination at which Measurements Were Taken (Areas B and C).


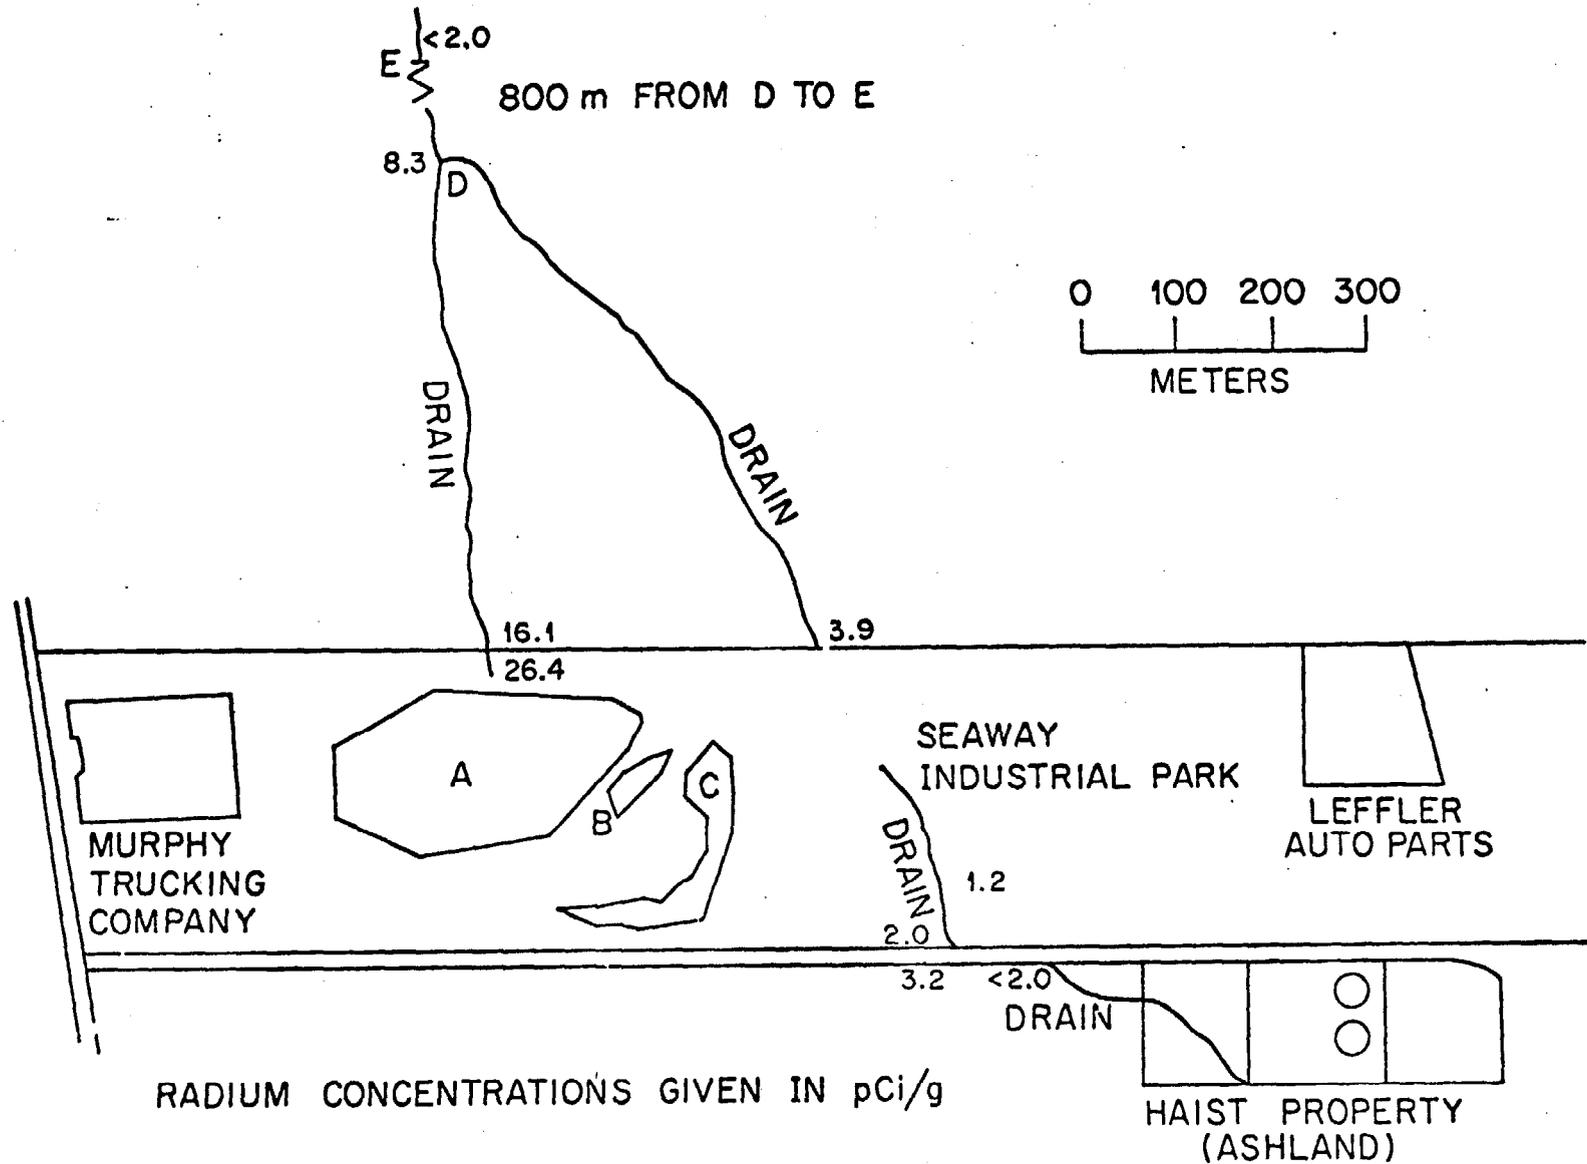


Figure 3. Locations and Radium Concentrations of Mud Samples.

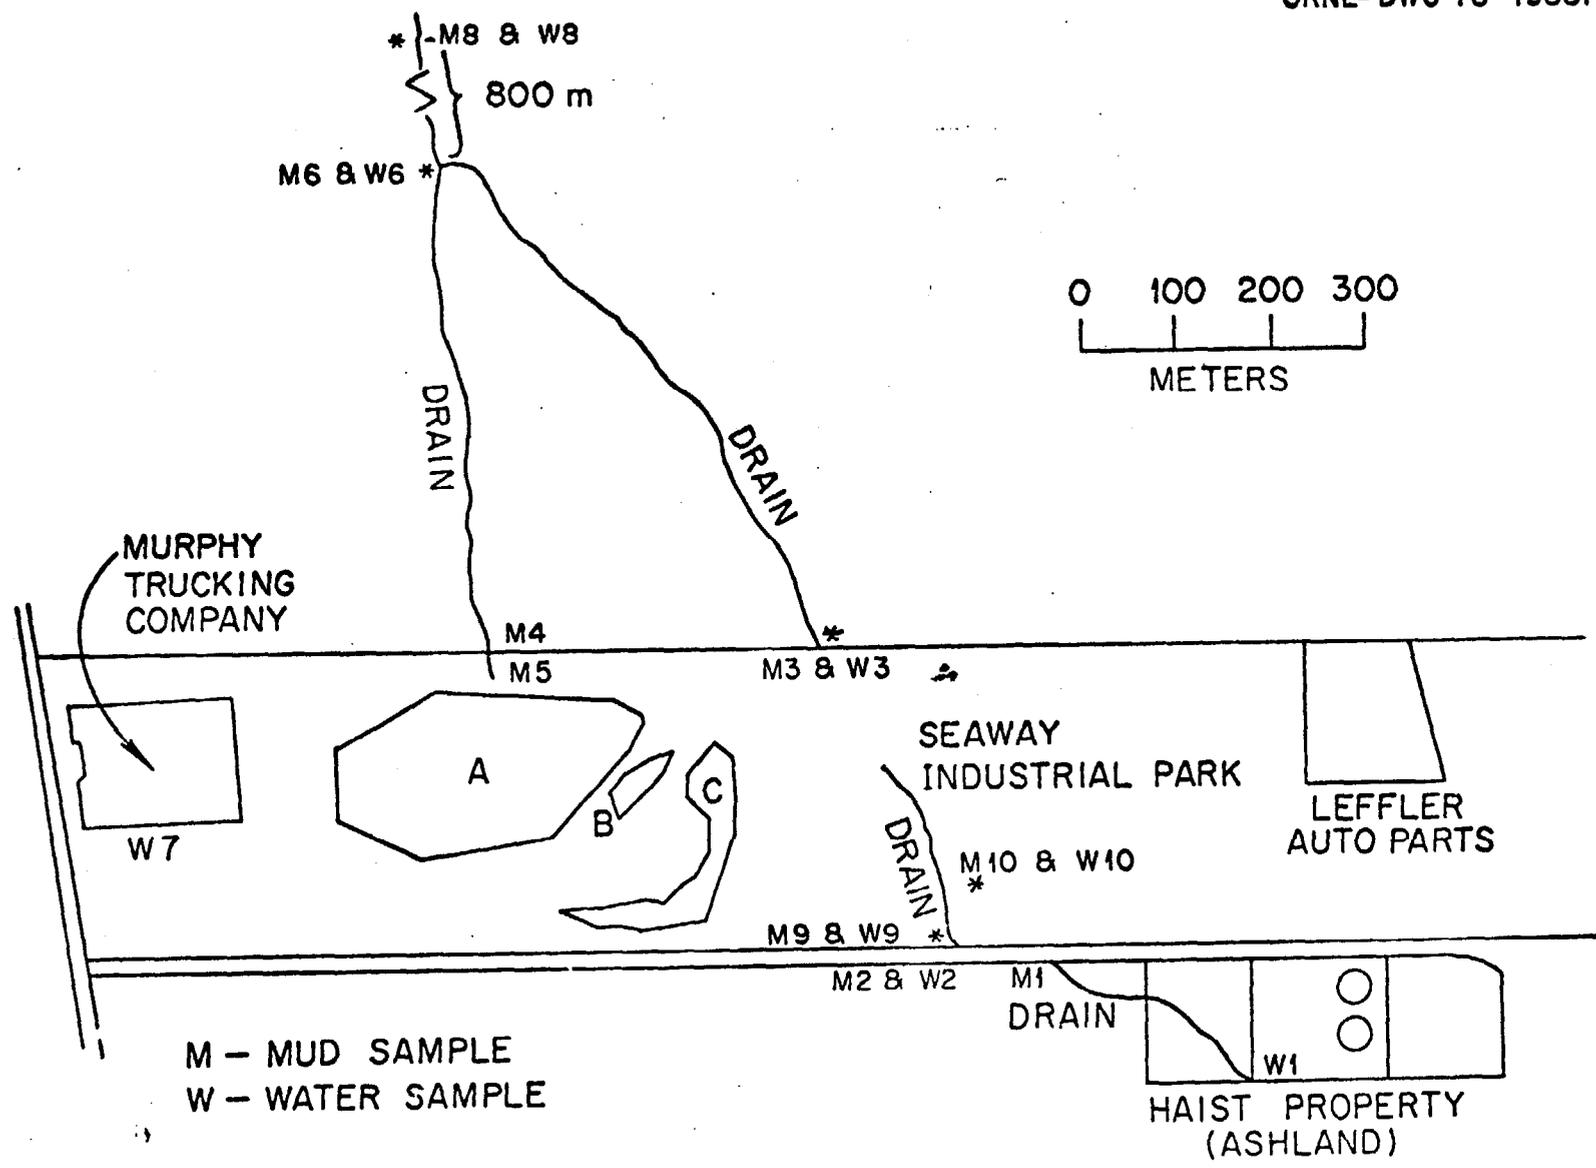

M - MUD SAMPLE
W - WATER SAMPLE

Locations of Water and Mud Samples.

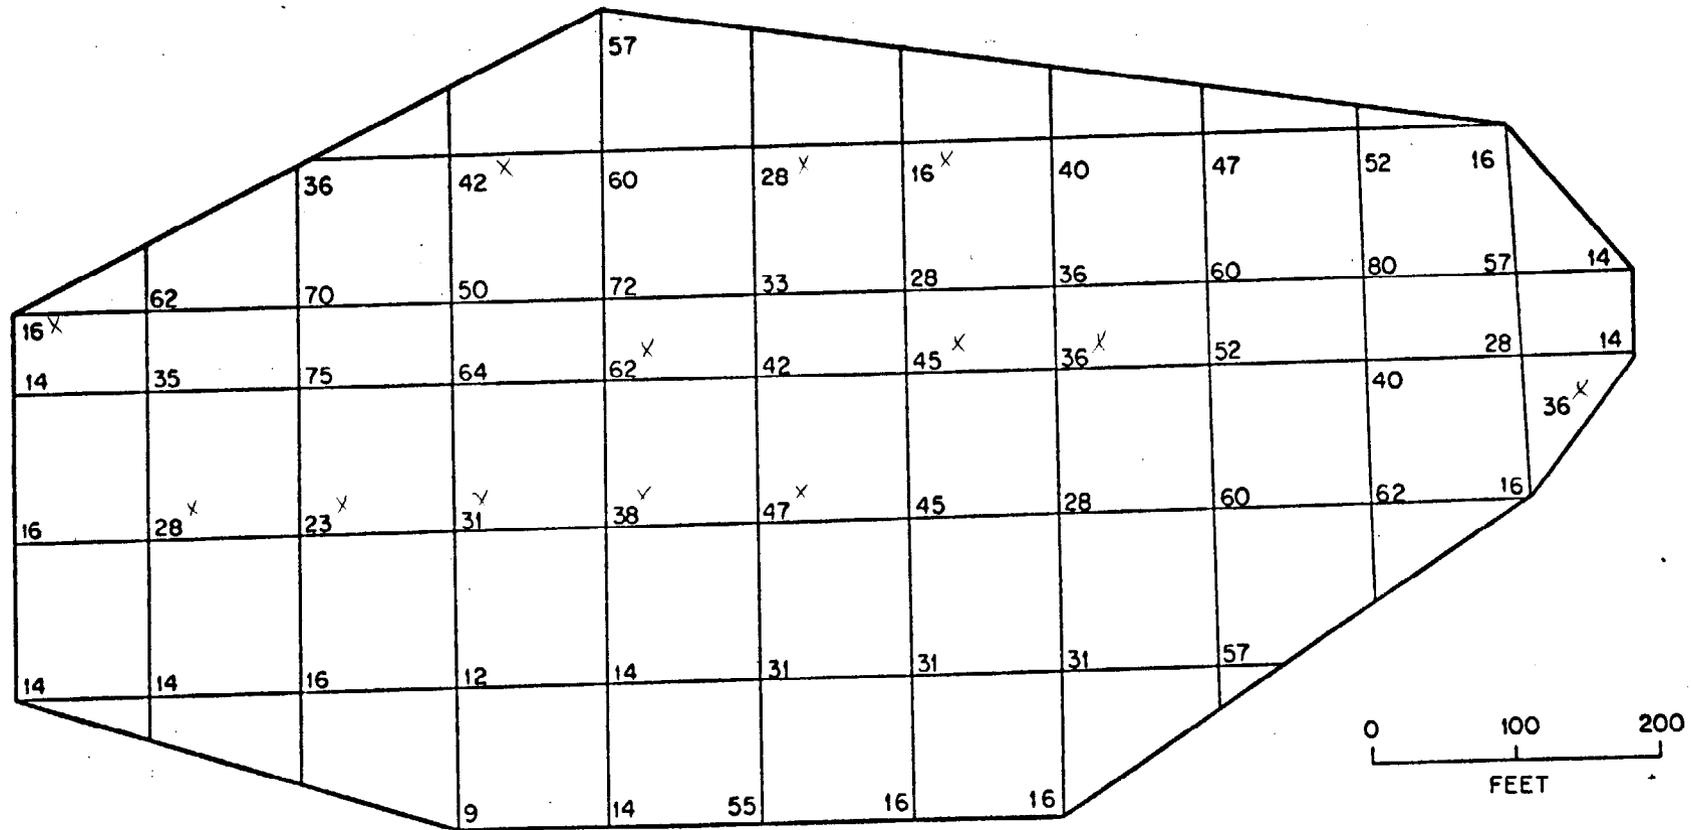


Figure 5. External Gamma Radiation Levels (in $\mu\text{R/hr}$) at 1 Meter Above Surface (Area A)

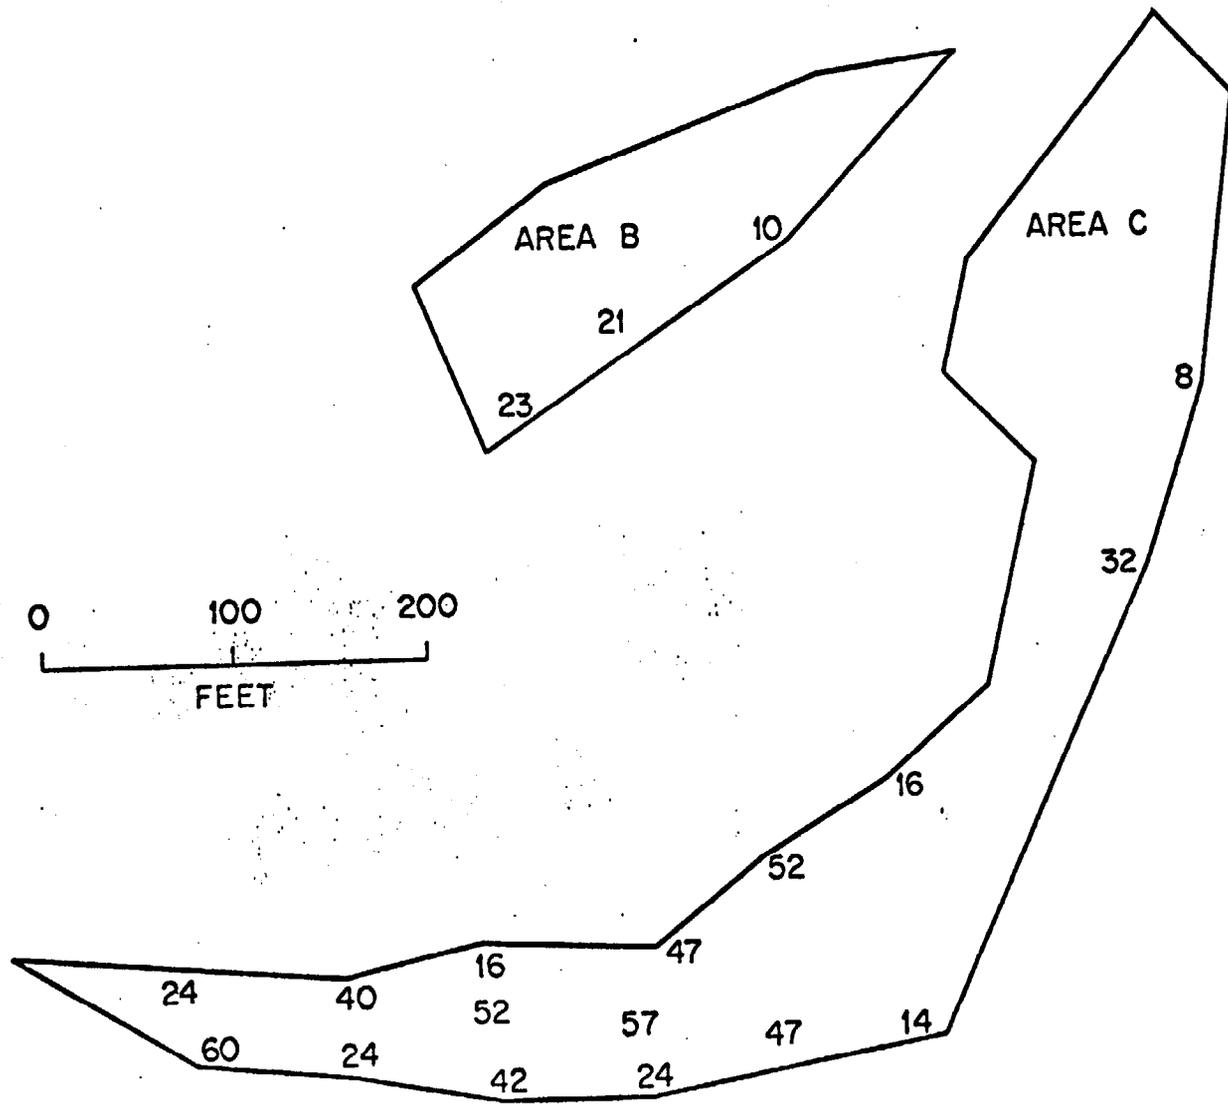


Figure 6. External Gamma Radiation Levels (in $\mu\text{R/hr}$), 1 Meter Above Surface (Areas B and C).


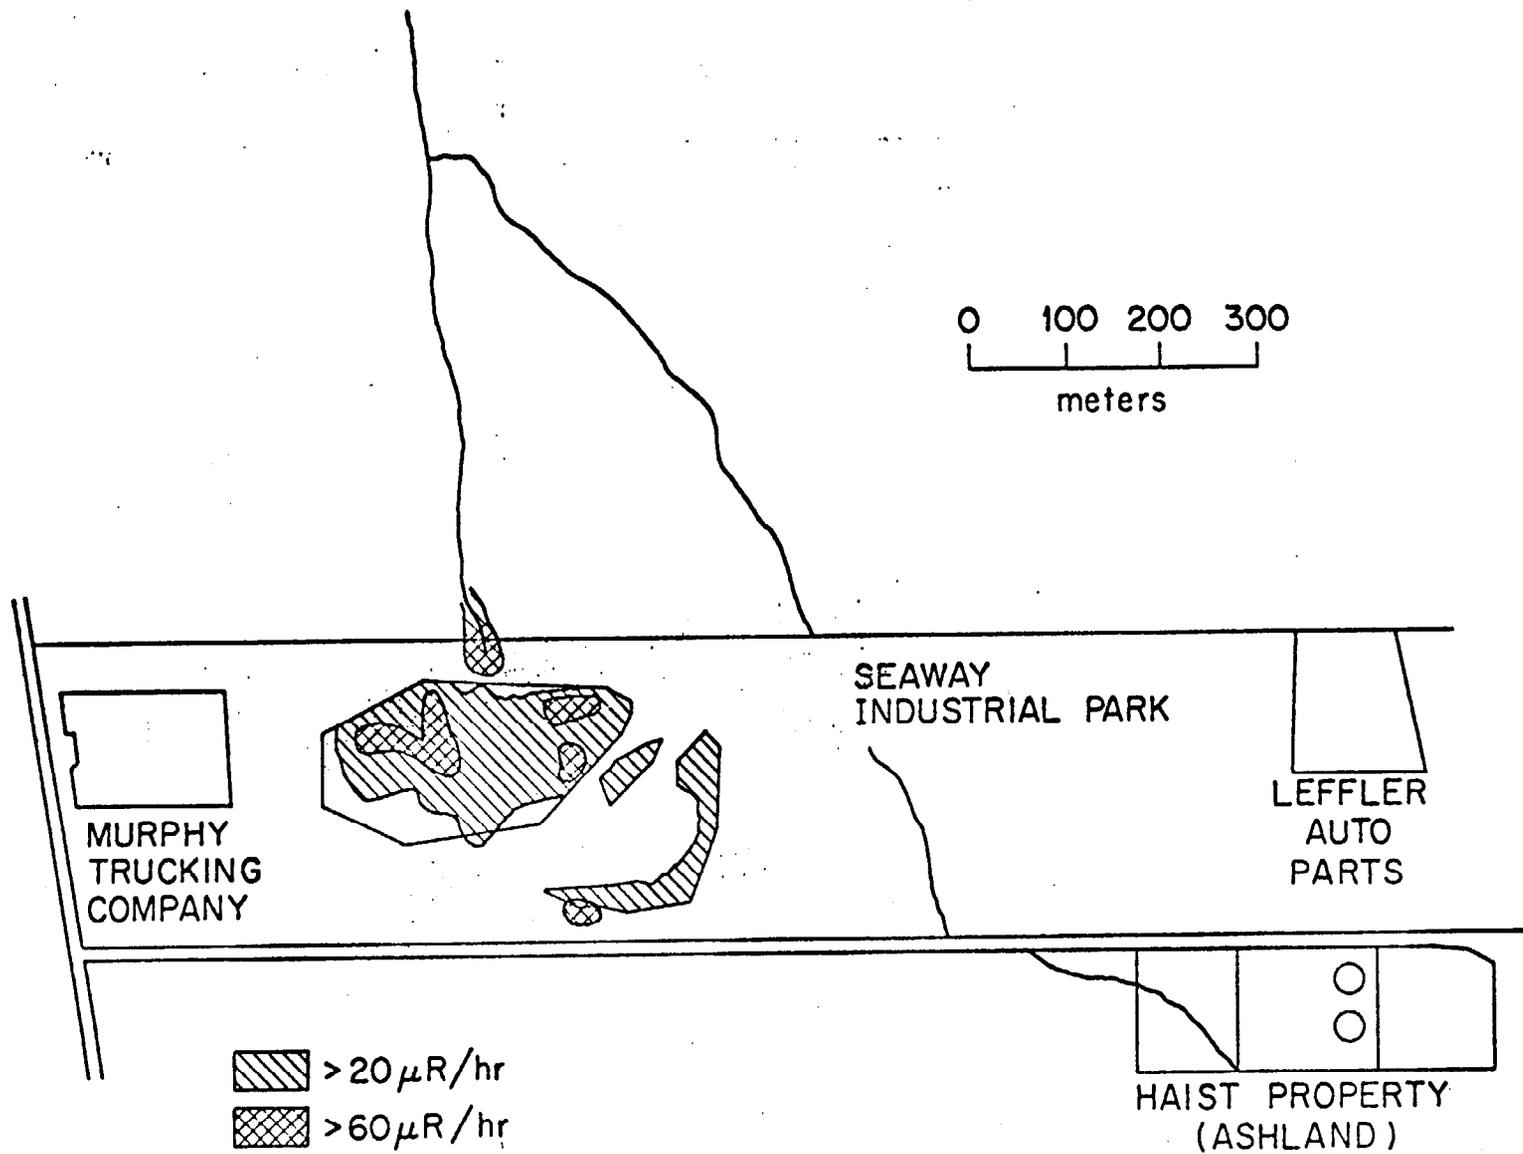


Fig. 1. Areas of Elevated External Gamma Radiation

ORNL-DWG 76-19889

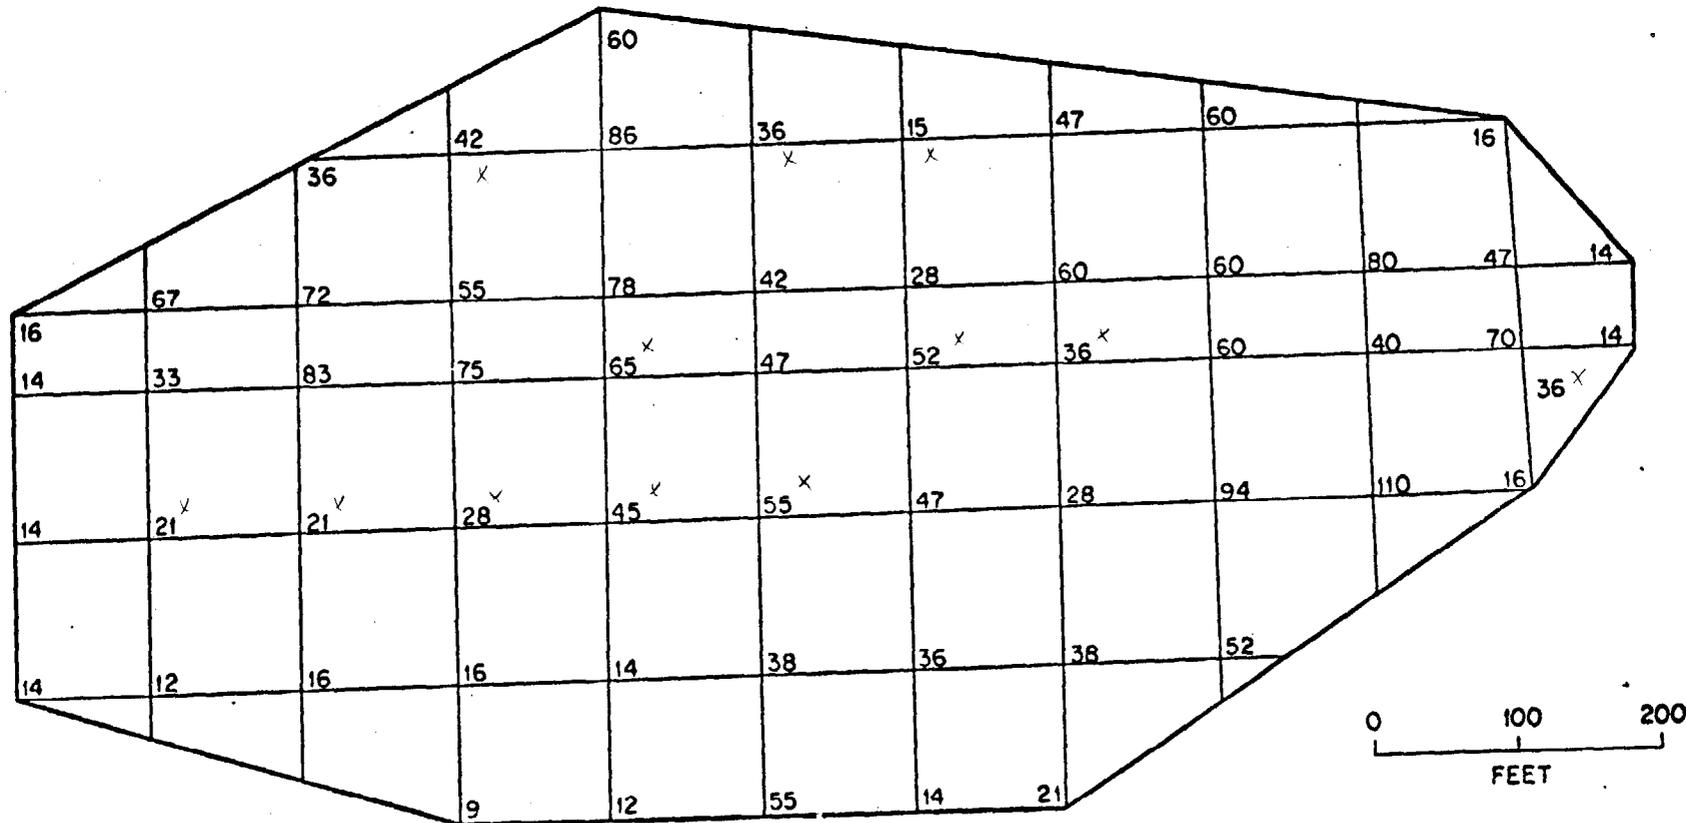

External Gamma Radiation (in uR/hr) at the Surface on Area A.

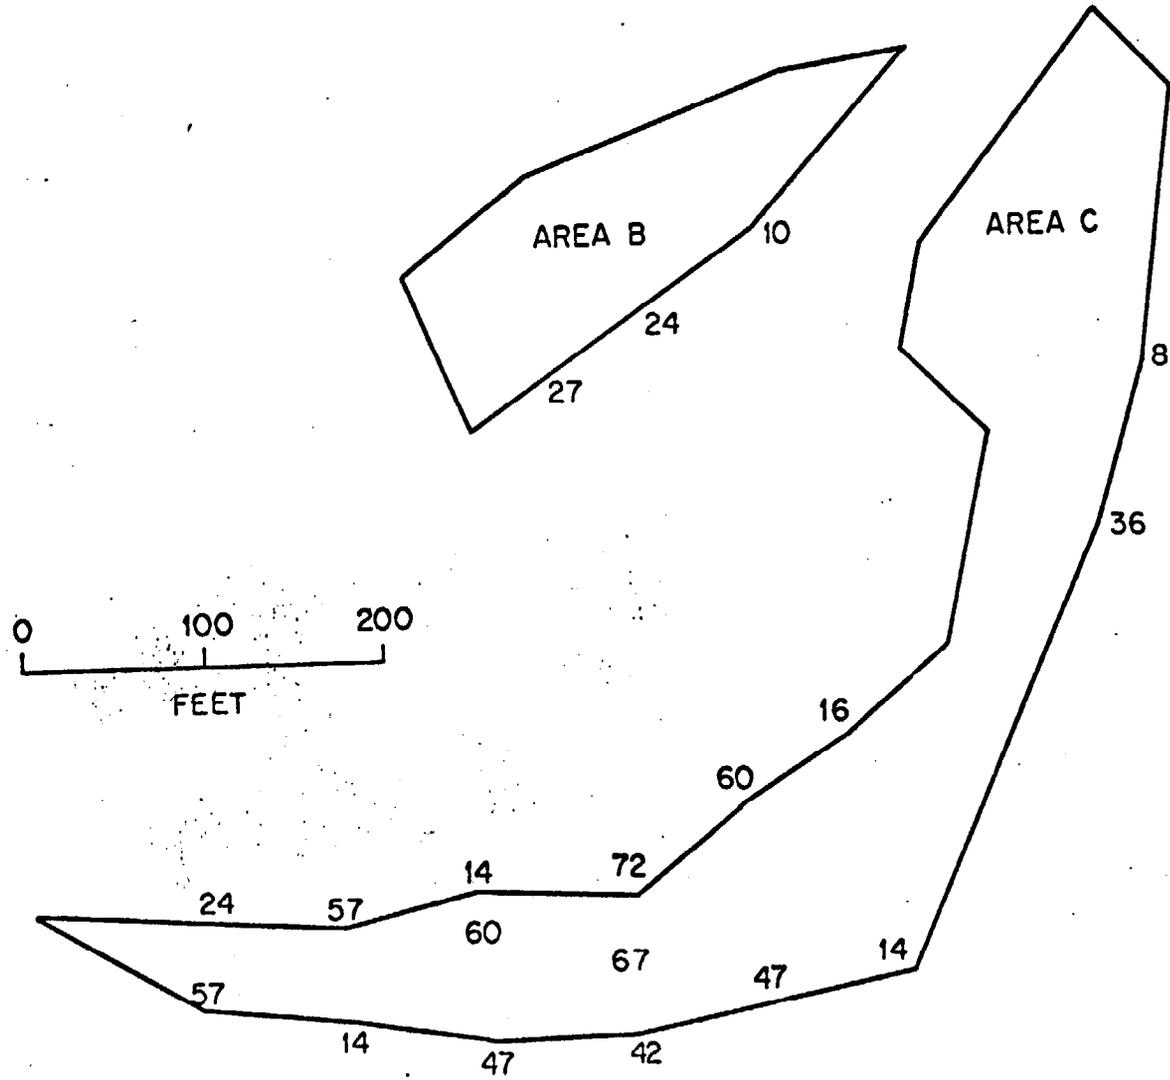


Figure 11. External Gamma Radiation Levels (in mR/hr) at the Surface of Areas B and C.

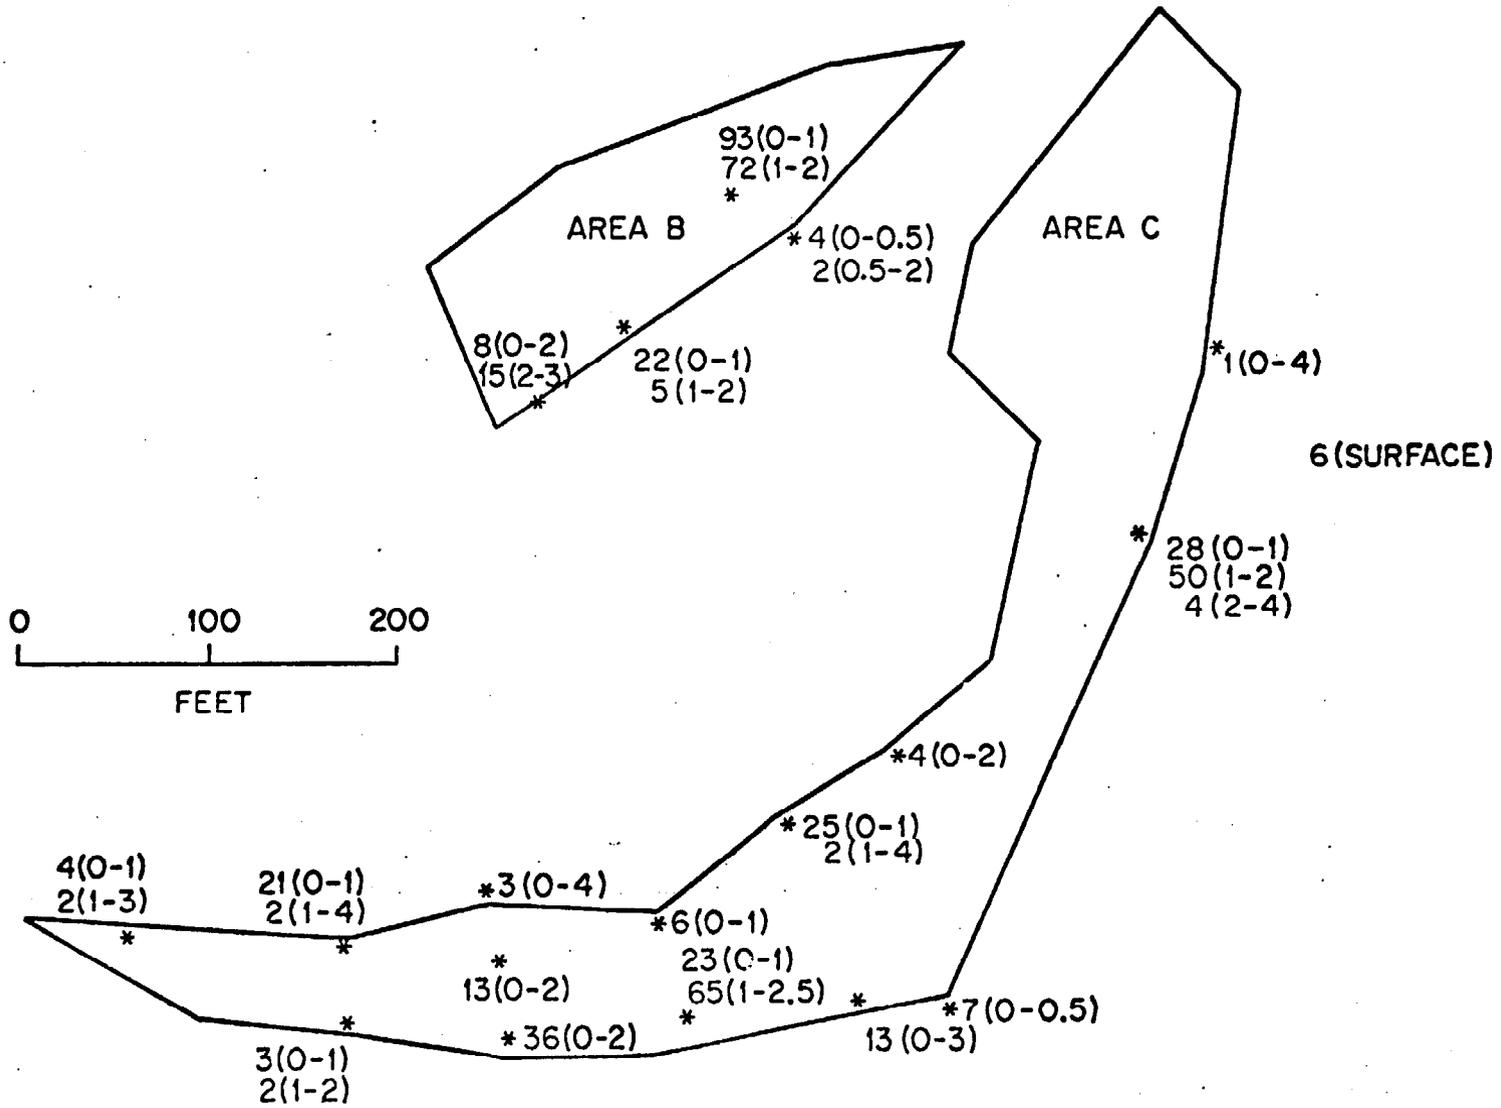


Figure 13. Radium Concentrations* Estimated from Loggings and Soil Sample Analyses (Areas B and C).

*u(v-w) indicates an average of u pci/g from a depth of v feet to a depth of w feet.

pCi/m²-s ²²²Rn/pCi/g ²²⁶Ra

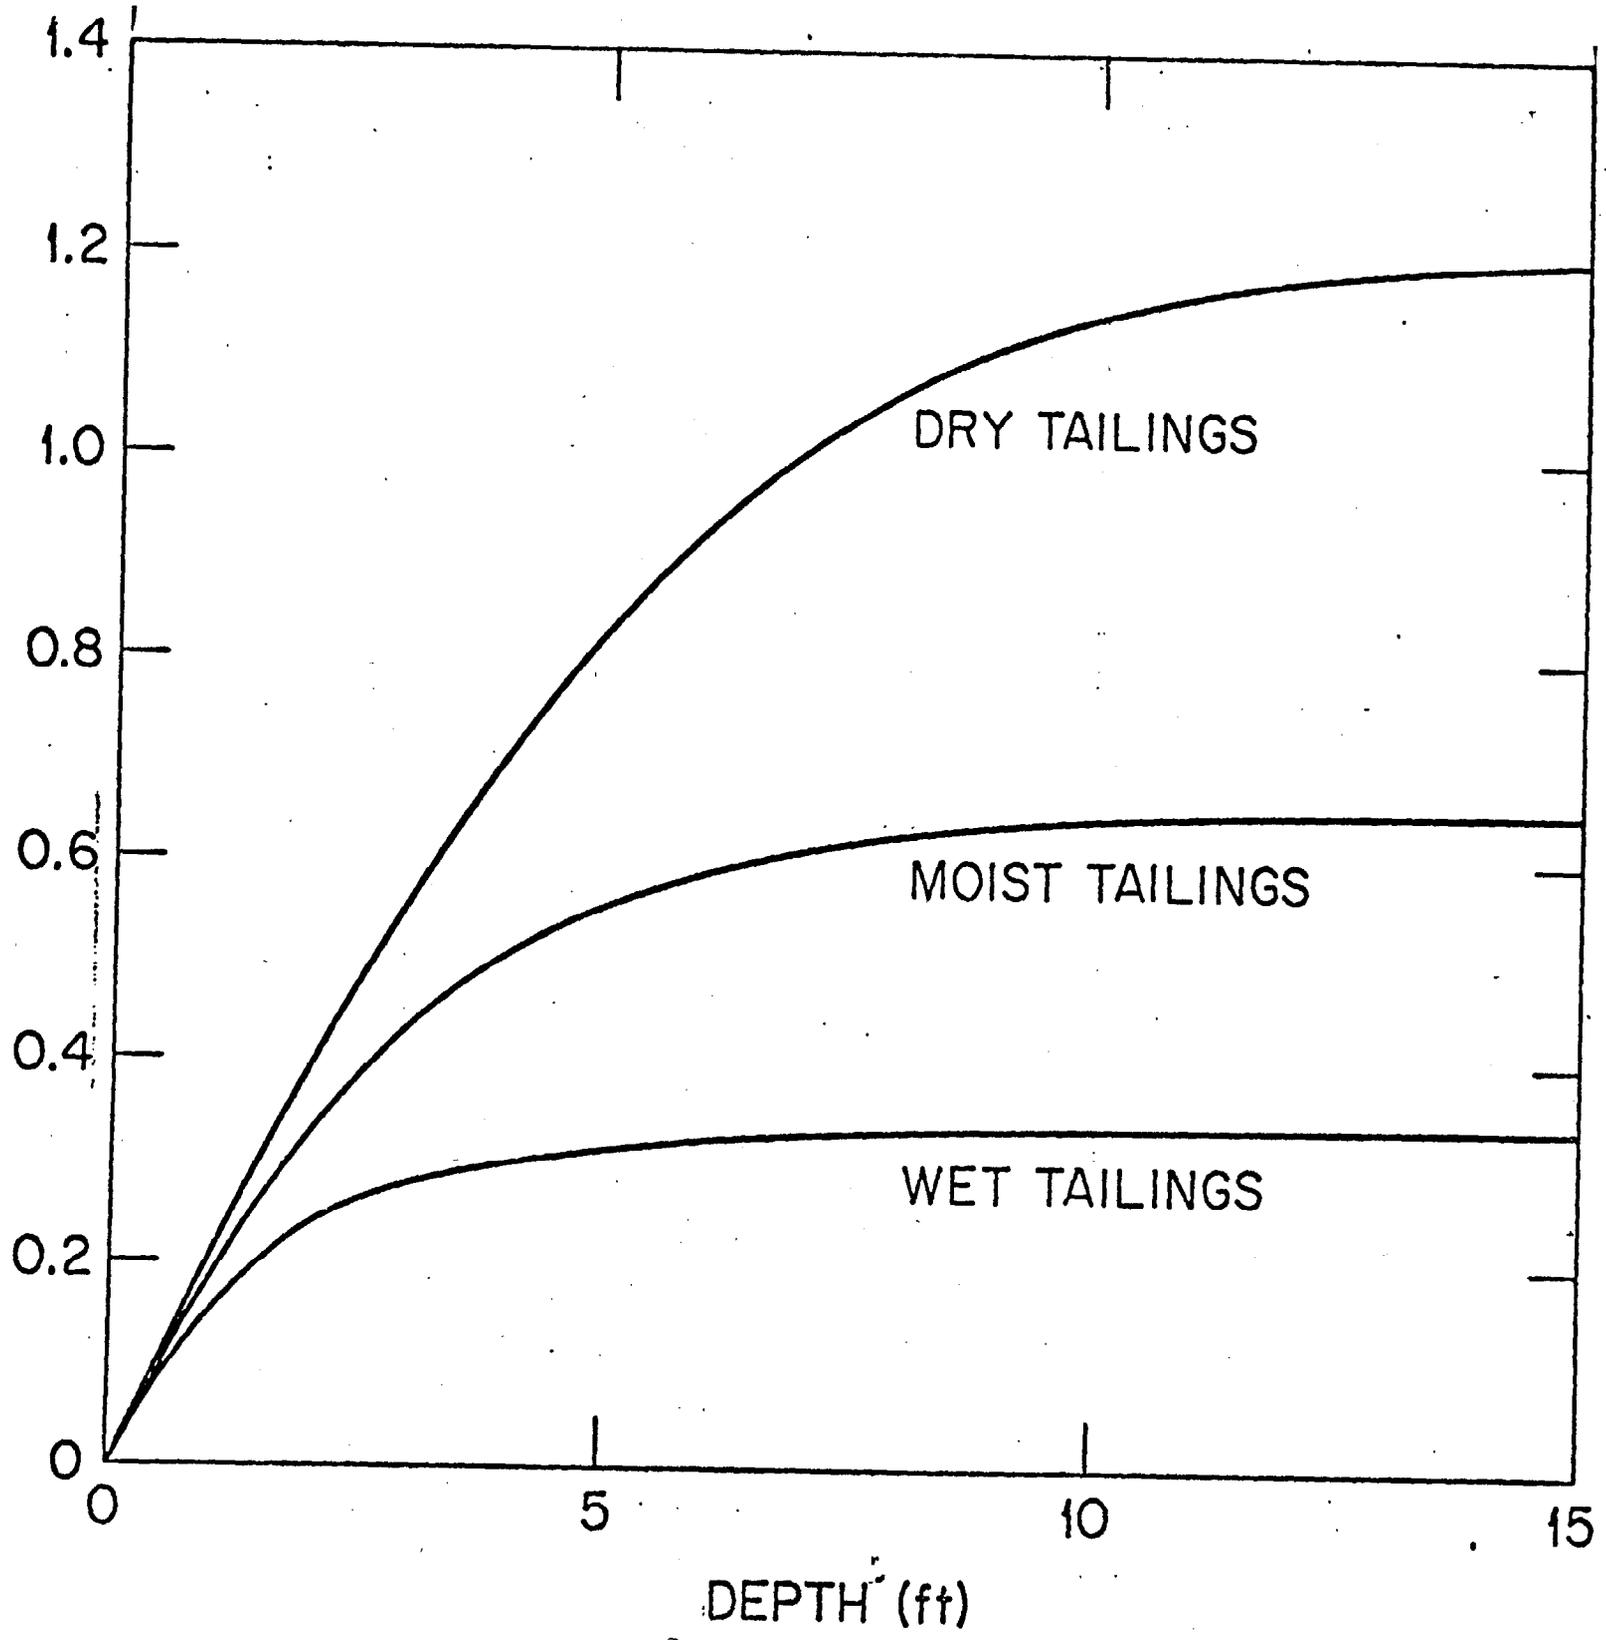


Fig. 15. Aerial Photograph of Seaway and Surrounding Area

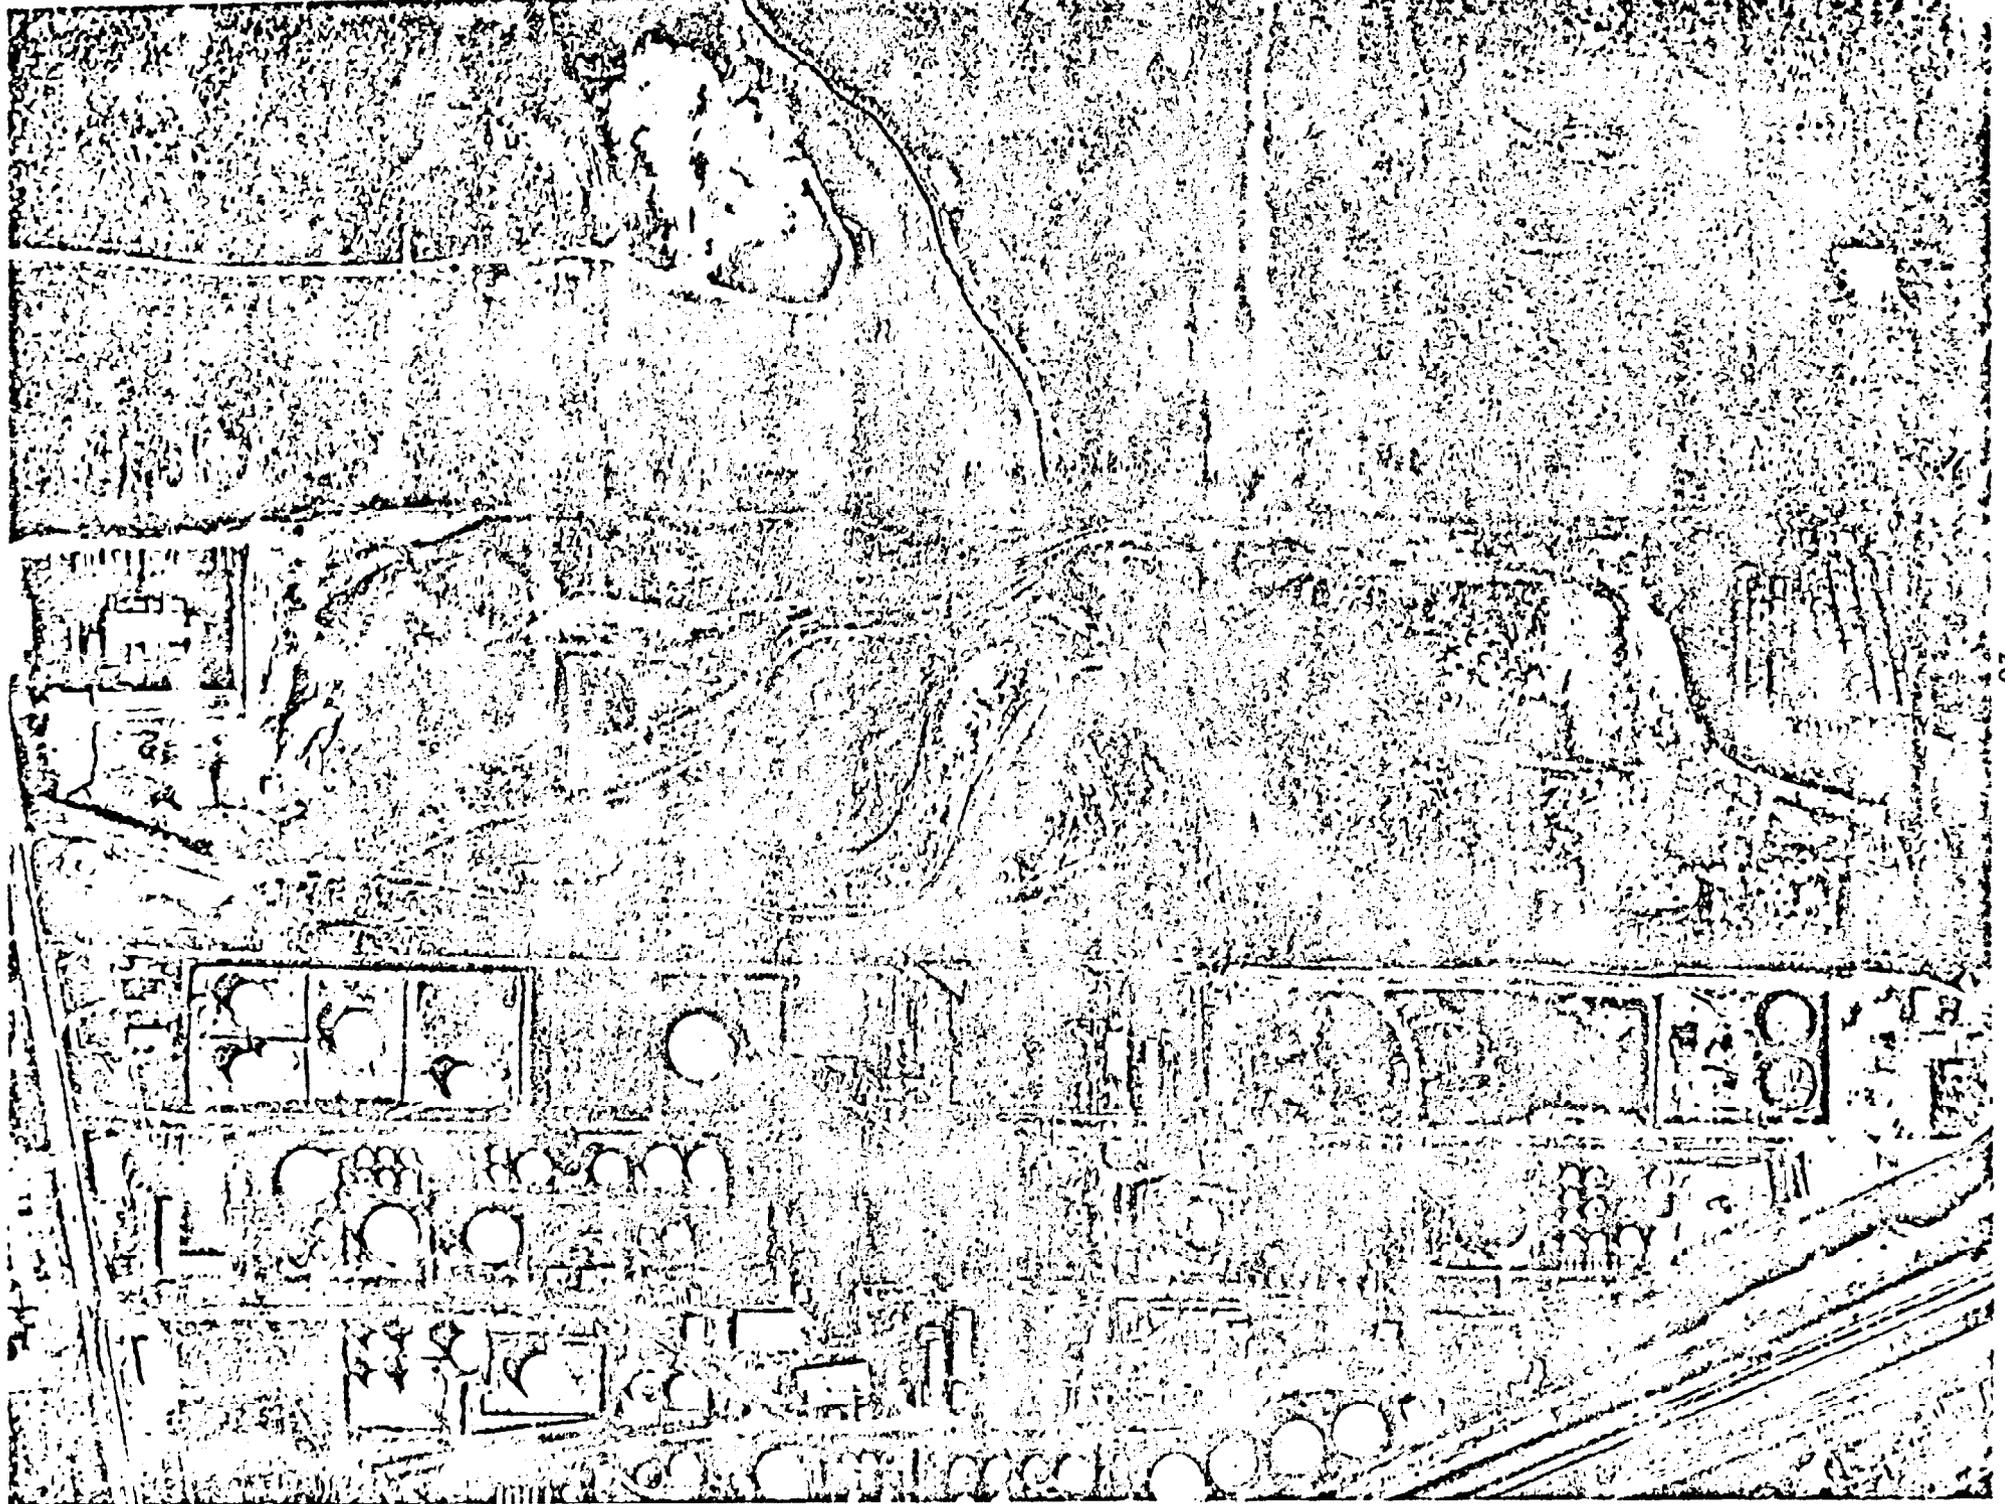


Table 1. Results of Water Sample Analyses
(measurements given in pCi/ml)

Sample	^{226}Ra	^{234}U	^{235}U	^{238}U	^{228}Th	^{230}Th	^{232}Th
W1	4.0×10^{-4}	2.8×10^{-2}	1.5×10^{-3}	2.8×10^{-2}	3.9×10^{-4}	1.8×10^{-4}	7.2×10^{-5}
W2	1.0×10^{-3}	2.0×10^{-2}	1.0×10^{-3}	2.0×10^{-2}	3.7×10^{-4}	9.0×10^{-5}	$< 4.0 \times 10^{-5}$
W3	6.3×10^{-4}	4.1×10^{-3}	3.4×10^{-4}	4.2×10^{-3}	3.6×10^{-4}	7.6×10^{-5}	1.1×10^{-4}
W6	1.6×10^{-3}	4.1×10^{-2}	1.3×10^{-2}	5.3×10^{-2}	3.2×10^{-4}	9.0×10^{-4}	6.8×10^{-5}
W7	9.0×10^{-4}	1.0×10^{-2}	4.4×10^{-4}	1.0×10^{-2}	3.0×10^{-4}	1.4×10^{-4}	$< 3.0 \times 10^{-5}$
W8	5.8×10^{-4}	4.0×10^{-2}	1.4×10^{-3}	3.9×10^{-2}	3.7×10^{-4}	1.1×10^{-4}	4.1×10^{-5}
W9	8.0×10^{-4}	5.0×10^{-2}	2.1×10^{-3}	5.0×10^{-2}	3.2×10^{-4}	8.6×10^{-5}	$< 3.0 \times 10^{-5}$
W10	1.1×10^{-3}	1.4×10^{-2}	7.6×10^{-4}	1.1×10^{-2}	3.2×10^{-4}	7.2×10^{-5}	$< 3.0 \times 10^{-5}$
MPC _w (Soluble)	3×10^{-2}	30	30	40	7	2	2

~~3x10⁻³~~

The 234 MPC_w for Ra 226 listed here is correct!

10A samples were not used
and not included in the table.

Table 2. Radium Concentrations* in the Soil

Sample	Depth (ft)	^{226}Ra	Sample	Depth (ft)	^{226}Ra
2-1	0-1	16.2	10-1	0-1	40.9
2-2	1-2	8.2	10-2	1-2	1.2
2-3	2-4	12.8			
2-4	4.5-5.5	1.1	✓11-1	0-2	20.5
2-5	5.5-6.5	0.8	11-2	2-3	1.3
✓3-1	0-1	27.8	12-1	0-2	6.3
3-2	1-2	9.0			
3-3	2-4	1.3	13-1	0-1	12.4
			13-2	1-2	17.3
4-1	0-1	3.3	✓13-3	2-3	30.6
4-2	1-2	3.0	13-4	3-4	20.8
4-3	2-4	8.2			
			14-1	0-2	9.9
✓5-1	0-2	1.6	14-2	2-3	1.7
			15-1	0-1	1.0
6-2	1-2	1.0	15-2	1-2	0.8
6-3	2-4	7.3			
			16-1	0-1	17.9
9-1	0-1	32.0	16-2	1-2	1.4
9-2	1-2	1.5			

* Measurements given in pCi/g.

Table 2. Radium Concentrations* in the Soil (cont'd)

Sample	Depth (ft)	^{226}Ra	Sample	Depth (ft)	^{226}Ra
17-1	0-1	40.5	31-1	0-1	50.8
17-2	1-2	1.0	31-2	1-2	50.2
18-1	0-1	15.0	32-1	0-1	17.8
18-2	1-2	1.9	32-2	1-2	2.9
19-1	0-1	11.5	33-1	0-1	4.8
19-2	1-2	1.3	✓ 33-2	1-2	0.43
22-1	0-1	1.2	✓ 34-1	0-1	2.0
24-1	0-1	1.3	34-2 [†]	1-2	7.4
24-4	4-4.5	1.8	✓ 36-1	0-1	1.3
25-1	0-1	3.3	37-1	0-0.5	6.9
25-3	2-3	4.4	38-1	0-0.5	9.4
25-7	Surface	8.0	39-1	0-1	20.2
26-1	0-1.5	7.8	40-1	0-0.5	22.5
✓ 28-1	0-1	1.4	40-2	0.5-1.0	1.8
29-1	0-2	7.5	41-1	0-0.5	3.7
30-1	0-1	21.2	43-1	0-0.5	9.9
✓ 30-2	1-2	1.3			

*Measurements given in pCi/g.

Table 2. Radium Concentrations* in the Soil (cont'd)

Sample	Depth (ft)	^{226}Ra	Sample	Depth (ft)	^{226}Ra
44-1	0-0.5	18.7	61-1	0-1	11.1
			61-2	1-2	2.5
45-1	0-1	18.0			
45-2	Surface	5.2	62-1	0-1	4.1
47-1	0-1	5.4	✓ 63-1	0-1	20.8
47-2	1-2	6.1			
✓ 47-3	2-3	3.6	64A-1	0-1	11.7
47-4	3-4	2.6	64A-2	1-2	15.1
47-5	4-5	3.5	64P	0-2	35.6
47-6	5-6	4.5			
			✓ 65P	0-1	23.1
48-1	0-1.5	32.3			
			✓ 66-1	0-1.5	13.0
			67-1	0-0.5	7.2
52-1	0-1	8.8			
52-2	1-2	4.5	✓ 68-1	0-1	5.8
53-1	0-1	32.6	70-1	0-0.5	2.6
53-2	1-2	1.5			
			72-1	0-1	3.4
54-1	0-1	10.7	72-2	1-2	1.9
54-2	1-2	7.8			
			75-1	0-1	24.6
55-1	0-1	5.6			
55-2	1-2	8.2			

* Measurements given in pCi/g.

Table 2. Radium Concentrations* in the Soil (cont'd)

Sample	Depth (ft)	^{226}Ra	Sample	Depth (ft)	^{226}Ra
76-1	0-1	28.0	80-P1	0-1	92.6
76P	Surface	5.9	80-P2	1-2	71.7
✓ 77-1	0-1	1.0			
77-2	1-2	1.0	81-2	1-2	1.0
			82-1	0-1	6.5
			82-2	1-2	1.1
✓ 79-1	0-1	22.2	82-3	2-3	40.0
80-1	0-0.5	3.6			

*Measurements given in pCi/g.

Table 3. Concentrations* of ^{238}U , ^{232}Th , ^{227}Ac and ^{40}K
in Selected Samples

Sample	^{238}U	^{232}Th	^{227}Ac	^{40}K
3.1	62.6	1.25	NS**	16.2
5.1	2.92	0.87	NF***	10.9
11.1	17.4	0.80	6.51	NF
13.3	39.6	1.40	44.6	NF
28.1	2.49	1.83	NS	15.5
30.2	2.80	1.13	NF	20.1
33.2	2.39	0.91	NF	18.2
34.1	4.26	0.88	NF	15.4
36.1	4.17	0.93	NS	17.3
47.3	3.53	0.82	6.62	11.6
63.1	34.1	1.21	20.8	NF
65P	20.6	1.05	16.1	17.8
66.1	11.6	1.02	13.2	16.1
68.1	12.2	0.60	33.4	14.5
77.1	2.51	0.95	NS	15.8
79.1	NF	0.85	66.4	NF

** NS = not sought

*** NF = not found

* Concentrations given in pCi/g

APPENDIX I

Description of Radiation Survey Meters

RADIATION SURVEY METERS

Beta-Gamma Survey Meter

A portable Geiger-Muller (G-M) survey meter is the primary instrument for measuring beta-gamma contamination. The G-M tube is a halogen-quenched stainless steel tube having a 30 mg/cm^2 wall thickness and presenting a cross-sectional area of approximately 10 cm^2 . Since the G-M tube is sensitive to both beta and gamma radiation, measurements are taken in both an open window and a closed-window configuration. Beta radiation cannot penetrate the closed window and thus the beta reading can be determined by taking the difference between the open and closed window readings. This meter is shown in Fig. IA.

The G-M survey meter was calibrated at ORNL for gamma radiation using an NBS standard Ra source and a depleted uranium source. The gamma calibration factor is typically of the order of 2600 cpm/mR/hr. The beta-gamma calibration was determined by comparison with a Victoreen Model 440 ionization chamber/ (see Fig. IB). Based on the measurement of a variety of uranium contaminated surfaces, the calibration factor was determined to be 1750 cpm per mrad/hr with a standard deviation of 25%.

Gamma Scintillation Meter

A portable survey meter using a NaI scintillation probe has been used to measure low-level gamma radiation exposure. The scintillation probe is a $3.2 \times 3.8 \text{ cm}$ NaI crystal mounted on a photomultiplier tube. This probe is coupled with a Victoreen Model Thyac III rate meter (see Fig. IB). This unit is capable of measuring radiation levels from a few $\mu\text{R/hr}$ to several hundred $\mu\text{R/hr}$. It is calibrated at ORNL with an NBS standard ^{226}Ra source. Typical calibration factors are of the order of 300-400 cpm/ $\mu\text{R/hr}$ (see Fig. IC).

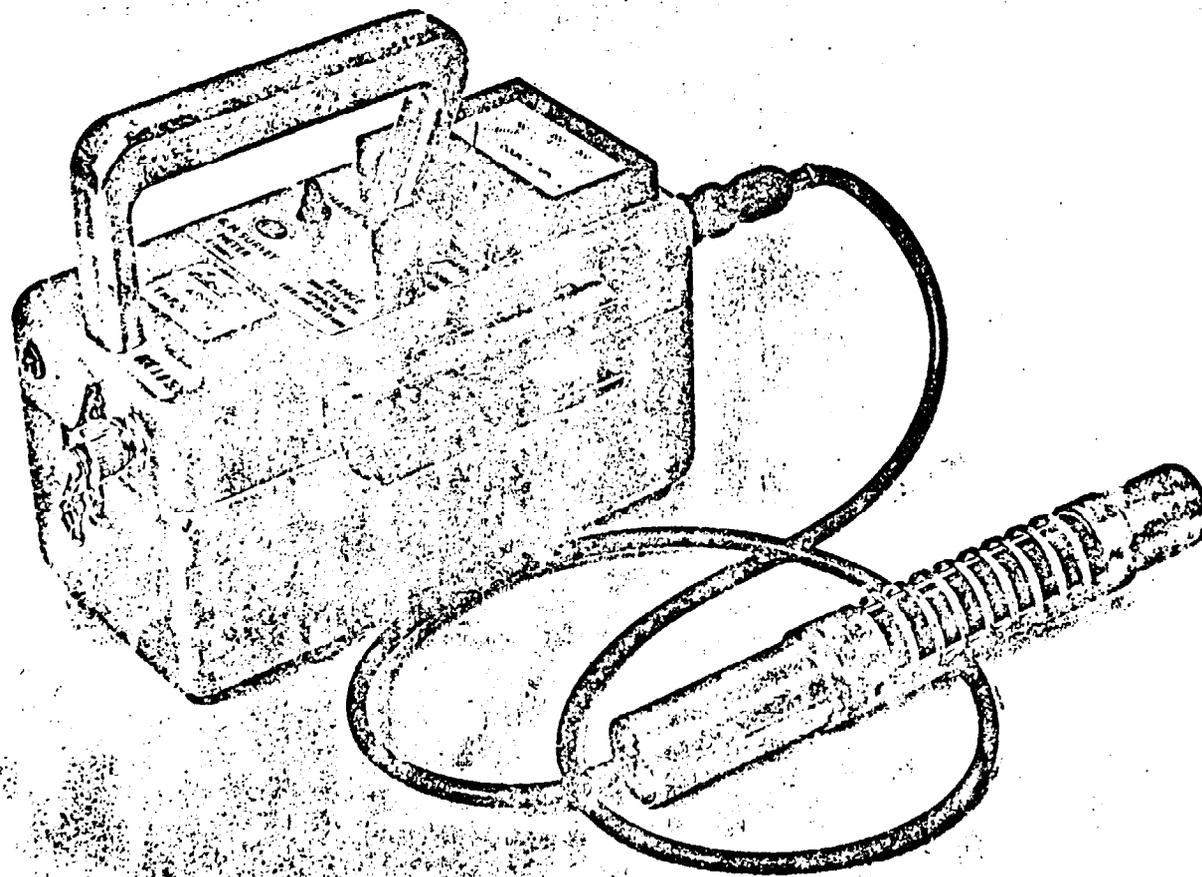


Fig. IA. Geiger-Muller Survey Meter.

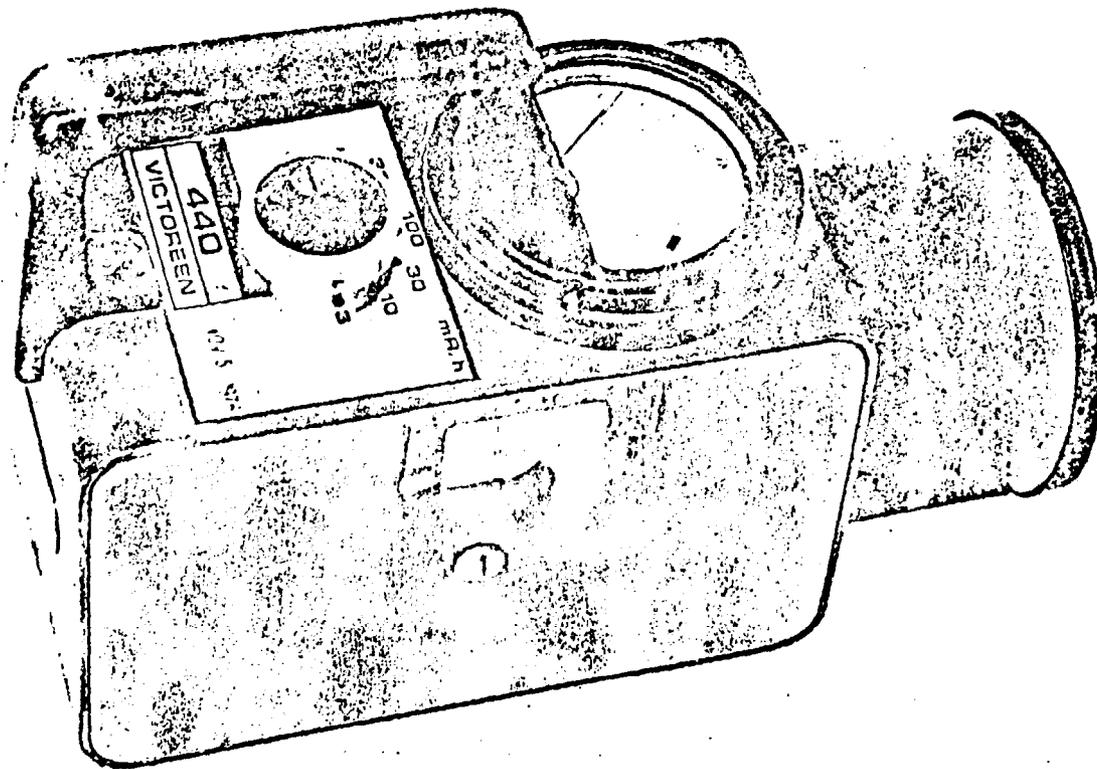


Fig. 1B. Victoreen Model 440 Ionization Chamber.

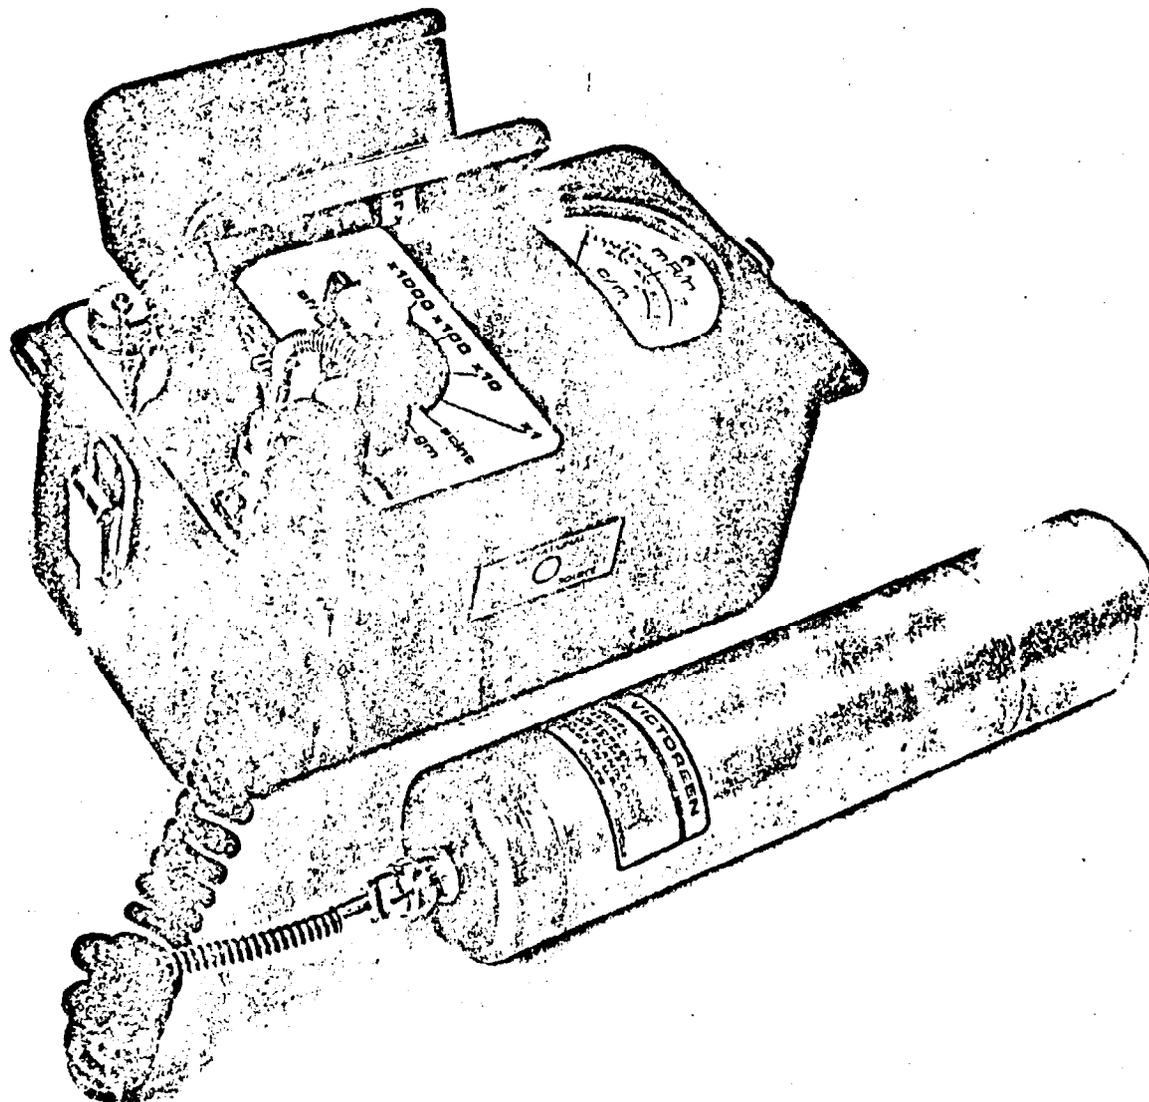


Fig. I-C. Gamma Scintillation Survey Meter.

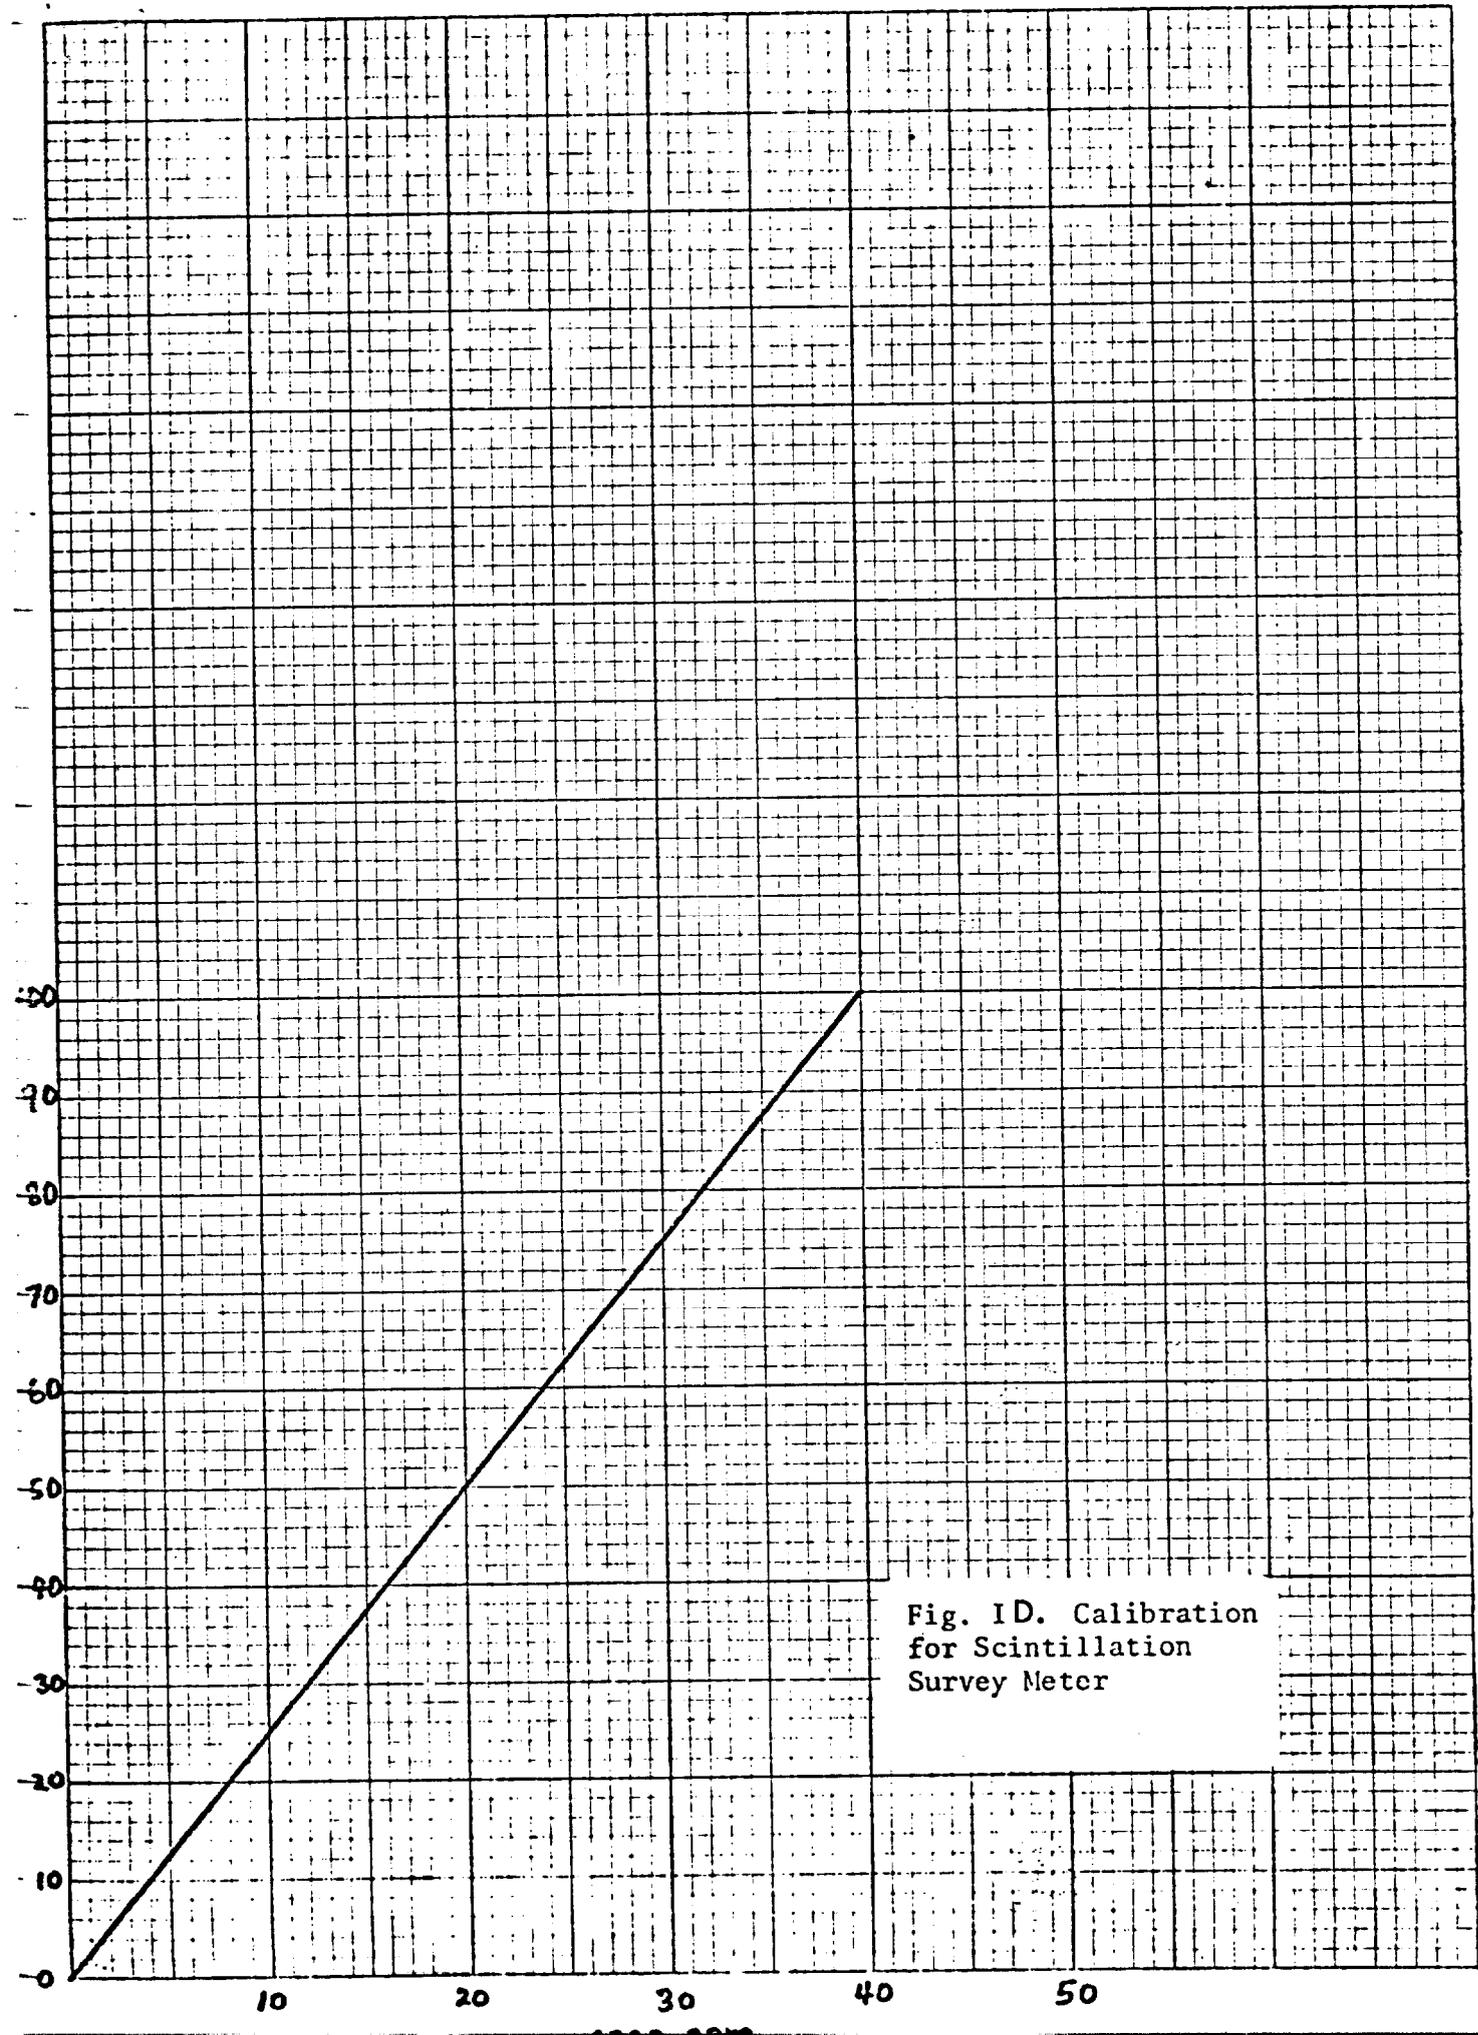


Fig. 1D. Calibration
for Scintillation
Survey Meter

APPENDIX II

Description of GeLi Detector and
Soil Counting Procedures

DESCRIPTION OF GeLi DETECTOR SYSTEM

A holder for twelve 30-cc polyethylene (standard liquid scintillation sample) bottles and a background shield have been designed for use with a 50-cc Ge(Li) detector system in laboratory counting of radioactivity in environmental samples (see Figs. II-A, II-B). During counting of the samples, the holder is used to position ten of the sample bottles around the cylindrical surface of the detector, parallel to and symmetric about its axis, and two additional bottles across the end surface of the detector, perpendicular to and symmetric with its axis. With a 300 cc sample and a graded shield developed for use with the system, it is possible to measure 1 pCi/cc of ^{232}Th or ^{226}Ra with an error of $\pm 10\%$.

Data is gathered by a 4096-channel analyzer, stored on magnetic tape, and subsequently entered into a computer program which uses an iterative least squares method to identify radionuclides corresponding to those gamma-ray lines found in the sample. The program relies on a look-up table of radioisotopes which contains approximately 700 isotopes and 2500 gamma-rays and runs continuously on the IBM-360 system at ORNL. In identifying and quantifying ^{226}Ra , six principal gamma-ray lines are analyzed. Most of these are from ^{214}Bi and correspond to 295, 352, 609, 1120, 1765 and 2204 KeV. An estimate of the concentration of ^{238}U is obtained from an analysis of the 93 KeV line from its daughter ^{234}Th .

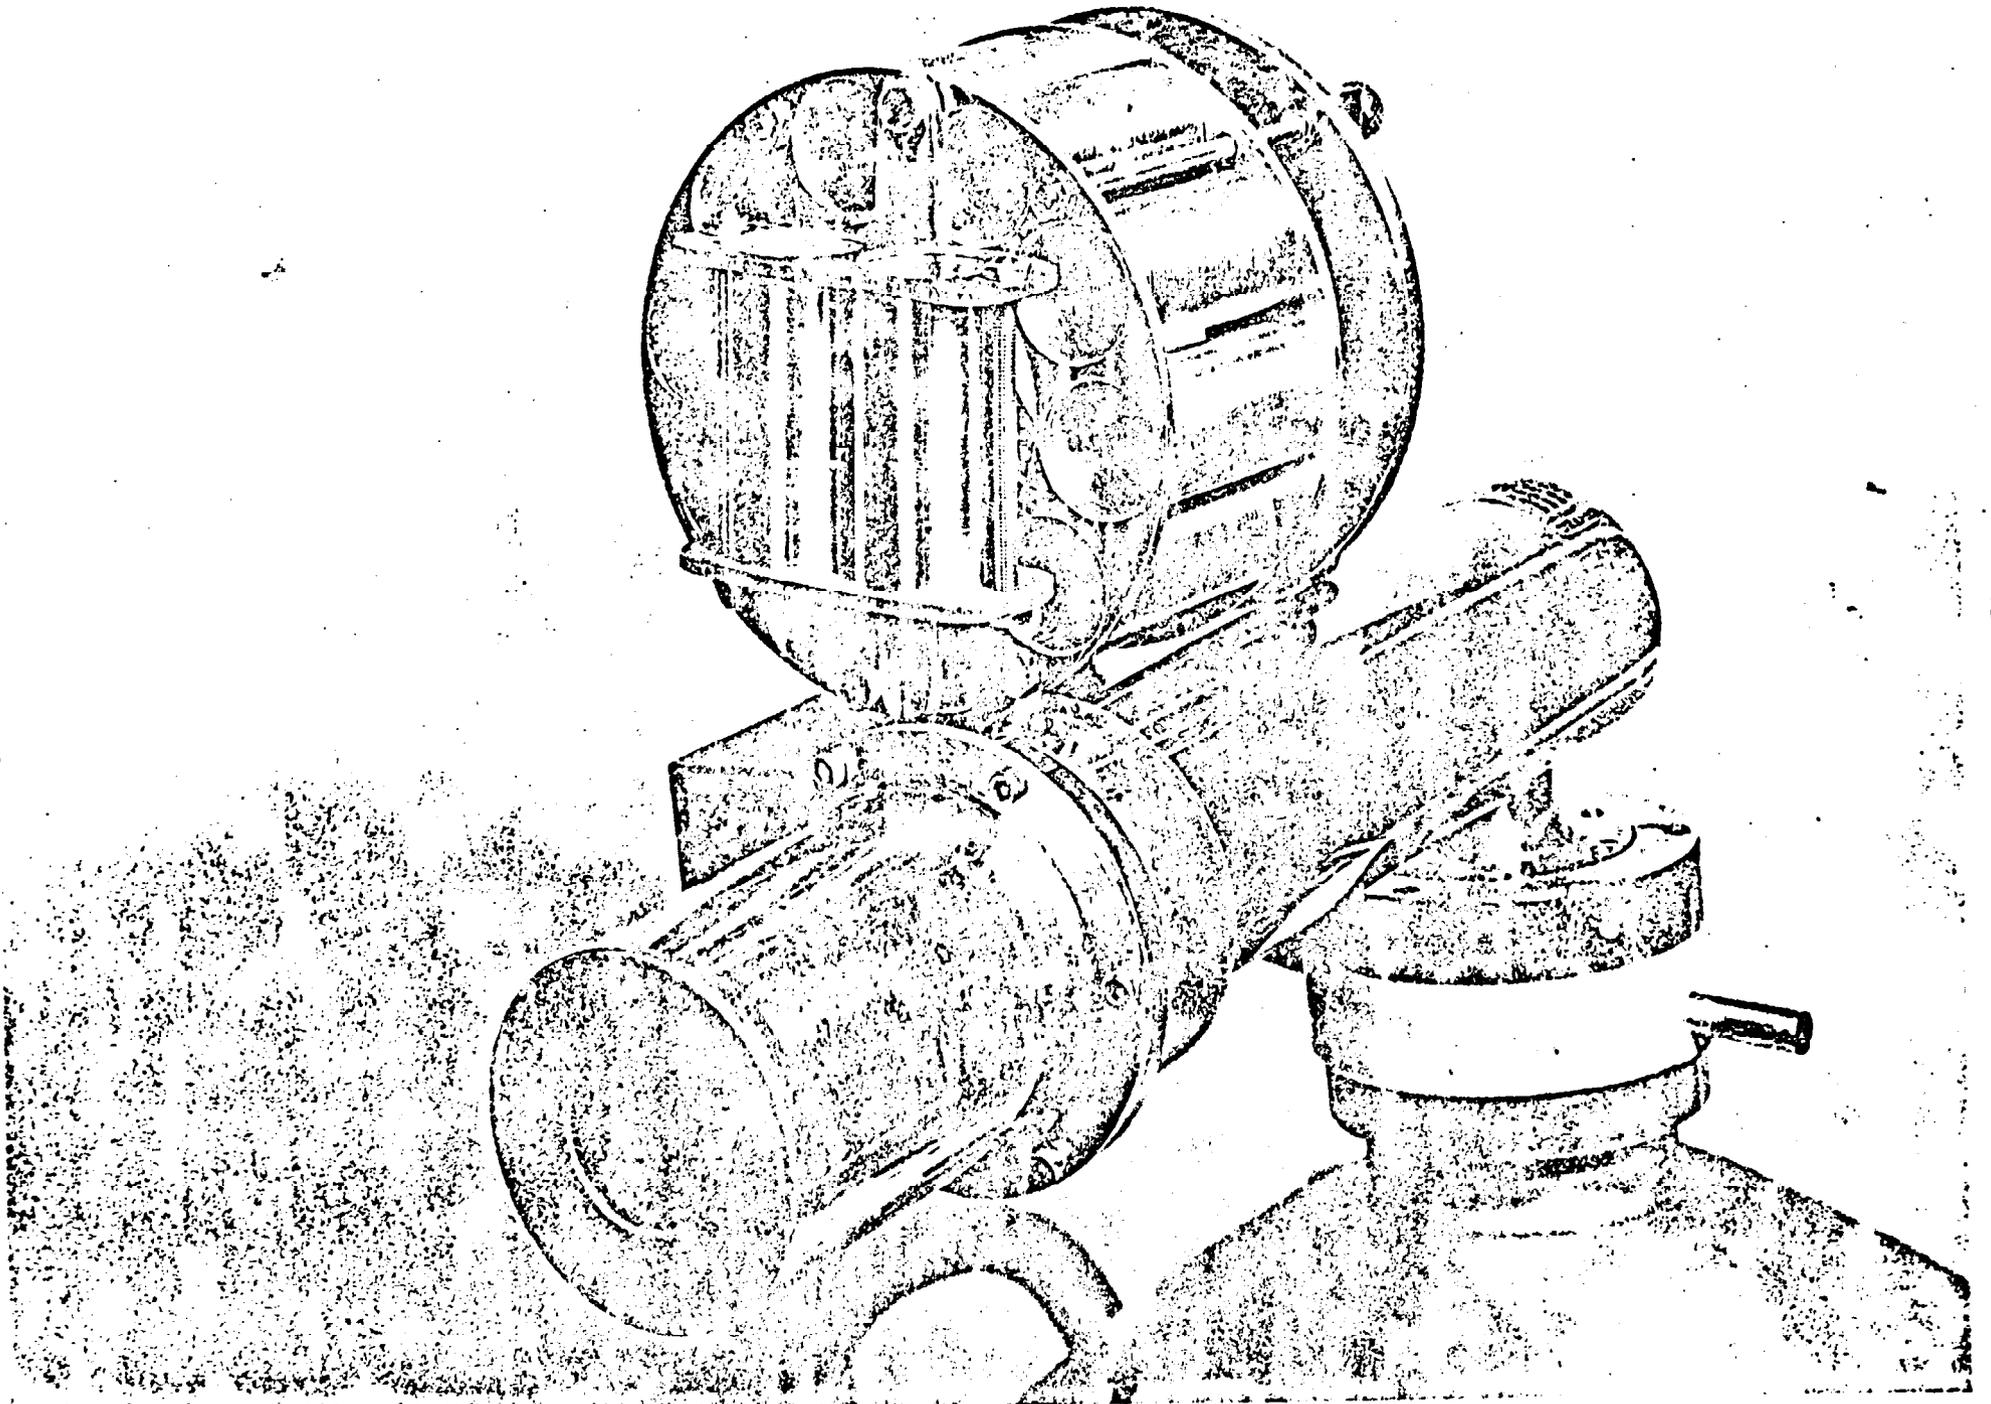


Fig. II-A

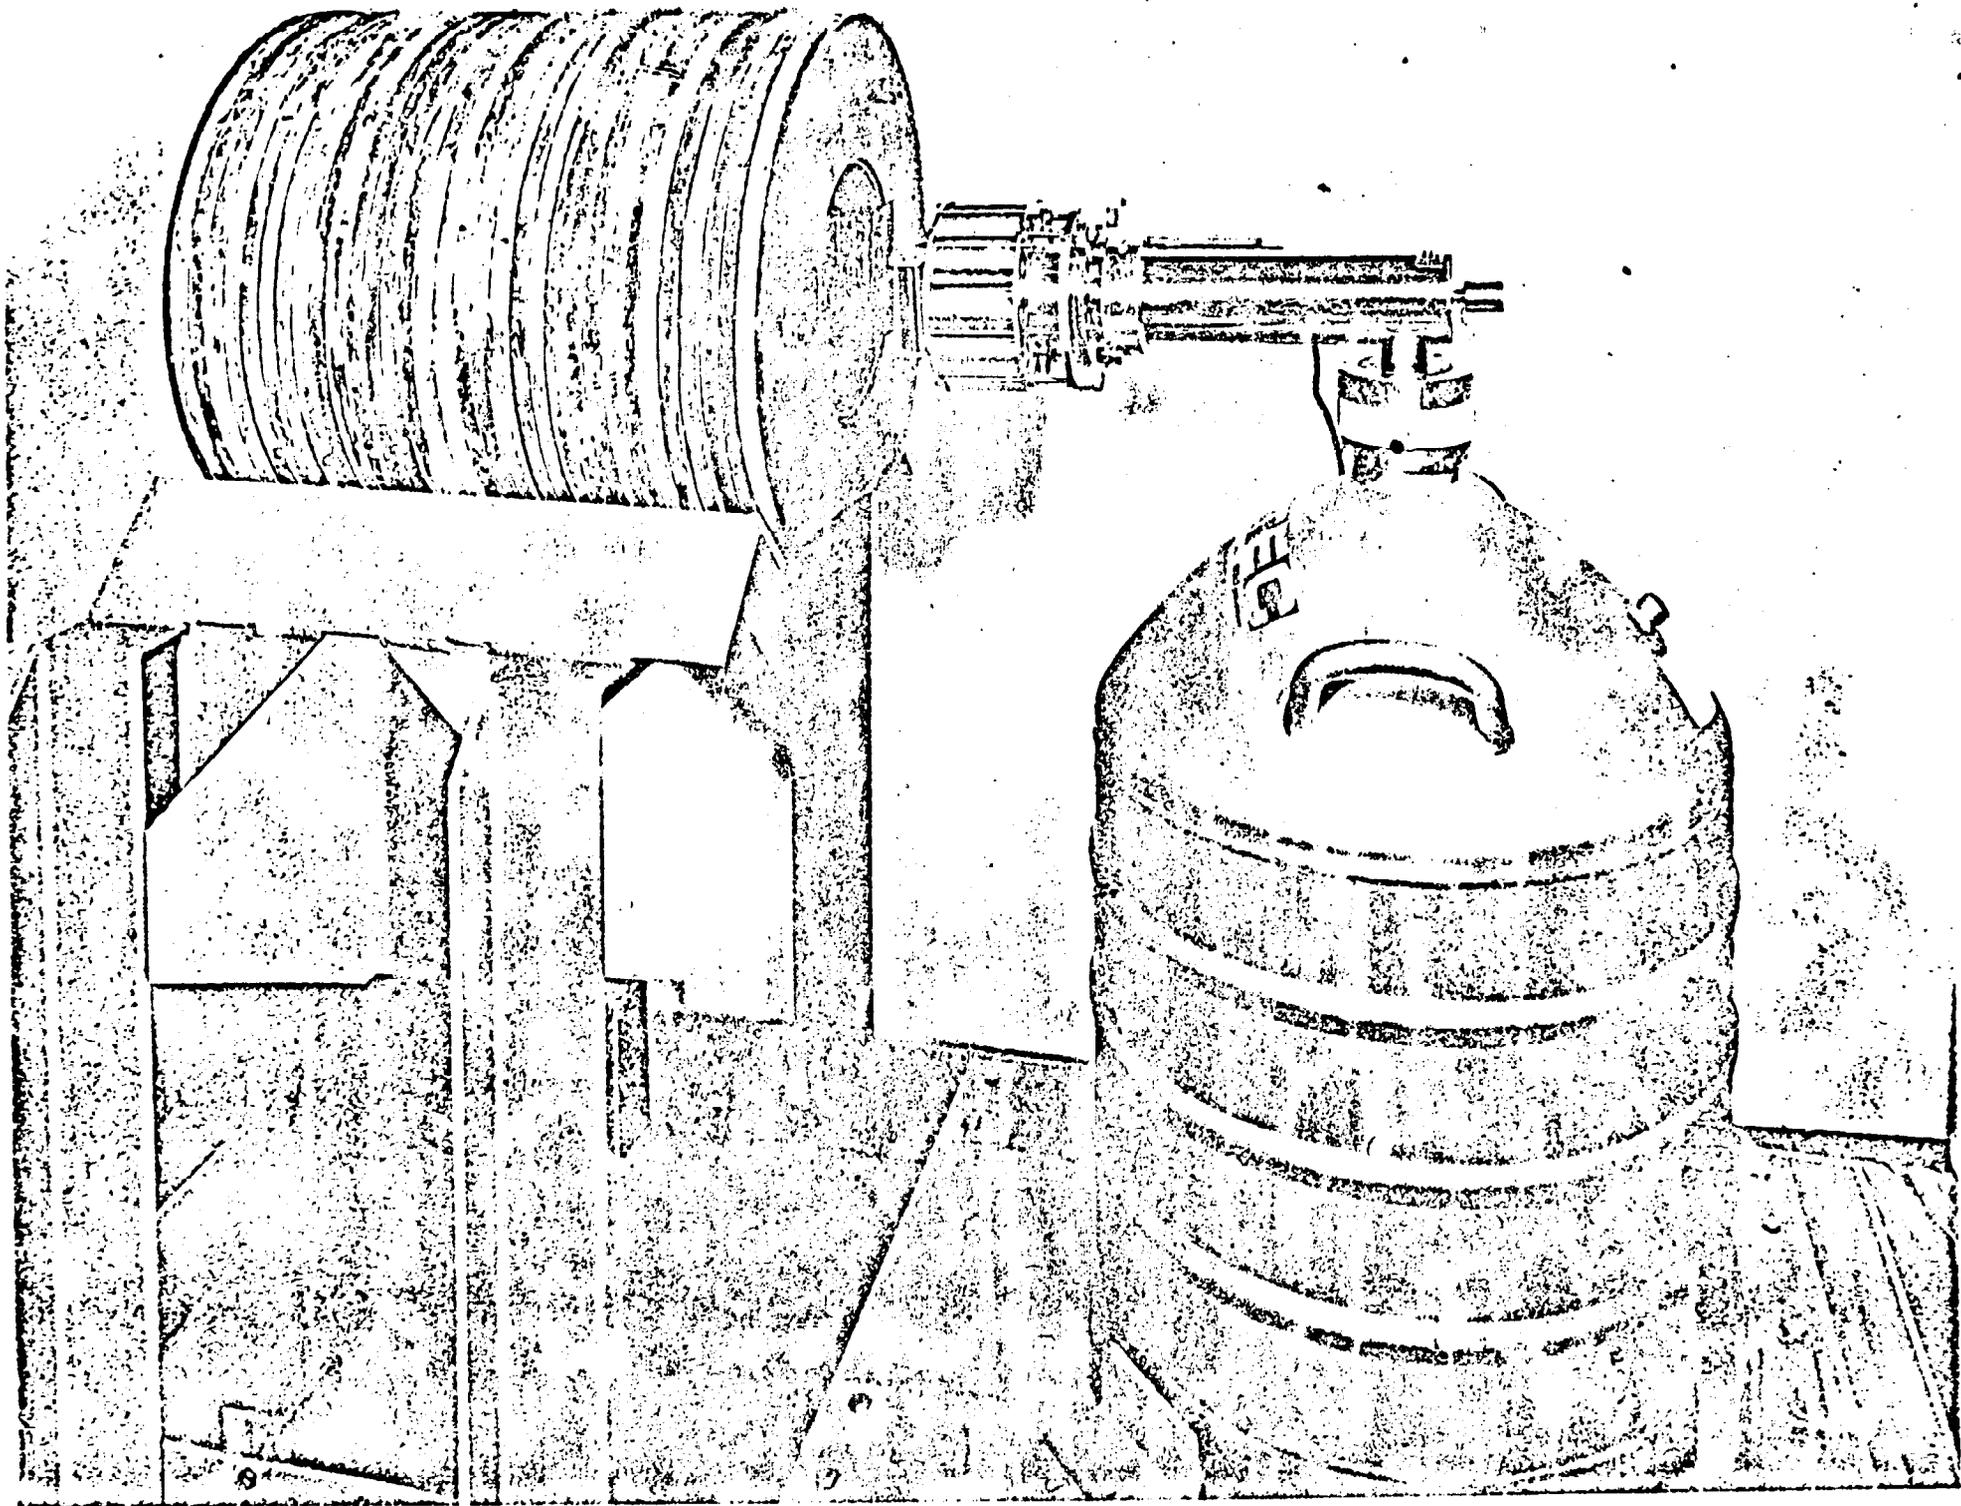


Fig. II-B

APPENDIX III

Estimates of Radium Concentrations
from Scintillation Probe Readings

ESTIMATES OF RADIUM CONCENTRATIONS
FROM SCINTILLATION PROBE READINGS

Scintillation probe readings were used to estimate radium concentrations at points where no soil samples were taken. For example, at location 19, no samples were taken below 2 feet. However, scintillation probe readings decreased by a factor of 2 from 1 foot to 4 feet; and since the measured radium concentration at 1-2 feet was 1.3 pCi/g, an estimate of 1 pCi/g was made for the average radium concentration from 1-4 feet. At location 33 no soil samples were taken below 2 feet. The measured concentration at 1-2 feet was near 0.5 pCi/g, and the scintillation probe readings decreased slightly from 1-4 feet. Hence a conservative estimate of 1 pCi/g was made for the average radium concentration at 1-4 feet. As a final example, we consider location 34 where no soil samples were taken below 2 feet. The measured concentration at 1-2 feet was about 7 pCi/g, and the average scintillation probe reading at 2-4 feet was slightly more than half the scintillation probe reading at 1.5 feet. Hence a conservative estimate of 5 pCi/g was made for the average radium concentration at 2-4 feet.

For core holes at which no soil samples were taken at any depth, estimates were based on the formula $y = 1.33 x$, where

$$x = \text{scintillation probe cpm}/1000$$

$$y = \text{pCi/g } {}^{226}\text{Ra}$$

The line $y = 1.33x$ is a "best-fitting" curve for about 90 pairs (x,y) for which both the scintillation probe reading x and the radium concentration y were known. (These scintillation probe readings and soil samples were taken at points on Seaway.) Estimates obtained from this formula are expected to be correct within a factor of 1.5 for scintillation probe counts greater than 5000 cpm. For scintillation probe counts less than 5000 cpm, the formula usually yields very conservative estimates for the radium concentrations.

APPENDIX IV

Site Description

SITE DESCRIPTION

The Seaway Industrial Park (lot 94 of the Town of Tonawanda, Erie County, New York) occupies nearly 100 acres, most of which has been used as a landfill for several years. The site is bounded by Ashland Oil, Inc.; Agway Fuel, Inc.; River Road; Murphy Trucking, Inc.; Leffler Auto Parts; and property owned by Niagara Mohawk Power Corporation (see Fig. IV). There are no buildings on Seaway, and there is little vegetation. Most parts of the site are at a higher elevation than the surrounding terrain.

Most of the drainage from Seaway flows north or northeast into drainage ditches or a creek and is eventually carried to the nearby Niagara River. Some of the drainage from the area just south of Murphy Trucking, Inc., flows down a steep incline toward River Road, and some of this run-off accumulates near Murphy Trucking, Inc. Drainage from the Ashland property normally flows northeast across Seaway and eventually into the Niagara River. However, incomplete culvert construction near the Seaway-Ashland line has caused much of the run-off from the Ashland property to accumulate in a low area near the southwestern boundary of Seaway.

NIAGARA MOHAWK POWER CORP. PROPERTY

MURPHY TRUCKING, INC.

LEFFLER
AUTO
PARTS

SEAWAY INDUSTRIAL PARK

PENN CENTRAL RAILROAD PROPERTY

AGWAY FUEL, INC

ASHLAND

(HAIST)

NIAGARA RIVER

RIVER ROAD

NEW YORK STATE THRUWAY

48

Fig. IV