

3.0 Environmental Monitoring

3.1 Water Monitoring

3.1.1 Introduction

This section presents data collected to satisfy water monitoring objectives implemented at the Site in accordance with RFLMA. The RFSOG provides a guidance framework in support of conducting LM activities, including monitoring, at the Site. Figure 2 shows a map with the water monitoring locations that were operational during the fourth quarter of CY 2010. Sampling maps for the first through third quarters of CY 2010 are available in the quarterly reports.

This annual report focuses on data collected during CY 2010 (January through December 2010). This section includes:

- An evaluation of analytical results from routine monitoring as required by RFLMA and detailed in the RFSOG, organized by monitoring objective;
- A summary of hydrologic data for the calendar year; and
- Supplemental data interpretation and evaluation for CY 2010.

Analytical water quality data are available in Appendix B.

3.1.1.1 Water Monitoring Highlights: CY 2010

During CY 2010, the water monitoring network successfully fulfilled the targeted monitoring objectives as required by RFLMA and using the RFSOG implementation guidance. During CY 2010, the RFLMA network consisted of 99 wells, 11 gaging stations, 10 surface-water grab sampling locations (three of which are pre-discharge pond locations), 8 treatment system grab sampling locations, and 8 precipitation gages. During CY 2010, 167 samples composed of 8,228 individual aliquots (“grabs”) were collected at the surface-water locations,² 74 samples were collected from treatment system locations, and 157 samples were collected from monitoring wells. Additional samples were collected beyond the RFLMA requirements, as discussed in this report.

Precipitation in CY 2010 was below average, with 11.64 inches of precipitation, which is approximately 94.5 percent of the average (the CY 1993–2009 average is 12.32 inches). The fall was significantly drier than average (44.9 percent of the CY 1993–2009 average of 2.58 inches). The spring was measurably wetter than average (121.4 percent of the CY 1993–2009 average of 4.84 inches). April was significantly wetter than average (162 percent of the average), while September and December were significantly drier than average (14 percent and 10 percent of the average, respectively). The largest daily events occurred on April 22 (0.92 inch) and April 23 (1.16 inches).³ The largest 2-day total (2.09 inches) also occurred on April 22–23. The highest peak flow rates for the year from the former Industrial Area were 19.9 cubic feet per second (cfs)

² Composite samples consist of multiple grabs of identical volume. Each grab is delivered by the automatic sampler to the composite container at each predetermined flow volume or time interval.

³ The precipitation gages used in the automated surface-water monitoring network are not heated due to the lack of AC power at the locations. Thus, the gages do not accurately measure snowfall (as water equivalent).

in North Walnut Creek, 37.5 cfs in South Walnut Creek, and 8.99 cfs in the South Interceptor Ditch (SID); all of these peak flows occurred on April 23, 2010.

All water quality data at the RFLMA POCs remained below the applicable standards throughout CY 2010.

Reportable 12-month rolling average Pu activities were observed starting on April 30, 2010, in surface water at RFLMA POE monitoring station SW027, which is located on the South Interceptor Ditch upstream of Pond C-2. SW027 has been dry since June 18, 2010, and no new data have been collected. The 12-month rolling average for Pu continues to be reportable at this location. SW027 data are evaluated in Section 3.1.2.2 of this report.

DOE initiated consultation with CDPHE on June 2, 2010, soon after data were available indicating the Pu exceedance. RFLMA Contact Record 2010-06, “Monitoring Results at Surface Water Point of Evaluation (POE) SW027” provides a discussion of the monitoring results and recaps the outcome of the RFLMA Parties’ consultation regarding steps to be taken to evaluate the SW027 drainage area. Contact Record 2010-06 is available on the Rocky Flats website, http://www.lm.doe.gov/Rocky_Flats/ContactRecords.aspx.

Subsequent to Contact Record 2010-06, the *Report of Steps Taken Regarding Monitoring Results at Surface Water Point of Evaluation (POE) SW027* was completed on August 31, 2010. This report provides data evaluation and an update on the steps taken in accordance with Contact Record 2010-06. Recommendations beyond the actions already taken and discussed in the Contact Record are also provided. This report is available on the Rocky Flats website, http://www.lm.doe.gov/Rocky_Flats/ContactRecords.aspx.

All other POE analyte concentrations remained below reporting levels throughout CY 2010. Erosion and runoff controls, as well as extensive revegetation efforts, have been effective in measurably reducing both sediment transport and constituent concentrations. During CY 2010, all of the other POEs had Pu and Am concentrations well below the RFLMA standards. With the removal of impervious areas resulting in decreased runoff, the stabilization of soils within the drainages, and the progression of revegetation, acceptable water quality is expected to continue.

Groundwater monitoring results at the PLF and OLF are evaluated in Section 3.1.2.8 and Section 3.1.2.9, respectively, of this report. Groundwater was monitored in accordance with RFLMA (DOE 2007a).

3.1.1.2 Use of Analytical Data

Analytical data are evaluated statistically to meet many objectives in accordance with RFLMA. Rejected data are not included in statistical evaluations. Statistical and other evaluations of analytical data focus solely on those results reported for RFLMA analytes (as listed in RFLMA Attachment 2, Table 1 [DOE 2007a]).

Surface-water data from POCs and POEs are evaluated semimonthly, and results of these evaluations are included in the quarterly reports. Details regarding data handling for all surface water can be found in Appendix B.


This page intentionally left blank

Groundwater data evaluations are reported annually because the groundwater regime is less dynamic than the surface-water regime and because groundwater conditions change much more gradually than surface-water conditions. However, groundwater data from Area of Concern (AOC) wells are evaluated for reportable conditions as they are received; when such conditions exist, they are described in the corresponding quarterly report as well as the annual report.

Groundwater statistics require a minimum of eight results representing routinely collected samples. A commercially available geostatistical software program (e.g., Sanitas, Visual Sample Plan) is used for these calculations. (**Note:** This report does not recommend any particular software; this information is merely included for the sake of completeness.) Furthermore, if trend calculations employ the Seasonal-Kendall (S-K) statistical method, the data representing these routinely collected samples must comprise four sets of results per season. For example, wells required to be monitored semiannually are sampled in the second and fourth quarters of a calendar year. Trending will require a minimum of eight sets of results from routinely collected samples, distributed as four per season—four in the second quarter and four in the fourth quarter. In this example, therefore, a well would need to be sampled for 4 years (4 samples × 2 samples/year = 8 samples total; 4 each of second quarter samples and fourth quarter samples requires 4 full years of semiannual samples) to provide the necessary and appropriate data for statistical analysis. For wells sampled quarterly, although the minimum eight sets of results could be collected in 2 years of routine sampling, the minimum four sets of results per season (four seasons) would not be collected until 4 years of successful, routine sampling had been completed.

Groundwater field duplicates are omitted from statistical evaluations. Groundwater samples assigned the laboratory qualifier “J” (estimated) are taken at face value, rather than being assigned a value of less than the method detection limit plus the practical quantitation limit (PQL). Samples assigned a “B” qualifier (which, for organics, indicates that the constituent was also detected in the blank) were also used at face value. This qualifier is commonly associated with results for methylene chloride. Because methylene chloride is a commonly used laboratory solvent, “B”-qualified results should be carefully reviewed alongside corresponding detection limits, concentrations in the blanks, and other relevant data before any decisions are based on them. (**Note:** In some cases, these considerations have led to the results being assigned a validation “U” qualifier, signifying that the result is so suspect as to be considered a nondetect. In such cases, the result is considered nondetect rather than the “B”-qualified value.)

For consistency, the RFSOG (DOE 2011a) instructs that nondetects reported for groundwater data be replaced by zeroes when performing statistical assessments. (This is because use of some common techniques, such as replacing the reported nondetect value with one-half the detection limit, could lead to false conclusions, as illustrated in Figure 3.) However, to calculate trends, the data cannot contain zeroes. Therefore, instead of zeroes, nondetects are replaced with a value of 0.001. (**Note:** This includes data with lab qualifiers as well as validation qualifiers that include “U.”) Likewise, the statistical program cannot perform the necessary calculations if negative numbers are included in the results, as is occasionally the case for U isotopes and other radionuclides. Therefore, any negative results are replaced with 0.001. Calculated trends may be affected by this data replacement; therefore, the data from calculated trends of interest should be carefully inspected before any conclusions are reached or decisions made based on these trends.

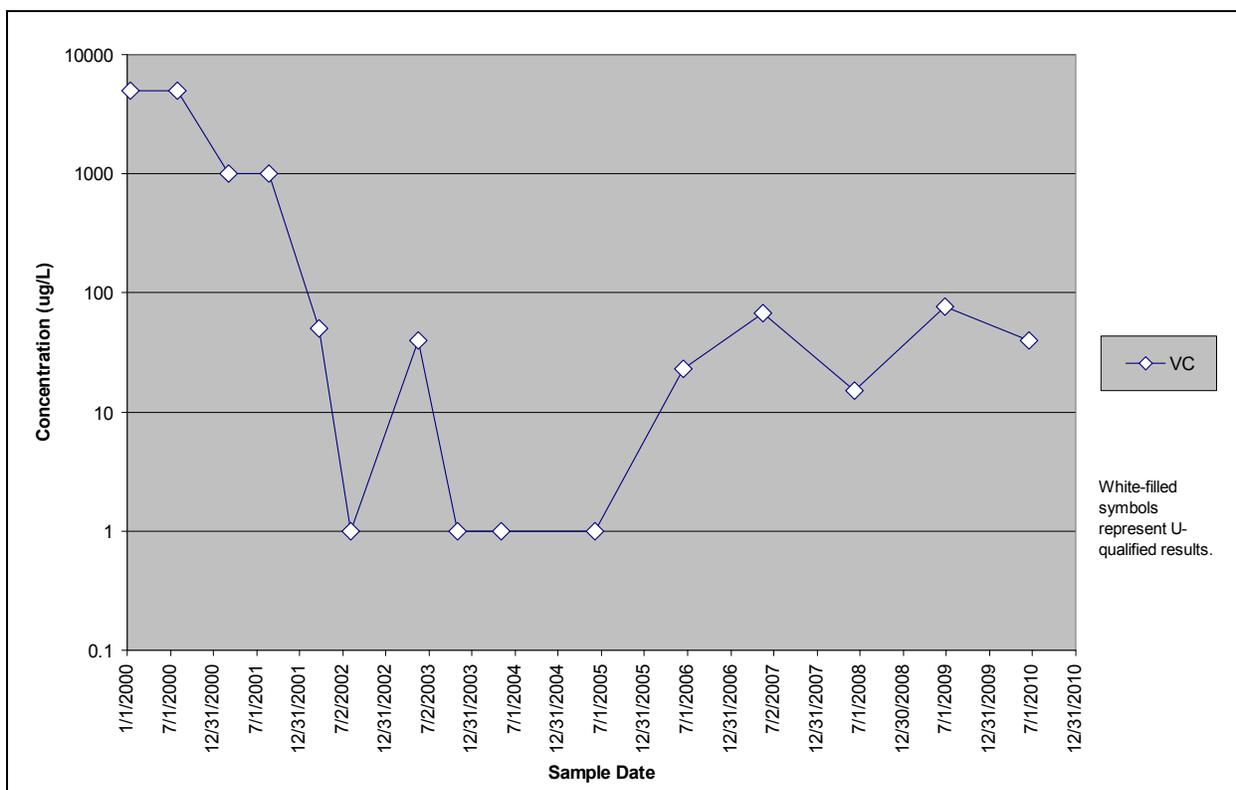

Note logarithmic concentration scale.

Figure 3. Vinyl Chloride Results from Evaluation Well 07391, Illustrating Variations in Detection Limits

Evaluations of U in groundwater are based on total U concentrations. In some cases, surface-water data are also evaluated (e.g., at GS13, the performance monitoring location supporting the SPPTS). The latter data through mid-2009, as well as some earlier groundwater data, are typically reported as isotopic activities. Any negative values for individual isotopic analyses are first replaced with 0.001 as described above, and then the individual results for a given location and date are converted to mass units and summed to provide a conservative approximation of total U by mass. Any total U results that were equal to or less than zero were also replaced with 0.001 to allow for the requirements of the statistical calculations. Conversion factors used to support these groundwater evaluations are listed in Table 3.

Table 3. U Isotope Conversion Factors Used in Groundwater Evaluations

Isotope	Conversion Factor	Typical Activity Units	Typical Mass Units
U-233 ^a	9,636.6 pCi/μg	pCi/L	μg/L
U-234	6,235.1 pCi/μg	pCi/L	μg/L
U-235	2.1612 pCi/μg	pCi/L	μg/L
U-236 ^a	64.672 pCi/μg	pCi/L	μg/L
U-238	0.33614 pCi/μg	pCi/L	μg/L

^a U-233 and U-236 are absent in natural U and, therefore, can be used as definitive markers for anthropogenic U. Los Alamos National Laboratory analyzes U-236 and also evaluates isotopic ratios for this purpose.

Source of conversion factors: Friedlander et. al 1981.

pCi/μg = picocuries per microgram; pCi/L = picocuries per liter

There are many instances in the database of multiple results for U on the same date at the same well. These results may represent any of the following: isotopic analysis providing results in activity units, isotopic analysis providing results in mass units, total U analysis via a metals analytical method, total U via a total U analytical method, filtered sample, unfiltered sample, unvalidated result, partially validated result, validated result, and result of reanalysis. (Note that these last four result types are most common in pre-closure data.) Before trends were calculated, for each well where this applied, these multiple results were winnowed to a single result representing each unique date. Factors evaluated in selecting the result for statistical use included:

- Filtration status;
- Validation qualifiers;
- Lab qualifiers; and
- Other U results from the well.

Because most samples for U analysis were field-filtered, where both sample results are provided, the filtered result is typically preferred for reasons of consistency. Similarly, where two very different results are presented, the result closer to others from the well is retained; if the two results are similar, the higher-concentration result is retained, to be conservative.

Data from original wells are grouped with those from replacement wells to form a data set on which the statistics are based. As additional data are collected from replacement wells, most of which were installed in 2005, this may prove to be inappropriate, given that the data populations from original and replacement wells may be discontinuous, which suggests that data from the original wells should be removed from statistical assessments of the groundwater data. This determination will be made as the post-closure data set becomes large enough to allow such an evaluation. Therefore, it should be stressed that trends for some locations may be misleading in that they may be strongly affected by well replacement and do not reflect only groundwater geochemistry and hydrology.

3.1.2 Routine Monitoring

3.1.2.1 POC Monitoring

This objective deals with monitoring discharges from the terminal ponds into Woman and Walnut creeks and streamflow at the additional POCs downstream at Indiana Street to demonstrate compliance with RFLMA surface-water-quality standards (see RFLMA Attachment 2, Table 1). Water-quality data at POCs are reportable under RFLMA when the applicable compliance parameters are greater than the corresponding Table 1 values (see Appendix D). Terminal pond discharges are monitored by POCs GS11, GS08, and GS31. Walnut Creek is monitored at Indiana Street by POC GS03. Woman Creek is monitored at Indiana Street by POC GS01. These locations are shown on Figure 4. Sampling and data evaluation protocols are summarized in Table 4.