

ENGINEERING
FILE NUMBER

12-33-568

INTERNAL DOCUMENT TRANSMITTAL

Transmittal No.: EDC-2001-031 Contract No. 3589 Date: 9/17/01

Work Pkg. No: 568 Title: IN-SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER

To: Document Control From: Engineering

Attention: Irene Russell Signature: *Karen Nennay*

ACTION REQUESTED **STATUS**

Per Joe Kazemi and Barb Duletsky, please issue controlled copies of attached to the following people at the appropriate time:

DOE, Gene Valett, Dave Hixson, Gary Branich, Neil DeYong, Vern Logan, Joe Kazemi, Barb Duletsky, and EDC

(COPY was given to Vern Logan for his use in bid preparation.)

| | |
|---------------------------------|---|
| Approved for Construction | A |
| Information Only | B |
| Controlled Document | C |
| Disapproved - Revise & Resubmit | D |

| Procedure Specification Drawing or Document No. | Rev. No. | No. of Copies | Title or Description | Status |
|---|----------|---------------|---|--------|
| NA | NA | 1 | Cover Sheet | C |
| NA | NA | 1 | Pricing Schedule | C |
| NA | 0 | 1 | Submittal Checklist - dated 9-12-01 | C |
| NA | NA | 1 | HASP Checklist | A.C |
| 3589SC-2-568-01000 | 0 | 1 | Special Conditions | A.C |
| 3840-C:HG-S-05-4859 | 0 | 1 | Summary of Work | A.C |
| 3840-C:HG-S-05-4860 | 0 | 1 | Measurement and Payment | A.C |
| 3840-C:HG-S-05-4861 | 0 | 1 | Submittals | A.C |
| 3840-C:EN-S-05-4862 | 0 | 1 | Quality Assurance | A.C |
| 3840-C:EN-S-05-4863 | 0 | 1 | Temporary Facilities and Controls | A.C |
| 3840-C:HG-S-05-4864 | 0 | 1 | Equipment Decontamination | A.C |
| 3840-C:EN-S-05-4865 | 0 | 1 | Material Storage and Handling | A.C |
| 3840-C:HG-S-05-4866 | 0 | 1 | In-Situ Chemical Oxidation | A.C |
| 3840-C:HG-S-05-4868 | 0 | 1 | Well Installation Oxidation of TCE in Groundwater | A.C |

| | |
|--|--|
| ADDRESSEE | THE ABOVE LISTED DOCUMENTS HAVE BEEN RECEIVED BY: |
| Receipt Acknowledgement Required NOTE: Please return one copy of this transmittal to Engineering within _____ working days. | Signature: NA |
| Receipt Acknowledgement Not Required X | Date Received: NA |

IN-SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER

SUBCONTRACT 3589-SC-WP568

ISSUED FOR BID

SEPTEMBER, 2001

Weldon Spring Site Remedial Action Project
Weldon Spring, Missouri



7295 Highway 94 South
St. Charles, MO 63304

Operating under prime contract No. DE-AC05-86OR21548
with the U.S. Department of Energy

**Weldon Spring Site Remedial Action Project
Pricing Schedule
Subcontract No. 3589SC-WP568
WP-568, In Situ Chemical Oxidation of TCE in Groundwater
Pilot-Scale Testing**

| Item No. | Description | Quantity | Units | Total \$ |
|----------|---------------------|----------|-------|----------|
| 1. | Pilot-Scale Testing | 1 | LS | |

Subcontractor: _____ Date: _____

Authorized Representative: _____

SET I.D. _____

IN-SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER

SUBCONTRACT 3589-SC-WP568

SEPTEMBER, 2001

Weldon Spring Site Remedial Action Project
Weldon Spring, Missouri



7295 Highway 94 South
St. Charles, MO 63304

Operating under prime contract No. DE-AC05-86OR21548
with the U.S. Department of Energy

SUBMITTALS CHECKLIST - WP 568 Rev. 0
In Situ Chemical Oxidation of TCE in Groundwater

Notes:

- The submittals listed below do not relieve the Subcontractor of submitting any information required by the terms and conditions of the Subcontract that is not listed.
- Items underlined are not required to be on a submittal form. These items can be transmitted by letter or given directly to the Construction Engineer.

| DELIVER TO: | REFERENCE SECTION | DESCRIPTION/ DELIVERABLE | SUBCONTRACTOR SUBMITTED | COMMENTS | Date Submitted | Date Returned |
|---------------------------|-------------------|---|---|---|----------------|---------------|
| GENERAL PROVISIONS | | | | | | |
| ENGR | GP-4 | Shop drawings. | Timely manner to support project. | Mandatory approval. | | |
| CM&O | GP-11 | <u>Invoices and payments.</u> | By the 15th of each calendar month. | Properly completed invoice in duplicate. | | |
| ENGR | GP-27 | Material Safety Data Sheets. | 5 working days prior to bringing materials on site. | See Health and Safety Plan. | | |
| CM&O | GP-29 | Temporary Buildings & Utilities. | Timely manner prior to need. | Mandatory approval. | | |
| PROC | GP-74 | Substance Abuse Program. | Within 14 days of contract award, prior to Notice to Proceed | Mandatory approval. | | |
| PROC | GP-75 | Certificate of Insurance. | Within 14 days of contract award, prior to Notice to Proceed | Mandatory approval. | | |
| GENERAL CONDITIONS | | | | | | |
| ENGR | GC-2 | As-built drawings. | Prior to final payment. | Mandatory approval. | | |
| ENGR | GC-3 | Construction schedule. | Within 14 days of contract award, prior to Notice to Proceed. | Mandatory approval. | | |
| ENGR | GC-3 | Schedule of Values | Prior to Notice to Proceed. | Mandatory approval. | | |
| CM&O | GC-3 | Monthly schedule analysis and update. | By <u>15</u> of each month. | Mandatory approval. Submit with Progress Payment Request. | | |
| ENGR | GC-7 | Lower tier subcontracts. | Within 14 days of contract award, prior to subtier arrival on-site. | Mandatory approval. Furnish list of references. | | |
| PROC | GC-8 | <u>Labor and equipment rates.</u> | Within 15 days of contract award. | Mandatory approval. | | |
| CM&O | GC-9 | <u>Daily construction report form.</u> | Daily. | Mandatory approval. | | |
| PROC | GC-10 | <u>Weekly man-hour report/employee roster form.</u> | Weekly. | Mandatory approval. | | |

| DELIVER TO: | REFERENCE SECTION | DESCRIPTION/ DELIVERABLE | SUBCONTRACTOR SUBMITTED | COMMENTS | Date Submitted | Date Returned |
|-------------------------------|-------------------|--|---|---|----------------|---------------|
| CM&O | GC-11 | <u>Overtime Request.</u> | 48 hours in advance. | Mandatory approval. | | |
| ENGR | GC-12 | Company logo. | Prior to on-site work. | Mandatory approval. | | |
| ENGR | GC-19 | Quality assurance. | 14 days after contract award, prior to Notice to Proceed. | Mandatory approval. | | |
| ENGR | GC-21 | Subcontractor supervision for off-hour emergencies. | Prior to on-site work. | Mandatory approval. | | |
| CM&O | GC-24 | <u>Interruption of existing service/utilities.</u> | 2 days prior to use. | Mandatory approval Submitted on outage request form. | | |
| PROC | GC-28 | <u>Use by S/C of facilities, utilities and equipment furnished under the S/C.</u> | 2 days prior to use. | Mandatory approval Written request to Contractor. | | |
| HEALTH AND SAFETY PLAN | | | | | | |
| ENGR | Section # 1.3.3 | Safe Work Plans. | 14 or 21 days after contract award (see Special Conditions), prior to Notice to Proceed. | Mandatory approval. | | |
| CM&O | Section # 1.4 | Task Specific Safety Assessments. | Prior to performing tasks. If in conjunction with an ES&H Review Form, submit 24 hours prior to performing the task. | Mandatory approval. | | |
| CM&O | Section # 1.8 | <u>Incident Reports.</u> | Immediately after incident. | Mandatory submittal. | | |
| CM&O | Section # 1.8 | <u>Foreman-Report-of-Injury Form.</u> | Within 3 days of the injury. | Mandatory submittal. | | |
| ENGR | Section # 3.1 | <u>Permit Required Confined Space Entry Program.</u> | As required by work. | Mandatory approval. | | |
| ENGR | Section # 3.1 | <u>Designation of Individuals responsible for confined space program implementation, including competent persons and rescue personnel.</u> | Prior to performing confined space entries. | Mandatory review and acceptance. | | |
| ENGR | Section # 3.4.1 | Material Safety Data Sheets. | 5 working days prior to bringing materials on site. | Mandatory approval. | | |
| ENGR | Section # 3.4.1 | <u>Chemical Inventories</u> | Monthly | Mandatory review and acceptance. | | |
| ENGR | Section # 3.4.1 | Written procedures for controlling exposures to carcinogens as low as reasonably achievable. | 5 working days prior to bringing materials on site which contain A1 or A2 carcinogens as identified by the American Conference of Governmental Industrial Hygienists. | Mandatory approval. | | |
| CM&O | Section #5.1.23 | <u>Monitoring Results.</u> | 24 hrs after receipt of results. | Mandatory submittal | | |
| ENGR | Section # 6.13 | Drawings of job-built jigs & tools. | Prior to use onsite. | Mandatory approval. | | |
| CM&O | Section # 6.14 | <u>Cutting/Welding/Open Flame Permit</u> | Prior to cutting burning, open flame work. | Mandatory approval. | | |
| ENGR | Section # 6.25 | Owners manual for heavy equipment. | Prior to use onsite. | Mandatory submittal. | | |

| DELIVER TO: | REFERENCE SECTION | DESCRIPTION/ DELIVERABLE | SUBCONTRACTOR SUBMITTED | COMMENTS | Date Submitted | Date Returned |
|---|------------------------|--|--|-------------------------|----------------|---------------|
| ENGR | Section # 6.25 | Operator qualifications for heavy equipment. | Prior to operating equipment onsite. | Mandatory submittal. | | |
| ENGR | Section # 7 | Medical evaluation reports. | 10 days prior to on-site work. | Mandatory approval. | | |
| CM&O | Section # 8 | <u>Training Authorization Forms.</u> | On the day of or before Contractor provided training. | Mandatory submittal. | | |
| ENGR | Section # 8.1.2.1 | <u>Training and Fit Testing documentation for respirators per OSHA standard.</u> | 10 days prior to performing work requiring respirators on site. | Mandatory submittal. | | |
| CM&O | Section # 8.1.3 | Training records for Safe Work Plans and TaSSAs. | At the end of each work shift. | Mandatory submittal. | | |
| ENGR | Section # 8.1.6 | Names and qualifications of on site supervisory personnel, including alternates, having overall responsibility for employee safety and health. | 10 days prior to performing work on site. | Mandatory submittal. | | |
| ENGR | Section # 8.2.1.1 | 24 hour hazardous waste site health and safety training certification and 1 day of documented field experience. | 10 days prior to on-site work. | Mandatory approval. | | |
| ENGR | Section # 8.2.1.1 | Supervisor training documentation meeting requirements of 29 CFR 1910.120(e). | 10 days prior to on-site work. | Mandatory approval. | | |
| ENGR | Section # 8.2.1.2 | 40 hour hazardous waste site health and safety training certification and 3 days of documented field experience. | 10 days prior to on-site work. | Mandatory approval. | | |
| ENGR | Section # 8.2.1.2 | Supervisor training documentation meeting requirements of 29 CFR 1910.120(e). | 10 days prior to on-site work. | Mandatory approval. | | |
| ENGR | Section # 8.4 | <u>Fire watch training.</u> | Prior to conducting fire watch. | Mandatory upon request. | | |
| CM&O | Section # 9.4.1 | <u>List of names of all employees required to be badged, including subtiers.</u> | 10 days prior to on-site work. | Mandatory submittal. | | |
| CM&O | Section # 9.4 | <u>WSSRAP Security Badge Information and Tracking Forms.</u> | Prior to on-site work. | Mandatory submittal. | | |
| CM&O | Section # 9.4.2 | <u>Name and description of duty of temporary employees.</u> | Prior to or at the time of arrival on site. | Mandatory submittal. | | |
| CM&O | Section # 9.4.4 | <u>Security Badges returned.</u> | Whenever a subcontract employee is terminated or the subcontract is completed. | Mandatory submittal. | | |
| ENGR | Section # 11.1 | Emergency Action Plan. | Prior to the commencement of work on site. | Mandatory submittal. | | |
| ENGR | Section # 11.2 | Name of the Subcontractor medical response personnel and associated first aid and CPR training documentation. | 10 days prior to on-site work. | Mandatory submittal. | | |
| TECHNICAL SPECIFICATION SUBMITTAL REQUIREMENTS | | | | | | |
| | 01300 (1.03.A, B, & C) | As-built drawings reflecting final as-built conditions | With completion report | | | |
| | 01300 (1.07.A.2) | Complete Construction Schedule including Barchart Schedule and Logic Diagram | Prior to Notice to Proceed | | | |
| | 01300 (1.07.B.1) | Construction Schedule including Barchart Diagram, Schedule Reports, and Narrative Report | Monthly on or about the 15 th | | | |

| DELIVER TO: | REFERENCE SECTION | DESCRIPTION/ DELIVERABLE | SUBCONTRACTOR SUBMITTED | COMMENTS | Date Submitted | Date Returned |
|-------------|-------------------------|--|---|----------|----------------|---------------|
| | 01300 (1.08.) | Catalog cuts, material certifications, shop drawings, Subcontractor drawings, operating/maintenance manuals, samples, special procedures, and/or other types of data as may be specified or listed | Such as to cause no delay in work and allow review and approval prior to receipt, inspection, installation, and/or incorporation of the item into the Work. | | | |
| | 01400 (1.04.A) | Quality Assurance Program | Prior to Notice to Proceed | | | |
| | 01400 (1.04.B) | Qualifications of QA representative and alternate | Prior to Notice to Proceed | | | |
| | 01400 (1.06.A) (1.06.B) | Quality related records | Upon completion of the contract | | | |
| | 01500 (3.03.C) | Subcontractor personnel spill response training evidence | Prior to bringing chemicals on site | | | |
| | 01503 (1.04.A) | Equipment Decontamination Plan | 5 days prior to decontamination pad construction | | | |
| | 01600 (1.03.A.1) | Material Safety Data Sheet (MSDS) for each chemical, reagent, oxidant, and other hazardous material brought on site | 5 days prior to bringing material on site | | | |
| | 01600 (1.03.A.2) | Supplier or manufacturer requirements and recommendations for material storage, handling, protection, and transportation for each chemical, reagent, oxidant, and other potentially hazardous material brought on site | 5 days prior to bringing material or chemical reagent, oxidant, or hazardous material on site | | | |
| | 02050 (1.06.A.1) | Pilot-Scale Work Plan and Design | With bid | | | |
| | 02050 (1.06.A.2) | Conceptual Full-Scale Design | With bid | | | |
| | 02050 (1.06.A.3) | Safe Work Plan | Prior to Notice to Proceed | | | |
| | 02050 (1.06.A.4) | Emergency Response Plan | Prior to Notice to Proceed | | | |
| | 02050 (1.06.A.5) | Sampling and Analysis Plan | Prior to analytical sampling | | | |
| | 02050 (1.06.A.6) | Analytical Laboratory Certification | Prior to Notice to Proceed | | | |
| | 02050 (1.06.A.7) | Interim Progress Report | Monthly after Notice to Proceed | | | |
| | 02050 (1.06.A.8) | Pilot-Scale Testing Summary Report | Completion of pilot-scale testing | | | |
| | 02050 (1.06.A.9) | Final Full-Scale Work Plan and Design | Completion of pilot-scale testing | | | |
| | 02050 (1.08.A) | Missouri Registered Geologist License (copy) and resume | Prior to Notice to Proceed | | | |
| | 02733 (1.01.E) | Missouri Well Drillers' License | Prior to Notice to Proceed | | | |
| | 02733 (1.05.A.1) | Injection Well Plan | 14 days prior to installation | | | |
| | 02733 (1.05.A.3) | All documentation required to certify new monitoring wells and injection wells | 14 days after completion of well installation | | | |
| | 02733 (3.01.E) | Daily Field Activity Report | Daily upon commencement of work | | | |
| | 02733 (3.09.A.2) | Field borehole logs, well construction diagrams, well development forms, and well abandonment forms | 5 working days after well completion or abandonment | | | |
| | 02733 (3.09.A.2) | Final typed borehole logs and as-built well diagrams | 30 days after well completion | | | |

David S. King 8-28-01
 ES&H Department Manager Approval and Date

WSSRAP HASP (REV. 7) CHECKLIST FOR WP-568 IN SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER
 (Replaces checklist for WP-550)

Notes:

1. The Subcontractor should review this checklist side-by-side with the Health and Safety Plan (HASP) in order, to fully understand the subcontract requirements and Contractor expectations. Those sections that the Contractor believes to be applicable to the scope of work defined in the subcontract documents have a "X" placed in the applicable column box for that section. The Subcontractor is responsible for reading all applicable HASP sections. The responsibility, for each applicable section, is denoted by a "X" in the appropriate box under the Responsibility column.
2. Additional sections of the HASP may become applicable based upon the Subcontractor's chosen work methods. In that event, the Subcontractor is responsible for full compliance with the additional sections of the HASP, even though the sections are not marked as applicable on this checklist.
3. Permits or forms are only required if the HASP section is applicable to the subcontract.

| HASP SECTION | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|--|------------|----------------|---------------|---|
| | | CONTRACTOR | SUBCONTRACTOR | |
| 1. INTRODUCTION | X | | X | |
| 1.1 SITE HISTORY | X | X | | |
| 1.2 SITE DESCRIPTION | X | X | | |
| 1.3 SAFE WORK PLANS | X | | X | All subsections apply when this section is applicable. Copies of representative Safe Work Plans will be made available to the Subcontractor upon request. |
| 1.4 TASK SPECIFIC SAFETY ASSESSMENTS | X | | X | TaSSA's may be used in place of SWPs at the Contractor's discretion. Form required. |
| 1.5 ENVIRONMENTAL SAFETY AND HEALTH REVIEWS | X | X | X | Contractor ES&H Representative will complete the ES&H Review Form, based on information provided by the Subcontractor about the individual work activity. |
| 1.5.1 ES&H REVIEW REQUIREMENTS FOR SAFE WORK PLANS | X | X | | Permit required. |
| 1.5.2 ES&H REVIEW, REQUIREMENTS FOR TASK SPECIFIC SAFETY ASSESSMENTS | X | X | | Permit required. |
| 1.6 GENERAL SAFETY PROVISIONS AND INSPECTIONS | X | | X | |
| 1.6.1 SUBCONTRACTOR MANAGEMENT /SUPERVISOR RESPONSIBILITIES | X | | X | |

| HASP SECTION | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|--------------|--|----------------|---------------|--|
| | | CONTRACTOR | SUBCONTRACTOR | |
| 1.6.2 | SPECIAL PROVISIONS FOR LABOR SUBCONTRACTS UNDER DIRECT PMC SUPERVISION | | | |
| 1.6.3 | EQUIPMENT AND TOOL INSPECTIONS | X | X | Contractor may perform inspections. |
| 1.6.4 | TEMPORARY FACILITIES | X | X | See Technical Specification 01500 for temporary facilities to be provided by the contractor. All other facilities will be provided by the subcontractor. |
| 1.6.5 | PRE-OCCUPANCY SAFETY INSPECTIONS | X | X | Permit required. |
| 1.7 | NONCONFORMING CONDITIONS AND PRACTICES | X | X | Contractor has authority to stop work. |
| 1.7.1 | SAFETY VIOLATION NOTICE | X | X | Contractor issues safety violation notices. Subcontractor must submit restart plan for all stop work orders. |
| 1.7.2 | DISCIPLINARY ACTIONS | X | | |
| 1.8 | INCIDENT REPORTING | X | | |
| 2 | CONTAMINANT AND HAZARD DESCRIPTION | X | X | |
| 2.1 | WSSRAP SOURCE AREAS AND CONTAMINANTS IN CONTROLLED AREAS | | | |
| 2.2 | RADIOLOGICAL CONTAMINANTS AND LEVELS AT THE WSSRAP AND VICINITY PROPERTIES | | | |
| 2.3 | RADIOLOGICAL HAZARDS IN CONTROLLED AREAS | | | |
| 2.3.1 | EXTERNAL BETA RADIATION | | | |
| 2.3.2 | EXTERNAL GAMMA RADIATION | | | |
| 2.3.3 | AIRBORNE RADIOACTIVITY | | | |
| 2.3.4 | HEALTH EFFECTS ASSOCIATED WITH RADIATION EXPOSURE | | | |
| 2.4 | NONRADIOLOGICAL WSSRAP CONTAMINANTS | X | X | Subcontractor will identify the action levels and permissible exposure limits for chemicals that are brought onsite. |

| HASP SECTION | | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|--|--|------------|----------------|---------------|--|
| | | | CONTRACTOR | SUBCONTRACTOR | |
| 2.5 | OTHER NONRADIOLOGICAL HAZARDS PRESENT IN UNCONTROLLED AND CONTROLLED AREAS | X | X | X | |
| 3 | WORK PRACTICES AND ENGINEERING CONTROLS | X | X | X | |
| 3.1 | SPECIAL REQUIREMENTS FOR ENTRY INTO CONFINED SPACES | X | X | X | |
| 3.1 RESPONSIBILITY FOR PROVIDING | HAZARD IDENTIFICATION AND ASSESSMENT | X | X | | |
| | IMPLEMENT. OF CONTROL MEASURES | X | X | X | |
| | EMERGENCY RESCUE SERVICES | X | X | | |
| | VENTILATION | X | X | | |
| 3.2 | MAN-MADE FIBERS | X | X | X | Contractor may be required to monitor. |
| 3.3 | HEARING CONSERVATION PROGRAM | X | X | X | |
| 3.3 RESPONSIBILITY FOR PROVIDING | ENGINEERING CONTROLS | X | | X | |
| | NOISE HAZARD POSTING | X | X | | |
| 3.4 | HAZARD COMMUNICATION PROGRAM | X | | X | Subcontractors may get approval for products already in the WSSRAP MSDS Tracking System without going through the submittal process by contacting the Contractor ES&H HAZCOM Coordinator and the Compliance Waste Minimization Coordinator in a Contractor prescribed manner (i.e. phone, e-mail, in person). Information that must be provided for approval includes (1) Product name, (2) Intended use, (3) Container size, and (4) Number of containers. Once approval is given, WSSRAP authorization labels may be picked up from the Waste Minimization Coordinator. A list of products in Site MSDS Tracking System is available upon request from the HAZCOM or Waste Minimization Coordinator. |

| HASP SECTION | | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|--------------|---|------------|----------------|---------------|---|
| | | | CONTRACTOR | SUBCONTRACTOR | |
| 3.4.1 | REQUIREMENTS FOR SUBCONTRACTS USING SUBCONTRACTOR MATERIALS | X | | X | The Subcontractor shall develop an inventory of all hazardous materials used in their operations. This inventory shall be submitted on a quarterly basis and contain, at the minimum, the following information for each material: quantity purchased/brought on site, quantity on hand, sizes of containers, and maximum quantity onsite during the quarter. The subcontractor shall use a Contractor-approved Form, and the inventory shall be certified by the Subcontractor as true and correct before submitting it to the Contractor. |
| 3.4.2 | SERVICE SUBCONTRACTOR MSDS REQUIREMENTS | | | | |
| 3.5 | CONTROL OF OZONE DEPLETING SUBSTANCES | X | | X | |
| 3.6 | DUST (PARTICULATE) CONTROL REQUIREMENTS | X | | X | |
| 3.6 | RESPONSIBILITY FOR PROVIDING DUST CONTROL EQUIPMENT | X | | X | |
| 3.7 | EXTREME TEMPERATURE REQUIREMENTS | X | X | X | Contractor provides heat stress monitoring. |
| 3.7 | RESPONSIBILITY FOR PROVIDING COLD WEATHER CLOTHES | X | | X | |
| | HEATED SHELTERS | X | | X | Contractor approval required. |
| | DRINK STATIONS | X | | X | Contractor approval required. |
| | SHADED REST AREAS | X | | X | |
| | ICE VESTS | X | | X | |
| 3.8 | VACUUM CLEANERS AND PORTABLE AIR-HANDLING EQUIPMENT | | | | |
| 3.8 | RESPONSIBILITY FOR PROVIDING VACUUM CLEANERS (INCLUDING HEPA) | | | | |
| | PORTABLE AIR-HANDLING EQUIPMENT | | | | |

| HASP SECTION | | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|--------------|---|--|----------------|---------------|--|
| | | | CONTRACTOR | SUBCONTRACTOR | |
| | VACUUM CLEANER RADIATION SURVEY FREQUENCY | | | | |
| 3.9 | REQUIREMENTS APPLICABLE TO CONTROLLED AREAS | | | | |
| 3.9.1 | CONTAMINATION CONTROL | | | | |
| 3.9.1 | RESPONSIBILITY FOR PROVIDING | PROCUREMENT OF SUFFICIENT TOOLS SO THAT TOOLS FREQUENTLY USED IN THE CONTAMINATION AREA MAY BE DEDICATED TO THAT USE | | | |
| 3.9.2 | MINIMIZING RADIATION EXPOSURES | | | | |
| 3.9.3 | COMMUNICATION SYSTEMS | X | | X | |
| 3.9.4 | REQUIREMENTS FOR ASBESTOS OPERATIONS | | | | |
| 3.9.5 | REQUIREMENTS FOR LEAD OPERATIONS | | | | |
| 3.9.6 | REQUIREMENTS FOR CADMIUM | | | | |
| 3.10 | ADDITIONAL REQUIREMENTS APPLICABLE TO WATER TREATMENT PLANTS | | | | |
| 3.11 | REQUIREMENTS FOR REMOVING SAMPLES FROM SITE | X | | X | Subcontractor may use their own or another chain of custody form, subject to contractor approval. |
| 3.11.1 | CHAIN OF CUSTODY REQUIREMENTS | X | | X | Subcontractor is responsible for the appropriate disposal of all of their samples. Samples will not be disposed of onsite. Samples shall be disposed of in accordance with all applicable regulations. |
| 3.12 | REQUIREMENTS FOR WORK INSIDE CONTROLLED AREAS | | | | |
| 4 | PERSONAL PROTECTIVE EQUIPMENT | X | | X | |
| 4.1 | SAFETY APPAREL FOR WORK AT THE WELDON SPRING SITE REMEDIAL ACTION PROJECT | X | | X | |

| HASP SECTION | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|---|------------|----------------|---------------|--|
| | | CONTRACTOR | SUBCONTRACTOR | |
| 4.2 SAFETY APPAREL FOR WORK IN RESTRICTED AREAS INSIDE CONTROLLED AREAS | | | | |
| 4.3 ADDITIONAL PERSONAL PROTECTIVE EQUIPMENT REQUIREMENTS FOR CONTROLLED AND UNCONTROLLED AREAS | X | | X | |
| 4.4 RESPIRATOR USAGE AT THE WSSRAP | X | X | X | Respirator fittest may be required if hot work is to be performed. |
| 4.4.1 SUPPLIED AIR SYSTEMS REQUIREMENTS | | | | |
| 4.5 DONNING AND DOFFING | X | | X | |
| 5 MONITORING | X | X | X | The ES&H Technicians will be conducting the monitoring and sample collection under the direction of the Contractor, and using materials provided to them by the Contractor. Subcontractor may be required to provide monitoring equipment for exotic substances. |
| 5.1 MONITORING PROGRAM ELEMENTS | X | X | X | |
| 5.1.1 GENERAL MONITORING PROGRAM REQUIREMENTS | X | X | X | |
| 5.1.2 FETAL PROTECTION POLICY | | | | |
| 5.1.3 PERSONNEL CONTAMINATION MONITORING | | | | |
| 5.1.4 AIR SAMPLING FOR LONG-LIVED RADIOACTIVE AIRBORNE PARTICULATES | | | | |
| 5.1.5 EXTERNAL BETA/GAMMA RADIATION | | | | |
| 5.1.6 INTERNAL RADIATION EXPOSURE (BIOASSAY) MONITORING | | | | |
| 5.1.7 RESPIRATOR CONTAMINATION MONITORING | | | | |
| 5.1.8 RADON AND RADON DAUGHTER MONITORING | | | | |
| 5.1.9 ASBESTOS AND/OR MAN-MADE MINERAL FIBER MONITORING | X | X | X | If MMF is present monitoring may be required. |

| HASP SECTION | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS | |
|--------------|--|----------------|---------------|-------------------------|---|
| | | CONTRACTOR | SUBCONTRACTOR | | |
| 5.1.10 | POLYCHLORINATED BIPHENYL MONITORING | | | | |
| 5.1.11 | LEAD MONITORING | | | | |
| 5.1.12 | CADMIUM MONITORING | | | | |
| 5.1.13 | MERCURY VAPOR MONITORING | | | | |
| 5.1.14 | NOISE MONITORING | X | X | | |
| 5.1.15 | HEAT STRESS MONITORING | X | X | | |
| 5.1.16 | AIRBORNE DUST (PARTICULATE) MONITORING | X | X | | |
| 5.1.17 | CONFINED SPACE ENTRY MONITORING | X | X | | |
| 5.1.18 | TORCH/PLASMA ARC CUTTING MONITORING | | | | |
| 5.1.19 | OXYGEN | | | | |
| 5.1.20 | EXPLOSIVE ATMOSPHERE | | | | |
| 5.1.21 | MONITORING FOR OTHER CONTAMINANTS | X | X | X | Contractor will provide oversight for the monitoring. |
| 5.1.22 | SUBCONTRACTOR INDUSTRIAL HYGIENE LABORATORY QUALIFICATIONS | | | | |
| 5.1.23 | SUBCONTRACTOR POSTING OF MONITORING RESULTS | | | | |
| 6 | GENERAL SAFETY | X | | X | |
| 6.1 | SAFETY REPORTING REQUIREMENTS FOR INJURY, ILLNESS, AND PROPERTY DAMAGE | X | | X | |
| 6.2 | TAGGING OF DEFECTIVE TOOLS, MATERIALS, OR EQUIPMENT | X | | X | |
| 6.3 | HOUSEKEEPING | X | | X | |
| 6.4 | SANITATION | X | | X | |

| HASP SECTION | | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|--|---|------------|----------------|---------------|--|
| | | | CONTRACTOR | SUBCONTRACTOR | |
| 6.4.1 GENERAL REQUIREMENTS | | X | | X | |
| 6.4.1 RESPONSIBILITY FOR PROVIDING | POTABLE WATER CONTAINERS | X | | X | |
| | NONPOTABLE WATER CONTAINERS | X | | X | |
| | CONSTRUCTION TOILETS | X | | X | |
| | SINGLE-USE CUP DISPENSERS | X | | X | |
| | WATER DISPENSER CLEANING SCHEDULE | X | | X | |
| | REST AREAS | X | | X | Contractor approval required. |
| | TRASH RECEPTACLES | X | | X | |
| 6.4.2 REQUIREMENTS FOR CONTROLLED AREAS | | | | | |
| 6.5 ILLUMINATION | | X | | X | |
| 6.5 RESPONSIBILITY FOR PROVIDING | LIGHTING | X | | X | |
| 6.6 FALL PROTECTION | | X | | X | |
| 6.6 RESPONSIBILITY FOR PROVIDING | LANYARDS | X | | X | |
| | FULL BODY HARNESS | X | | X | |
| | LIFELINES | X | | X | |
| 6.7 SLIP, TRIP, AND FALL HAZARDS | | X | | X | |
| 6.8 WORKING ON OR NEAR WATER | | | | | |
| 6.8 RESPONSIBILITY FOR PROVIDING | LIFE VESTS AND OTHER APPROPRIATE SAFETY EQUIPMENT | | | | |
| | TWO-WAY RADIOS | X | | X | Radio communication will be provided between the subcontractor and contractor. |

| HASP SECTION | | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|--------------|--|------------|----------------|---------------|----------------------------------|
| | | | CONTRACTOR | SUBCONTRACTOR | |
| 6.9 | FIRE PROTECTION AND PREVENTION | X | | X | |
| 6.9 | RESPONSIBILITY FOR PROVIDING FIRE EXTINGUISHERS | X | | X | |
| 6.10 | FUEL STORAGE TANKS | | | | |
| 6.11 | WASTE STORAGE TANKS | X | | X | |
| 6.12 | MATERIAL HANDLING AND STORAGE | X | | X | |
| 6.12 | RESPONSIBILITY FOR PROVIDING DUNNAGE | X | | X | |
| 6.13 | TOOLS | X | | X | |
| 6.13 | RESPONSIBILITY FOR PROVIDING TAGGING OF DEFECTIVE TOOLS | X | | X | |
| 6.14 | TORCH/PLASMA ARC CUTTING, WELDING, AND OPEN FLAME REQUIREMENTS | X | X | X | Permit required. |
| 6.14 | RESPONSIBILITY FOR PROVIDING FIRE PREVENTION EQUIPMENT | X | | X | |
| | FIRE WATCH | X | | X | |
| 6.15 | LOCKOUT/TAGOUT/TRYP OF ENERGY SOURCES | X | X | X | Training provided by Contractor. |
| 6.16 | ELECTRICAL | X | X | X | Contractor approval required. |
| 6.16 | RESPONSIBILITY FOR PROVIDING GROUND FAULT CIRCUIT INTERRUPTERS | X | | X | |
| 6.17 | LADDERS | X | | X | |
| 6.17 | RESPONSIBILITY FOR PROVIDING LADDERS | X | | X | |
| | LADDER LABELING | X | | X | |

| HAASP SECTION | | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|---|--|------------|----------------|---------------|-------------------------|
| | | | CONTRACTOR | SUBCONTRACTOR | |
| 6.18 SCAFFOLDING | | | | | |
| 6.18 RESPONSIBILITY FOR PROVIDING | SCAFFOLDING | | | | |
| | SCAFFOLD TAGS | | | | |
| 6.19 POWER-DRIVEN STAGING AND PLATFORMS | | | | | |
| 6.19 RESPONSIBILITY FOR PROVIDING | POWER-DRIVEN STAGING AND PLATFORMS | | | | |
| | PROPER PLACARDS AND LABELING | | | | |
| 6.20 MANBASKETS | | | | | |
| 6.20 RESPONSIBILITY FOR PROVIDING | MANBASKET | | | | |
| 6.21 SIGNS, BARRICADES, GUARDRAILS, HANDRAILS, COVERS, STAIRS, DECKS, AND RAMPS | | | | | |
| 6.21 RESPONSIBILITY FOR PROVIDING | SIGNS | | | | |
| | BARRICADES | | | | |
| 6.22 ROOFS | | | | | |
| 6.22 RESPONSIBILITY FOR PROVIDING | SOLID WORKING SURFACE | | | | |
| | FULL BODY HARNESS WITH RETRACTABLE BLOCK LIFELINES | | | | |
| 6.23 CRANES | | | | | |
| 6.23 RESPONSIBILITY FOR PROVIDING | CRANES | | | | |
| 6.23.1 CRANE INSPECTION | | | | | |

| HAASP SECTION | | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|---|---|------------|----------------|---------------|-------------------------|
| | | | CONTRACTOR | SUBCONTRACTOR | |
| 6.23.1 RESPONSIBILITY FOR PROVIDING | WEATHER-PROOF CONTAINER ON CRANE | | | | |
| 6.23.2 | MAST OR TOWER CRANE | | | | |
| 6.23.2 RESPONSIBILITY FOR PROVIDING | MAST OR TOWER CRANE | | | | |
| 6.23.2 CONTINUED | SPECIAL SAFETY HARNESS AND LIFELINE | | | | |
| 6.23.3 | MOVEMENT OF CRANES (UNDER THEIR OWN POWER) | | | | |
| 6.23.3 RESPONSIBILITY FOR PROVIDING | ESCORT VEHICLE WHEN NEEDED | | | | |
| 6.23.4 | CRITICAL LIFTS | | | | |
| 6.23.5 | CRANE WORK NEAR OVERHEAD POWER LINES | | | | |
| 6.23.6 | CRANE WORK OVER CRITICAL PIPING | | | | |
| 6.24 | RIGGING | | | | |
| 6.24.1 | GENERAL | | | | |
| 6.24.2 | EQUIPMENT INSPECTION AND TESTING | | | | |
| 6.24.2 RESPONSIBILITY FOR PROVIDING | RIGGING LABELING | | | | |
| | RIGGING AND HOISTING EQUIPMENT | | | | |
| 6.24.3 | SAFE WORKING LOADS | | | | |
| 6.24.4 | ALLOY STEEL CHAINS | | | | |
| 6.24.5 | WIRE ROPES | | | | |

| HASP SECTION | | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|---|---|------------|----------------|---------------|--|
| | | | CONTRACTOR | SUBCONTRACTOR | |
| 6.24.6 | SLINGS | | | | |
| 6.24.7 | SHACKLES, HOOKS, AND BOLTS | | | | |
| 6.24.8 | KNOTS | | | | |
| 6.24.9 | WEATHER CONDITIONS | | | | |
| 6.24.10 | INCIDENT REPORTING | | | | |
| 6.25 | MOTOR VEHICLES AND HEAVY EQUIPMENT | X | | X | |
| 6.25 RESPONSIBILITY FOR PROVIDING | MOTOR VEHICLES | X | | X | |
| | HEAVY EQUIPMENT | X | | X | |
| 6.26 | UNDERGROUND UTILITIES AND COMMUNICATIONS LINES | X | | X | |
| 6.26 RESPONSIBILITY FOR PROVIDING | UTILITY OWNER NOTIFICATION | X | | X | |
| 6.26.1 | EXCAVATION OF UNDERGROUND UTILITIES AND COMMUNICATION LINES | X | | X | |
| 6.26.2 | INSTALLATION OF UNDERGROUND UTILITIES AND COMMUNICATION LINES | | | | |
| 6.27 | EXCAVATIONS | X | X | X | Excavation permit may be required. Contractor signs off on the permit. |
| 6.28 | DEMOLITION | | | | |
| 6.29 | TRAFFIC CONTROL | X | | X | |
| 6.30 | CLEARING AND GRUBBING | | | | |
| 6.31 | ELECTRICAL TRANSMISSION LINES | X | | X | |
| 6.32 | CONCRETE PLACEMENT | X | | X | |
| 6.33 | NUCLEAR SOIL DENSITY/MOISTURE TESTING | | | | |

| HASP SECTION | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS | |
|--------------|--|----------------|---------------|-------------------------|--|
| | | CONTRACTOR | SUBCONTRACTOR | | |
| 7 | MEDICAL SURVEILLANCE PROGRAM | X | | X | |
| 7.1 | GENERAL MEDICAL SURVEILLANCE PROGRAM FOR PERSONNEL WORKING AT THE WELDON SPRING SITE REMEDIAL ACTION PROJECT | X | | X | |
| 7.1.1 | RESPIRATOR MEDICAL MONITORING REQUIREMENTS | X | | X | |
| 7.1.2 | AUDIOMETRIC TESTING | X | | X | |
| 7.1.3 | ADDITIONAL OSHA SPECIFIC MEDICAL MONITORING REQUIREMENTS | X | | X | |
| 7.2 | MEDICAL SURVEILLANCE PROGRAM FOR PERSONNEL WORKING IN CONTROLLED AREAS | X | | X | |
| 7.2.1 | MEDICAL SURVEILLANCE PROGRAM FOR HAZARDOUS WASTE WORKERS | X | | X | |
| 7.3 | ASBESTOS MEDICAL MONITORING REQUIREMENTS | | | | |
| 8 | TRAINING AND QUALIFICATIONS | X | | X | |
| 8.1 | GENERAL TRAINING REQUIREMENTS FOR PERSONNEL WORKING AT THE WELDON SPRING SITE REMEDIAL ACTION PROJECT | X | X | X | |
| 8.1.1 | GENERAL EMPLOYEE TRAINING AND GENERAL EMPLOYEE RADIOLOGICAL TRAINING | X | X | X | Contractor provides training. |
| 8.1.2 | RESPIRATOR TRAINING AND FIT-TESTING | X | X | X | Contractor may provide the training and fit testing. |
| 8.1.2.1 | SUBCONTRACTOR-PROVIDED TRAINING AND FIT-TESTING | | | | |
| 8.1.2.2 | CONTRACTOR-PROVIDED TRAINING AND FIT-TESTING | X | X | X | Contractor will provide fit test. |
| 8.1.3 | TASK-SPECIFIC SAFETY BRIEFING | X | | X | |

| HASP SECTION | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|--|------------|----------------|---------------|--|
| | | CONTRACTOR | SUBCONTRACTOR | |
| 8.1.4 HAZARD COMMUNICATION PROGRAM | X | | X | |
| 8.1.4.1 SUBCONTRACTOR-PROVIDED PROGRAM AND TRAINING | X | | X | |
| 8.1.4.2 CONTRACTOR PROGRAM AND TRAINING | | | | |
| 8.1.5 HEARING CONSERVATION PROGRAM | X | | X | |
| 8.1.6 SUPERVISOR QUALIFICATIONS | X | | X | |
| 8.1.7 PERMIT REQUIRED CONFINED SPACE ENTRY TRAINING | X | X | X | Competent person appointed by subcontractor. |
| 8.1.7.1 SUBCONTRACTOR TRAINING | X | | X | |
| 8.1.7.2 CONTRACTOR TRAINING | X | | X | |
| 8.1.8 EXCAVATION AWARENESS TRAINING FOR EXCAVATIONS | | | | |
| 8.1.9 MAN-MADE MINERAL FIBER TRAINING | X | X | X | As needed. |
| 8.1.10 LOCKOUT TAGOUT TRAINING | X | X | | Contractor provides training. |
| 8.2 ADDITIONAL TRAINING REQUIREMENTS FOR PERSONNEL WORKING IN CONTROLLED AREAS | X | | X | |
| 8.2.1 HAZARDOUS WASTE OPERATIONS SITE WORKER TRAINING REQUIREMENTS | X | | X | |
| 8.2.1.1 HAZARDOUS WASTE OPERATIONS SITE WORKER 24-HOUR TRAINING REQUIREMENTS | X | | X | |
| 8.2.1.2 HAZARDOUS WASTE OPERATIONS SITE WORKER 40-HOUR TRAINING REQUIREMENTS | X | | X | Only required for those individuals designated to use respirators. |
| 8.2.2 SITE VISITOR REQUIREMENTS | X | | X | |
| 8.2.3 SAFETY HEALTH AND RADIATION PROTECTION TRAINING | | | | |
| 8.2.4 ASBESTOS | | | | |

| HASP SECTION | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|---|------------|----------------|---------------|--|
| | | CONTRACTOR | SUBCONTRACTOR | |
| 8.2.5 TRAINING CARDS | X | X | | Contractor will provide training cards. |
| 8.2.6 TORCH/PLASMA WELDING TRAINING | X | | X | |
| 8.3 ADDITIONAL TRAINING FOR CONTROLLED AND UNCONTROLLED AREAS | X | | X | |
| 8.4 FIRE WATCH TRAINING | X | | X | |
| 9 SITE CONTROL | X | X | | The Technicians will work under the direction and along with the Contractor representatives. |
| 9.1 BUDDY SYSTEM | X | | X | Required for a restrictive area. |
| 9.2 PROHIBITED ITEMS | X | | X | |
| 9.3 SECURITY BADGING REQUIREMENTS | X | X | X | All subsections apply when this section is applicable. Contractor issues badges. |
| 10 WORK ZONE EXIT REQUIREMENTS, DECONTAMINATION, AND CLEANING | X | | X | |
| 10.1 UNCONTROLLED AREA WORK ZONE EXIT REQUIREMENTS | X | | X | |
| 10.2 CONTROLLED AREA WORK ZONE EXIT AND CONTAMINATION CONTROL REQUIREMENTS | X | | X | See section 10.2.7. |
| 10.2.1 REQUIREMENTS FOR TEMPORARY SHOWERS AND CHANGE ROOMS | | | | |
| 10.2.2 WORK ZONE EXIT REQUIREMENTS WHEN SHOWERS ARE NOT REQUIRED | | | | |
| 10.2.3 ADDITIONAL REQUIREMENTS FOR ASBESTOS OR MMF | | | | |
| 10.2.4 ADDITIONAL REQUIREMENTS FOR PCBs | | | | |
| 10.2.5 EQUIPMENT DECONTAMINATION REQUIREMENTS APPLICABLE AT WORK ZONE EXITS | | | | |
| 10.2.6 TEMPORARY RESTROOM FACILITIES IN CONTROLLED AREAS | | | | |

| HASP SECTION | APPLICABLE | RESPONSIBILITY | | ADDITIONAL REQUIREMENTS |
|---|------------|----------------|---------------|---|
| | | CONTRACTOR | SUBCONTRACTOR | |
| 10.2.7 PERSONAL PROTECTIVE CLOTHING SEGREGATION AND DISPOSAL REQUIREMENTS | X | | X | |
| 10.3 CONTROLLED AREA EXIT REQUIREMENTS | | | | |
| 10.3.1 PERSONNEL | | | | |
| 10.3.2 EQUIPMENT | | | | |
| 11. EMERGENCY RESPONSE | X | | X | |
| 11.1 EMERGENCY PLAN | X | | X | |
| 11.1.1 TRAINING | X | | X | |
| 11.2 FIRST AID/MEDICAL CARE FOR INJURIES | X | | X | Contractor's resources will be available as a backup. |
| 11.3 HEAT/COLD STRESS | X | | X | |
| 11.4 FIRE | X | | X | |
| 11.5 INCLEMENT WEATHER | X | | X | |
| 11.6 NOTIFICATION | X | | X | |
| 11.7 UNUSUAL OCCURRENCE | X | | X | |
| 11.8 CONTINGENCY PLAN FOR SPILLS | X | | X | |
| 11.8.1 SPILL NOTIFICATION | X | | X | Disregard references to Access Control. All emergency notifications should be made to Main Site Security. |
| 11.8.1.1 SPILL NOTIFICATION FOR WATER TREATMENT PLANTS | | | | |
| 11.8.2 RESPONSE PROCEDURES | X | | X | |
| 11.8.3 REPORTING | X | | X | |
| 11.9 EQUIPMENT AND SERVICES | X | | X | |



CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

| | | |
|-----------------|---|----------------------|
| DOCUMENT TITLE: | Specification Section 01000 | 3589SC-2-568-01000-0 |
| | Special Conditions | (DOCUMENT NUMBER) |
| | In-Situ Chemical Oxidation of TCE in Groundwater | |
| | WP-568, Rev. 0 | |

| | (SIGNATURE) | (DATE) |
|-----------------------|--------------------|---------|
| PREPARED: B. Duletsky | <i>B. Duletsky</i> | 9-12-01 |
| REVIEWED: J. Kazemi | <i>Joe Kazemi</i> | 9-12-01 |

APPROVED:

| | | |
|------------------------|-------------------------|---------|
| PROJECT ENGINEER | <i>Joe Kazemi</i> | 9-12-01 |
| GWOU TECHNICAL MANAGER | <i>[Signature]</i> | 9-13-01 |
| ES&H MANAGER | <i>[Signature]</i> | 9-14-01 |
| SAFETY MANAGER | <i>Mike Mitchell</i> | 9/14/01 |
| ENGINEERING MANAGER | <i>Michael D. Oakes</i> | 9-14-01 |

QUALITY LEVEL: [] 1 [x] 2 [] 3

APPROVED FOR CONSTRUCTION:

| | | |
|-------------------------|--------------------------|-----------|
| DEPT. PROJECT DIRECTOR | <i>[Signature]</i> | 9/14/01 |
| PROJECT QUALITY MANAGER | <i>Steve D. Gotsch</i> | 9/14/2001 |
| DOE PROJECT ENGINEER | <i>Thomas C. Pauling</i> | 9/14/2001 |

WELDON SPRING SITE REMEDIAL ACTION PROJECT
WELDON SPRING, MISSOURI
IN SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER
SUBCONTRACT NO. 3589SC-WP-568

SPECIAL CONDITIONS

TABLE OF CONTENTS

| <u>SECTION</u> | <u>TITLE</u> | <u>PAGE</u> |
|-----------------------|--|--------------------|
| SC-1 | STATEMENT OF WORK | 2 |
| SC-2 | SCHEDULE AND RESTRAINTS | 2 |
| SC-3 | COMMENCEMENT AND COMPLETION OF WORK | 3 |
| SC-4 | EXCEPTIONS TO THE GENERAL CONDITIONS AND GENERAL PROVISIONS .. | 4 |
| SC-5 | KEY PERSONNEL..... | 5 |
| SC-6 | QUALITY ASSURANCE..... | 6 |
| SC-7 | UNCLASSIFIED FOREIGN VISITS AND ASSIGNMENTS..... | 6 |
| SC-8 | ADDITIONAL HEALTH AND SAFETY REQUIREMENTS | 6 |
| SC-9 | COST OF DISPOSAL FOR CONTAMINATED SOIL..... | 8 |

SC-1 STATEMENT OF WORK

Unless otherwise specified, the subcontractor shall furnish and assume full responsibility, including security, for all materials, equipment, labor, transportation, construction equipment and machinery, tools, appliances, fuel, power, water, sanitary facilities, temporary facilities, and incidentals necessary for furnishing, performance, start-up and completion of the work, in strict accordance with the specifications, schedules, and drawings forming parts of this subcontract.

SC-2 SCHEDULE AND RESTRAINTS

- A. The complete construction schedule "Master Schedule" shall be submitted for review and approval within 14 calendar days of receipt of Notice of Award. Notice to Proceed with on-site work will not be issued until the schedule has been reviewed and approved by the Contractor. The construction schedule shall consist of a minimum of 30 activities in a Critical Path Method (CPM) schedule in a Gantt bar chart format with logic ties shown or as approved by the Contractor. The schedule shall include all "Hold and Witness Points", logic restraints, and activity relationships. Intermediate and/or detailed schedules shall directly reconcile with, and reference, the Master Schedule activity that they support.
- B. Concurrent Work: MK-Ferguson Company, and other Subcontractors may be engaged in work or use of the general areas covered by the work under this subcontract. Such personnel will have access to the areas and to the existing utilities. The Subcontractor shall cooperate to best utilize the available areas, roadways, and other facilities to avoid conflicts and unnecessary delays in construction. Coordination shall be through the Contractor's Construction Engineer. Potentially concurrent work in this general area includes, but is not limited to, the following:
1. Site grading, restoration, and seeding.
 2. Groundwater monitoring and sampling.
 3. Maintenance of Contractor-installed roads.
 4. Propane generator maintenance and refueling.
 5. Wastewater testing and transfer.
 6. Fence construction.
 7. Surveying.

Document No. 3589SC-2-568-01000-0

**IN SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER
SPECIAL CONDITIONS**

Page 2 of 8

Issued for Review - Revision 0

SC-3 COMMENCEMENT AND COMPLETION OF WORK

- A. Written Notice of Award shall authorize the Subcontractor to proceed with design, training, and submittal requirements as specified within the subcontract documents. On-site mobilization and work shall not commence until the Subcontract Administrator has issued the Subcontractor a written Notice to Proceed.
- B. Partial Notice to Proceed will be issued approximately 14 calendar days after the Notice of Award. This will authorize the Subcontractor to mobilize and construct temporary roads, staging areas, drilling pads, and decontamination facility, and to drill the two injection points and associated monitoring wells. In order to receive this partial Notice to Proceed, the following items shall be submitted and, if required, approved within 14 calendar days of the date of the Notice of Award:
1. Insurance Certificates
 2. Bonds
 3. Key Personnel Qualifications
 4. Missouri Well Drillers License
 5. Safe Work Plans for each of the activities to be performed
 6. Construction Schedule
 7. Substance Abuse Program
 8. QA/QC Program
 9. Executed Subcontract Document
 10. Subtier's substantiation of the submission of an application to the applicable unions for the National Maintenance Agreement(s), possess agreements, and proof of having received permission to use them.
- C. Full Notice to Proceed will be issued approximately 21 calendar days after Notice of Award. This will authorize the Subcontractor to perform all remaining fieldwork. In order to receive Full Notice to Proceed, the following additional items shall be submitted and, if required, approved within 21 calendar days of the date of the Notice of Award:

Document No. 3589SC-2-568-01000-0

**IN SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER
SPECIAL CONDITIONS**

Page 3 of 8

Issued for Review - Revision 0

1. Analytical Laboratory Certification
 2. Safe Work Plans for each of the remaining activities to be performed
- D. Upon receiving a Notice to Proceed, the Subcontractor shall be required to:
1. Conduct, in conjunction with the Contractor's representatives, an inspection of the Contractor's facilities to be used during execution of the work. Any facilities requiring repair or maintenance shall be noted. Remedy of deficiency shall be agreed to prior to initiation of activities.
 2. Commence field work under this subcontract within 5 calendar days of the date the Subcontractor receives a Notice to Proceed.
 3. Execute the work diligently.
- E. The Pilot-Scale Test Completion Report and the Full-Scale Treatment Design and Work Plan shall be submitted for review and approval no later than April 30, 2002.
- F. The Subcontractor shall allow for a 90-day monitoring period after the initial injection prior to abandoning wells.
- G. The total performance period of the contract, including training, submittals, mobilization, construction of temporary facilities, well drilling, chemical injection, groundwater sampling, reporting, final design of the full-scale treatment system, abandonment and dismantling of the pilot-scale system, and demobilization, shall be no longer than 203 calendar days from Notice of Award.

SC-4 EXCEPTIONS TO THE GENERAL CONDITIONS AND GENERAL PROVISIONS

- A. Exceptions to all General Conditions (GC's) and General Provisions (GP's):
1. Delete all references to "Access Control Points" or "Access Control Area"
- B. Exceptions to GC's for Construction Subcontracts:
1. GC-1, (c), last sentence: Delete sentence.
 2. GC-13, (c) (3), first sentence: Delete "the disposal site, the transportation, and".
 3. GC-14, (a), second sentence: Replace "will be inspected" with "are subject to inspection".

Document No. 3589SC-2-568-01000-0

IN SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER SPECIAL CONDITIONS

Page 4 of 8

Issued for Review - Revision 0

4. GC-26, (b): Replace with "Electrical power for construction will be provided as stated in Technical Specification Section 01500, Part 1.03.C."
5. GC-26, (c): Delete first sentence, and delete "additional" from the second and third sentences.
6. GC-26, (d) (2): Replace with "Construction water is available as stated in Technical Specification Section 01500, Part 1.03.B."

C. Exceptions to GC's for Service Subcontracts:

1. GC-1, (c), last sentence: Delete sentence.
2. GC-10, (c) (3), first sentence: Delete "the disposal site, the transportation, and".
3. GC-11, (a), second sentence: Replace "will be inspected" with "are subject to inspection".
4. GC-24, (b): Delete first sentence, and delete "additional" from the second and third sentences.
5. GC-24, (c), (2): Replace with "Construction water is available as stated in Technical Specification Section 01500, Part 1.03.B."

SC-5 KEY PERSONNEL

- A. The job functions listed in this section are considered essential to the work performed under this subcontract. The Subcontractor shall identify key personnel for each of the following job functions:
1. Project Manager/Engineer
 2. Geologist
 3. Health and Safety Officer
 4. General Superintendent
- B. Prior to diverting any of the specified individuals away from this subcontract, the Subcontractor shall notify the Contractor not less than 21 days in advance, and shall submit justification (including proposed substitutions) in sufficient detail to

Document No. 3589SC-2-568-01000-0

**IN SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER
SPECIAL CONDITIONS**

Page 5 of 8

Issued for Review - Revision 0

permit the Contractor to evaluate the impact on the project. No diversion of key personnel shall be made by the Subcontractor without the written consent of the Contractor.

- C. The General Superintendent and the Health and Safety officer shall be located onsite whenever field work is being performed under this subcontract. The Geologist shall be located onsite during all well installation, development, and permeability testing activities.

SC-6 QUALITY ASSURANCE

- A. The Subcontractor shall perform quality-related work in accordance with a written QA/QC Program submitted to the Contractor. The program shall conform to the applicable sections of DOE Order 414.1A and shall be approved by the Contractor prior to the Subcontractor performing work.
- B. The Subcontractor shall provide the Contractor access to his records or facilities for the purpose of inspection, audit, or surveillance.
- C. The Subcontractor shall report any nonconforming or discrepant conditions to the Contractor upon discovery of the condition.
- D. Upon completion of each item of the Work, all requested Quality Assurance records generated by the Subcontractor shall be transmitted to the Contractor.

SC-7 UNCLASSIFIED FOREIGN VISITS AND ASSIGNMENTS

The Subcontractor shall complete and submit the attached form to the Contractor for approval by DOE prior to any visits and/or assignments by any foreign nationals to any DOE facility.

SC-8 ADDITIONAL HEALTH AND SAFETY REQUIREMENTS

- A. The Subcontractor shall comply with applicable requirements of the *Weldon Spring Site Remedial Action Project Health and Safety Plan (HASP)*, Rev. 7, November 2000, at all times while performing work at the Weldon Spring Site. All applicable requirements noted on the HASP checklist will be enforced. The Subcontractor is encouraged to review Section 6, General Safety, and related training requirements.
- B. Subcontractor employees, including all sub-tier employees, shall attend a site-specific safety and health orientation provided by the Contractor, which is available

Document No. 3589SC-2-568-01000-0

IN SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER
SPECIAL CONDITIONS

Page 6 of 8

Issued for Review - Revision 0

once each week and shall not exceed 6 hours. This training will include General Employee Training and other applicable training (e.g., RCRA, MSDS awareness, etc.) as required for the activities to be performed

C. A "Restricted Area" is defined as any site area where access is controlled due to the presence of hazardous waste. The Contractor's ES&H representative will delineate Restricted Areas during the course of work. The following training and medical requirements shall apply to all personnel entering Restricted Areas:

1. The Subcontractor shall comply with 29 CFR 1910.120 when its employees or sub-tier employees are inside Restricted Areas of the site. These requirements include but are not limited to, Hazardous Waste Operations and Emergency Response (HAZWOPER) training, medical surveillance, PPE usage, etc. Minimal 24-hour HAZWOPER training, including annual 8-hour refresher training, shall be required for entry into restricted areas. Additional 8-hour HAZWOPER training, in accordance with 29 CFR 1910.120(e)(4), shall be required for individuals working in field supervisory roles. Training, medical surveillance, and respirator fit testing, in accordance with 29 CFR 1910.120 and 29 CFR 1910.134, shall be required when respiratory protection is needed to perform work.
2. Training certificates or equivalent documentation, medical surveillance requirements (when necessary), and current annual respirator fit testing results (when necessary) shall be submitted to the Contractor for review and acceptance prior to starting onsite work within Restricted Areas. This includes copies of initial training and annual refresher training certificates, and most recent annual medical clearance to wear respirators at hazardous waste sites. The Contractor reserves the right to audit or investigate any Subcontractor training programs required under 29 CFR 1910.120.
3. Training and medical requirements listed in Parts 1 or 2 (above) do not apply to employees or Subtier employees that perform activities within a Restricted Area that pose no reasonable potential for exposure to hazardous waste or substances or to health and safety hazards resulting from a hazardous waste operation. This includes delivery personnel, facility construction personnel, etc.

D. The Subcontractor shall delineate and post each area where chemicals are stored, mixed, and/or injected as a "Chemical Usage Area." Only authorized personnel who have received appropriate training specific to the chemicals being used and

Document No. 3589SC-2-568-01000-0

**IN SITU CHEMICAL OXIDATION OF TCE IN GROUNDWATER
SPECIAL CONDITIONS**

Page 7 of 8

Issued for Review - Revision 0

the activities being performed shall be permitted to enter these areas. Training certificates or equivalent documentation shall be submitted to the Contractor for review and acceptance prior to starting onsite work within Chemical Usage Areas.

- E. The Subcontractor shall provide an Emergency Response Plan that addresses anticipated emergencies (i.e., personal injuries heat/cold stress, fire, severe weather, and chemical spills). This plan shall also include the arrangements for emergency showers and eye wash stations, as appropriate. These stations shall comply with the current ANSI standard (ANSI, Z358.1-1998), which requires the equipment to provide fifteen minutes of water at a flow of 30 gallons per minute (gpm) for showers and 0.4 gpm for eye wash stations. Travel time to the facilities shall be either 10 seconds or not more than 100 feet of distance, in accordance with 29 CFR 1910.151.

SC-9 COST OF DISPOSAL FOR CONTAMINATED SOIL

The Subcontractor shall reimburse the Contractor for the following costs of characterization, shipping, and disposal of contaminated soil wastes generated by the Subcontractor or his Subtiers through accidental releases of process chemicals or hydraulic fluids:

| Task | Cost (\$/drum*) |
|---|-----------------|
| Characterization (Sampling, analytical testing, data review) | 500 |
| Shipping (Loading and transportation @ \$1,581/cy) | 427 |
| Disposal (Envirocare @ \$104/cy) | 28 |
| TOTAL | 955 |

*Drum is assumed to be a standard 55-gallon drum containing contaminated soil wastes with no free liquid.

END OF SPECIAL CONDITIONS

U.S. Department of Energy
Washington, D.C.

NOTICE

DOE N 142.1

Approved: 7-14-99

SUBJECT: UNCLASSIFIED FOREIGN VISITS AND ASSIGNMENTS

1. PURPOSE. To provide interim Department of Energy (DOE) requirements and responsibilities for unclassified visits and assignment by foreign nationals to DOE facilities for unclassified activities. This Notice supplements DOE P 142.1 dated 7-14-99, which sets overall Departmental policy on unclassified foreign visits and assignments. It is a complement to existing counterintelligence and security orders and policies.
2. CANCELLATION. DOE 1240.2B, UNCLASSIFIED VISITS AND ASSIGNMENTS BY FOREIGN NATIONALS, of 8-21-92; including all exemptions and waivers to that Order.
3. APPLICABILITY. This Notice applies to all Departmental Elements and contractor organizations that receive unclassified visits and assignments of foreign nationals except those facilities designated by the Secretary, and to all DOE funded activities. This notice does not apply to visits or activities that are open to the public. Exclusions or modifications to the requirements of this Notice must be approved by the Secretary of Energy or designee.
4. REQUIREMENTS.
 - a. All unclassified visits (30 days or less) and assignments (more than 30 days) of foreign nationals will be managed consistent with DOE and national security policy and requirements
 - b. All DOE organizations that sponsor unclassified foreign national visits and assignments will maintain a reporting and recordkeeping system consistent with the requirements of this Notice. The reporting system will be an integral part of the approval process and reporting information will be provided to DOE Headquarters to support the Departmental information needs. At a minimum, the following information on each foreign visitor and assignees will be reported:
 - Biographical and personal information including date and place of birth and permanent address, and place/nature of employment.
 - Passport, visa, and Immigration and Naturalization Service information.
 - Purpose for the visit or assignment including detailed information on the research to be performed.
 - Actual dates, subjects, and areas to be visited and those areas actually visited.

Distribution:
All Departmental Elements

Initiated By:
Office of the Secretary

7-14-99

- Need for an export license.
- Information related to required indices checks.
- Information related to the appropriate security plan (generic or specific).
- Identity of the host of the visit or assignment
- Identity of the sponsoring organization of the visit or assignment.

Additional information will be required for all visits or assignments that require access to a security area by a foreign national, access to a sensitive subject by a foreign national, or access to any DOE facility or site by a foreign national from a sensitive country. This additional information must clearly indicate the results of coordination with counterintelligence, foreign intelligence, export control, and security organizations. Counterintelligence organizations will maintain the responsibility for indices checks, export control organizations will maintain responsibility for sensitive subject reviews and transfer authorization, and security organizations will ensure development of plans for the protection of security interests. The additional information will be provided to DOE Headquarters to support Departmental information needs.

- c. Approval authority, with the exception noted below, for all unclassified foreign visits and assignments at DOE field and contractor sites (including DOE laboratories) will be delegated to the site manager/laboratory director. Approval authority for unclassified visits and assignments at DOE Headquarters will be assigned to the Secretarial Officer from the sponsoring organization. Approving officials will be accountable for all approval decisions and for implementing an approval process in conformance with this Notice. Each DOE and DOE contractor organization must have an approval process which includes appropriate input from officials with responsibility for counterintelligence, security, export control, and technology transfer. These processes must address requirements for indices checks and security plans, if required, and will provide for follow-up contact by facility counterintelligence officials. These processes will also assure (1), that instances of close and continuing contact (including email contact) with foreign visitors and assignees from sensitive countries both on or off DOE sites are referred to the facility counterintelligence officials and (2), compliance with the Export Control Guidelines established by the Office on Non-proliferation and National Security. All visits and assignments by foreign nationals from countries on the list of State sponsors of terrorism maintained by the Department of State are to be approved by the Secretary.
- d. Indices checks are required for all visits and assignments of foreign nationals that are citizens of, or are employed by a government or institution of, a sensitive country, and all visits and assignments of foreign nationals involving security areas or sensitive subjects. Indices checks will be completed by the Office of Counterintelligence.

Indices checks will not be required for visits to designated DOE officials by foreign national diplomats and other foreign national senior government officials for the primary purpose of high-level policy dialogue. The Secretary will designate these DOE officials.

- e. A minimum of 30 days advance notice will be required for indices checks on visitors and assignees as required in paragraph d. The results of indices checks will be used in the review and approval process by the host organization.
- f. Indices checks must be completed prior to the visit or assignment. When circumstances do not allow for timely submission or completion of an indices check, the approving official must consult with the appropriate counterintelligence official prior to making an approval decision.
- g. Security plans are required for all unclassified foreign visits and assignments to security areas. Specific security plans tailored for individual foreign visits or assignments shall be developed and approved by the site manager/laboratory director for all visits or assignments that require access to a security area, access to a sensitive subject, or access to any DOE facility or site by a foreign national from a sensitive country. When access to a security area or a sensitive subject is not required, generic security plans will be developed. Generic security plans shall ensure that security interests and sensitive information and technologies are not placed at risk as a result of hosting foreign visitors and assignees. Security plans shall be reviewed by the cognizant DOE Field or Headquarters security organization (depending on where the visitor or assignee is going) and approved by the unclassified foreign visits and assignments approval authority prior to the commencement of the visit or assignment.
- h. The Office of Nonproliferation and National Security will maintain and distribute a current list of Sensitive Countries which will be updated annually based on input from the appropriate DOE organizations. This list may be supplemented by the Secretary of Energy, to include additional countries posing significant national economic security concerns. Approving officials are responsible for managing approvals according to the current list.
- i. The Office of Nonproliferation and National Security will maintain and distribute a current list of Sensitive Subjects. This list will be reviewed at least every six months based on input from appropriate DOE organizations. DOE facilities may append lists of their own comprising proprietary information. These lists shall be developed with input from facility officials with responsibility for counterintelligence, export control, foreign intelligence, and national security; and are to be submitted to The Office of Nonproliferation and National Security and the Office of Counterintelligence.

- j. The Office of Foreign Visits and Assignments Policy, in coordination with the Office of Counterintelligence, will manage a central tracking system for visits and assignments to DOE facilities and establish required reporting formats.
- k. Line management is responsible for implementation of the unclassified foreign visits and assignments process. Program reviews shall be conducted periodically by the Office of Foreign Visits and Assignments Policy and the Office of Counterintelligence to assess policy effectiveness and identify improvement areas. Independent oversight of the overall performance of the Foreign Visits and Assignments Program is the responsibility of the Office of Independent Oversight and Performance Assurance

5. DEFINITIONS.

Assignment. Presence, including employment, of an invited foreign national at a DOE facility for more than 30 calendar days. Assignments are normally for the purpose of participating in the work of the facility, gaining experience, or contributing to projects.

Close and Continuing Contact. Close and continuing contact with a foreign national is defined as a relationship that (a) involves bonds of affection and/or personal obligation, and/or (b) where the employee and foreign national share private time together in a public or private setting where sensitive professional and personal information is discussed or is the target of discussion. This includes contact regardless of location (on or off-site), but does not include incidental contact. Questions concerning this term and the required reporting obligations should be directed to the appropriate counterintelligence officials.

Economic Security. Concerns protection of U.S. proprietary economic or trade secret information from theft by any foreign power (see Economic Espionage Act of 1996).

Export Controlled Information (ECI). Certain unclassified Government information under DOE's cognizance which requires a specific license or authorization for export under United States laws or regulations and which unrestricted dissemination could reasonably be expected to adversely affect United States national security and nonproliferation objectives.

Foreign National. For the purposes of this Notice, a foreign national is any person who is not a U.S. citizen, and includes permanent resident aliens. Foreign nationals sponsored for visits or assignments may include, among others:

- (1) Officials or other persons employed by foreign governments or other foreign institutions, who may or may not be involved in cooperation under international agreements;
- (2) Foreign students at U.S. institutions;
- (3) Employees of DOE or other U.S. Government agencies or their contractors, of universities, of companies (professional or service staff), or of other institutions; and
- (4) Prospective employees of DOE or DOE contractors.

Host. A DOE or DOE contractor employee who is sponsoring a visitor or assignee as described in the Notice. A visitor or assignee cannot be a host unless he or she is an employee of DOE or a DOE contractor. A sensitive country foreign national can not be a host of another sensitive country foreign national. The host is directly responsible for ensuring adherence to the requirements of this notice.

Indices Check. A procedure whereby a request is made to appropriate U.S. Government agencies to determine whether information exists on a particular foreign national.

International Agreement. An agreement between the United States or an entity thereof, and a foreign country or an entity thereof, or an international organization or an entity thereof, to cooperate in an endeavor of common interest. Included are agreements of specific types, such as umbrella agreements, project agreements, implementing agreements, cooperative agreements, protocols, memoranda of understanding, and contracts providing for cooperative endeavors.

Proprietary Information. Information which contains trade secrets or commercial or financial information which is privileged or confidential, and may only include such information which:

- (1) Has been held in confidence by its owner;
- (2) Is of a type which is customarily held in confidence by its owner;
- (3) Has not been transmitted by the transmitting party to other entities (including the receiving party) except on the basis that it be held in confidence; and
- (4) Is not otherwise available to the receiving party from another source without restriction on its further dissemination.

Security Area. A specific physically bounded area, individually certified by the cognizant security officer, which has been approved by the Department for generating, receiving, using, processing, storing, reproducing, transmitting, destroying, or handling special nuclear material or classified matter. A security facility temporarily sanitized to protect a security interest during a visit or assignment continues to be a security facility for the purposes of this Notice.

Security Plan. A plan developed and implemented to protect DOE and DOE contractor assets and to prevent the compromise of a DOE security interest or sensitive subject to a foreign visitor or assignee. All sites and facilities hosting unclassified foreign visits and assignments are responsible for developing and approving a generic security plan that identifies general restrictions on access by all foreign visitors and assignees. Sites and facilities hosting unclassified foreign visits and assignments involving access to a security facility, access to a sensitive subject, or access to any DOE facility or site by a foreign national from a sensitive country shall develop a security plan specific to the individual visit. The specific security plan shall impose specific access restrictions and security countermeasures to ensure effective protection of DOE assets. The security plan will be approved by the approval authority for the unclassified foreign visit or assignment. The effectiveness of the security plan will serve as a critical decision element regarding approval actions. The security plan must provide sufficient detail to support the approval authority in the decision making process.

Sensitive Country. A country to which particular consideration is given for policy reasons during the DOE internal review and approval process of visits and assignments by foreign nationals. Countries may appear on this list for reasons of national security, nuclear nonproliferation, regional instability, threat to national economic security, or terrorism support. For purposes of this Order, a foreign national is considered to be from a sensitive country if a citizen of, or employed by, a government or institution of a sensitive country. The list of sensitive countries, derived from existing Government sources, will be maintained by Office of Nonproliferation and National Security.

Sensitive Subject. Unclassified subject/topics identified in existing Federal regulations governing export control as well as those identified by DOE as unique to its work, which involves information, activities, and/or technologies that are relevant to national security. Disclosure of sensitive subjects has the potential for enhancing weapons of mass destruction capability, leading to weapons of mass destruction proliferation, divulging militarily critical technologies, or revealing other advanced technologies which may adversely affect U.S. national economic security. Therefore, they require special management oversight, especially prior to release to foreign nationals. The list of sensitive subjects will be maintained by the Office of Nonproliferation and National Security.

Technology. Also referred to as technical data, technical skills or know-how, or as scientific and technical information. Technology is derived from basic or applied research, development, engineering, technological demonstration, economic and social research, or scientific inquiry into phenomena or technology applications. It may exist as machinery or equipment; it may be recorded, spoken, or represented in a medium for storage of communication, and may be contained in computer software with scientific and technical applications.

U.S. Citizen. A citizen of the United States, including naturalized citizens.

DOE N 142.1
7-14-99

7 (and 8)

Visit. Presence of a foreign national at a DOE facility for 30 calendar days or less. Visits which total over 30 calendar days in a period of 12 months are defined as assignments. Visits are normally for the purpose of technical discussions, orientation, observation of projects or equipment, training, contract service work, or discussion of collaboration on topics of mutual interest without participation in the work of the facility, or for courtesy purposes. The term "visit" includes officially-sponsored attendance at a DOE event off-site from a DOE facility, but does not include on, or off-site events and activities open to the general public. Off-site events, that do not include participation by DOE or DOE contractor personnel that work in areas of national security and nonproliferation, or have knowledge in subjects of interest to foreign nationals that may attempt to compromise national security may be exempted from the provisions of this notice by the approving official from the host organization.



BILL RICHARDSON
Secretary of Energy

UNCLASSIFIED FOREIGN VISITS AND ASSIGNMENTS

Name of Visitor: _____
Last First M.I.

Birth Date: _____ Place of Birth: _____

Permanent Address: _____
Street City Country

Employer: _____

Employer Address: _____

Employer Phone Number: _____

Current Position: _____ How Long with Employer: _____

Passport Number: _____

Visa Information: _____

Immigration and Naturalization Service Information

Purpose of Visit: _____ Date(s) of Visit: _____

Area(s) to be Visited: _____

Person to be Responsible for Visit: _____

Acknowledgements

Responsible Party

Print Signature Date

Safety Manager

Print Signature Date

Deputy/Project Manager

Print Signature Date

DOE Approval

Print Signature Date

SET I.D. _____



MK-FERGUSON
A MORRISON KNUDSEN COMPANY

U.S. DEPARTMENT OF ENERGY

CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

DOCUMENT TITLE: Specification Section 01010 3840-C:HG-S-05-4859-00

Summary of Work (DOCUMENT NUMBER)

In Situ Chemical Oxidation
of TCE in Groundwater

WP-568, Rev. 0

(SIGNATURE) (DATE)

PREPARED: OSE

See Attached

REVIEWED: B. Duletsky

Barb Duletsky 9-12-01

APPROVED:

PROJECT ENGINEER

Joe Kazem 9-12-01

GWOU TECHNICAL MANAGER

Carl Cato 9-13-01

ES&H MANAGER

David ... 9-14-01

SAFETY MANAGER

Mike Mitchell 9-14-01

ENGINEERING MANAGER

Miguel Oakes 9-14-01

QUALITY LEVEL: []1 [x]2 []3

APPROVED FOR CONSTRUCTION:

DEPT. PROJECT DIRECTOR

John D. ... 9/14/01

PROJECT QUALITY MANAGER

John D. ... 9/14/2001

DOE PROJECT ENGINEER

Thomas C. Pauling 9/14/2001





WSSRA PROJECT REVIEWS AND APPROVALS

W.P. NO. 568 TASK NO. 541GW.900 DOC. NO. 3840-C:HG-S-05-4859-00

W.P. TITLE: In Situ Chemical Oxidation of TCE in QUALITY LEVEL 2
Groundwater LEAD DISCIPLINE Hydrogeology

SUBJECT: WSSRAP - Chemical Plant
Technical Specifications Section 01010
Summary of Work
Issued for Construction
Revision 0
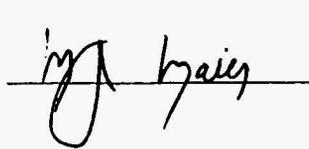
| | <u>PRINT/TYPE NAME</u> | <u>SIGNATURE</u> | <u>DATE</u> |
|------------------------------|------------------------|--|----------------|
| PREPARED: | <u>P. Patchin</u> |  | <u>9/10/01</u> |
| REVIEWED: | <u>K. Ohsiek</u> |  | <u>9/10/01</u> |
| APPROVED MKES: | | | |
| - LEAD TASK ENGINEER | <u>P. Patchin</u> |  | <u>9/10/01</u> |
| - LEAD DISCIPLINE DEPT. MGR. | <u>S. Vincent</u> |  | <u>9/10/01</u> |
| - DESIGN MANAGER | <u>R. Rager</u> |  | <u>9/10/01</u> |
| - ENGINEERING MANAGER | <u>R. Bohachek</u> |  | <u>9/10/01</u> |
| APPROVED: | | | |
| - OFF-SITE QUALITY MANAGER | <u>M. Maier</u> |  | <u>9/10/01</u> |

SECTION 01010
SUMMARY OF WORK

PART 1 - GENERAL

1.01 SCOPE

- A. The Subcontractor shall design, furnish, install, and operate a pilot-scale treatment system for in situ chemical oxidation of trichloroethene (TCE) in the groundwater at the Weldon Spring Site Remedial Action Project (WSSRAP) Chemical Plant site. The Work includes:
1. Mobilization
 2. Pilot-scale system installation and operation including, as necessary, installation of monitoring wells, installation of injection wells, field instrumentation, electrical systems, temporary facilities, piping systems, and appurtenant features and systems.
 3. Groundwater monitoring, sampling, and analysis
 4. Progress reporting
 5. Preparation and submittal of Pilot-Scale Testing completion report.
 6. Preparation and submittal of the Final Full-Scale Work Plan and Design based on incorporation of pilot-scale test results into the Conceptual Full-Scale Design submitted with the bid package
 7. Injection point and observation well abandonment
 8. Demobilization
- B. The Subcontractor shall also:
1. Provide all submittals required by these specifications
 2. Comply and coordinate with Contractor's witness and hold points
 3. Provide a Quality Assurance/Quality Control Program, as defined in Section 01400
 4. Provide required temporary facilities not already provided by the Contractor, as defined in Section 01500

5. Install, maintain, and remove temporary access roads and drilling pads necessary for well installations and abandonments, as described in Section 02733.
 6. Install and remove temporary decontamination facilities, as described in Section 01503.
 7. Decontaminate equipment, as described in Sections 01503 and 02733.
 8. Collect and store contaminated drilling-derived, development, decontamination and/or purge water, as described in Section 01600.
 9. Collect, treat, and store wastewater containing detectable levels of chemicals introduced by the Subcontractor.
 10. Handle, store and dispose of Subcontractor-generated contaminated and hazardous material, and treatment-derived wastes, as described in Section 01600
 11. Implement waste minimization practices to reduce the volume of contaminated and non-contaminated wastes generated from the work
- C. The following activities are not included in the Work:
1. Restoration and reestablishment of vegetation on areas and surfaces disturbed by the Subcontractor while performing Contractor-approved work
 2. Surveying

1.02 DEFINITIONS

- A. DOE: U.S. Department of Energy
- B. Contractor: As used in these Technical Specifications, the Contractor is the Project Management Contractor (PMC), as defined in the Special Contract Requirements Section H.002-C.
- C. Hold Point: Unless otherwise indicated in these specifications, a key item of fabrication and/or manufacturing or field activity that will require stoppage of the work and inspection by the Contractor. The inspection may include sampling and testing by the Contractor. The Contractor may also require stoppage of the work until the inspection is complete and may require written approval or Notice to Proceed from the Contractor prior to the Subcontractor resuming work. The Subcontractor shall give five days advance notice to the Contractor prior to the day that such hold point activity will take place.

D. ES&H: Environmental Safety and Health

E. Site: The U.S. Department of Energy's property known as the Weldon Spring Chemical Plant, which is shown on Figure 1 of this section.

F. TCE Impact Area: The southwest area of the Site and adjacent property where monitoring wells show a detection for Trichloroethene at 5 µg/L (MCL) or greater. The TCE impact area is shown on Figure 2 of this section.

G. Witness Point: Unless otherwise indicated in these specifications, a key item of fabrication and/or manufacturing or field construction activity that will require inspection by the Contractor. The Subcontractor shall give five days advance notice to the Contractor prior to the day that such inspection activity will take place. A written notification by the Contractor shall be required to waive a witness point.

H. MCL: Maximum contaminant level

I. ppb: Parts per billion

J. µg/L: Micrograms per liter (10^{-6} grams per liter)

1.03 SPECIFICATIONS AND CONSTRUCTION DRAWINGS

A. Work shall be performed according to the following Sections:

| <u>Work Package</u> | <u>Section No.</u> | <u>Title</u> |
|---------------------|--------------------|-----------------------------------|
| 568 | 01010 | Summary of Work |
| 568 | 01025 | Measurement and Payment |
| 568 | 01300 | Submittals |
| 568 | 01400 | Quality Assurance |
| 568 | 01500 | Temporary Facilities and Controls |
| 568 | 01503 | Equipment Decontamination |
| 568 | 01600 | Material Storage and Handling |
| 568 | 02050 | In Situ Chemical Oxidation |
| 568 | 02733 | Well Installation and Abandonment |

1.04 PLANS AND REPORTS

A. The Subcontractor shall prepare plans and reports describing sequencing, scheduling, procedures, and coordination limited to the Subcontractor's scope of the Work. All plans and reports shall be subject to review and approval by the Contractor as a minimum. The DOE and regulatory agencies will review certain plans and reports as defined in the various Sections. The plans and reports to be submitted for review and approval are listed below:

WP-568 - In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4859-00
Issued for Construction - Revision 0
Summary of Work
01010-3

W.O. 3840
9/14/01

1. Section 01400 – Quality Assurance Program
2. Section 01503 – Equipment Decontamination Plan
3. Section 02050 – Pilot-Scale Work Plan and Design (to be included with bid)
4. Section 02050 – Conceptual Full-Scale Design (to be included with bid)
5. Section 02050 – Safe Work Plan
6. Section 02050 – Emergency Response Plan
7. Section 02050 – Sampling and Analysis Plan
8. Section 02050 – Interim Progress Reports
9. Section 02050 – Pilot-Scale Testing Completion Report
10. Section 02050 – Full-Scale Work Plan and Design
11. Section 02733 – Injection Well Plan

1.05 OPERATIONAL CRITERIA

- A. Chemical reagents shall be covered and stored in such a way as to prohibit exposure to the weather, prevent dissolution or mobilization of the chemical in runoff water, and prevent airborne emissions due to wind erosion. Volumes of chemicals stored at the site for the purpose of treatment shall be limited to the amount necessary to perform the Work. All chemicals used shall be reviewed for their compatibility and storage requirements and shall be stored, protected, handled and used according to the manufacturer's, vendor's, or supplier's recommendations.
- B. Discharging of water without a valid Contractor Disposition Documentation Form (DDF) permit shall not be permitted.
- C. During shutdown periods, Subcontractor shall have sufficient staff on site for shutdown activities. During snow removal, shutdowns or non-working periods including overnights, weekends, holidays and periods of inclement weather, the Subcontractor shall:
 1. Maintain a fire watch for all operating power equipment, including generators not provided by the Contractor, pumps, and combustion engines.
 2. Ensure erosion and surface water controls, traffic control devices, and barricades are in place and working properly.

3. Perform fueling and maintenance on all operating Subcontractor-supplied power equipment including pumps, combustion engines, generators.
 4. Ensure all containers are intact and securely covered to prevent water accumulation, infiltration, and discharge of the material.
 5. Ensure safe storage of chemicals used for treatment.
- D. The Subcontractor shall allow for work activities to be conducted by the Contractor and other subcontractors within or near the TCE impact area. The following Contractor activities may be conducted concurrently with Subcontractor activities and will require interface and coordination with the Subcontractor:
1. Contractor water quality sampling activities.
 2. Construction water access (to the 2-inch Contractor-supplied water line).
 3. Contractor inspection of equipment and materials.
 4. Waste characterization, transfer, and disposal including contaminated groundwater from well development or sampling.
 5. Installation and monitoring of wells not included in this scope.
- E. The Subcontractor shall coordinate with the Contractor any required interruption of facility access, shutdown of water supply, or shutdown of electrical power.
- F. Scheduling the performance of operations is the sole responsibility of the Subcontractor and shall ensure completion of the Work in accordance with the schedule established in the approved Subcontractor's Pilot-Scale Work Plan. This includes a determination of the availability of all specified or accepted substitute products, and the scheduling of their deliveries in order to allow sufficient time for installation during orderly and timely progress of the Work.
- G. Subcontractor shall attend two meetings with the Contractor and provide information (possibly additional to the Pilot-Scale Work Plan and Design) that will allow the Contractor's ES&H Department to prepare Hazard Categorization/Safety Analysis documents. These meetings may be in addition to other required meetings.

1.06 CONDITIONS OF WORK IN PLACE

- A. Special restrictions apply to all work performed within the WSSRAP property boundaries. Requirements for this work shall include, but not be limited to, the following restrictions:

WP-568 - In Situ Chemical Oxidation of TCE in Groundwater

Document No. 3840-C.HG-S-05-4859-00

Issued for Construction - Revision 0

Summary of Work

01010-5

W.O. 3840

9/14/01

1. All workers shall receive necessary site-specific training as required by the HASP and HASP Checklist regarding worker training and safe work planning.
2. No materials originating from or brought into a posted Controlled Area or a posted Restricted Area shall be released for off-site disposal or salvage without Contractor's approval.
3. Contaminated materials encountered during drilling and well installation or development as identified by the Contractor shall be dispositioned as directed by the Contractor.
4. No materials shall be burned on site.

1.07 CONTRACTOR WITNESS AND HOLD POINTS

- A. Specific Contractor witness and hold points are listed in the Sections to which they apply.

1.08 CONSTRUCTION DOCUMENTS

- A. Only controlled current copies of Construction Documents marked "Revision 0" (Rev. 0) and subsequent numeric revisions shall be utilized for construction by the Subcontractor.

1.09 SITE CONDITIONS

- A. The subsurface profile consists of overburden soils overlying Burlington-Keokuk Limestone. Overburden thickness varies but generally ranges between 20 and 50 feet. Depth to water varies with location as well as with seasonal and climatic conditions, but generally ranges between 25 and 50 feet below ground surface. A groundwater divide occurs roughly coincidental with the topographic divide that traverses the southern portion of the site. In the area of TCE impact, the groundwater flows to the northwest (Figure 3 of this section).
- B. The Burlington-Keokuk Limestone is a fine-to coarse-grained, thinly to massively bedded limestone containing 60% chert as nodules and interbeds. The weathered limestone exhibits relatively thin, highly conductive zones, consisting of fracture zones and solution features. There is a general decrease with depth in the degree of weathering, intensity of fractures, and number and size of solution vugs and voids in the limestone. Figure 4 of this section is an updated map of the bedrock surface beneath the site that incorporates recent drilling data.
- C. The shallow bedrock aquifer has been conceptualized as a diffuse flow system with superimposed conduit flow. Hydraulic conductivity of the weathered Burlington-Keokuk Limestone as determined from packer testing ranges from 3×10^{-6} to $1 \times$

10^{-3} cm/sec. Values determined from constant discharge aquifer tests in a highly conductive zone of the TCE-impacted area range from 3×10^{-3} to 8×10^{-1} cm/sec.

- D. Trichloroethene (TCE) contamination in varying concentrations is present in the groundwater primarily within weathered and fractured limestone (Figure 2). The TCE contamination in the groundwater is localized, primarily in the southern to southwestern part of the Chemical Plant area in the vicinity of the recently removed raffinate pits. TCE concentrations measured in late February and early March 2001 range from the detection limit of $1 \mu\text{g/L}$ to $1000 \mu\text{g/L}$. The MCL is $5 \mu\text{g/L}$.
- E. TCE is the predominant contaminant of concern at the site although tetrachloroethylene (PCE), dichloroethylene (DCE), uranium, nitroaromatic compounds, and nitrate have also been identified. Remediation of the uranium, nitroaromatics, and nitrate is being addressed under separate treatment studies (see Article 1.09.F. below) being performed in 2001 in the TCE-impact area. Maximum concentrations for these contaminants measured in the first quarter of 2001 within the area of TCE impact are 54 pCi/L uranium, $34 \mu\text{g/L}$ nitroaromatics, and 665 mg/L nitrate.
- F. A feasibility study for the pumping of groundwater using artificial recharge has been completed in the area of TCE impact. Approximately 1.9 million gallons of water were pumped from two extraction wells (MW-3028 and MW-3033) in this area during the 6 month study. In addition, injection of potable water into the aquifer via two injection wells (MW-2037 and MW-3032) was conducted to augment recharge to the pumping well. Approximately 1.4 million gallons of water were injected into the aquifer over a 4-month period. During stages of the study involving pumping but no injection, the sustainable yield in MW-3028 was less than 6 gallons per minute (gpm). (A sustainable yield for MW-3033 was not determined.)
- During stages involving introduction of 5 gpm of potable water into each injection well, the sustainable extraction rate in MW-3028 was 9.7 gpm and 3.4 gpm in MW-3033. During stages with injection rates of 10 gpm in each well, the sustainable extraction rate in MW-3028 was 16 gpm. MW-2037 accepted 10 gpm with a slight (i.e., 2- to 3-foot) increase in the water level inside the well casing. MW-3032 initially accepted only about 1 gpm; however, when the water level in the well casing was increased to about 5 feet below the ground surface, an injection rate of 3.5 gpm could be maintained. In order to achieve an injection rate of 10 gpm in MW-3032, a packer was installed above the well screen and water was introduced at a pressure of 30 psi (measured at the top of the well).
- G. Results of laboratory bench-scale studies performed in April 2001 showed that the following oxidants effectively destroyed TCE in site groundwater: potassium permanganate, sodium persulfate, and Fenton's reagent. Natural oxidant demand was shown to be less than 1 gram of potassium permanganate per kilogram of aquifer material. Reports from each of the four vendors conducting bench-scale studies are included in this bid package.

PART 2 - PRODUCTS


(Not Used)

PART 3 - EXECUTION

(Not Used)

END OF SECTION 01010

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4859-00
Issued for Construction – Revision 0
Summary of Work
01010-8

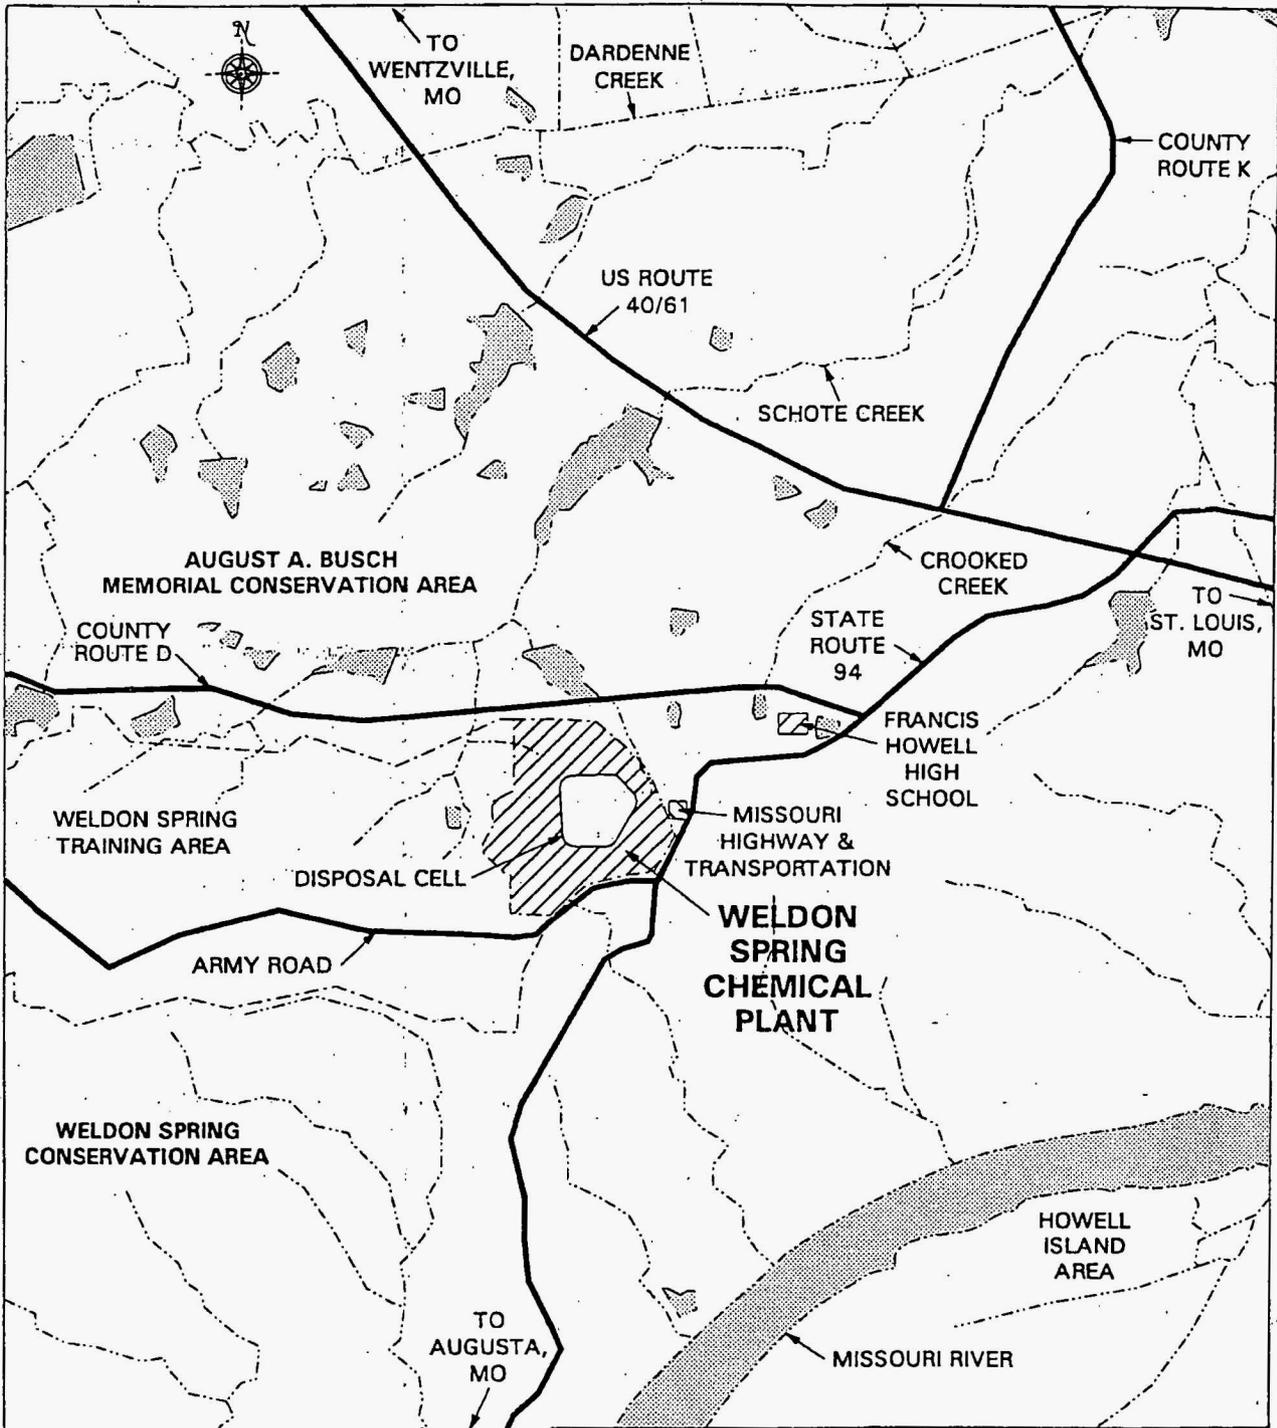

LEGEND

- CREEK OR SURFACE DRAINAGE
- ▨ POND OR LAKE



**WELDON SPRING CHEMICAL PLANT
SITE AND VICINITY**

FIGURE 1

| | | | |
|-------------|-------------------|--------------|---------------|
| REPORT NO.: | WP-568 SPEC 01010 | EXHIBIT NO.: | A/VP/008/0401 |
| ORIGINATOR: | BWD | DRAWN BY: | GLN |
| | | DATE: | 8/29/01 |

SET I.D. _____

U.S. DEPARTMENT OF ENERGY



CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

| | | |
|-----------------|---|------------------------|
| DOCUMENT TITLE: | Specification Section 01025 | 3840-C:HG-S-05-4860-00 |
| | Measurement and Payment | (DOCUMENT NUMBER) |
| | In Situ Chemical Oxidation of TCE in Groundwater | |
| | WP-568, Rev. 0 | |

PREPARED: OSE

(SIGNATURE) See Attached (DATE)

REVIEWED: B. Duletsky

Barb Duletsky 9-12-01

APPROVED:

PROJECT ENGINEER

Joe Rogmi 9-12-01

GWOU TECHNICAL MANAGER

John Cate 9-13-01

ES&H MANAGER

David Saffell 9-14-01

SAFETY MANAGER

Mike Mitchell 9-14-01

ENGINEERING MANAGER

Mary-Lou Oakes 9-14-01

QUALITY LEVEL: []1 [x]2 []3

APPROVED FOR CONSTRUCTION:

DEPT. PROJECT DIRECTOR

OS2 Sff 9/14/01

PROJECT QUALITY MANAGER

Orin D. Cate 9/14/2001

DOE PROJECT ENGINEER

Thomas C. Paulig 9/14/2001



WSSRA PROJECT REVIEWS AND APPROVALS

W.P. NO. 568 TASK NO. 541GW.900 DOC. NO. 3840-C:HG-S-05-4860-00

W.P. TITLE: In Situ Chemical Oxidation of TCE in QUALITY LEVEL 2
Groundwater LEAD DISCIPLINE Hydrogeology

SUBJECT: WSSRAP - Chemical Plant
Technical Specifications Section 01025
Measurement and Payment
Issued for Construction
Revision 0

| | <u>PRINT/TYPE NAME</u> | <u>SIGNATURE</u> | <u>DATE</u> |
|------------------------------|------------------------|---|----------------|
| PREPARED: | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |
| REVIEWED: | <u>K. Ohsiek</u> | <u><i>Kenn Ohsiek</i></u> | <u>9/10/01</u> |
| APPROVED MKES: | | | |
| - LEAD TASK ENGINEER | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |
| - LEAD DISCIPLINE DEPT. MGR. | <u>S. Vincent</u> | <u><i>Sean Vincent</i></u> | <u>9/10/01</u> |
| - DESIGN MANAGER | <u>R. Rager</u> | <u><i>RR</i></u> | <u>9/10/01</u> |
| - ENGINEERING MANAGER | <u>R. Bohachek</u> | <u><i>S. Hunter for R. Bohachek</i></u> | <u>9/11/01</u> |
| APPROVED: | | | |
| - OFF-SITE QUALITY MANAGER | <u>Mike Maier</u> | <u><i>MJ Maier</i></u> | <u>9/10/01</u> |

SECTION 01025

MEASUREMENT AND PAYMENT

PART 1 - GENERAL

1.01 SCOPE

- A. This Specification Section includes descriptions of measurement and payment as they apply to this Subcontract.
- B. The Contractor will perform all measurements for payment.

1.02 RELATED WORK

- A. General Provisions – Payments to Subcontractor.
- B. General Conditions – Progress Schedules and Reports; Progress Payment Estimate.
- C. Special Conditions.
- D. Applicable Subcontract Drawings.
- E. Layout of Work and Surveys.
- F. Section 01010 – Summary of Work
- G. Section 01300 – Submittals
- H. Section 01400 – Quality Assurance
- I. Section 01500 – Temporary Facilities and Controls
- J. Section 01503 – Equipment Decontamination
- K. Section 01600 – Material Storage and Handling
- L. Section 02050 – In Situ Chemical Oxidation
- M. Section 02733 – Well Installation and Abandonment
- N. Pricing Schedule

1.03 DEFINITIONS

- A. Lump Sum (LS): A unit of measure for the entire item, unit of work, structure or combination thereof.

1.04 PAYMENT

- A. Payment will be full compensation for furnishing all labor, materials, tools, equipment, transportation, services, and incidentals, as specified in the Subcontract Documents, and for performing all work necessary for completing the item or work classification, including all adjusting and balancing, testing, cleaning, and all other incidental work.
- B. Full compensation for all costs involved in conforming to the requirements for measuring materials or work shall be considered as included in the lump-sum prices paid for the work, and no additional compensation will be permitted.

1.05 MEASUREMENT AND PAYMENT

- A. Measurement: Measurement for payment for the Work will be by lump sum (LS).
- B. Payment: Payment for the Work will be made at the lump sum price quoted in the Pricing Schedule, and will include all items specified herein. Payment will be made as follows:
 - 1. Payment of the lump sum price will be made upon completion of the Work except as authorized for progress payments. Work items included in the pilot-scale testing are:
 - a. Submittal of all required submittals (e.g., work plans, designs, reports, permits, certifications, insurance and bond premiums).
 - b. Training of Subcontractor labor.
 - c. Mobilization
 - d. Installation of temporary utilities and temporary facilities not provided by the Contractor.
 - e. Drilling, installation, and development of injection points and monitoring wells.
 - f. Equipment decontamination.

- g. Contaminated water storage and treatment of residual oxidation reagent in contaminated water during pilot-scale testing.
 - h. Execution and completion of the pilot-scale in situ chemical oxidation injection
 - i. Monitoring and sampling of groundwater to evaluate the effects of pilot-scale injection.
 - j. Completion of a pilot-scale testing summary report.
 - k. Completion of the final full-scale work plan and design (including schedule and cost estimate).
 - l. Abandonment of injection points and monitoring wells.
 - m. Demobilization.
2. Separate measurement will not be made for payment for the items listed below which will be considered incidental to the Work:
- a. Physical exams and drug tests.
3. All costs for such work will be included in the lump sum prices quoted for work activities specified in the Subcontract Documents relative to this pay item.
4. Progress payments will be made as follows:
- a. 20% of the lump sum price upon mobilization and completion of road, staging area, and drilling pad construction.
 - b. 40% of the lump sum price upon completion of all work resulting in the installation of the pilot-scale in situ chemical oxidation remediation system, but prior to the first injection.
 - c. 20% of the lump sum price upon completion of the pilot-scale injection(s) and fieldwork including monitoring and sampling.
 - d. 10% of the lump sum price upon completion and submittal of the Pilot-Scale Testing Completion Report and the Full-Scale Work Plan and Design (including schedule and cost estimate).
 - e. 10% of the lump sum price upon completion of well abandonment and demobilization.

WP-568 - In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4860-00
Issued for Construction - Revision 0
Measurement and Payment

W.O. 3840
9/10/01

PART 2 - PRODUCTS

Not Used.

PART 3 - EXECUTION

Not Used.

END OF SECTION 01025

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4860-00
Issued for Construction – Revision 0
Measurement and Payment
01025-4

W.O. 3840
9/10/01



CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

DOCUMENT TITLE: Specification Section 01300 3840-C:HG-S-05-4861-00
Submittals (DOCUMENT NUMBER)
In Situ Chemical Oxidation
of TCE in Groundwater
WP-568, Rev. 0

| | (SIGNATURE) | (DATE) |
|-----------------------|----------------------|---------|
| PREPARED: OSE | See Attached | |
| REVIEWED: B. Duletsky | <i>Barb Duletsky</i> | 9-12-01 |

APPROVED:

| | | |
|------------------------|-----------------------|---------|
| PROJECT ENGINEER | <i>Joe Kojmi</i> | 9-12-01 |
| GWOU TECHNICAL MANAGER | <i>John O'Leary</i> | 9-13-01 |
| ES&H MANAGER | <i>David S. Kelly</i> | 9-14-01 |
| SAFETY MANAGER | <i>Mike Mettel</i> | 9-14-01 |
| ENGINEERING MANAGER | <i>myra L. sales</i> | 9-14-01 |

QUALITY LEVEL: [] 1 [x] 2 [] 3

APPROVED FOR CONSTRUCTION:

| | | |
|-------------------------|-------------------------|-----------|
| DEPT. PROJECT DIRECTOR | <i>JS2</i> | 9/14/01 |
| PROJECT QUALITY MANAGER | <i>Chris D. Coate</i> | 9/14/2001 |
| DOE PROJECT ENGINEER | <i>Thomas C. Pauley</i> | 9/14/2001 |



WSSRA PROJECT REVIEWS AND APPROVALS

W.P. NO. 568 TASK NO. 541GW.900 DOC. NO. 3840-C:HG-S-05-4861-00

W.P. TITLE: In Situ Chemical Oxidation of TCE in QUALITY LEVEL 2
Groundwater LEAD DISCIPLINE Hydrogeology

SUBJECT: WSSRAP - Chemical Plant
Technical Specifications Section 01300
Submittals
Issued for Construction
Revision 0

| | <u>PRINT/TYPE NAME</u> | <u>SIGNATURE</u> | <u>DATE</u> |
|------------------------------|------------------------|--|----------------|
| PREPARED: | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |
| REVIEWED: | <u>K. Ohsiek</u> | <u><i>K. Ohsiek</i></u> | <u>9/10/01</u> |
| APPROVED MKES: | | | |
| - LEAD TASK ENGINEER | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |
| - LEAD DISCIPLINE DEPT. MGR. | <u>S. Vincent</u> | <u><i>Sean Vincent</i></u> | <u>9/10/01</u> |
| - DESIGN MANAGER | <u>R. Rager</u> | <u><i>R.R.</i></u> | <u>9/10/01</u> |
| - ENGINEERING MANAGER | <u>R. Bohachek</u> | <u><i>S. Hensley for R. Bohachek</i></u> | <u>9/10/01</u> |
| APPROVED: | | | |
| - OFF-SITE QUALITY MANAGER | <u>M. Maier</u> | <u><i>M. Maier</i></u> | <u>9/10/01</u> |

SECTION 01300

SUBMITTALS

PART 1 - GENERAL

1.01 SCOPE

- A. This Specification Section describes the requirement and procedures for submittals as identified and listed in the Technical Specifications. To ensure that the specified products are furnished and installed in accordance with technical requirements, procedures have been established for advanced submittal of design data and for its review and acceptance or rejection by Contractor.

1.02 SUBMITTAL DRAWINGS

- A. Scale Required: Unless otherwise specifically directed by Contractor, all submittal drawings shall be of such scale as to clearly show all pertinent features of the item and its method of connection to the work.
- B. Certification of Submittal Drawings: When submittal drawings are required to be prepared either by or under the direct supervision of a registered professional engineer or geologist, these submittal drawings shall bear the seal of that registered professional engineer or geologist appropriate for the subject matter of submittal.
- C. Status of Submittal Drawings: Submittal drawing submittals processed by Contractor, or by Contractor's Representative or consultants, become Construction Documents and will be reviewed and approved accordingly.
- D. Drawing Revisions: A revision block shall be included on shop drawings identifying current revision. Shop drawing changes shall require a resubmittal of the drawing and an update of the revision block for Contractor's review and acceptance.

1.03 AS-BUILT DRAWINGS

- A. The Subcontractor shall maintain and submit marked-up prints of as-built drawings for all Work performed. The prints shall be marked up by redlining. The submittal of as-built drawings shall be completed prior to final acceptance of the Work by the Contractor. The Subcontractor shall maintain and submit as-built drawings of the work as completed for different areas, phases, and disciplines. The as-built drawings shall be prepared in accordance with the following requirements:
 - 1. The Construction Drawings shall be utilized as the drawing base for Subcontractor as-built drawings.

2. The as-built drawings shall be to scale, of good quality, and legible.
 3. The as-built drawings shall include all approved field modifications made during construction.
 4. The as-built drawings shall include consolidated information provided by vendor data and drawings, Subcontractor and Contractor sketches and drawings.
 5. The as-built drawings shall reflect final as-built field conditions.
- B. The Subcontractor shall mark up one set of controlled prints to show the as-built conditions as work progresses including the accurate location of all Subcontractor-installed underground utilities. These as-built marked prints shall be kept current and available on the jobsite at all times. All changes that are made in the work or additional information that might be uncovered in the course of construction, shall be accurately and neatly recorded as they occur by means of details and notes. As work progresses, the Subcontractor shall submit as-built marked prints for each drawing superseded by revision on a monthly basis or as otherwise required by the Contractor.
- C. The as-built marked prints will be jointly reviewed for accuracy and completeness by the Contractor's representative and a responsible representative of the Subcontractor on a monthly basis. The Subcontractor shall correct any inaccuracies and complete mark-up of any omissions noted in this review. Completed as-built drawings shall be subject to approval by the Contractor.

1.04 MANUFACTURER'S CERTIFICATES

- A. Submit certificates to the Contractor according to the requirements of each Specification Section.

1.05 IDENTIFICATION OF SUBMITTALS

- A. Subcontractor shall completely identify each submittal and resubmittal by showing at least the following information.
1. Name and address of submitter, plus name and telephone number of the individual who may be contacted for further information.
 2. Name of Project as it appears on the Construction Documents.
 3. Drawing number or Specification Section number to which the submittal applies.

4. Submittal number, numerically serialized and sequential beginning with the number 1 (one).
 5. Resubmittals shall be designated with numeric suffixes to the original submittal number (e.g., Submittal No. 32R-1).
- B. Each submittal shall be submitted using the Contractor's "Construction Submittal Transmittal and Disposition Form."

1.06 COORDINATION OF SUBMITTALS

- A. General: Prior to submittal for Contractor's review, the Subcontractor shall use all means necessary to fully coordinate all material, including the following requirements:
1. Determine and verify all field dimensions and conditions, materials, catalog numbers, availability with respect to Project Schedule, and similar data.
 2. Coordinate as required with all trades.
- B. Groupings of Submittals: Unless otherwise specifically permitted by Contractor, the Subcontractor shall make all submittals in groups containing all associated items. Contractor may reject partial submittals as not complying with the Construction Documents.

1.07 SCHEDULES

- A. Initial Submittal:
1. The scheduling and progress reporting of construction is the responsibility of the Subcontractor.
 2. A complete construction schedule shall be submitted for review and approval prior to Notice to Proceed. The construction schedule shall consist of the following:
 - a. Barchart Schedule: The selection of activities will be left to the discretion of the Subcontractor but subject to the Contractor's approval. Unless otherwise approved by the Contractor, the construction schedule shall consist of the following items and shall be represented on the same diagram. The activities shall be shown sequentially by major work area. Upon approval by the Contractor, the complete construction schedule will be classified as the Baseline Schedule and will be the schedule against which system progress will be measured. The barchart schedule shall include the following:

- 1) Identification number for each activity (activity code), coded in such a manner to reflect the major project work areas.
 - 2) Description of each activity.
 - 3) Baseline start and finish dates for each activity (early/late start and finish dates which are derived from logic ties in the critical path method [CPM]).
 - 4) Duration for each activity.
 - 5) Manpower assigned to each activity.
 - 6) Arrange in order of forecast start dates.
 - 7) Activities grouped by major work area.
- b. Logic Diagram: The Subcontractor shall submit a critical path method (CPM) logic diagram, using precedence notation. The CPM diagram shall be structured following the same criteria detailed in Items (1) through (4), (6) and (7) of Article A.2.a above.

B. Monthly Transmittals:

1. The construction schedule(s), as described above, shall show monthly status and shall be transmitted on or about the 15th of every month. This monthly transmittal shall consist of the following reports:
 - a. Barchart Diagram: Show fully progressed update, (actual or forecast start/finish dates) for each activity, laid against the original Baseline Schedule. Include all items as described in Article A.2.a. in addition to the following:
 - 1) Arrange in order of actual/forecast start dates.
 - 2) Show new, approved field modification activities resulting from baseline reschedule process and their respective scheduled dates.
 - 3) Percent complete for each activity with updated status for EAC dates.
 - 4) Total float for each activity.
 - b. Schedule Reports: List all activities in tabular format with the same information included on the updated Barchart Diagram and sorted as follows:
 - 1) In the same order as the updated barchart diagram.
 - 2) In order of activity code.
 - c. Narrative Report: Discuss accomplishments, goals/milestones met, current or anticipated problem areas, delaying factors and potential impacts. Also describe current or proposed corrective action or recovery plans that would be required to ensure meeting the completion date. Address individual activities as required.

1.08 SUBMITTAL REQUIREMENTS

- A. Submittals such as catalog cuts, material certifications, shop drawings, Subcontractor drawings, operating/maintenance manuals, samples, special procedures, and/or other types of data as may be specified or listed in these documents shall be submitted to the Contractor as specified herein.
- B. The Subcontractor shall submit all data identified in these specifications, to the Contractor with such promptness as to cause no delay in the Work or that of any other subcontractor. Unless otherwise specified, submittals for all material and equipment requiring approval shall be submitted, reviewed, and approved prior to receipt, inspection, installation, and/or incorporation of the item into the Work.
- C. The Subcontractor shall furnish copies of such data requiring approval sufficiently in advance of the date that the material/equipment is required to meet the approved schedule so that, if the item is disapproved, no delay will be occasioned to the schedule.
- D. The Contractor will review and generally return submittals within ten days of receipt, but in no case will this process take longer than 30 days.
- E. Following a review, the Contractor will indicate, by stamping upon each submittal, the appropriate approval category:
 - A – Approved
 - B – Approved as Noted, Work May Proceed, Revise and Resubmit
 - C – Not Approved, Work May Not Proceed, Revise and Resubmit
 - D – Rejected
 - E – Receipt Acknowledged, Approval Not Required
- F. The applicable blocks of the Construction Submittal Transmittal and Disposition Form will be completed by the Contractor showing the disposition action for each item listed on the form. When submittals are returned marked with either "Revise and Resubmit," or "Rejected," the Subcontractor shall make such revisions and corrections as required and resubmit the submittal with the same submittal number followed by a sequential revision number as specified in Article 1.05.A.5.
- G. One copy of the stamped Submittal will be returned to the Subcontractor. If further actions are required, the Subcontractor shall perform such actions as directed. The required submittal and resubmittal sequence shall be repeated until no further action is required.

PART 2 - PRODUCTS

(Not Used)

PART 3 - EXECUTION

(Not Used)

END OF SECTION 01300

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4861-00
Issued for Construction – Revision 0
Submittals
01300-6



U.S. DEPARTMENT OF ENERGY

CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

DOCUMENT TITLE: Specification Section 01400 3840-C:EN-S-05-4862-00

Quality Assurance (DOCUMENT NUMBER)

In Situ Chemical Oxidation
of TCE in Groundwater

WP-568, Rev. 0

(SIGNATURE) (DATE)

PREPARED: OSE

See Attached

REVIEWED: B. Duletsky

B. Duletsky 9-12-01

APPROVED:

PROJECT ENGINEER

Joe Kazmi 9-12-01

GWOU TECHNICAL MANAGER

B. Duletsky 9-13-01

ES&H MANAGER

David S. [unclear] 9-14-01

SAFETY MANAGER

Mike Mitchell 9-14-01

ENGINEERING MANAGER

Miguel L. Oakes 9-14-01

QUALITY LEVEL: [] 1 [x] 2 [] 3

APPROVED FOR CONSTRUCTION:

DEPT. PROJECT DIRECTOR

QS2 [unclear] 9/14/01

PROJECT QUALITY MANAGER

Chris D. Coate 9/14/2001

DOE PROJECT ENGINEER

Thomas C. Pauling 9/14/2001



WSSRA PROJECT REVIEWS AND APPROVALS

W.P. NO. 568 TASK NO. 541GW.900 DOC. NO. 3840-C:EN-S-05-4862-00

W.P. TITLE: In Situ Chemical Oxidation of TCE in QUALITY LEVEL 2
Groundwater LEAD DISCIPLINE Hydrogeology

SUBJECT: WSSRAP - Chemical Plant
Technical Specifications Section 01400
Quality Assurance
Issued for Construction
Revision 0

| | <u>PRINT/TYPE NAME</u> | <u>SIGNATURE</u> | <u>DATE</u> |
|------------------------------|------------------------|----------------------------------|----------------|
| PREPARED: | <u>P. Patchin</u> | <u>Paul Patchin</u> | <u>9/10/01</u> |
| REVIEWED: | <u>K. Ohsiek</u> | <u>Karen Ohsiek</u> | <u>9/10/01</u> |
| APPROVED MKES: | | | |
| - LEAD TASK ENGINEER | <u>P. Patchin</u> | <u>Paul Patchin</u> | <u>9/10/01</u> |
| - LEAD DISCIPLINE DEPT. MGR. | <u>S. Vincent</u> | <u>Sean Vincent</u> | <u>9/10/01</u> |
| - DESIGN MANAGER | <u>R. Rager</u> | <u>R.R.</u> | <u>9/10/01</u> |
| - ENGINEERING MANAGER | <u>R. Bohachek</u> | <u>S. Hester for R. Bohachek</u> | <u>9/10/01</u> |
| APPROVED: | | | |
| - OFF-SITE QUALITY MANAGER | <u>M. Maier</u> | <u>M. Maier</u> | <u>9/10/01</u> |

SECTION 01400

QUALITY ASSURANCE

PART 1 - GENERAL

1.01 SCOPE

- A. Applicable Standards
- B. Quality Assurance
- C. Submittals
- D. Workmanship
- E. Record Retention

1.02 APPLICABLE STANDARDS

- A. *Specification and Guidelines for Quality Systems for Environmental Data Collection and Environmental Technology Program, ANSI/ASQC E4:1994 (guidance only).*
- B. DOE Order 414.1A, *Quality Assurance*

1.03 QUALITY ASSURANCE

- A. The Subcontractor shall develop a Quality Assurance Program meeting the applicable requirements of DOE Order 414.1A as noted in the attached applicability checklist (Attachment 1). The Subcontractor shall submit a Quality Assurance Program to the Contractor for review and approval prior to Notice to Proceed. The Quality Assurance Program shall be approved and accepted by the Contractor PRIOR to performing any on-site activities.
- B. The Contractor reserves the right of access to Subcontractor's facilities or contracted laboratories for the purpose of inspection, surveillance, review, and/or audit.
- C. The Subcontractor's Quality Assurance Program shall maintain control of suppliers, analytical laboratories, manufacturers, products, services and workmanship, to produce work of specified quality as required by the technical specifications of the contract.
- D. The Subcontractor shall submit for review and approval prior to Notice to Proceed, the qualifications of the Subcontractor's designated Quality Assurance

Representative, a letter defining his authority, and a description of assigned responsibilities. The Subcontractor shall also submit to the Contractor the name and qualifications of an alternate QA representative who could assume the responsibilities of the primary representative, if the primary representative should become unavailable for any reason.

- E. Procedures for the collection, preservation, handling, shipping, analytical testing and documentation of environmental samples established by the Subcontractor, shall be submitted to the Contractor for review and approval. These procedures shall be followed during Subcontractor groundwater sampling events.
- F. Any laboratory that provides analytical services to the Subcontractor shall have the applicable laboratory accreditation, certifications, and/or registrations for those services which are utilized. The analytical testing laboratory may NOT further subcontract laboratory testing without first obtaining written approval from the Contractor.

1.04 SUBMITTALS

The Subcontractor shall submit the following to the Contractor for approval.

- A. Subcontractor Quality Assurance Program.
- B. Qualifications of the Subcontractor's Quality Assurance Representative and alternate accompanied by a letter defining this authority and responsibilities.

1.05 SUBMITTAL SCHEDULE

- A. The following submittals are required in accordance with this specification.

| Specification Reference | Requirements | Period |
|-------------------------|---|---------------------------------|
| 01400 (1.04.A) | Quality Assurance Program | Prior to Notice to Proceed |
| 01400 (1.04.B) | Qualifications of QA representative and alternate | Prior to Notice to Proceed |
| 01400 (1.06.A) (1.06.B) | Quality related records | Upon completion of the contract |

1.06 RECORD RETENTION

- A. A list of all quality-related records shall be maintained by the Subcontractor. All quality-related records shall be protected in a 1-hour fire-rated file cabinet; alternately, quality-related records shall be stored in two separate locations until such time that the records are submitted to the Contractor.
- B. All quality-related records which are generated during this contract shall be submitted to the Contractor upon completion of the contract.

PART 2 - PRODUCTS

(Not Used)

PART 3 - EXECUTION

(Not Used)

END OF SECTION 01400

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:EN-S-05-4862-00
Issued for Construction – Revision 0
Quality Assurance
01400-3

ATTACHMENT 1
DOE Order 414.1A Applicability Checklist

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:EN-S-05-4862-00
Issued for Construction – Revision 0
Quality Assurance

APPLICABLE ELEMENT

DOE ORDER 414.1A
APPLICABILITY CHECKLIST

PO NO. N/A
CONTRACT NO. N/A
WP NO. WP-568

Shirley D. Gato 8/15/2001
PQM SIGNATURE DATE

The REQUIREMENTS checked below apply to this procurement. Clarifications are provided when the extent of, coverage varies or when exceptions are taken. If no clarification is provided, the requirement applies as written.

See Page 2 for clarification(s).

REQUIREMENTS

| | |
|--|---|
| <input checked="" type="checkbox"/> Criterion 1 - Program | <input type="checkbox"/> Criterion 6 - Design |
| <input checked="" type="checkbox"/> Quality Assurance Program Document | <input type="checkbox"/> Design Input/Output |
| <input checked="" type="checkbox"/> Organizational Chart | <input type="checkbox"/> Design Changes |
| <input checked="" type="checkbox"/> Criterion 2 - Personnel Training and Qualification | <input type="checkbox"/> Design Interfaces |
| <input checked="" type="checkbox"/> QA/QC Representative | <input type="checkbox"/> Design Verification |
| <input type="checkbox"/> Assessment Personnel | <input type="checkbox"/> Design Records |
| <input checked="" type="checkbox"/> Independent Testing Laboratory | <input type="checkbox"/> Design Computer Program Validation |
| <input checked="" type="checkbox"/> Criterion 3 - Quality Improvement | <input checked="" type="checkbox"/> Criterion 7 - Procurement |
| <input type="checkbox"/> Performance Trending | <input type="checkbox"/> Supplier Evaluation |
| <input checked="" type="checkbox"/> Nonconformance Item Control | <input type="checkbox"/> Source Inspection |
| <input type="checkbox"/> Stop Work Authority | <input checked="" type="checkbox"/> Receipt Inspection |
| <input checked="" type="checkbox"/> Corrective Action Program | <input type="checkbox"/> Pre/Post Installation Tests |
| <input type="checkbox"/> Root Cause Analysis | <input checked="" type="checkbox"/> Certificates of Conformance |
| <input type="checkbox"/> Lessons Learned Program | <input checked="" type="checkbox"/> Criterion 8 - Inspection and Acceptance Testing |
| <input checked="" type="checkbox"/> Criterion 4 - Documents and Records | <input checked="" type="checkbox"/> Inspection/Test Reports |
| <input checked="" type="checkbox"/> Controlled Document Maintenance | <input checked="" type="checkbox"/> Hold/Witness Points |
| <input checked="" type="checkbox"/> Quality Assurance Records/Storage | <input checked="" type="checkbox"/> Test Procedures |
| <input checked="" type="checkbox"/> As-Built Record Drawings | <input type="checkbox"/> Criterion 9 - Management Assessment |
| <input checked="" type="checkbox"/> Criterion 5 - Work Processes | <input type="checkbox"/> Management Assessment Schedule |
| <input checked="" type="checkbox"/> Work Instructions/Procedures | <input type="checkbox"/> Management Assessment Reports |
| <input checked="" type="checkbox"/> Identification and Control of Items | <input type="checkbox"/> Criterion 10 - Independent Assessment |
| <input checked="" type="checkbox"/> Handling, Storage, and Shipping | <input type="checkbox"/> Independent Assessment Schedule |
| <input checked="" type="checkbox"/> Calibration and Maintenance of Monitoring and Data Collection Equipment and Measuring and Test Equipment | <input type="checkbox"/> Independent Assessment Reports |

DOE ORDER 414.1A
APPLICABILITY CHECKLIST

PO NO. _____ N/A _____
CONTRACT NO. _____ N/A _____
WP NO. _____ WP-568 _____

CLARIFICATION

The selection of the aforementioned DOE Order 414.1A Applicability Checklist Requirements is based upon a review of Work Package No. 568 and associated specifications.



CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

DOCUMENT TITLE: Specification Section 01500 3840-C:EN-S-05-4863-00

Temporary Facilities and Controls (DOCUMENT NUMBER)

In Situ Chemical Oxidation of TCE in Groundwater

WP-568, Rev. 0

(SIGNATURE) (DATE)

PREPARED: OSE

See Attached

REVIEWED: B. Duletsky

B. Duletsky 9-12-01

APPROVED:

PROJECT ENGINEER

Joe Rymy 9-12-01

GWOU TECHNICAL MANAGER

John ... 9-13-01

ES&H MANAGER

David ... 9-14-01

SAFETY MANAGER

Mike Mitchell 9-14-01

ENGINEERING MANAGER

my - L. Oakes 9-14-01

QUALITY LEVEL: []1 [x]2 []3

APPROVED FOR CONSTRUCTION:

DEPT. PROJECT DIRECTOR

W. J. ... 9/14/01

PROJECT QUALITY MANAGER

E. D. ... 9/14/2001

DOE PROJECT ENGINEER

Thomas C. Paulson 9/14/2001



WSSRA PROJECT REVIEWS AND APPROVALS

W.P. NO. 568 TASK NO. 541GW.900 DOC. NO. 3840-C:EN-S-05-4863-00

W.P. TITLE: In Situ Chemical Oxidation of TCE in QUALITY LEVEL 2
Groundwater LEAD DISCIPLINE Civil

SUBJECT: WSSRAP - Chemical Plant
Technical Specification Section 01500
Temporary Facilities and Controls
Issued for Construction
Revision 0

| | <u>PRINT/TYPE NAME</u> | <u>SIGNATURE</u> | <u>DATE</u> |
|------------------------------|------------------------|--|----------------|
| PREPARED: | <u>P. Patchin</u> | <u><i>Paul C Patchin</i></u> | <u>9/10/01</u> |
| REVIEWED: | <u>K. Ohsiek</u> | <u><i>Karen Ohsiek</i></u> | <u>9/10/01</u> |
| APPROVED MKES: | | | |
| - LEAD TASK ENGINEER | <u>P. Patchin</u> | <u><i>Paul C Patchin</i></u> | <u>9/10/01</u> |
| - LEAD DISCIPLINE DEPT. MGR. | <u>K. Ohsiek</u> | <u><i>Karen Ohsiek</i></u> | <u>9/10/01</u> |
| - DESIGN MANAGER | <u>R. Rager</u> | <u><i>RR</i></u> | <u>9/10/01</u> |
| - ENGINEERING MANAGER | <u>R. Bohachek</u> | <u><i>S. Huder for R. Bohachek</i></u> | <u>9/01/01</u> |
| APPROVED: | | | |
| - OFF-SITE QUALITY MANAGER | <u>M. Maier</u> | <u><i>My Maier</i></u> | <u>9/10/01</u> |

SECTION 01500

TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.01 SUMMARY

- A. This Specification Section specifies the requirements for temporary facilities and controls, including temporary utilities, support facilities, and security and protection facilities not provided by the Contractor and necessary for execution of the Work. This Section also lists and describes the existing facilities that are available for use.
- B. Figure 1 depicts the existing site features and facilities that will be in place at the start of the fieldwork and available for the Subcontractor's use with the Contractor's approval.
- C. Temporary utilities include, but are not limited to, the following:
 - 1. Water service
 - 2. Sanitary facilities, including toilets, wash facilities, and drinking-water facilities.
 - 3. Electric power service and portable generators
 - 4. Portable work zone lighting
 - 5. Telephone service
- D. Support facilities include, but are not limited to, the following:
 - 1. Staging and equipment set-up and lay-down areas
 - 2. Office trailer
 - 3. Chemical mixing equipment
 - 4. Temporary decontamination pad
 - 5. Contaminated water storage tanks
 - 6. Temporary water treatment unit

7. Temporary roads and drilling pads necessary for well installations, as described in Section 02733.
- E. Security and protection facilities include, but are not limited to, the following:
1. Environmental protection, including hazards from dust emissions and chemicals
 2. Stormwater, sediment, and erosion control
 3. Protection of existing features, including site perimeter fencing, survey benchmarks, monitoring wells, and drainage structures
 4. Work zone security (e.g., tool sheds, fencing)
 5. Field communication system
 6. Fire protection, including storage shed for flammable materials

1.02 APPLICABLE STANDARDS

- A. American National Standards Institute (ANSI), Z358.1-1998 "Emergency Eyewash and Shower Equipment".
- B. National Electric Code

1.03 TEMPORARY UTILITIES

- A. The Contractor will furnish the following temporary utilities:
 1. Potable water
 2. Electric power service
- B. The water service available to the Subcontractor is a 2-inch line (see Figure 1) capable of delivering potable water at a static pressure of 45 psi and maximum flow of 36 gpm. The Contractor will provide freeze protection for this line up to the yard hydrant. The Subcontractor shall provide freeze protection for any lines downstream of this point.
- C. Electric power service available to the Subcontractor consists of a 30-kW propane-fired generator with a 10-kW backup. All maintenance and refueling of the generator will be the responsibility of the Contractor. Any electric power needs in addition to this generator shall be provided by the Subcontractor.
- D. The Subcontractor shall provide utility service to all emergency facilities required by the HASP (e.g., eye wash station, emergency shower). The water temperature, flow

rate, and capacity of showers and eye wash stations shall be in accordance with ANSI standards and approved by the Contractor.

- E. The Subcontractor shall provide sanitary facilities for Subcontractor personnel.
- F. The Subcontractor shall provide all lighting and mobile light plants necessary for the work.
- G. The Subcontractor shall furnish and maintain a communication system (e.g., cellular telephones or radios) for the duration of the work.

1.04 SUPPORT FACILITIES

- A. Subcontractor staging and equipment lay-down areas shall be kept to the minimum practical. The Contractor will allow use of an existing staging and laydown area (see Figure 1 of this section).
- B. The Contractor will furnish and install a field office trailer for Subcontractor use (see Figure 1 of this section).
- C. The Subcontractor shall furnish and install temporary access roads and drilling pads necessary for well installations, as described in Section 02733.
- D. Subcontractor shall furnish and install separate storage tanks for decontamination-derived water and contaminated groundwater derived from drilling operations, well development, and well purging. The tanks shall be installed in a Contractor-approved area and shall have sufficient capacity to manage all contaminated and treated water produced during the course of the Work. The Subcontractor shall supply enough storage tanks to allow for a 10-day storage period during which the Contractor will test and determine the ultimate disposition of water as described in Section 01600, Articles 3.03 and 3.04.
- E. The Subcontractor shall furnish and install a temporary decontamination facility. The final location shall be approved by the Contractor prior to construction. The facility shall be constructed entirely above-ground and shall be completely lined and bermed so as to prevent decontamination water from infiltrating into the underlying soil and to facilitate pumping and containerizing the decontamination water. The design for this temporary facility shall be included in the Equipment Decontamination Plan as described in Section 01503 Article 1.03.A.

1.05 SECURITY AND PROTECTION FACILITIES

- A. The Subcontractor shall implement environmental protection measures to control hazards from materials brought on site by the Subcontractor including hazards from emissions, man-made fibers (MMF), chemicals, Resource Conservation and

Recovery Act (RCRA) materials, and Toxic Substances Control Act (TSCA) materials.

1. Dust emissions shall be controlled during operations, and no visible emissions shall be allowed past the work zone boundary. The Contractor will perform emission monitoring within the work zone and along roads. If the action levels identified in the HASP are exceeded, mitigative measures shall be implemented. The Subcontractor shall perform road wetting to mitigate dust emissions within his work zone. The Contractor will be responsible for dust control on roads used for general site purposes.
 2. The Subcontractor shall delineate and post chemical usage areas where chemicals are stored, mixed and/or injected, and comply with applicable regulations and requirements contained in the HASP.
 3. Noise emissions shall be kept within requirements of the HASP.
 4. If suspect materials are encountered, the Subcontractor shall notify the Contractor immediately and suspend work in the immediate area to allow Contractor evaluation. The Subcontractor shall follow the procedures detailed in the Health and Safety Plan (HASP).
- B. The Subcontractor shall not disturb existing stormwater, sediment, and erosion control in the areas impacted by the Work unless approved by the Contractor.
1. Existing stormwater drainage patterns and structures shall not be altered unless approved by the Contractor.
 2. Sediment and erosion control measures, including silt fences, straw bales, drainage ditches, and temporary seeding, will be furnished, installed, and maintained by the Contractor as needed to prevent effluent settleable solids measured at the NPDES structure at the site boundary from exceeding 1 ml per liter per hour.
- C. The Subcontractor shall protect existing features, including fencing, survey benchmarks, monitoring wells, and drainage structures (e.g. culverts, weirs, berms, pipes).
- D. The Subcontractor shall install a temporary fence (4 to 5 ft plastic construction fence) around the in situ treatment area. The Subcontractor shall furnish and install all other necessary temporary work zone security measures with the exception of a Contractor-provided Conex tool shed as shown on Figure 1.
- E. The Subcontractor shall furnish, install, and maintain field communications (e.g., radios or cellular phones). The system shall be approved by the Contractor. If a radio system is used, the Subcontractor shall provide four radios to the Contractor.

- F. The Subcontractor shall be responsible for fire protection, including furnishing and installing a storage facility for flammable materials, and other requirements as defined in the HASP.

1.06 RELATED WORK

- A. Section 02050 – In Situ Chemical Oxidation

PART 2 - PRODUCTS

2.01 WATER

- A. Application of water is an acceptable method of suppressing dust and other emissions.

PART 3 - EXECUTION

3.01 TEMPORARY FACILITIES INSTALLATION

- A. Subcontractor shall install those required temporary facilities not provided by the Contractor as approved by the Contractor.
- B. All temporary structures shall be blocked and tied down the same day that they are installed. Four-foot long or longer helical-type anchors shall be used.
- C. Steps and handrails shall be installed in accordance with the HASP, applicable OSHA requirements, and other federal, state, and local requirements.
- D. Electrical receptacles shall be installed in accordance with the National Electric Code and equipped with ground fault circuit interrupter (GFCI) devices.

3.02 SUSPECT HAZARDOUS MATERIALS

- A. The Subcontractor shall notify the Contractor immediately if suspect hazardous materials are encountered.
- B. The Contractor will determine the boundary of the hazard and the control measures to be implemented.
- C. The Contractor will notify the Subcontractor to stop work in the affected work area. The Subcontractor may then relocate operations to another work area.

- D. Control measures to be implemented by the Subcontractor at the direction of the Contractor include, but are not limited to:
 - 1. Place Contractor-provided signs, barricade affected area, and restrict access.
 - 2. Ensure surface water controls are sufficient to prevent run-on and runoff at all work areas.
 - 3. Remove, package, and relocate hazardous materials.
 - 4. Cover area with tarps or HDPE liner material.
- E. In all cases, the spread of contamination and hazardous materials shall be prevented.
- F. Waste generation shall be minimized.

3.03 CHEMICAL SPILLS

- A. The Subcontractor shall notify the Contractor of accidental spills or other accidental releases to the ground, and immediately suspend work in the area.
- B. Prior to resuming operations, the Contractor will utilize direct reading air monitoring equipment to assess airborne chemical hazards, and may collect bulk samples for analysis. Personal exposure sampling of Subcontractor personnel may be required in accordance with the HASP. Contractor monitoring requirements are delineated in the HASP.
- C. Subcontractor field personnel shall be trained in spill response for the chemicals being used during the treatment and shall provide evidence of this training to the Contractor.
- D. The Subcontractor shall clean up spills in accordance with the requirements of the HASP and as directed by the Contractor. The Subcontractor shall follow the written procedures for spill response included in the approved Emergency Response Plan.
- E. Waste generation shall be minimized.



3.04 EMISSIONS CONTROL

- A. Immediate action shall be taken when emissions above the action levels specified in the HASP are identified. Work shall be stopped any time these action levels are exceeded.
- B. If emission action levels are exceeded, the Contractor will not permit work to resume until the Subcontractor submits a plan for review and approval by the Contractor that describes specific methods of maintaining concentrations of each of the constituents below the specific action level.

- C. Off-gas produced during the in situ chemical oxidation treatment process shall be controlled in accordance with the HASP.

END OF SECTION 01500

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:EN-S-05-4863-00
Issued for Construction – Revision 0
Temporary Facilities and Controls
01500-7

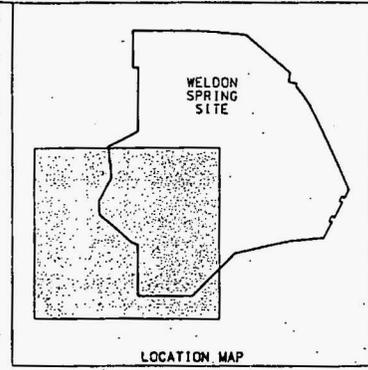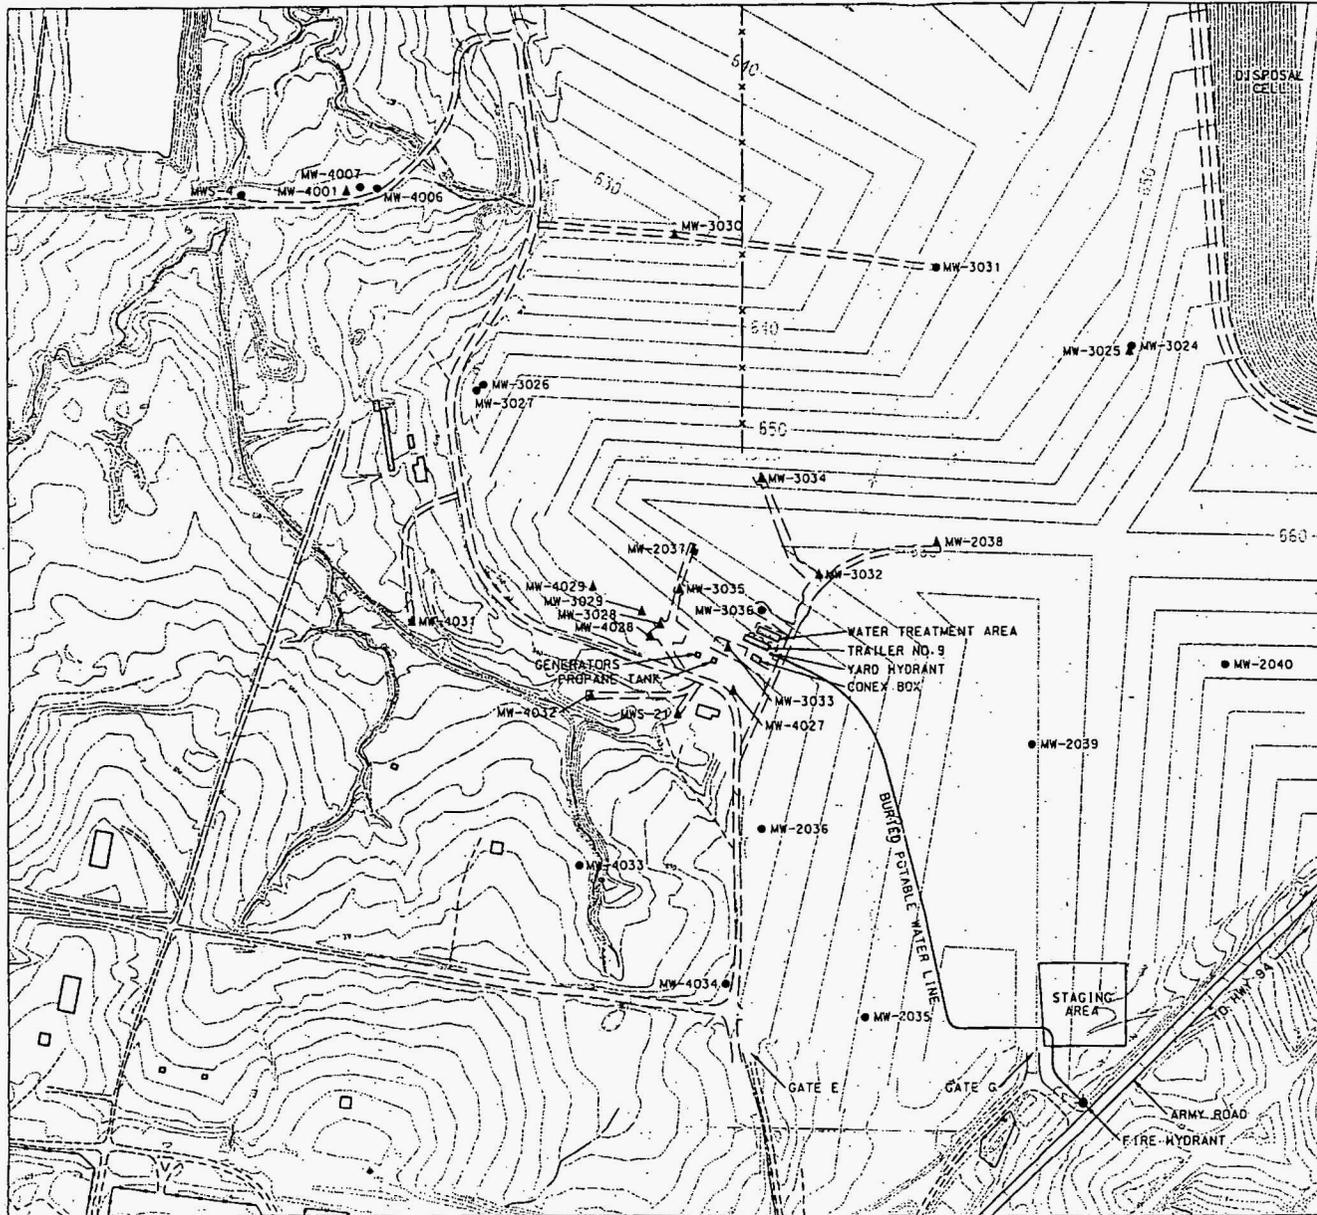

LEGEND

- ▲ - MONITORING WELL WITH WITH ≥ 1 ug/l TCE
- - OTHER MONITORING WELL
- - GRAVEL ROAD
- x- - CHAIN LINK FENCE

0 250 500
SCALE FEET

LAYOUT OF THE
GENERAL TCE WORK AREA

FIGURE 1

| | |
|-------------------------------|----------------------------|
| REPORT NO.: WP-568 SPEC 01500 | EXHIBIT NO.: B/CP/039/0401 |
| ORIGINATOR: BWD | DATE: 9/12/01 |
| DRAWN BY: GLN | |

SET I.D. _____



U.S. DEPARTMENT OF ENERGY

CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

DOCUMENT TITLE: Specification Section 01503 3840-C:HG-S-05-4864-00
Equipment Decontamination (DOCUMENT NUMBER)
In Situ Chemical Oxidation
of TCE in Groundwater
WP-568, Rev. 0

(SIGNATURE) (DATE)

PREPARED: OSE See Attached
REVIEWED: B. Duletsky Bob Duletsky 9-12-01

APPROVED:

PROJECT ENGINEER Joe Kazm 9-12-01
GWOU TECHNICAL MANAGER John Cato 9-13-01
ES&H MANAGER Daniel Griffin 9-14-01
SAFETY MANAGER Mike Mitchell 9-14-01
ENGINEERING MANAGER Mary L. Oakes 9-14-01

QUALITY LEVEL: []1 [x]2 []3

APPROVED FOR CONSTRUCTION:

DEPT. PROJECT DIRECTOR John D. Gately 9/14/01
PROJECT QUALITY MANAGER Phil D. Gately 9/14/2001
DOE PROJECT ENGINEER Thomas C. Gately 9/14/2001



WSSRA PROJECT REVIEWS AND APPROVALS

W.P. NO. 568 TASK NO. 541GW.900 DOC. NO. 3840-C:HG-S-05-4864-00

W.P. TITLE: In Situ Chemical Oxidation of TCE in QUALITY LEVEL 2
Groundwater LEAD DISCIPLINE Hydrogeology

SUBJECT: WSSRAP - Chemical Plant
Technical Specifications Section 01503
Equipment Decontamination
Issued for Construction
Revision 0

| | <u>PRINT/TYPE NAME</u> | <u>SIGNATURE</u> | <u>DATE</u> |
|------------------------------|------------------------|--|----------------|
| PREPARED: | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |
| REVIEWED: | <u>K. Ohsiek</u> | <u><i>K. Ohsiek</i></u> | <u>9/10/01</u> |
| APPROVED MKES: | | | |
| - LEAD TASK ENGINEER | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |
| - LEAD DISCIPLINE DEPT. MGR. | <u>S. Vincent</u> | <u><i>Sean Vincent</i></u> | <u>9/10/01</u> |
| - DESIGN MANAGER | <u>R. Rager</u> | <u><i>R.R.</i></u> | <u>9/10/01</u> |
| - ENGINEERING MANAGER | <u>R. Bohachek</u> | <u><i>S. Maier for R. Bohachek</i></u> | <u>9/10/01</u> |
| APPROVED: | | | |
| - OFF-SITE QUALITY MANAGER | <u>M. Maier</u> | <u><i>MJ Maier</i></u> | <u>9/10/01</u> |

SECTION 01503

EQUIPMENT DECONTAMINATION

PART 1 - GENERAL

1.01 SECTION INCLUDES

- A. This Specification Section describes the requirements and procedures for equipment decontamination.
- B. Equipment to be decontaminated prior to leaving the site includes drilling equipment, chemical injection equipment, and other contaminated equipment.

1.02 RELATED SECTIONS

- A. Section 01300 – Submittals
- B. Section 02050 – In Situ Chemical Oxidation
- C. Section 02733 – Well Installation

1.03 SUBMITTALS

- A. The Subcontractor shall prepare an Equipment Decontamination Plan for Contractor review and approval. The plan shall describe the materials and construction of the temporary decontamination facility, which the Subcontractor shall use for equipment decontamination. The plan shall also describe the decontamination procedures to be followed and the dismantlement of the facility. Sketches, plans, and other information shall be included as appropriate.

1.04 SUBMITTAL SCHEDULE

The following submittal is required in accordance with this specification.

| Specification Reference | Requirements | Period |
|-------------------------|--------------------------------|--|
| 01503 (1.03.A) | Equipment Decontamination Plan | 5 days prior to decontamination pad construction |

1.05 PROJECT SITE CONDITIONS

- A. The areas of the site where the work will be performed are at final grade, and temporary vegetation has been established.

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4864-00
Issued for Construction – Revision 0
Equipment Decontamination
01503-1

- B. TCE is the major contaminant of concern in groundwater beneath the site although tetrachloroethylene (PCE), dichloroethylene (DCE), uranium, nitroaromatic compounds, and nitrate have also been identified
- C. A staging area approved by the Contractor shall be used by the Subcontractor for the construction of a temporary decontamination facility.

PART 2 - PRODUCTS

(Not Used)

PART 3 - EXECUTION

3.01 PREPARATION

- A. All equipment or materials that will come into contact with subsurface materials shall be decontaminated or certified clean prior to bringing on site.
- B. Contamination of equipment shall be minimized to the extent practical through barriers, engineering controls, and administrative controls.
- C. All contaminated equipment shall be decontaminated at a Subcontractor-furnished decontamination facility. The pad shall be constructed at a location approved by the Contractor, in accordance with the approved Equipment Decontamination Plan, and shall be constructed entirely above ground.

3.02 DECONTAMINATION

- A. All contaminated material removed from equipment shall be contained and controlled. The spread of contamination shall be prevented.
- B. Waste generation shall be minimized.
- C. All contamination shall be handled and disposed in accordance with the requirements of the HASP.
- D. Decontamination water shall constitute a contaminated wastewater stream and shall be handled in accordance with the approved Work Plan and Section 01600.

END OF SECTION 01503

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4864-00
Issued for Construction – Revision 0
Equipment Decontamination

01503-2



CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

DOCUMENT TITLE: Specification Section 01600 3840-C:EN-S-05-4865-00

Material Storage and Handling (DOCUMENT NUMBER)

In Situ Chemical Oxidation of TCE in Groundwater

WP-568, Rev. 0

(SIGNATURE) (DATE)

PREPARED: OSE

See Attached

REVIEWED: B. Duletsky

Barb Duletsky

9-12-01

APPROVED:

PROJECT ENGINEER

Joe Kozmi

9-12-01

GWOU TECHNICAL MANAGER

John C. ...

9-13-01

ES&H MANAGER

David S. ...

9-14-01

SAFETY MANAGER

Mike Mitchell

9-14-01

ENGINEERING MANAGER

Miguel L. Oaks

9-14-01

QUALITY LEVEL: []1 [x]2 []3

APPROVED FOR CONSTRUCTION:

DEPT. PROJECT DIRECTOR

John D. ...

9/14/01

PROJECT QUALITY MANAGER

Steve D. ...

9/14/2001

DOE PROJECT ENGINEER

Thomas C. ...

9/14/2001



WSSRA PROJECT REVIEWS AND APPROVALS

W.P. NO. 568 TASK NO. 541GW.900 DOC. NO. 3840-C:EN-S-05-4865-00

W.P. TITLE: In Situ Chemical Oxidation of TCE in QUALITY LEVEL 2
Groundwater LEAD DISCIPLINE Civil

SUBJECT: WSSRAP - Chemical Plant
Technical Specifications Section 01600
Material Storage and Handling
Issued for Construction
Revision 0

| | <u>PRINT/TYPE NAME</u> | <u>SIGNATURE</u> | <u>DATE</u> |
|------------------------------|------------------------|---|----------------|
| PREPARED: | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |
| REVIEWED: | <u>K. Ohsiek</u> | <u><i>Karen Ohsiek</i></u> | <u>9/10/01</u> |
| APPROVED MKES: | | | |
| - LEAD TASK ENGINEER | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |
| - LEAD DISCIPLINE DEPT. MGR. | <u>K. Ohsiek</u> | <u><i>Karen Ohsiek</i></u> | <u>9/10/01</u> |
| - DESIGN MANAGER | <u>R. Rager</u> | <u><i>RR</i></u> | <u>9/10/01</u> |
| - ENGINEERING MANAGER | <u>R. Bohachek</u> | <u><i>S. Husler for R. Bohachek</i></u> | <u>9/10/01</u> |
| APPROVED: | | | |
| - OFF-SITE QUALITY MANAGER | <u>M. Maier</u> | <u><i>Mj Maier</i></u> | <u>9/10/01</u> |

SECTION 01600

MATERIAL STORAGE AND HANDLING

PART 1 - GENERAL

1.01 SCOPE

- A. This Specification Section describes the requirements for material storage, protection, handling, transportation, and disposal.
- B. Materials addressed by this Section include all chemicals, reagents, oxidants, and other hazardous or potentially hazardous materials furnished by the Subcontractor or created during execution of the Work.

1.02 RELATED SECTIONS

- A. Section 01300 – Submittals
- B. Section 01503 – Equipment Decontamination
- C. Section 02050 – In Situ Chemical Oxidation
- D. Section 02733 – Well Installation and Abandonment

1.03 SUBMITTALS

- A. The Subcontractor shall submit:
 - 1. Material Safety Data Sheet (MSDS) for each chemical, reagent, oxidant, and other hazardous or non-hazardous material 5 days prior to bringing on site and shall be the latest available version.
 - 2. Supplier or manufacturer requirements and recommendations for material storage, handling, protection, and transportation for each chemical, reagent, oxidant, and other potentially hazardous material brought on site.

1.04 SUBMITTAL SCHEDULE

- A. The following submittals are required in accordance with this specification.

| Specification Reference | Requirements | Period |
|-------------------------|--|---|
| 01600 (1.03.A.1) | Most current Material Safety Data Sheet (MSDS) for each chemical, reagent, oxidant, and other hazardous material brought on site | 5 days prior to bringing material on site |
| 01600 (1.03.A.2) | Supplier or manufacturer requirements and recommendations for material storage, handling, protection, and transportation for each chemical, reagent, oxidant, and other potentially hazardous material brought on site | 5 days prior to bringing material on site |

1.05 PROJECT SITE CONDITIONS

- A. The areas of the site where the work will be performed are at final grade and temporary vegetation has been established. Trichloroethene (TCE) is present in certain locations in the shallow groundwater. Other contaminants known to be present in the groundwater include dichloroethylene (DCE), tetrachloroethylene (PCE), uranium, nitroaromatics, and nitrate.

PART 2 - PRODUCTS

(Not Used)

PART 3 - EXECUTION

3.01 GENERAL

- A. All materials shall be stored, protected, transported, handled, and disposed in accordance with applicable local, state, and federal rules and regulations.
- B. The Subcontractor shall provide trained labor and the proper equipment (in good working order) to load, unload, and transport all materials.
- C. If the Subcontractor during execution of the Work encounters any unexpected hazardous or potentially hazardous material, chemical, or contaminant, the Contractor shall be notified immediately.

3.02 STORAGE, PROTECTION, AND HANDLING

- A. All materials shall be stored, protected, and handled in accordance with the requirements and recommendations of the material supplier and/or manufacturer.

- B. Volumes of chemicals stored at the site for the purpose of treatment shall be limited to the amount necessary to perform the Work.
- C. All materials shall be stored, protected, and handled in accordance with the requirements of the WSSRAP Health and Safety Plan (HASP). Chemicals may not be stored in the office trailer.
- D. The Subcontractor is responsible for freeze protection for chemicals, hazardous materials, and solutions, as well as stored water awaiting reagent-neutralization treatment by the Subcontractor and subsequent treatment by the Contractor.
- E. All necessary and appropriate enclosures, security, barricades, and other measures for proper material storage, protection, and handling shall be furnished and provided by the Subcontractor. Enclosures shall meet applicable OSHA standards, DOE orders, and National Fire Protection Association codes.
- F. The Subcontractor shall maintain and submit to the Contractor an inventory of all on-site chemicals, hazardous materials, potentially hazardous materials, potentially contaminated drilling cuttings and fluids, potentially contaminated groundwater, and other materials associated with the Work. All such materials shall be kept separate and shall not be consolidated, combined, or mixed without prior approval by the Contractor. This inventory shall include chemical usage by the Subcontractor and shall be submitted to the Contractor as part of the daily report.

3.03 GROUNDWATER

- A. The Subcontractor shall limit the quantity of groundwater brought to the ground surface to the minimum necessary to execute the Work. The Subcontractor shall prevent the spread of potentially contaminated groundwater onto the ground surface or surface drainages, and shall capture and collect all groundwater brought to the ground surface. The collected groundwater shall be protected from precipitation.
- B. Groundwater brought to the ground surface by drilling, well development, sampling, or other activities shall be considered and handled as RCRA waste due to TCE contamination. The Subcontractor shall mark any containers used to transport this water to the treatment area as "Hazardous Waste" and label with accumulation date.
- C. The Subcontractor shall treat all collected groundwater that is characterized as containing residual oxidation reagent (the Contractor will treat all collected groundwater that is characterized as RCRA hazardous due to TCE contamination or exceeds the site's NPDES permit limitations for any other parameter).
- D. The Subcontractor shall notify the Contractor when a wastewater storage tank has been filled. Following notification, the Contractor will transfer the contents of the tank to the Contractor wastewater treatment area within 10 days.

3.04 DECONTAMINATION WATER

- A. The Subcontractor shall collect and store decontamination water. Water generated by decontamination activities shall be considered and handled as potentially contaminated material. The Subcontractor shall treat the decontamination water for residual oxidation reagent.
- B. The Subcontractor shall identify in the Work Plan all contaminants that may be present in the decontamination water from the residual oxidation reagent and have the potential to enter the effluent stream so that the Contractor can provide a 30-day notice to the State.
- C. Disposition of treated decontamination water shall be addressed as described in Article 3.03 D.

3.05 OTHER CONTAMINATED WASTES

- A. All contaminated soil wastes generated by chemical spills, leaks, or other releases shall be handled in accordance with RCRA regulations as applicable. The Subcontractor shall clean up, neutralize if necessary, and containerize all spill residues in clean, Subcontractor-provided, compatible containers. The Subcontractor shall label and store the containers in accordance with RCRA regulations (as applicable) at the staging area near Gate G to await characterization by the Contractor.
- B. The Subcontractor shall handle all contaminated non-aqueous waste generated as a byproduct of the residual reagent treatment process in accordance with RCRA regulations as applicable. The Subcontractor shall containerize all such wastes in clean, Subcontractor-provided, Contractor-approved, compatible containers. The Subcontractor shall label and store the containers in accordance with RCRA regulations (as applicable) at the staging area near Gate G to await characterization by the Contractor.
- C. The Contractor will characterize the containerized contaminated wastes and approve their ultimate disposition. The Subcontractor shall be responsible for the cost of sampling, testing, shipping, treatment, and/or disposal of the wastes that are the result of the Subcontractor's treatment processes (see Special Conditions for cost details).

3.06 DISPOSAL

- A. All unused chemicals, reagents, oxidants, and other hazardous or potentially hazardous chemicals or materials originally brought on site by the Subcontractor shall be removed from the site by the Subcontractor and/or disposed of off-site in accordance with all local, state, and federal rules and regulations.

END OF SECTION 01600

SET I.D. _____



U.S. DEPARTMENT OF ENERGY

CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

DOCUMENT TITLE: Specification Section 02050 3840-C:HG-S-05-4866-00
In Situ Chemical Oxidation (DOCUMENT NUMBER)
In Situ Chemical Oxidation
of TCE in Groundwater
WP-568, Rev. 0

(SIGNATURE) (DATE)

PREPARED: OSE

See Attached

REVIEWED: B. Duletsky

Barb Duletsky 9-12-01

APPROVED:

PROJECT ENGINEER

Joe Kazmi 9-12-01

GWOU TECHNICAL MANAGER

[Signature] 9-13-01

ES&H MANAGER

David [Signature] 9-14-01

SAFETY MANAGER

Miko Mitchell 9-14-01

ENGINEERING MANAGER

Mj L. Sales 9-14-01

QUALITY LEVEL: []1 [x]2 []3

APPROVED FOR CONSTRUCTION:

DEPT. PROJECT DIRECTOR

[Signature] 9/14/01

PROJECT QUALITY MANAGER

Orvil D. Lente 9/14/2001

DOE PROJECT ENGINEER

Thomas C. Panley 9/14/2001



WSSRA PROJECT REVIEWS AND APPROVALS

W.P. NO. 568 TASK NO. 541GW.900 DOC. NO. 3840-C:HG-S-05-4866-00

W.P. TITLE: In Situ Chemical Oxidation of TCE in QUALITY LEVEL 2
Groundwater LEAD DISCIPLINE Hydrogeology

SUBJECT: WSSRAP - Chemical Plant
Technical Specifications Section 02050
In Situ Chemical Oxidation

Issued for Construction

Revision 0

| | <u>PRINT/TYPE NAME</u> | <u>SIGNATURE</u> | <u>DATE</u> |
|------------------|------------------------|----------------------------|----------------|
| PREPARED: | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |

| | | | |
|------------------|------------------|----------------------------|----------------|
| REVIEWED: | <u>K. Ohsiek</u> | <u><i>Karen Ohsiek</i></u> | <u>9/10/01</u> |
|------------------|------------------|----------------------------|----------------|

APPROVED MKES:

| | | | |
|------------------------------|--------------------|---|----------------|
| - LEAD TASK ENGINEER | <u>P. Patchin</u> | <u><i>Paul Patchin</i></u> | <u>9/10/01</u> |
| - LEAD DISCIPLINE DEPT. MGR. | <u>S. Vincent</u> | <u><i>Steve Vincent</i></u> | <u>9/10/01</u> |
| - DESIGN MANAGER | <u>R. Rager</u> | <u><i>RR</i></u> | <u>9/10/01</u> |
| - ENGINEERING MANAGER | <u>R. Bohachek</u> | <u><i>S. Hunter for R. Bohachek</i></u> | <u>9/11/01</u> |

APPROVED:

| | | | |
|----------------------------|-----------------|------------------------|----------------|
| - OFF-SITE QUALITY MANAGER | <u>M. Maier</u> | <u><i>MJ Maier</i></u> | <u>9/10/01</u> |
|----------------------------|-----------------|------------------------|----------------|

SECTION 02050
IN SITU CHEMICAL OXIDATION

PART 1 - GENERAL

1.01 SCOPE

- A. The Subcontractor shall perform pilot-scale in situ chemical oxidation treatment of groundwater at the WSSRAP Chemical Plant for dissolved TCE contamination. The design of the pilot-scale testing shall incorporate results from the previously performed bench-scale testing, which are provided in the bid documents. The testing shall be performed at two locations within the TCE impact area of the site, as shown on Figure 1 of this section.
- B. This Specification Section describes the requirements for in situ chemical oxidation, (i.e., treatment) of trichloroethene (TCE) in groundwater at the Chemical Plant site including:
 - 1. Pilot-scale treatment system design
 - 2. Pilot-scale testing of treatment concept
 - 3. Groundwater monitoring and testing before, during and after injection to evaluate progress of in situ oxidation of TCE in groundwater
 - 4. Full-scale treatment system design

1.02 RELATED WORK

- A. Section 01300 – Submittals
- B. Section 01503 – Equipment Decontamination
- C. Section 01600 – Material Storage and Handling
- D. Section 02733 – Well Installation and Abandonment

1.03 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this Section to the extent referenced. The publications are referred to in the text by the basic designation only:

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4866-00
Issued for Construction – Revision 0
In Situ Chemical Oxidation
02050-1

1. Missouri CSR – Code of State Regulations
 - 10 CSR 23 – Missouri Well Construction Rules
 - 10 CSR 50 – Underground Injection Control Rules
2. MDNR – Missouri Department of Natural Resources
 - Missouri Well Construction Rules. Authorizing Statutes – 256.600 to 256.640 RSMo, Division of Geology and Land Survey, Rolla, Missouri.
3. National Electric Code

1.04 DEFINITIONS

- A. DOE: U.S. Department of Energy
- B. TCE: Trichloroethene
- C. DCE: Dichloroethylene
- D. PCE: Tetrachloroethylene
- E. Treatment system: All necessary well installation(s), field instrumentation, electrical systems, temporary facilities, piping systems, and appurtenances necessary for the introduction of reagent(s) into and/or transport of potentially contaminated groundwater.
- F. PPE: Personal protective equipment
- G. ppb: Parts per billion
- H. µg/L: Micrograms per liter (10^{-6} grams per liter)
- I. MCL: Maximum contaminant level
- J. SAP: Sampling and Analysis Plan

1.05 PROTECTION

- A. The Subcontractor shall protect the following:
 1. Benchmarks and monuments
 2. Existing structures and fences
 3. Monitoring wells

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4866-00
Issued for Construction – Revision 0
In Situ Chemical Oxidation
02050-2

4. All areas outside of immediate work area
5. Existing features not part of this Work

1.06 SUBMITTALS

- A. In accordance with the schedule given in this Section, the Subcontractor shall submit the following to the Contractor for approval in accordance with Section 01300.
1. **Pilot-Scale Testing Work Plan and Design.** The Pilot-Scale Testing Work Plan and Design prepared in accordance with Article 3.02 shall be submitted with the bid package. The Pilot-Scale Testing Work Plan shall describe implementation of in situ chemical oxidation and shall include a schedule for completion of pilot testing milestones. The plan shall address mobilization of Subcontractor equipment and personnel; site preparation and infrastructure needs; construction and installation of the delivery system; construction of temporary roads and facilities; installation of wells and/or injection points; operation of the system; oxidant (and associated reagent) application rates and pressures; operational and performance monitoring; system optimization; decontamination of equipment, necessary water treatment, and waste handling methods.
 2. **Conceptual Full-Scale Design.** As part of the bid package, a conceptual design for full-scale implementation of in situ chemical oxidation treatment shall be submitted. This document shall clearly state all assumptions upon which the conceptual design is based (e.g., radius of influence, reaction rate, etc.), as well as how the results of the pilot scale test may potentially impact the full-scale design.
 3. **Safe Work Plan.** A Safe Work Plan shall be submitted to the Contractor prior to Notice to Proceed. Health and safety aspects of the project including but not limited to the use of PPE, material handling and storage requirements, and job hazard analysis, shall be described in this plan. The Safe Work Plan shall identify all potential hazards associated with the implementation of the treatment system and must follow the outline provided in the WSSRAP Health and Safety Plan which is included in these Subcontract documents.
 4. **Emergency Response Plan.** An Emergency Response Plan shall be submitted to the Contractor prior to Notice to Proceed. This plan shall describe procedures to be followed in the event of an emergency, and shall address medical emergencies, fires, explosions, spills and releases.
 5. **Sampling and Analysis Plan.** Prepare and submit for approval a Sampling and Analysis Plan which addresses the Subcontractor's approach to monitoring the groundwater impact of the treatment process. The Plan shall include a sampling schedule for all locations to be sampled, list the types of analyses to

be performed for each event, and address methodology to be used for sample collection, preservation, handling, shipping, chain-of-custody, analytical test methods, detection limits, quality control, and data reporting formats. Detection limits for TCE, 1,2- DCE, PCE, and vinyl chloride shall be at least 1 µg/l. The Sampling and Analysis Plan shall be submitted and approved by the Contractor prior to conducting analytical sampling.

6. Analytical Laboratory Certification. The analytical testing laboratory qualifications and certifications shall be submitted to demonstrate that the laboratory is certified according to applicable RCRA regulations and qualified to perform the analytical testing required as part of the Work. The laboratory shall also certify that they are able to reach a detection limit of 1 µg/l for TCE, 1,2- DCE, PCE, and vinyl chloride.
7. Daily Field Activity Reports. Prepare and submit activity reports on a daily basis. Daily reports shall describe all work activities performed by the Subcontractor for that day. Attachments to the daily reports shall include hazardous material/chemical inventories required in Section 01600.3.02.F and field sheets associated with sampling events required in Article 3.05.E of this Specification.
8. Interim Progress Reports. Prepare and submit Interim Progress Reports informing the Contractor of significant activities conducted as part of the Work. The reports shall be submitted monthly following the Notice to Proceed and shall contain a list of project milestones completed to date, as well as a look-ahead schedule to indicate upcoming activities.
9. Pilot-Scale Testing Completion Report. Upon completion of pilot-scale testing, prepare and submit a report describing all field activities performed as part of the pilot-scale testing program and present the testing results. The report shall contain all field and laboratory documentation generated during the project, including well installation logs, boring logs, chemical injection logs, field monitoring logs, and sample analytical results. In addition, the report shall contain all analytical data generated during the project including raw data sheets, instrument printouts, calibration and internal QC reports, sample preparation sheets, test methods, and detection limits. The report shall discuss any unexpected conditions encountered in the field, as well as any subsequent modifications to the Pilot-Scale Work Plan and Design. The report shall include an evaluation of all data obtained during pilot-scale testing, particularly with respect to reaction rate, radius of influence, and efficiency of TCE destruction. The report shall also address any other effects of the chemical oxidation process on aquifer conditions (e.g., changes in permeability, mobilization of contaminants other than TCE, etc.).

10. **Final Full-Scale Work Plan and Design.** The Final Full-Scale Work Plan and Design shall be submitted following the completion of pilot-scale testing and concurrent with analysis and documentation of the pilot-scale testing. The plan shall refer to and incorporate the results of the pilot-scale testing and describe how these results affect the design of the full-scale treatment. The Final Full-Scale Work Plan and Design shall include the same elements that were addressed in the Pilot-Scale Work Plan and Design as they pertain to the full-scale system. A construction schedule and cost estimate shall be included with the Final Full-Scale Work Plan and Design.

1.07 SUBMITTAL SCHEDULE

The following submittals are required in accordance with this specification.

| Specification Reference | Submittal | Schedule |
|-------------------------|--|--|
| 02050 (1.06.A.1) | Pilot-Scale Work Plan and Design | With bid |
| 02050 (1.06.A.2) | Conceptual Full-Scale Design | With bid |
| 02050 (1.06.A.3) | Safe Work Plan | Prior to Notice to Proceed |
| 02050 (1.06.A.4) | Emergency Response Plan | Prior to Notice to Proceed |
| 02050 (1.06.A.5) | Sampling and Analysis Plan | Prior to analytical sampling |
| 02050 (1.06.A.6) | Analytical Laboratory Certification | Prior to Notice to Proceed |
| 02050 (1.06.A.7) | Daily Field Activity Reports | Daily following the start of fieldwork |
| 02050 (1.06.A.8) | Interim Progress Report | Monthly after Notice to Proceed |
| 02050 (1.06.A.9) | Pilot-Scale Testing Completion Report | Completion of pilot-scale testing |
| 02050 (1.06.A.10) | Final Full-Scale Work Plan and Design | Completion of pilot-scale testing |
| 02050 (1.08.A) | Registered Geologist License (copy) and resume | Prior to Notice to Proceed |

1.08 PERSONNEL QUALIFICATION

- A. All work that involves characterization, testing, analysis, or interpretation of the geology or hydrogeology of the site shall be performed or directly supervised by a geologist registered in the State of Missouri. A copy of the registered geologist's resume and license shall be submitted to the Contractor for approval prior to Notice to Proceed.

1.09 WITNESS AND HOLD POINTS

- A. Contractor witness points are listed below:
 - 1. During injection well or monitoring well installations.
 - 2. During chemical reagent injection episodes.
- B. Contractor hold points, including the estimated time needed for the Contractor to conduct the necessary review, inspections, sampling and tests, are listed below:
 - 1. Safe Work Plan review and comment – 10 working days.
 - 2. After drilling and permeability testing of pilot scale injection point, prior to installation of associated monitoring wells – 1 working day.
 - 3. After installation of the pilot-scale system, prior to injection – 5 working days.
 - 4. After completion and submittal of Pilot-Scale Test Completion Report and prior to dismantlement of the pilot scale system and abandonment of wells – 25 working days.

PART 2 - PRODUCTS

2.01 MATERIALS

- A. The materials used for the treatment system shall be chemically compatible with the oxidant used.
- B. Oxidant chemicals and reagents shall be of consistent and known quality. Impurities present in the oxidant chemicals shall not be of high enough concentration to cause the groundwater to exceed drinking water MCLs as measured at the end of the performance period.
- C. The Subcontractor shall obtain and submit prior to injection, a laboratory analysis of the oxidant chemical solution. This analysis shall include manganese and TOX metals (i.e., As, Ba, Cr, Cd, Hg, Pb, Ag, Se).

PART 3 - EXECUTION

3.01 GENERAL

- A. The Subcontractor shall design, furnish, install, and operate a pilot-scale in situ chemical oxidation treatment system at the Chemical Plant site in two Contractor-selected areas (Figure 1 of this section). Pilot-scale treatment shall focus on the shallow aquifer that includes the weathered upper portion of the Burlington-Keokuk Limestone. The system shall be located in the area of TCE impact where concentrations are expected to exceed an MCL of 200 µg/L.
- B. The Subcontractor's pilot-scale design shall include containment systems in accordance with RCRA requirements. Static water testing of all tanks and storage units and hydro testing of delivery systems (pipes/hoses, tubing) shall also be included in the design and work plan.
- C. The pilot-scale treatment system shall introduce the chemical oxidant into the full thickness of the weathered upper portion of the Burlington-Keokuk Limestone and within the zone of saturation. The concentration of oxidant and the rate of delivery shall be designed to deliver enough oxidant to satisfy both the TCE demand and the natural oxidant demand of the aquifer in order to preclude insufficient degradation of TCE and creation of undesirable reaction by-products.
- D. The pilot-scale treatment system shall be designed and operated in such a manner as to minimize eruptions or leakage of the oxidant chemicals. The Subcontractor shall clean up and containerize all soil waste generated by such a release as described in Section 01600.
- E. Injection of excessive amounts of residual reagent that may be discharged in the surface water at down-gradient springs shall be prevented.
- F. Up to two treatment injections shall be performed. Groundwater TCE concentrations in the treatment area shall be monitored for a period of one month following the initial treatment injection. If concentrations remain above the MCL in the Subcontractor-installed monitoring wells after the one-month monitoring period, a second treatment shall be injected.
- G. The Subcontractor shall define the reaction by-products and breakdown products that result from application of the treatment. In any case, by-products and breakdown products that create additional groundwater contamination (e.g., vinyl chloride, manganese, or hexavalent chromium), or significantly affect the aesthetic quality (color) are not allowed.
- H. The operation of the in situ oxidation system shall not create reaction by-products (e.g. precipitated metal compounds) or residual reagent to a degree that will

adversely affect the water chemistry or aquifer permeability (aquifer plugging) in a way that will make conventional water treatment more difficult.

- I. Testing and operation of the treatment system shall not facilitate migration of TCE beyond the March 2001 defined limits of contamination.
- J. Uranium, nitrate, and nitroaromatic contaminants are present in the subsurface environment. The Subcontractor shall account for their presence and chemical properties in the treatment system design. Long-term mobilization of these contaminants by the in situ chemical oxidation of TCE shall be prevented.
- K. The level of impurities in the reagent shall not result in further contamination of the aquifer following injection.
- L. The Subcontractor shall attend meetings with the Contractor as necessary to present progress reports and/or discuss immediate needs.

3.02 PILOT-SCALE WORK PLAN AND DESIGN

- A. The Subcontractor shall prepare and submit a Pilot-Scale Work Plan and Design with the bid. This Work Plan and Design shall provide information and details on the pilot-scale testing, including test objectives, schematic diagram of the oxidant delivery system, location and layout design of the system, types and concentrations of chemicals to be used, oxidant mixing methods, injection technique, special contingencies, and performance monitoring.
- B. The required oxidant concentration, introduction rate, and duration shall be determined by the Subcontractor from results of previous bench-scale testing, which are included in these bid documents. These parameters shall be delineated in the Pilot-Scale Work Plan and Design.
- C. The Pilot-Scale Work Plan and Design submitted by the Subcontractor will be reviewed by the Contractor, the DOE, and regulatory agency(s). The Subcontractor shall attend a meeting on-site to discuss implementation of the Pilot-Scale Work Plan and Design prior to proceeding with the fieldwork.

3.03 PILOT-SCALE TESTING

- A. The Subcontractor shall perform pilot-scale testing of the treatment system in accordance with the approved Pilot-Scale Work Plan and Design. The Subcontractor shall furnish, install, and operate the treatment system and appurtenances.
- B. The Subcontractor shall perform pilot-scale testing at two locations selected by the Contractor within the TCE-impact area to account for variations in aquifer permeability. One location shall be in the area of highest aquifer permeability and

the other location in the area of lowest permeability so that best- and worst-case conditions can be evaluated. These locations are shown in Figure 1 of this section.

- C. The Subcontractor shall test the hydraulic conductivity of the weathered Burlington Keokuk Limestone at each injection point prior to completing the injection well and any associated monitoring well drilling and installations. If the hydraulic conductivity testing indicates conditions different than anticipated (e.g., low hydraulic conductivity at the high conductivity injection location), the Contractor may direct the Subcontractor to move the injection location.
- D. The Subcontractor shall provide a means for monitoring and controlling off-gas to comply with emission limits and worker exposure limits identified in the HASP.
- E. The Subcontractor shall provide freeze protection for all exposed plumbing related to the treatment system.
- F. The Subcontractor shall prepare a Pilot-Scale Testing Completion Report detailing the pilot-scale testing operations and resulting degree of success in reducing dissolved TCE in groundwater.

3.04 FULL-SCALE WORK PLAN AND DESIGN

- A. The Subcontractor shall prepare and submit a Final Full-Scale Work Plan and Design concurrent with the analysis and documentation of the pilot-scale testing. The Work Plan shall incorporate the results of the pilot-scale testing and describe modifications to the Conceptual Full-Scale Design necessary for effective full-scale operation of the system. The same elements that are addressed in the Pilot-Scale Work Plan and Design for the pilot-scale testing shall be addressed in the Full-Scale Work Plan and Design as they pertain to the full-scale system.
- B. The required oxidant concentration, introduction rate, and duration shall be determined by the Subcontractor from the pilot-scale testing, and shall be sufficient to treat the entire area of TCE impact and reduce groundwater concentrations of TCE to 5 µg/L. Results of the pilot-scale testing shall be used to determine the radius of influence achieved at each injection point. Proposed injection points shall be placed at optimal intervals to achieve full coverage of the TCE impact area without overdosing the aquifer.
- C. The Full-Scale Work Plan and Design will be reviewed by the Contractor and off-site regulatory agencies. The review and comment process duration is fifteen working days. The Subcontractor must account for the review and comment period in the project schedule, and incorporate revisions as directed into the Work Plan and Design.

3.05 GROUNDWATER MONITORING AND TESTING

- A. The Subcontractor shall prepare and submit a Sampling and Analysis Plan (SAP) in conjunction with the Pilot -Scale Work Plan for operation of the chemical oxidant delivery system. The SAP shall address the number and locations of groundwater monitoring points, frequency of monitoring, collection methods, preservation techniques, target compounds, analytical test methods and detection limits for the Subcontractor-performed sampling. Samples may be taken from the existing groundwater monitoring well system, or from new wells, probes, injection points, or other features installed for monitoring or as part of the delivery system prior to, during, and after operation of the treatment system. The Subcontractor is responsible for all handling and shipping of these samples in accordance with all state and federal requirements. The Contractor will periodically take splits of Subcontractor samples and shall have the right to sample at any time and at any location during the testing.
- B. The Subcontractor shall monitor and document the rate, total volume, and concentration of the oxidant delivered, during and after operation of the treatment system to demonstrate that delivery is in accordance with the approved Work Plan. The Subcontractor may modify these parameters based on analytical test results in order to optimize performance of the treatment system. All modifications that deviate from the Work Plan shall be approved by the Contractor prior to implementation.
- C. The Subcontractor shall measure groundwater levels in existing and new wells prior to, during, and after operation of the treatment system.
- D. The Subcontractor shall sample groundwater from new and/or existing monitoring wells prior to, during, and following injection. At a minimum, the following parameters shall be monitored: TCE, 1,2-DCE, PCE, vinyl chloride, uranium, nitrates, and TOX metals (i.e., As, Ba, Cr, Cd, Hg, Pb, Ag, Se). Analytical data from this sampling shall be submitted to the Contractor with the daily reports as it is received from the laboratory.
- E. The Subcontractor shall test groundwater samples for physical parameters during each sampling event. Physical parameters shall at a minimum include temperature, conductivity, dissolved oxygen, pH and Eh. These parameters shall be recorded on field sheets which shall be submitted to the Contractor with the daily reports.
- F. Groundwater samples collected during the pilot-scale testing may contain above-background concentrations of uranium. Based on historic site data, these levels are expected to be below 60 pCi/l and will not pose a radioactive health hazard to anyone contacting or handling them. Neither the Subcontractor nor the analytical laboratory will require a specific license from the U.S. Nuclear Regulatory Commission (NRC) (see 10 CFR 40.13) to handle these samples. In addition, the



samples will not contain sufficient radioactivity to meet the U.S. Department of Transportation (DOT) definition of radioactive material (see 49 CFR 173.403). The samples will, however, be likely to contain TCE concentrations that exceed RCRA characteristic levels, and should be packaged, handled, and shipped in accordance with applicable RCRA and DOT regulations.


- G. The Subcontractor shall monitor and document concentrations of off-gasses and other potentially hazardous conditions during operation of the treatment system. If necessary, the Subcontractor shall modify operations to avoid or mitigate the creation of hazardous conditions for workers and the environment.

3.06 EVALUATION OF THE EFFECTIVENESS OF TREATMENT

- A. The Contractor will make the final determination of the effectiveness of the treatment of TCE based on Contractor-obtained and analyzed samples.
- B. The Contractor will sample and analyze groundwater from the monitoring well network both prior to and following pilot-scale testing to track potential changes in TCE.


END OF SECTION 02050

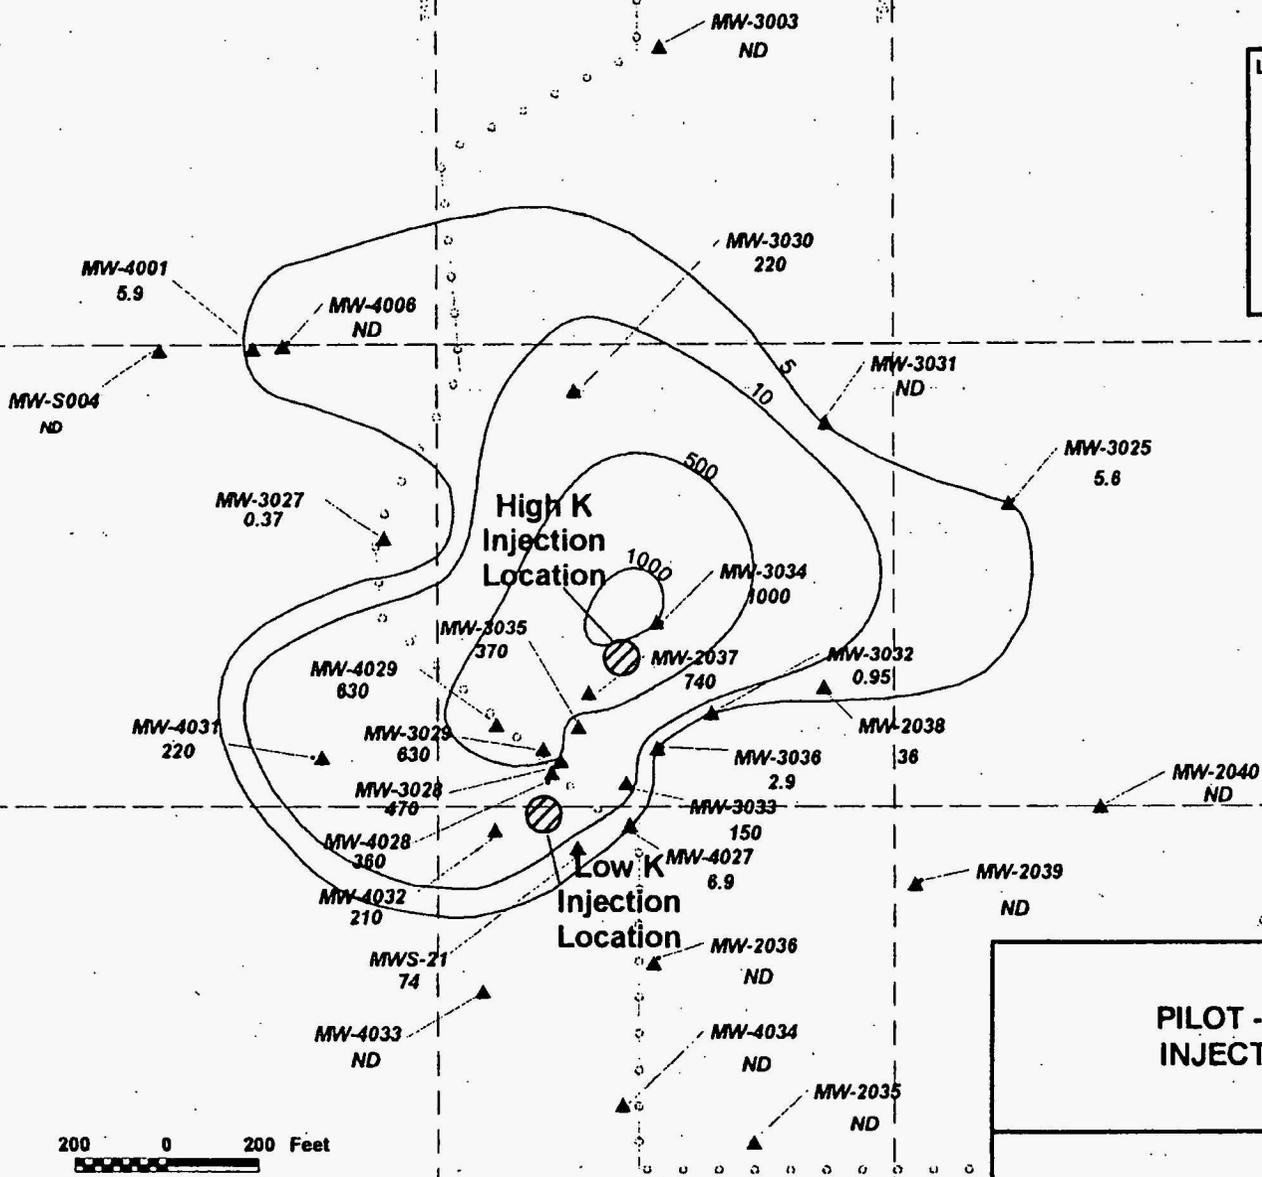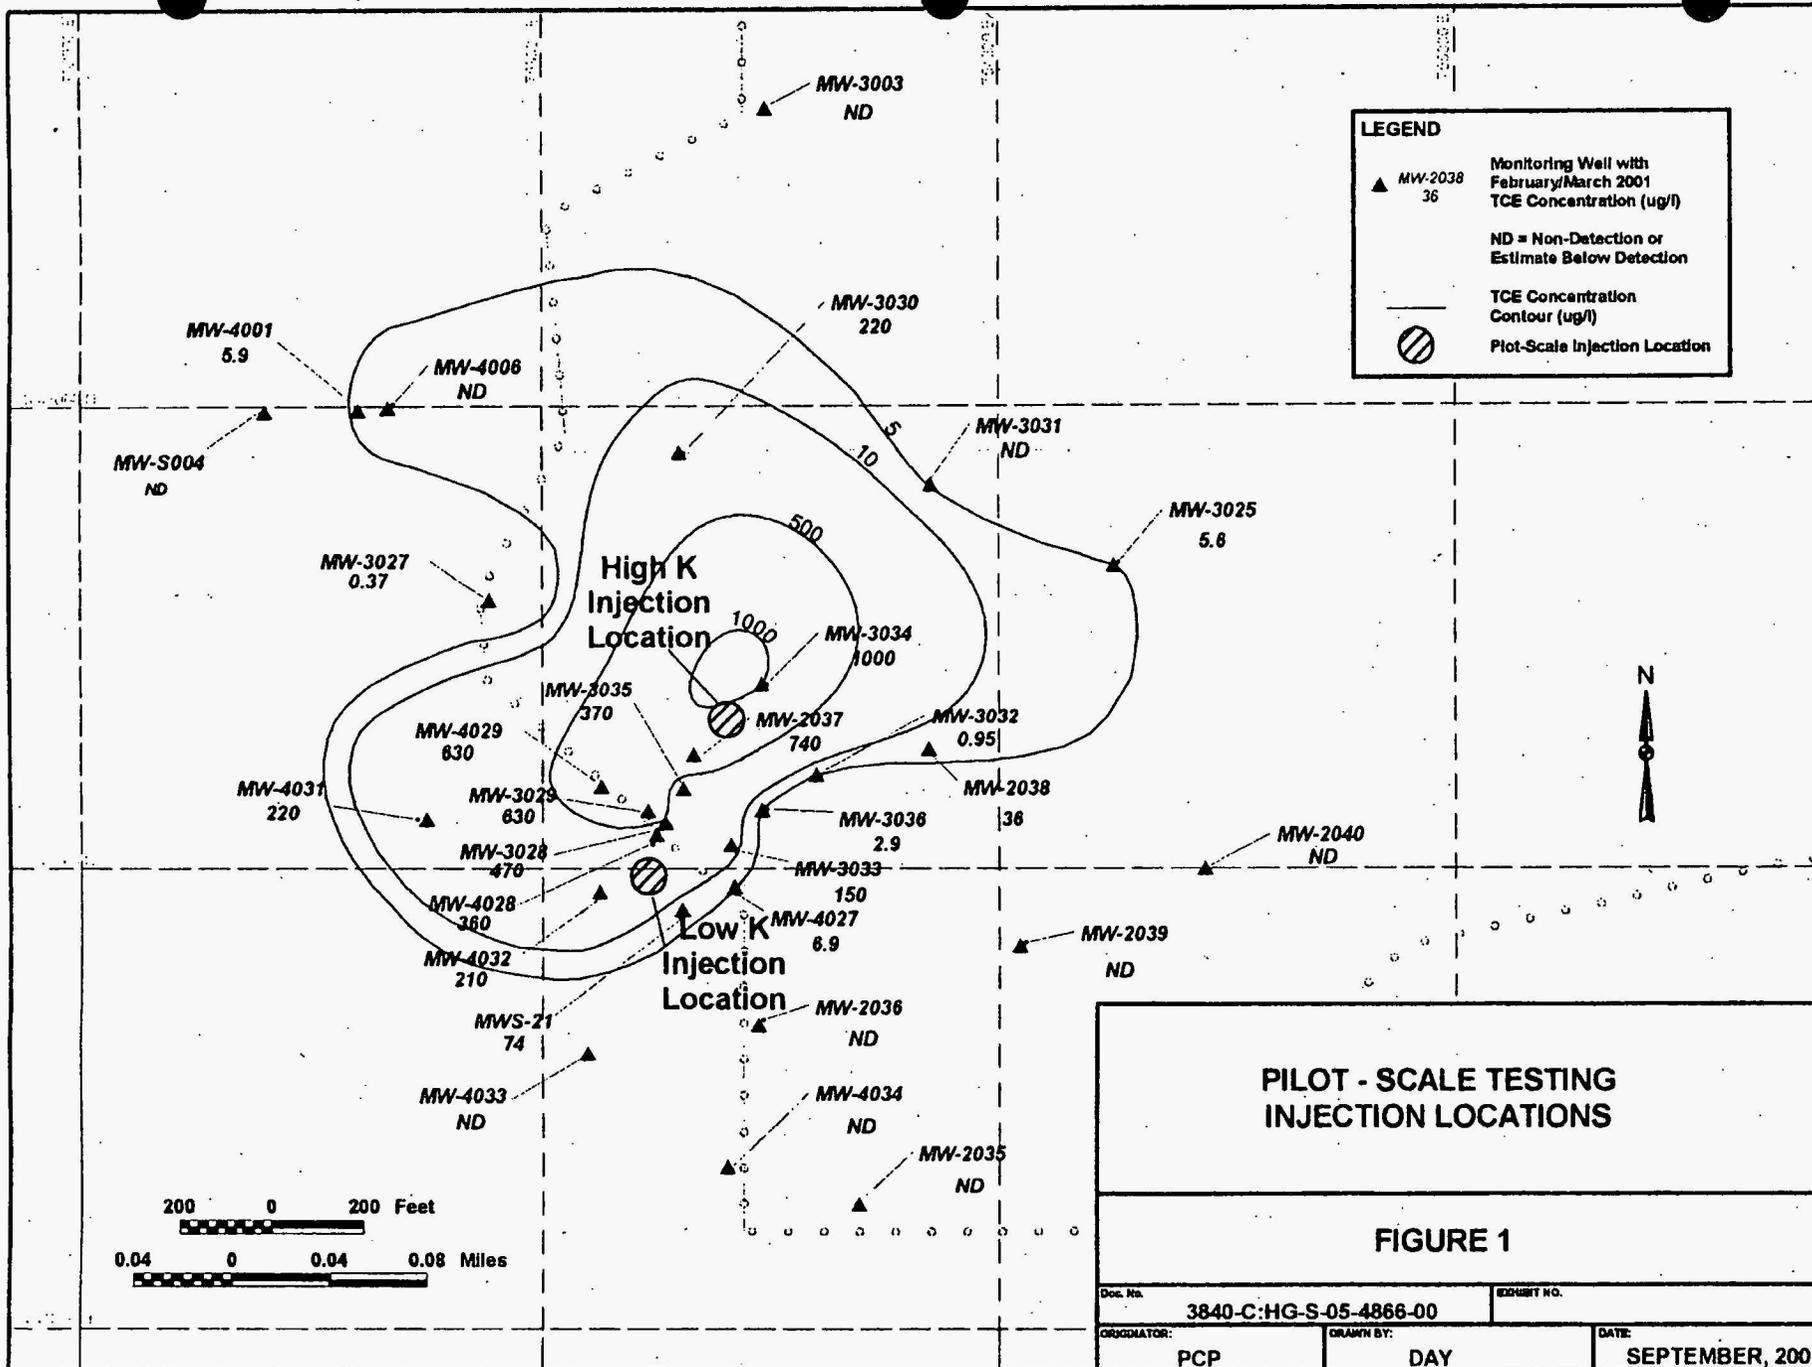

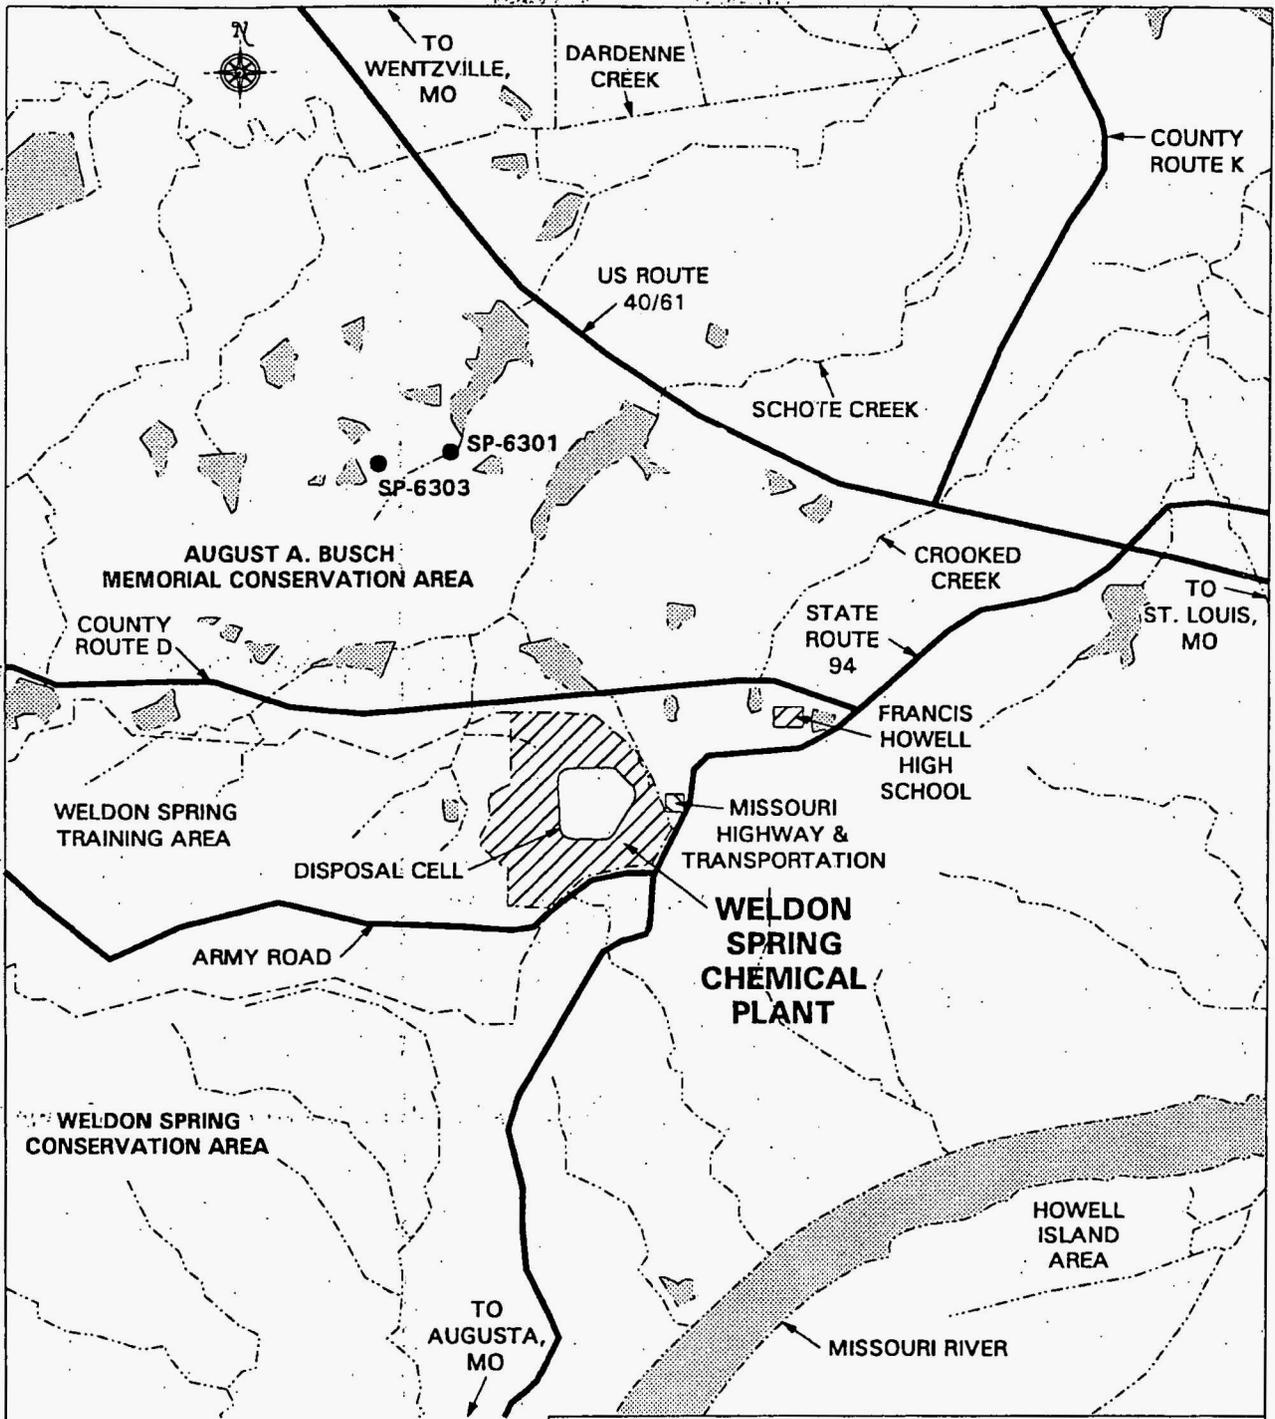

LEGEND

- CREEK OR SURFACE DRAINAGE
- ▣ POND OR LAKE

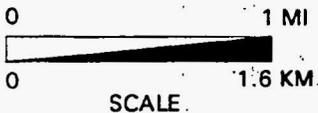

**WELDON SPRING CHEMICAL PLANT
SITE AND NEARBY SPRINGS**

FIGURE 2

| | | | |
|-------------|-------------------|--------------|---------------|
| REPORT NO.: | WP-568-SPEC.02050 | EXHIBIT NO.: | A/VP/027/0901 |
| ORIGINATOR: | BWD | DRAWN BY: | GLN |
| | | DATE: | 9/12/01 |



CONTRACT No. DE-AC05-86OR21548

WELDON SPRING SITE REMEDIAL ACTION PROJECT

ENGINEERING DOCUMENT APPROVALS

DOCUMENT TITLE: Specification Section 02733 3840-C:HG-S-05-4868-00

Well Installation and Abandonment (DOCUMENT NUMBER)

In Situ Chemical Oxidation of TCE in Groundwater

WP-568, Rev. 0

| | (SIGNATURE) | (DATE) |
|-----------------------|----------------------|---------|
| PREPARED: OSE | See Attached | |
| REVIEWED: B. Duletsky | <i>Barb Duletsky</i> | 9-12-01 |

APPROVED:

| | | |
|------------------------|-----------------------|---------|
| PROJECT ENGINEER | <i>Joe Kazmi</i> | 9-12-01 |
| GWOU TECHNICAL MANAGER | <i>Bob White</i> | 9-13-01 |
| ES&H MANAGER | <i>David S. Hoff</i> | 9-14-01 |
| SAFETY MANAGER | <i>Mike Mitchell</i> | 9-14-01 |
| ENGINEERING MANAGER | <i>Maria L. Oakes</i> | 9-14-01 |

QUALITY LEVEL: [] 1 [x] 2 [] 3

APPROVED FOR CONSTRUCTION:

| | | |
|-------------------------|-------------------------|-----------|
| DEPT. PROJECT DIRECTOR | <i>John D. Latta</i> | 9/14/01 |
| PROJECT QUALITY MANAGER | <i>John D. Latta</i> | 9/14/2001 |
| DOE PROJECT ENGINEER | <i>Thomas C. Paulig</i> | 9/14/2001 |



WSSRA PROJECT REVIEWS AND APPROVALS

W.P. NO. 568 TASK NO. 541GW.900 DOC. NO. 3840-C:HG-S-05-4868-00

W.P. TITLE: In Situ Chemical Oxidation of TCE in QUALITY LEVEL 2
Groundwater LEAD DISCIPLINE Hydrogeology

SUBJECT: WSSRAP - Chemical Plant
Technical Specifications Section 02733
Well Installation and Abandonment
Issued for Construction
Revision 0

| | <u>PRINT/TYPE NAME</u> | <u>SIGNATURE</u> | <u>DATE</u> |
|------------------------------|------------------------|---|----------------|
| PREPARED: | <u>P. Patchin</u> | <u><i>Paul C Patchin</i></u> | <u>9/10/01</u> |
| REVIEWED: | <u>K. Ohsiek</u> | <u><i>Karen Ohsiek</i></u> | <u>9/10/01</u> |
| APPROVED MKES: | | | |
| - LEAD TASK ENGINEER | <u>P. Patchin</u> | <u><i>Paul C Patchin</i></u> | <u>9/10/01</u> |
| - LEAD DISCIPLINE DEPT. MGR. | <u>S. Vincent</u> | <u><i>Sean Vincent</i></u> | <u>9/10/01</u> |
| - DESIGN MANAGER | <u>R. Rager</u> | <u><i>R. Rager</i></u> | <u>9/10/01</u> |
| - ENGINEERING MANAGER | <u>R. Bohachek</u> | <u><i>S. Husler for R. Bohachek</i></u> | <u>9/10/01</u> |
| APPROVED: | | | |
| - OFF-SITE QUALITY MANAGER | <u>M. Maier</u> | <u><i>M. Maier</i></u> | <u>9/10/01</u> |

SECTION 02733

WELL INSTALLATION AND ABANDONMENT

PART 1 - GENERAL

1.01 SCOPE

- A. This Specification Section describes the requirements for:
1. Monitoring well installation
 2. Injection well installation
 3. Monitoring well abandonment
 4. Injection well abandonment
- B. The work includes mobilization and demobilization of equipment; drilling and sampling; installation of monitoring and injection wells at both on-site and off-site locations, including well protection; packer testing; development of wells; abandonment of monitoring and injection wells; site restoration; and equipment and personnel decontamination. This Specification shall be adhered to by the Subcontractor and lower-tier subcontractors for such operations.
- C. All new wells shall be installed at locations previously staked by the Contractor's surveyor. Location coordinates and approximate depths shall be specified in the Work Plan.
- D. The Subcontractor shall provide all equipment, supplies, materials, transportation, and labor needed to provide all services as described in this Specification. The Subcontractor shall be able to mobilize one additional crew with the equipment and training necessary for work at the WSSRAP as required to meet the project schedule.
- E. The Subcontractor shall be responsible for complying with any and all applicable rules and regulations regarding drilling, well installation, and well abandonment as specified in the State of Missouri Monitoring Well Construction Rules (10 CSR 23) The Subcontractor shall comply with the State of Missouri Geologist Registration Act, 4 CSR 145. The Subcontractor shall submit for Contractor approval a copy of their State of Missouri well drilling license and drilling permit prior to Notice to Proceed.
- F. Negotiation of issues regarding the Missouri Underground Injection Control Rules (10 CSR 50) will be the responsibility of the Contractor.

1.02 RELATED WORK

- A. Section 01503 – Equipment Decontamination
- B. Section 01600 – Material Storage and Handling
- C. Section 02050 – In Situ Chemical Oxidation

1.03 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this Specification to the extent referenced using the most current version available at the time the work is awarded. The publications are referred to in the text by the basic designation only.
 - 1. ASTM D1586 Standard Method for Penetration Test and Split-Barrel Sampling of Soils
 - 2. ASTM D1587 Standard Practice for Thin-Walled Tube Sampling of Soils
 - 3. ASTM D2113 Method for Diamond Core Drilling for Site Investigations
 - 4. ASTM D2487 Standard Test Method for Classification of Soils for Engineering Purposes
 - 5. ASTM D3550 Standard Practice for Ring-Lined Barrel Sampling in Soils
 - 6. ASTM D4220 Standard Practices for Preserving and Transporting Soil Samples
 - 7. U.S. EPA, *RCRA Groundwater Monitoring Technical Enforcement Guidance Document*, 1986
 - 8. Missouri Department of Natural Resources' Division of Geology and Land Survey, *Missouri Well Construction Rules*, 10 CSR 23, June 1996.
 - 9. EPA-570/975-001, *EPA Manual of Water Well Construction Practices*
 - 10. EPA 600/489/034/1989, *Handbook of Suggested Practices for the Design and Installation of Groundwater Monitoring Wells*
 - 11. U.S. Department of Interior, *Groundwater Manual*, A Water Resources Technical Publication, First Edition, 1977.
 - 12. Missouri Geologist Registration Act, 4 CSR 145.
 - 13. Applicable provisions of OSHA CFR 1910 and 1926.
 - 14. Weldon Spring Site Remedial Action Project Health and Safety Plan, (most current version).

1.04 PROTECTION

- A. The Subcontractor shall protect the following:
1. Benchmarks and monuments
 2. Existing structures and fences
 3. Monitoring wells
 4. All areas outside of immediate work area
 5. Existing features not part of this Work

1.05 SUBMITTALS

- A. In accordance with the schedule given in this Section, the Subcontractor shall submit the following to the Contractor for approval in accordance with Section 01300.
1. Injection Well Plan detailing the location(s) and construction details for injection well(s).
 2. Missouri Well Driller License (copy).
 3. All documentation required to certify new monitoring and injection wells.
 4. Daily Field Activity Report.
 5. Field borehole logs, well construction diagrams, well development, and well abandonment forms.
 6. Final typed borehole logs and as-built well diagrams.

1.06 SUBMITTAL SCHEDULE

The following submittals are required in accordance with this specification.

| Specification Reference | Requirements | Period |
|-------------------------|--|--|
| 02733 (1.01.E) | Missouri Well Driller License | Prior to Notice to Proceed |
| 02733 (1.05.A.1) | Injection Well Plan | 14 days prior to installation |
| 02733 (1.05.A.3) | All documentation required to certify new monitoring wells and injection wells. | 14 days after completion of well installation |
| 02733 (3.01.E) | Daily Field Activity Report | Daily upon commencement of work |
| 02733 (3.09.A.2) | Field borehole logs, well construction diagrams, well development, and well abandonment forms. | Five working days after well completion or abandonment |
| 02733 (3.09.A.2) | Final typed borehole logs and as-built well diagrams. | 30 days after well completion. |

1.07 PERSONNEL QUALIFICATIONS

- A. The driller performing the work shall be a well driller licensed in the State of Missouri.
- B. All drilling, well installations, and well abandonment shall be under the direct supervision of a geologist registered in the State of Missouri. Also see Section 02050.1.08.A.

1.08 SITE CONDITIONS

A. Stratigraphic Units and Soil Characteristics at the Weldon Spring Chemical Plant Site:

1. Bedrock:

- a. The Burlington-Keokuk Limestone (Mississippian) comprises the uppermost bedrock stratigraphic unit at the Weldon Spring site. Because the Burlington-Keokuk Limestone was the only bedrock unit encountered during the previous investigations, it is the only unit discussed here. This unit is a thin to thick bedded, argillaceous, fine to coarsely crystalline limestone containing abundant chert as nodules and beds. On the basis of borehole stratigraphic data, the formation has been primarily divided into two sub-units according to the degree of weathering. The upper sub-unit is referred to as the weathered unit; the lower one is referred to as the unweathered unit.
 - 1) The weathered unit is typically grayish orange to yellowish gray, and argillaceous. It contains up to 60% chert as nodules and interbeds. It is fossiliferous, moderately to highly fractured, and slightly to severely weathered. Solution features are common.
 - 2) The unweathered unit is light gray, finely to coarsely crystalline, stylolitic, and fossiliferous, with less chert (20% to 40%) than the weathered limestone. This unit is much less fractured than the weathered limestone.

2. Overburden Soil:

- a. Unconsolidated soil units overlying the limestone bedrock in the Weldon Spring site area are typically Pleistocene to Holocene glacial and periglacial sediments capped by a layer of organic topsoil. At the base of the sequence is the residuum, which has been interpreted as resulting from pre-Quaternary weathering of the youngest bedrock formation. The residuum is generally a reddish-brown gravelly clay to clayey gravel. Thickness and areal extent are variable.
 - 1) The basal till (early Pleistocene) overlies the residuum. This unit is a yellowish-brown, sandy, clayey, silty gravel with angular chert

pebbles in a loosely bound matrix. The thinness or absence of this unit in areas of high bedrock elevations suggests that the deposition of this unit may have been affected by bedrock topography. The basal till is found in the western and north central areas of the site.

- 2) The clay till unit overlies the basal till. This early Pleistocene deposit is composed of yellowish-brown silty clay to clayey silt. Clay till sediments are massive, very stiff, and moderately to highly plastic. Pebbles in the till are subrounded chert and igneous and metamorphic detritus in contrast with the coarse fraction of the basal till. This may indicate a different source area for the unit. The clay till is widely spread beneath the site.
- 3) Overlying the clay till is the Ferrelview Formation, a mid-Pleistocene glacial till plain sediment. This unit is a mottled gray and dark yellowish-orange silty clay to clayey silt. It is usually very stiff and plastic. This unit is also found throughout the site subsurface.
- 4) Overlying the Ferrelview Formation is a loess unit (late Pleistocene) that occurs sporadically across the site. The spotty distribution may be due to predepositional topography, post depositional erosion, and/or extensive reworking of the upper soils during site construction activities. The loess is primarily silt to clayey silt, with very minor amounts of sand, and has a low plasticity.
- 5) The uppermost soil unit is the combined topsoil/fill unit. The topsoil is generally a black, organically rich silt to silty clay. The fill fraction varies in thickness and composition across the site, but is primarily a clayey silt.

B. Trichloroethene (TCE) contamination in varying concentrations is present in groundwater at some locations.

1.09 PREPARATION

- A. The Subcontractor shall be responsible for providing access to and construction of suitable drill pads as approved by the Contractor, as follows:
1. Because most of the work area is at final grade, the preparation of access roads from existing roads will involve only the placement of aggregate directly on the ground surface without any excavation. The aggregate used to construct these temporary access roads and drill pads shall be clean material.
 2. Following completion of the drilling work, the Subcontractor shall remove the temporary access roads and drill pads.

PART 2 - MATERIALS, EQUIPMENT, AND METHODS

2.01 MATERIALS

- A. **Lubricants:** Only teflon tape or vegetable-based lubricants shall be used on the threads of downhole drilling equipment. Oils, greases, or pipe dope shall not be used on pipe threads, drilling rods, downhole hammer bits, or other downhole tools. Similarly, no hydrocarbon-based oils or greases shall be used on other open, lubricated surfaces of the drilling rig.
- B. **Antifreeze:** If antifreeze is added to any pump, hose, etc., in an area in contact with drilling fluid, this antifreeze shall be completely purged and containerized for safe disposal and the system flushed by the Subcontractor prior to equipment use in drilling, mud mixing, or any other part of the overall drilling operation. Only polypropylene based antifreeze without rust inhibitors and/or sealants shall be used. The dates, equipment, quantities, and brand names of antifreeze shall be noted on the Daily Field Activity Report. An MSDS must be submitted and approved for antifreeze, and all other hazardous chemicals brought on site, per Section 3 of the WSSRAP Health and Safety Plan.
- C. **Drilling Fluids:** Drilling operations shall be performed with no drilling fluids other than air or potable water without approval from the Contractor. The Subcontractor shall be responsible for providing hoses, tanks, and other equipment and transporting water to drilling locations. All tanks, hoses, and other water-handling equipment shall be decontaminated as specified in Article 3.10 of this Specification prior to commencing work. Hoses, valves, and other fittings shall be decontaminated between drilling locations. If bentonite-based drilling fluids are used, the bentonite shall be a certified sodium bentonite type.
- D. **Grout:** Grout for well installation and/or abandonment shall be a bentonite slurry grout, a neat cement grout specifically designed for sealing subsurface openings, or an approved cement/bentonite grout mixture. The ratio of grout to fresh potable water shall be consistent with the manufacturer's instructions with respect to weights and measures and shall also comply with 10 CSR 23.
- E. **Potable Water:** A potable water source will be supplied by the Contractor. The Subcontractor shall use potable water as needed to ensure that cuttings are removed from boreholes. Potable water must also be used for decontamination procedures as specified in Article 3.10.
- F. **Inert Gas:** If packer testing is performed, the Subcontractor shall be prepared to supply inert gas as needed to properly and completely fill inflatable packers during packer testing.

- G. Filter Sand: The Subcontractor shall be prepared to supply clean, uniform silica sand sized appropriate to the screen size, for use in well installation operations.
- H. Well materials shall be compatible with the in situ chemical oxidation treatment process used.
- I. Well materials shall be certified clean or decontaminated in accordance with Section 01503. Well casing, screens, and accessories shall be stored in a non-contaminated area, elevated off the ground, and covered with clean, new plastic sheeting. Any well casing, screens, or accessories that are subsequently contaminated by contact with the ground or other potentially contaminated media, shall without exception be cleaned again prior to use.

2.02 DRILLING EQUIPMENT AND METHODS

- A. All drilling and grouting equipment to be used in the work shall be clean and free of chemical or radioactive contamination. All equipment must be inspected and approved by the Contractor prior to entering the site.
- B. The drilling method and equipment used during well installations shall be described in the appropriate Work Plan and approved by the Contractor. The following are requirements for common drilling methods previously used at the site:
 - 1. Water Rotary: If water rotary equipment and methods are proposed, the Subcontractor shall:
 - a. Use portable recirculation tanks. The use of dug sumps/pits (lined or unlined) is expressly prohibited.
 - b. Perform drilling operations without the use of any additives.
 - 2. Air Rotary: If air rotary equipment and methods (including reverse-circulation air rotary) are proposed, the Subcontractor shall:
 - a. Specify the type and capacity of air compressor and lubricating oil to be used in the compressor, and retain a pint sample of each oil, along with a record of oil consumption on the boring log, for evaluation in the event of future problems.
 - b. Use an air line oil filter maintained in accordance with Manufacturer's recommendations. This maintenance activity shall be recorded by the Subcontractor on the boring log. Filter changes shall be done on a basis that is sufficient to eliminate oil from filtered air.
 - c. Perform drilling operations without the use of additives for bit lubrication and cuttings removal.

- d. Fully describe, on the boring logs, air usage to include equipment description(s), manufacturer(s), model(s), air pressures used, frequency of oil filter change, and evaluations of the system performance.
 - e. Use a cuttings deflector shield or tube during operations to direct cuttings to a lined surface impoundment or a roll-off bin for containment.
3. Hollow-stem Augers: If hollow-stem auger equipment and methods are used, the Subcontractor shall use the appropriate-sized auger inner diameter to drill through the soil formations and allow installation of the well materials. The specific size of the hollow-stem auger shall be specified in the appropriate Work Plan.
4. Direct Push Method: If appropriate, the Subcontractor shall use direct-push equipment to place injection or monitoring wells. A Geoprobe® or equivalent system capable of sampling and installing wells to the required depths shall be utilized.
- C. Drilling equipment shall be capable of drilling in clayey or granular soils and consolidated bedrock, above or below the water table. The Subcontractor shall maintain circulation and ensure that all cuttings are removed from the hole. Rig capabilities may be combined on a piece of equipment, or separate rigs with specialized functions may be used.
- D. Packer Testing Equipment: If packer testing is performed, the packer testing method, equipment, and setup shall be approved by the Contractor prior to use.
- E. Soil samples shall be collected when indicated in the Work Plan. Sampling methods and equipment shall be described in the Work Plan.

PART 3 - EXECUTION

3.01 GENERAL

- A. The drilling, installation, and abandonment methods shall be described by the Subcontractor in detail in the Pilot-Scale Work Plan including, but not limited to, the type of equipment to be used and dimensions of bits, augers, and core barrels. The methods proposed must be approved by the Contractor prior to starting field operations and must include techniques which:
- 1. Minimize subsurface contamination or cross-contamination.
 - 2. Minimize waste generation in the form of drill cuttings or contaminated groundwater.

- B. Drilling for monitoring and injection well installations shall avoid penetration into the unweathered portion of the Burlington-Keokuk Limestone to prevent downward migration of contaminants.
- C. The Contractor will provide any applicable estimates of approximate overburden thickness, depth to unweathered portion of the Burlington-Keokuk Limestone, or other pertinent information to the Subcontractor.
- D. The Subcontractor shall develop and submit to the Contractor for review and approval a Safe Work Plan as described in Section 02050 Article 1.06.A. The Safe Work Plan must follow the outline provided in the WSSRAP Health and Safety Plan which is included in these Subcontract documents.
- E. The Subcontractor shall submit to the Contractor at the end of each day a Daily Field Activity Report covering all activities.

3.02 WELL CONSTRUCTION AND INSTALLATION

- A. All wells shall comply with Missouri Well Construction Rules (10 CSR 23). Alternate designs or installation methods require approval in advance from the Contractor and from the Missouri Department of Natural Resources Division of Geology and Land Survey (MDNR-DGLS). Obtaining approval from the MDNR-DGLS shall be the responsibility of the Subcontractor and drilling subcontractor.
- B. Equipment and tools to be used in the well construction shall be steam cleaned or high-pressure washed on a temporary on-site decontamination pad immediately prior to their use unless certified clean and sealed. Decontamination shall be performed in accordance with Article 3.10 of this section and Section 01503.
- C. All depths and thicknesses including total depth of hole, filter pack thickness, and depth to top of bentonite seal shall be checked and recorded by the Subcontractor geologist by use of a stainless steel weighted tape and verified by the Contractor. The depth of the well shall be sounded and recorded. The static water level in the well shall also be measured and recorded prior to and after well development. The Subcontractor geologist shall complete record forms in accordance with Article 3.09 of this Specification.
- D. Protective surface casing, well cap, traffic barriers, and concrete pad shall be installed by the Subcontractor.
- E. The Subcontractor shall submit a completed as-built well diagram to the Contractor and shall conform to all quality assurance requirements in Section 01400.

3.03 PACKER TESTING

- A. If packer testing is performed, the testing shall be executed by isolating a drill hole interval, as specified in the Pilot Scale Work Plan. Typical test intervals shall be provided.
- B. The Subcontractor is responsible for providing the appropriate equipment to perform packer testing. The packer testing configuration shall be approved by the Contractor.
- C. Tests shall be conducted using either a single inflatable packer capable of achieving internal pressures necessary to completely seal the borehole. Water flow and pressure shall be monitored using a flow meter and pressure gauge, respectively. After a test section has been cored, the hole shall be flushed with potable water and the drill string will be removed. The packer assembly and associated piping shall be lowered and set at the interval to be tested and the packer shall be inflated with inert gas. After the packer is securely seated, the hole shall be pressurized with potable water to the desired pressure, allowed to stabilize, and the flow rate shall be monitored. Recording of monitoring data shall be the responsibility of the Subcontractor.

3.04 WELL DEVELOPMENT

- A. The Subcontractor shall develop each well in accordance with Missouri State Regulations 10 CSR 23-4.0 and the following techniques and criteria unless a waiver is obtained from State regulators and the Contractor that is consistent with the drilling method and the use of the well. This development shall begin no sooner than 24 hours after installation is complete.
 - 1. Development must be conducted using downhole pumps (hand operated or mechanically driven). The use of bailers must be approved by the Contractor. The use of air-lift methods for development is prohibited. All development equipment must be constructed of stainless steel, Teflon®, PVC, or tygon. No glues, solvent, pipe dope, or adhesive tape shall be used on any downhole equipment. The development technique shall utilize a large surge block periodically during the development cycle to properly develop the filter pack.
 - 2. Static water levels must be measured using an electronic water level indicator.
 - 3. A well volume shall consist of the water in the well casing and the hole annulus.
 - 4. Development shall be considered complete when all of the following conditions have been met after removing at least three times the volume added during drilling and installation or three well volumes, whichever is greater.
 - a. Three consecutive electrical conductivity measurements are stable within $\pm 20\%$;

- b. Three consecutive pH measurements are stable within ± 0.2 standard units;
- c. Three consecutive temperature measurements are stable within 1° ;
- d. Three consecutive turbidity measurements are stable within 10% and below 100 NTUs. If these measurements do not stabilize and/or if the required amount of water is not removed, the Contractor must make a determination as to the completeness of the development.

All well development parameters shall be recorded on the Monitoring Well Development Form (Attachment 4) throughout the development.

- 5. Development and purge water shall be dispositioned as described in Article 3.08 of this document.
- 6. The development of all wells must be approved by the Contractor. If this approval is not obtained, the Subcontractor shall, at his own expense, return to perform any work deemed necessary to properly complete the development.

3.05 PROTECTIVE CASING, GUARD POSTS, AND CONCRETE PAD

- A. The Subcontractor shall provide and install a steel protective casing for each monitoring well and if necessary, each injection well. Other well protection means must be approved by the State regulators and the Contractor. Protective casings shall be a minimum of five feet in length and have an overlapping, locking cap. The protective casing and pad shall be installed prior to well development. Protective casings shall be anchored a minimum of three feet into the upper annulus by a concrete aggregate pad. The pad dimensions shall be two feet in diameter and shall extend three feet downhole. The pad shall be finished four inches above grade, with its surface sloping away from the protective casing (Figure 1).
- B. Each well shall be protected from damage in accordance with the Missouri Well Construction Rules.

3.06 CROSS-CONTAMINATION PREVENTION MEASURES

- A. The Subcontractor shall at all times prevent the contamination or cross-contamination of all wells and borings. Prevention measures include appropriate drilling and well installation procedures and decontamination of drilling equipment and well screens and casing in accordance with Article 3.10 of this Specification. Potential contaminants include, but are not limited to, oils, greases, hydraulic fluids, fuels, and contaminated soils.
- B. If the rig or any other equipment becomes contaminated due to equipment breakdown or the Subcontractor's negligence, decontamination shall be at the

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4868-00
Issued for Construction – Revision 0
Well Installation and Abandonment

Subcontractor's expense. Drill bits, drilling rods, other downhole tools, and hand tools shall be decontaminated between boreholes. Any inadvertent introduction of contaminants to the borehole shall require the hole to be abandoned and replaced at the Subcontractor's expense.

- C. Cross-contamination shall be minimized by thoroughly cleaning all external and internal surfaces of all drilling equipment, tools, drill bits, drilling stem, hoses, and all other pertinent equipment after each hole is completed and before moving to the next drilling location. Cleaning shall be accomplished by completely removing all soil from the equipment. Gross removal of soil can be performed at the drill site before moving.
- D. During the performance period, the Subcontractor shall prevent soils and liquids from entering the borehole. Decontamination procedures for surface casings may be performed at the drilling locations.

3.07 COLLECTION AND DISPOSITION OF DRILL CUTTINGS

- A. The Subcontractor shall dispose of any resultant cuttings as indicated by the Contractor. Upon direction by the Contractor, the Subcontractor shall spread uncontaminated cuttings in the immediate area of the well or collect contaminated cuttings in Subcontractor-provided containers and transport them to the Gate G staging area for disposition by the Contractor.

3.08 COLLECTION AND DISPOSITION OF DRILLING FLUIDS, DEVELOPMENT WATER, AND DECONTAMINATION WATER

- A. The Subcontractor is responsible for collecting, containing, and, as necessary, treating of all wastewater produced during a drilling, development, or decontamination activity as directed by the Contractor. The Subcontractor shall treat for residual reagent and store this water as described in Section 01600.

3.09 RECORD KEEPING, LOGS, AND OTHER DOCUMENTATION

- A. Preparation of Drilling, Lithologic, and Abandonment Logs:
 - 1. The Subcontractor shall supply a Contractor-approved geologist with each drill rig to prepare lithologic logs, well completion forms, well development forms, and well abandonment forms (see attachments for Subcontractor use or provide an equivalent). The minimum qualifications for geologist approval include a 4-year degree in geology or geological engineering and recent relevant experience in preparing lithologic logs in unconsolidated and consolidated materials. The geologist or geological engineer shall be responsible at each operating drill rig for the logging of samples, sample recovery, measurement of grout density, monitoring of drilling operations, recording of water losses/gains and groundwater data, preparing the boring logs and well construction

diagrams, and recording the well installation procedures. Particular emphasis shall be placed on recording stratigraphic features and discontinuities that could affect contaminant or reagent transport and facilitate selection of screened intervals for monitoring and injection wells.

2. All depths and thicknesses, including total depth of the hole, filter pack thickness, and depth to top of bentonite seal, shall be checked and recorded by the Subcontractor and verified by the Contractor. Copies of field logs, well diagrams, and well abandonment forms shall be submitted to the Contractor within five working days of individual well completion or abandonment. Typed lithologic logs and as-built well completion diagrams shall be submitted within 30 calendar days of well installation completion.
- B. Logbooks: The Subcontractor shall maintain a detailed logbook for all field activities. The logbooks shall be bound, shall have waterproof paper, and shall be completed using waterproof ink or marker. This logbook shall contain, at a minimum, a listing of all personnel at the sampling location and their affiliation; the time of arrival and departure from the site; each sampling location; personnel visiting and/or inspecting and/or auditing the sampling crews; accidents, unusual occurrences or observations; weather conditions; all water losses until development is achieved; and other relevant information necessary to allow a complete recreation of events. These logbooks shall be signed daily by the recording individual. All errors shall be deleted by a single strike mark through the error, with the initials of the person correcting the error, and the date by the strike mark. Copies of the logbooks shall be delivered to the Contractor upon completion of field work.
- C. Completion of Daily Field Activity Reports and Other Documentation:
1. The Subcontractor shall complete a Daily Field Activity Report detailing the work performed on that particular date. These forms shall be signed daily by the Subcontractor's on-site supervisor and the Contractor.
 2. Other documentation to be completed by the Subcontractor upon the completion of well installations are packer test forms (if packer testing is performed), and MDNR Certification forms.

3.10 EQUIPMENT DECONTAMINATION PROCEDURES

- A. All coring, sampling, augering, and other drilling equipment and tools used by the Subcontractor shall be decontaminated by hot water steam cleaning and air drying after mobilization, prior to use on-site, between installations and abandonments, and prior to demobilization. The Subcontractor shall perform decontamination of the above-mentioned equipment at an on-site, Subcontractor-constructed, temporary decontamination pad. Subcontractor-supplied decontamination equipment shall receive a safety inspection by the Contractor prior to use.

- B. All decontamination fluids shall be collected and treated as described in Section 01600. All solid decontamination materials (i.e., rags, brushes, loose soil, PPE, etc.) shall be collected, packaged or containerized, and delivered to a disposal area as directed by the Contractor.
- C. Screens and casing, including protective casing, shall be decontaminated using a high-pressure steam cleaner, unless wrapped in plastic or otherwise covered and accompanied by the manufacturer's certification of decontamination prior to installation. The Subcontractor shall supply all equipment, including a high-pressure steam cleaner and materials necessary to perform adequate decontamination procedures.

3.11 INJECTION WELL ABANDONMENT

- A. The injection wells to be abandoned and all drilled holes that do not receive permanent monitoring equipment shall be abandoned in compliance with Missouri State Regulations 10 CSR 23.
- B. All casing material and associated hardware (i.e., caps, plugs, riser pipe, centralizers), filter pack, annular seal, protective casing including concrete pad, and protective posts shall be removed during abandonment. The Contractor must be notified if any material cannot be removed prior to plugging the hole. The well casings, concrete, and rubble shall be taken to an off-site disposal location after approval is received from the Contractor.
- C. Where it has been determined that removal of the well materials is impractical, the Subcontractor shall present options and obtain concurrence from the Contractor on the selected option prior to contacting the State regulators to request a variance.
- D. Drilling shall be concentric to the casing to ensure removal of all well construction material and loose unconsolidated/consolidated material.
- E. To ensure removal of all well construction material, the hole shall be reamed at a minimum of the original hole diameter.
- F. After monitoring equipment (screen and/or riser casing) has been removed (leaving an open hole), the hole must be grouted simultaneously with casing removal to prevent hole collapse. If the well cannot be abandoned in one day, the Subcontractor shall cap the hole with the rig and drill stem to maintain the integrity of the hole.
- G. The preferred abandonment method shall be to tremie-place a bentonite slurry grout specifically designed for sealing boreholes to the ground surface. Any other 10 CSR 23 approved grout method may be used with Contractor prior approval. The grout shall be mixed according to the manufacturer's specifications. If bentonite grout is used, the ratio of clay grout to fresh potable water must achieve a weight of at least 9.4 pounds/gallon. The grout shall be mixed by jetting through the hopper

and circulated through the rig's mud pump and tremied with a positive displacement pump. This ratio shall be verified and properly documented by the Subcontractor in the field using a mud balance. Native topsoil shall be applied at the surface to a depth of approximately two feet.

- H. As an option to the rig's pump, the Subcontractor may also use a portable grout mixer or pump for the mixing and placing of grout by tremie pipe into the well boreholes.
- I. Where complete removal of steel casings is required and unlikely to be achieved by overdrilling and pulling on the casing, a hydraulic casing cutter shall be used. This method shall be pre-approved by the Contractor and described in the Work Plan submitted. The cutter shall be lowered into the hole to a depth specified by the PMC representative and the casing shall be cut. The cutter shall be retrieved and the casing below the cut line grouted as outlined above. The steel casing above the cut line shall then be removed as outlined above.

3.12 COMPLETION

- A. **Site Restoration:** The Subcontractor shall be responsible for site cleanup and restoration not provided by the Contractor and required as a result of activities associated with this Specification. This shall include:
 - 1. Immediate measures to prevent erosion resulting from Subcontractor activity.
 - 2. Removal of all work-derived trash and debris.
 - 3. Repairing of any damaged structures or fences.

END OF SECTION 02733

ATTACHMENT 1

Borehole Log for Soil

WP-568 - In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4868-00
Issued for Construction - Revision 0
Well Installation and Abandonment

ATTACHMENT 2

Borehole Log for Rock Cores

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4868-00
Issued for Construction – Revision 0
Well Installation and Abandonment

ATTACHMENT 3

Monitoring Well Installation Diagram

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4868-00
Issued for Construction – Revision 0
Well Installation and Abandonment

WELDON SPRING SITE REMEDIAL ACTION PROJECT MONITORING WELL INSTALLATION DIAGRAM

PROJECT NAME _____ WORK PACKAGE NO. _____

WELL NO. _____ WELL LOCATION _____

DATE _____ TIME _____ COORDINATES N: _____ E: _____

GROUND SURFACE ELEVATION _____ BENTONITE TYPE _____

TOP OF SCREEN ELEVATION _____ MANUFACTURER _____

REFERENCE POINT ELEVATION _____ GROUT TYPE _____

TYPE FILTER PACK _____ GRADATION _____ MANUFACTURER _____

FILTER PACK MANUFACTURER _____ GROUT WEIGHT _____

SCREEN MATERIAL _____ BOREHOLE DIAMETER _____

MANUFACTURER _____ FIELD REPRESENTATIVE _____

SCREEN DIAMETER _____ SLOT SIZE _____ DRILLING CONTRACTOR _____

RISER MATERIAL _____ AMOUNT BENTONITE USED _____

MANUFACTURER _____ AMOUNT CEMENT USED _____


RISER DIAMETER _____ AMOUNT SAND USED _____

DRILLING TECHNIQUE _____ STATIC WATER LEVEL (> 24 hrs after dev.) _____

AUGER/BIT SIZE AND TYPE _____ MEASURED ON (date/time) _____

REMARKS _____

(NOT TO SCALE: ALL MEASUREMENTS IN FEET)

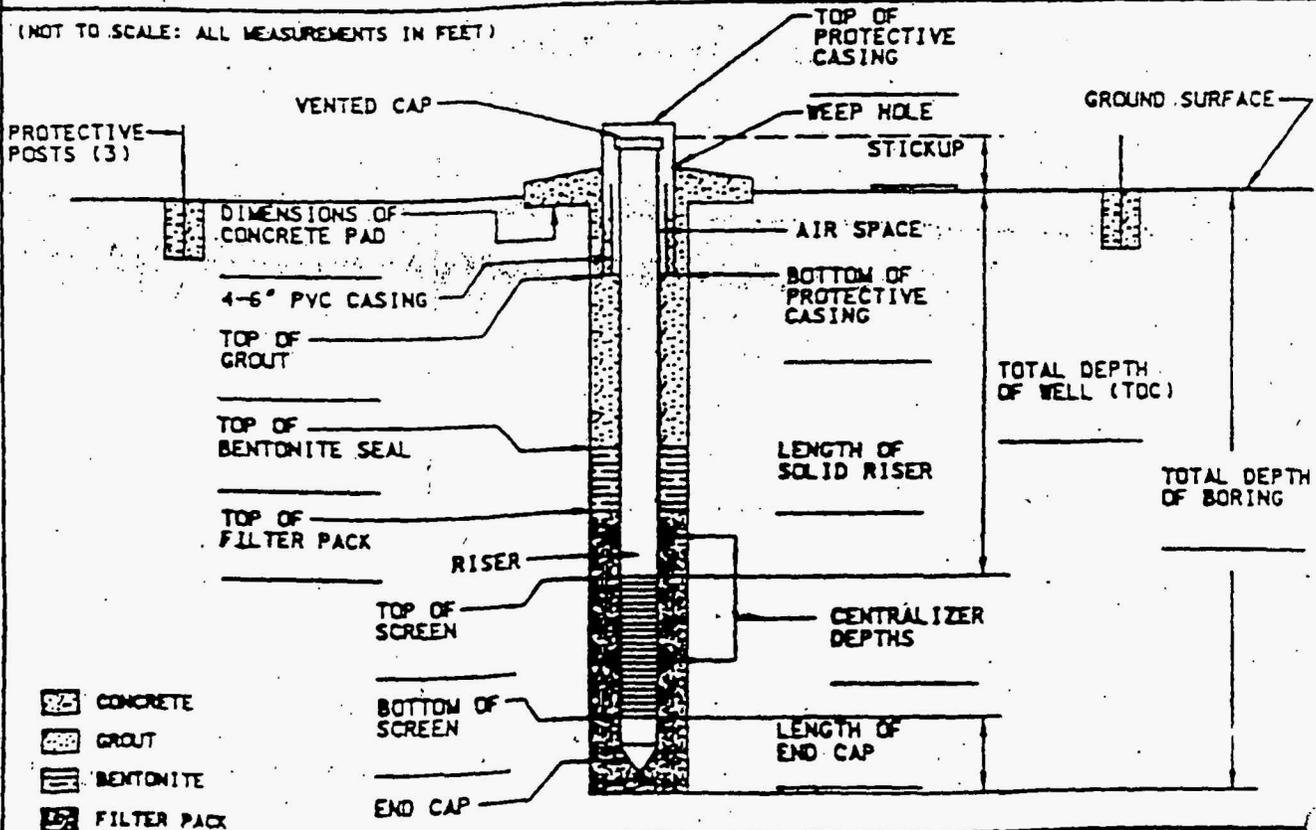

QA/QC

DRILLER: _____ INSPECTOR: _____
DISCREPANCIES: _____ CHECKED BY: _____ DATE: _____

A/P1/052/0495
04/03/95

ATTACHMENT 4

Monitoring Well Development Form

WP-568 -- In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4868-00
Issued for Construction -- Revision 0
Well Installation and Abandonment

WELDON SPRING SITE REMEDIAL ACTION PROJECT

MONITORING WELL DEVELOPMENT FORM

ES&H 4.4.8.2, Rev. 3, 4/97

PROJECT NAME _____ WORK PACKAGE NO. _____

SHEET 1 OF 2

DEVELOPED BY _____

1. Well Number.: _____ Well Location: _____

2. Date of Installation: _____

3. Date of Development: _____

4. Static Water Level: Before Development _____ ft.; At least 24 hrs. after _____ ft.

5. Organic Vapor: Before development _____ ppm; After development _____ ppm.

6. Quantity of water loss during drilling, if used: _____ gal.

7. Quantity of standing water in well and annulus before development: _____ gal.

8. Depth from top of well casing to bottom of well: _____ ft. (from Well Installation Diagram)

9. Well diameter: _____ in.

10. Screen length: _____ ft.

11. Minimum quantity of water to be removed: _____ gal.

12. Depth to top of sediment: Before development _____ ft.; After development _____ ft.

13. Physical character of water (before/after development): _____

14. Type and size of well development equipment:

15. Description of surge technique: _____

16. Height of well casing above ground surface: _____ ft. (from Well Installation Diagram).

Quantity of water removed: _____ gal. Time for removal: _____ hr./min.


ATTACHMENT 5
Well Abandonment Form

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4868-00
Issued for Construction – Revision 0
Well Installation and Abandonment

FIGURE 1

Typical Monitoring Well Construction

WP-568 – In Situ Chemical Oxidation of TCE in Groundwater
Document No. 3840-C:HG-S-05-4868-00
Issued for Construction – Revision 0
Well Installation and Abandonment

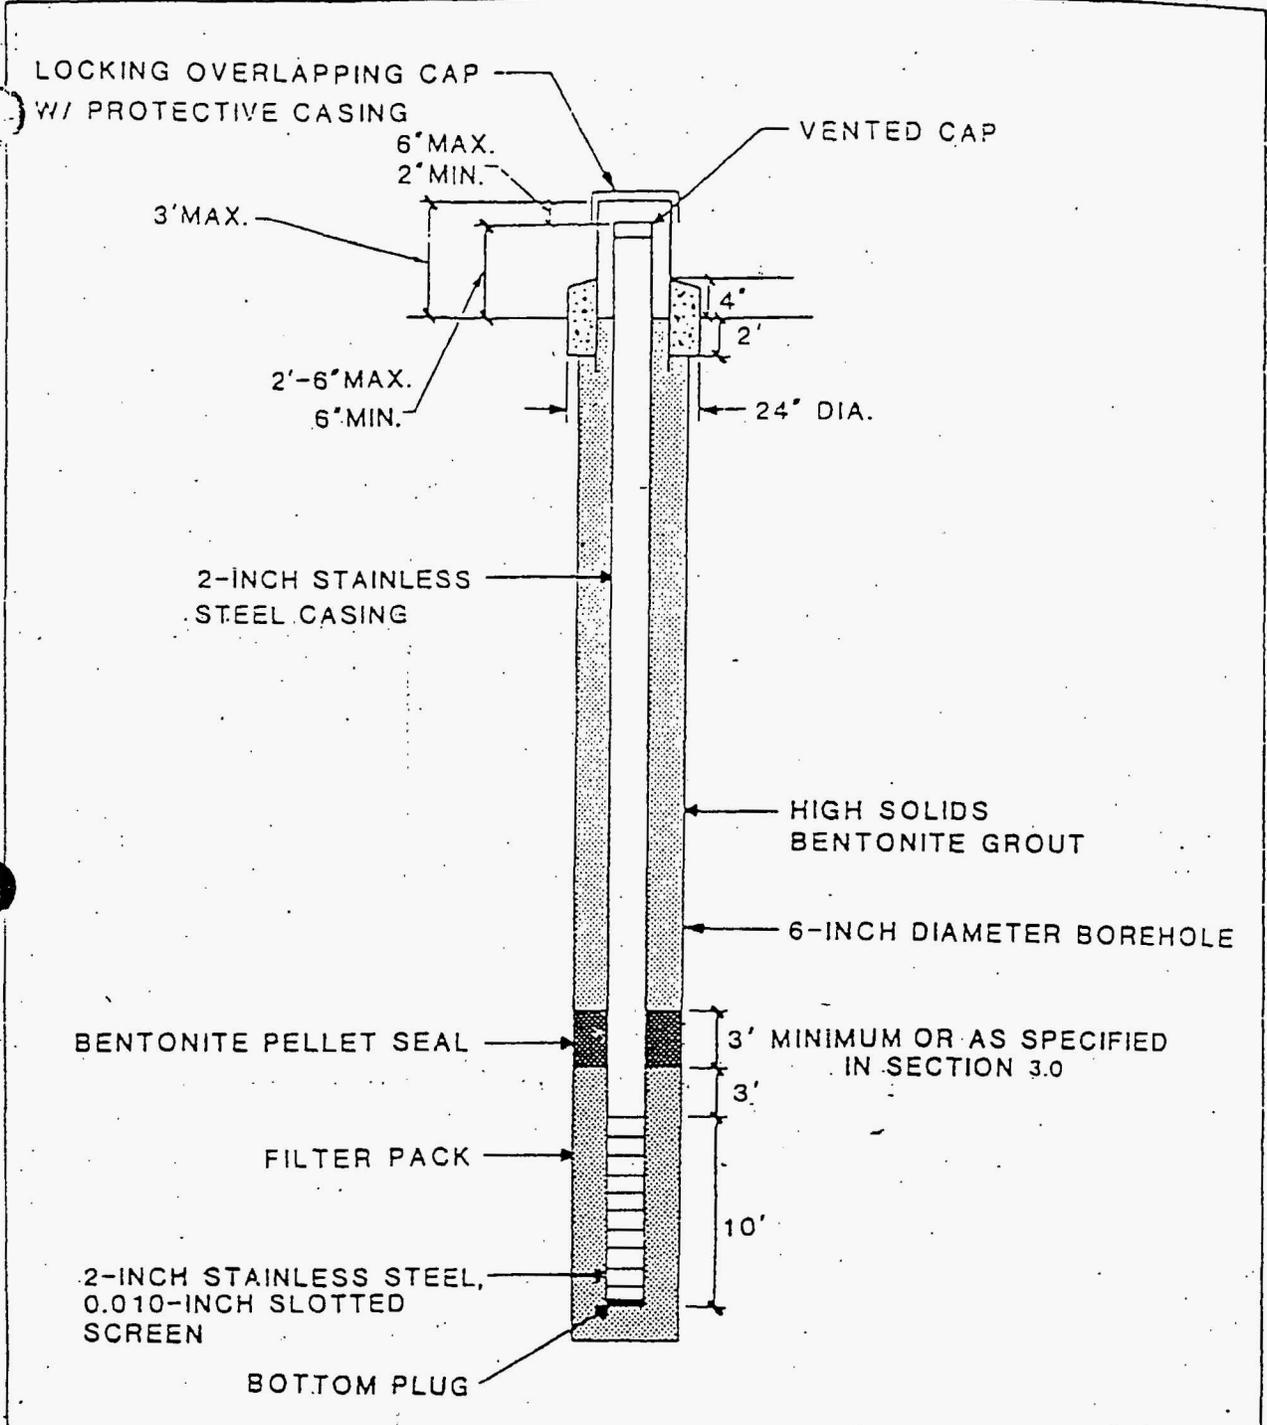

NOTE: THIS FIGURE DEPICTS A TYPICAL 2" STAINLESS STEEL MONITORING WELL. SOME DIMENSIONS AND MATERIALS MAY VARY AS THE SPECIFICATION ALLOWS.

NOT TO SCALE

TYPICAL MONITORING WELL CONSTRUCTION

| | |
|--------------------|-----------------------------|
| FIGURE 1 | |
| REPORT NO.: WP-487 | DRAWING NO.: A/PI/216/1191 |
| ORIGINATOR: SDG | DRAWN BY: GLN DATE: 6/11/97 |

