

4053

**FACILITY UTILIZATION REPORT FEMP
JANUARY 15, 1993**

01/14/93

**DOE-RN/EPA
DOE-0853-93
70
REPORT**

4053

Facility Utilization Report
Fernald Environmental Management Project
Fernald, Ohio



January 15, 1993

United States Department of Energy

4053

Facility Utilization Report
Fernald Environmental Management Project
Fernald, Ohio



January 15, 1993

United States Department of Energy

**Facility Utilization Report
for
Fernald Environmental Management Project
Fernald, Ohio**

CONTENTS

SECTION

1.0	Introduction	1-1
1.1	Background Information	1-1
1.2	Future Plans	1-3
2.0	Description of Facility Utilization Report	2-1
2.1	Basis of the Report	2-1
2.2	Categories	2-1
2.3	Annual Updates	2-1
2.4	Assumptions	2-2
2.5	Methods Used	2-2
3.0	Results	3-1
3.1	General	3-1
3.2	Existing Facilities "Currently Not Needed" During Remediation	3-2
3.3	"New" Facilities Required During Remediation	3-5
3.4	Existing Facilities "Needed" During Remediation	3-5
4.0	References	4-1

APPENDICES

- A Facility Database and Definitions (sorted by facility number)
- B Facility Index (sorted alphabetically by facility name)
- C Facility Maps

LIST OF TABLES

TABLES

- 3-1 Existing Facilities "Currently Not Needed" During Remediation
- 3-2 "New" Facilities Required During Remediation

LIST OF ACRONYMS

CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CG&E	Cincinnati Gas & Electric
CRU	CERCLA/RCRA Unit
D&D	Decontamination and Dismantling
DOE	United States Department of Energy
FEMP	Fernald Environmental Management Project
FERMCO	Fernald Environmental Restoration Management Corporation
FMPC	Feed Materials Production Center
NAD	North American Datum
OU	Operable Unit
RCRA	Resource Conservation and Recovery Act
RI/FS	Remedial Investigation/Feasibility Study
ROD	Record of Decision
US EPA	United States Environmental Protection Agency
WP	Work Plan

SECTION 1

INTRODUCTION

This document is prepared in response to Section IX.F.4. of the Amended Consent Agreement. The primary purpose of the Facility Utilization Report is to determine which facilities at the FEMP site are not needed during remediation and are, therefore, candidates for decontamination and dismantling (D&D), possibly as removal actions. This review was done to facilitate the systematic planning of removal actions and to plan the future remediation of the site. This study assigns each site facility to the categories of "Needed," "Not Needed," or "New;" and provides information on site remediation goals, facility and land requirements, future land uses, and future major facility construction programs.

Given the condition of most of the facilities at Fernald, a primary differentiator amongst them is whether or not they can (or should) wait for completion of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) process before being decontaminated and demolished. To make this determination, factors such as risk and physical condition, along with the utilization factor from the Facility Utilization Study, must be used. The results presented in this report reflect this determination as currently formulated.

1.1 Background Information

The Fernald Environmental Management Project (FEMP), formerly the Feed Materials Production Center (FMPC), is a contractor-managed federal facility located on a rural 1,050 acre site in southwestern Ohio. The site is owned by the United States Department of Energy (DOE) and is currently managed by Fernald Environmental Restoration Management Corporation (FERMCO).

1.1.1 Site Mission and Workload

The FMPC manufactured uranium-metal products to satisfy Defense Program demands at other DOE sites. Production operations spanned more than 37 years until they were suspended on July 10, 1989, because of a sharp reduction in the demand for uranium-metal products and continuing problems in achieving full regulatory compliance at the site. Following necessary Congressional notifications the facility was formally shut down on June 19, 1991.

In August 1991, the facility name was changed to FEMP, signifying the change in mission to solely environmental restoration and waste management. The FEMP is being implemented pursuant to several agreements and decrees with State and Federal regulatory agencies. Consistent with the terms of these agreements and decrees, the DOE is working cooperatively with the United States Environmental

Protection Agency (US EPA) and the Ohio Environmental Protection Agency to effect the clean-up of the FEMP site. Facilities considered in this study were based on, and include, the facilities discussed in the Operable Unit 3 (OU-3) Remedial Investigation/Feasibility Study (RI/FS) Work Plan Addendum.

1.1.2 Site Population

The on-site population consists of approximately 1700 full-time FERMCO employees and subcontractors, and 57 DOE employees.

1.1.3 Regional Information

The FEMP is located in southwestern Ohio, about 20 miles from downtown Cincinnati. The total site consists of 1,050 acres, of which 850 acres are in Crosby Township in Hamilton County, and 200 acres are in Morgan and Ross Townships in Butler County. Community stake holders are concerned about past site activities and actively participate in meetings which ask for their opinions.

It is too early to estimate the exact method of clean-up or potential future uses for the site. When these become more clearly defined it will be possible to determine any conditions in the surrounding region which might enhance or impede the accomplishment of the site mission.

1.1.4 Site Conditions

The FEMP site has accumulated an inventory of nuclear process materials, low-level radioactive wastes, mixed wastes, and contaminated materials, equipment, and facilities from activities associated with past uranium-metal production and storage. Characterization of the contaminated material is on-going. Contaminated soils and groundwater at the site also have the potential to impact public health and the environment.

Many of the site facilities are currently serving temporary functions in support of remediation. These functions include waste storage, office space, cafeterias, and break rooms. Site facilities are described in the facility database printout located in Appendix A. The current use and anticipated future uses, if any, of each site facility is also listed in Appendix A.

1.2 Future Plans

The goal of the FEMP is to accomplish the environmental restoration of the site by the year 2017 in a manner fully compliant with the terms of all pertinent statutes, regulations, DOE Orders, and legal agreements.

1.2.1 Facility and Land Requirements

Of the 1,050 total site acres approximately 136 acres are occupied by the former production area and 38 acres are occupied by the waste pits of OU-1. The remainder of the site is occupied by the OU-4 silo area, the various disposal areas of OU-2, and by wooded and open areas.

1.2.2 Future Land Uses and Major Facility Locations

All future land uses will be for new facilities which support the remediation mission of the site. While the exact nature of these facilities will not be finalized until the remedial alternatives have been accepted by the US EPA, the types of new facilities likely to be sited include: waste treatment facilities, stock pile areas, construction laydown areas, stormwater retention basins, and support facilities such as office buildings, warehouses, service buildings, change rooms, and parking lots. Depending on the remedial alternative selected, a major use of land could be waste disposal or waste storage structures.

1.2.3 Utility Sources and Loads

The FEMP is served by a Cincinnati Gas & Electric (CG&E) feeder to a 37.5 MVA substation from which electrical power is distributed throughout the site. The site is also served by a CG&E natural gas main. The site supplies potable water, process water, and fire protection through its own system of wells and two storage towers. The site also provides its own water and sewage treatment. Treated wastewater is discharged to the Great Miami River through the site's National Pollutant Discharge Elimination System outfall. Steam is supplied from a coal-fired boiler plant. Compressed air and breathing air are also supplied through a site-wide distribution system.

Since the site ceased production in 1989, utility loads have generally been well below existing capacity. Temporary supplemental water treatment capacity was recently installed for additional treatment of stormwater runoff. Permanent additions to the wastewater treatment system are being designed.

Depending on the remediation methods chosen, existing utility capacity may not be sufficient to meet future site demands. Studies are underway to modernize and upgrade the site utility distribution system and, if necessary, eventually add the capacity required for remediation.

1.2.4 Five Year Construction Program

Due to the evolutionary nature of design activities for remediation of the FEMP, a 5-year construction program cannot be provided at this time.

SECTION 2

DESCRIPTION OF FACILITY UTILIZATION REPORT

2.1 Basis of the Report

This report is based on data and information obtained and analyzed in a formal Facility Utilization Study. The information consists of forecasts made of current and future uses of site facilities. The information was provided by site personnel responsible for providing services inherent to remediation activities, services in direct support of those activities, or services in support of the general operation and maintenance of the site. Validation of current and forecast facility uses and dates was accomplished through peer and management review.

2.2 Categories

Facilities have been placed into three categories.

- 1) "New" facilities are those which do not currently exist and are required to support remediation of the site. Many new facilities will likely be required. The exact composition of these facilities will be tentative until the selection of remedial alternatives for each operable unit. This report includes the known "new" facilities that meet one of the following criteria.
 - (1) Facility construction in progress as of January 1, 1993.
 - (2) Construction contract for the facility will be signed prior to December 31, 1993.
- 2) "Needed" facilities are those for which a permanent continuing use beyond the completion of remediation has been identified.
- 3) "Not Needed" facilities are those for which a permanent continuing use beyond the completion of remediation has not been identified.

2.3 Annual Updates

The FEMP remediation program is dynamic in nature. Evolution will cause forecasts of facility utilization to change. D&D activities will remove facilities from the site, new facilities will begin construction, and additional requirements for new facilities may develop.

The Facility Utilization Report will be reviewed as site remediation progresses and will be updated annually. Results of each update will be forwarded to the US EPA on or about January 15 of each year.

2.4 Assumptions

The following assumptions were applied to the Facility Utilization Study during data collection and compilation:

- 1) The term "Facility" refers to any building, structure, system (such as roads, railroad tracks, or utilities), or significant individual component (such as electrical substations, dust collectors, or cranes) requiring individual evaluation for scheduling and planning of remediation activities.
- 2) For location and reference purposes, a grid has been established consistent with the North American Datum of 1983 (NAD 83). The Ohio State Plane of 1983 has been put in place at the FEMP and is contained within the NAD 83.
- 3) Each site system such as railroads, roadways, and individual utilities is considered as a single facility although specific portions of a system may be modified or dismantled as required.
- 4) "Needed" facilities are those with identified permanent continuing uses beyond the completion of remediation.
- 5) Any facility under construction on January 1, 1993, or which will have a construction contract signed prior to the end of the current calendar year (December 31, 1993) is considered to be "New" for the purposes of this study.
- 6) Contamination is a consideration in this report only to the extent that knowledge of its presence has influenced the potential utilization of a facility.

2.5 Methods Used

The information contained in this report is derived from the Facility Database. The facility database was generated by the following procedure:

- 1) Building names and building numbers for existing facilities were taken from the OU-3 RI/FS Work Plan (WP) Addendum (DOE 1992).
- 2) Information from the OU-3 WP Addendum concerning facility description or contents was also transferred to the database.

- 3) A site walk-through was performed to verify the existence of all the named facilities and to identify any facilities not listed in the OU-3 WP Addendum. During the walk-through, descriptive information from the OU-3 WP Addendum was verified as time permitted.
- 4) The facilities lists were distributed to the WEMCO Facility Managers, Site Support, and Waste Management staff. These personnel were asked to identify any current and future projected uses of FEMP facilities.
- 5) "New" facilities that were identified by the WEMCO Facility Managers, Site Support, or Waste Management Staff were added to the facility database.
- 6) The draft Facility Utilization Report has been reviewed by WEMCO/FERMCO Environmental Management, Environmental Remediation, Project Management, and Acquisition Engineering and Site Services.
- 7) "Not needed" facilities have been grouped into two phases corresponding to whether they are planned for remediation after filing of the OU-3 Record of Decision (ROD) or removal actions before the ROD.

SECTION 3

RESULTS

3.1 General

As required by the CERCLA Amended Consent Agreement between the DOE and the US EPA, this section provides lists of the FEMP facilities categorized as currently "not needed", "new", or "needed" during the period of remediation. This categorization was derived through the process outlined in Section 2. Subsections 3.1.1 and 3.1.2 describe the current and projected missions of the site and the resources required for their execution. Subsection 3.1.3 discusses special considerations pertinent to the categorization of FEMP facilities. Descriptive information for all FEMP facilities is included in Appendix A. Appendix B contains an index of all site facilities sorted alphabetically by building name.

3.1.1 Mission Projections

The mission of the FEMP is environmental remediation of the site. There are no missions currently projected beyond the completion of remediation.

3.1.2 Mission Resource Requirements

Remediation activities at the site have been estimated to continue at least until the year 2017.

3.2 Existing Facilities Currently "Not Needed" During Remediation

Table 3-1 lists existing facilities which have been determined to be "not needed", namely, having no current use or planned remediation support use and can, therefore, be scheduled for decontamination and demolition as removal actions or remedial action(s). The list is divided into two phases; Phase 1 consists of those facilities for which a determination has been made by FERMCO/DOE to plan to accomplish decontamination and demolition through removal actions prior to the date of the filing of the CERCLA ROD for OU-3 (May 1997), and Phase 2 consists of those facilities for which current plans are to wait until after the filing of the ROD for disposition as part of the remedial action(s). The basis for the Phase 1 characterization of facilities is contained in the Removal Action 27 EE/CA.

Table 3-1 Facilities Currently Not Needed

NO	NAME	COORDINATE	PAGE	PHASE
1C	PLANT 1 ORE SILOS	P-16	A-2	1
2F	COLD SIDE ORE CONVEYOR	Q-16	A-5	2
2G	HOT SIDE ORE CONVEYOR	Q-16	A-5	2
2H	CONVEYOR TUNNEL (FROM PLT. 1)	P-16	A-6	2
3B	OZONE BUILDING	R-17	A-7	2
3D	NAR TOWERS	R-17	A-8	2
3E	HOT RAFFINATE BUILDING	R-16	A-8	2
3F	HARSHAW SYSTEM	R-16	A-9	1
3K	OLD COOLING WATER TOWER	R-16	A-11	2
5B	PLANT 5 INGOT PICKLING	Q-20	A-14	2
5D	WEST DERBY BREAKOUT/SLAG MILLING	R-20	A-15	2
5E	PLANT 5 FILTER BUILDING	R-20	A-15	2
6C	PLANT 6 ELECTROSTATIC PRECIP., SOUTH	S-22	A-18	2
6D	PLANT 6 ELECTROSTATIC PRECIP., CENTRAL	S-22	A-18	2
6E	PLANT 6 ELECTROSTATIC PRECIP., NORTH	R-22	A-19	2
6F	PLANT 6 SALT OIL HEAT TREAT BUILDING	S-22	A-19	2
6G	PLANT 6 SUMP BUILDING	Q-21	A-20	2
7A	PLANT 7	S-19	A-20	1
8D	PLANT 8 RAILROAD FILTER BUILDING	S-18	A-23	2

NO	NAME	COORDINATE	PAGE	PHASE
8F	PLANT 8 OLD DRUM WASHER	S-16	A-24	2
9B	PLANT 9 SUMP TREATMENT FACILITY	P-21	A-25	2
9C	PLANT 9 DUST COLLECTOR	P-21	A-25	2
9E	PLANT 9 CYLINDER SHED	P-21	A-26	2
9F	PLANT 9 ELECTROSTATIC PRECIPITATOR	P-22	A-27	2
10D	CONTAMINATED OIL/GRAPHITE BURN PAD	M-20	A-29	1
12B	CYLINDER STORAGE BUILDING	O-20	A-31	2
13A	PILOT PLANT, WET SIDE	T-15	A-32	2
13C	SUMP PUMP HOUSE	T-15	A-33	1
13D	THORIUM TANK FARM	T-15	A-34	2
18K	LOW NITRATE TANK (BDN)	P-13	A-43	1
18L	HIGH NITRATE TANK (BDN)	Q-13	A-44	1
19B	PILOT PLANT AMMONIA TANK FARM	T-15	A-46	2
22D	SCALE HOUSE & WEIGH SCALE	Q-15	A-53	2
26C	MAIN ELECTRICAL STRAINER HOUSE	T-22	A-60	2
28C	GUARD POST, SOUTH END OF "D" STREET	U-21	A-62	2
28D	GUARD POST WEST END OF 2ND STREET	P-15	A-62	2
30C	OLD TEN TON SCALE	O-18	A-64	2
31B	OLD TRUCK SCALE PLATFORM	T-21	A-65	2
32A	MAGNESIUM STORAGE BUILDING	N-22	A-65	1
32B	BUILDING 32 COVERED LOADING DOCK	N-22	A-66	1
35A	METAL OXIDE STORAGE TANK NORTH (SILO 4)	P-9	A-67	2
39C	INCINERATOR SPRINKLER RISER HOUSE	R-16	A-71	2
39D	SEWAGE TREATMENT PLANT INCINERATOR	S-27	A-71	1
45B	UTILITY SHED, EAST OF RUST TRAILERS	R-15	A-74	2
54C	PILOT PLANT DISSOCIATOR SHELTER	T-15	A-78	2
55A	SLAG RECYCLING BUILDING	R-21	A-78	2
55B	SLAG RECYCLING PIT/ELEVATOR	R-21	A-79	2

5.013

NO	NAME	COORDINATE	PAGE	PHASE
69	DECONTAMINATION BUILDING	M-22	A-85	1
73A	FIRE BRIGADE TRAINING CENTER BLDG.	H-18	A-87	1
73B	FIRE TRAINING POND	H-19	A-87	1
73C	FIRE TRAINING TANK	H-19	A-88	1
73D	FIRE TRAINING BURN TROUGH	H-19	A-88	1
73E	CONFINED SPACE BURN TANK	H-18	A-89	1
90	TRAP RANGE BUILDING	W-25	A-103	2
G-012	DRUMS (NON-RCRA)	VARIOUS	A-109	2
G-013	RCRA DRUMS	VARIOUS	A-110	2
G-014	INVENTORY	VARIOUS	A-110	2

3.3 "New" Facilities Required During Remediation

Table 3-2 lists facilities which are currently under construction after January 1, 1993, or which will have a construction contract signed prior to the end of the current calendar year (December 31, 1993).

Table 3-2 New Facilities

NO.	NAME	COORDINATE	PAGE
10E	UTILITIES HEAVY EQUIPMENT GARAGE	M-19	A-29
12D	MAINTENANCE WAREHOUSE	O-19	A-32
N8	SOUTH PLUME GROUNDWATER RECOVERY SYSTEM	Y-16, VARIOUS	A-119
N9	AWWT, PHASE I&II	U&V-14	A-120
N28	SOIL AND RUBBLE PILE COVER	L-15&16	A-121
N29	CENTRAL STORAGE FACILITY (CSF)	J-23	A-121
N30	NEW BOILER PLANT	T-14	A-122
N50	DECONTAMINATION FACILITY PAD (DFP)	O-23	A-122
N51	SCRAP METAL PAD COVER (SMPC)	L-21	A-123

3.4 Existing Facilities "Needed" During Remediation

The Amended Consent Agreement requested a list of all facilities which would be needed during remediation. Given the remediation mission of the site and the intent that all facilities will eventually be decontaminated and demolished, the FEMP has determined there are no existing facilities which are required beyond the completion of remediation. Existing facilities needed during remediation consist of the facilities having no permanent use beyond the completion of remediation (termed here "not needed") but which have current temporary uses which support remediation. These facilities are all of the existing facilities which are not included in Table 3-1. Appendix A lists each facility and its current temporary use. Each subsequent annual submittal of this report will review this list for changes and updates.

SECTION 4

REFERENCES

- (DOE 1991) U.S. Department of Energy, 1991, August. *Environmental Restoration and Waste Management, Five-Year Plan Fiscal Years 1993-1997*. Washington: DOE. FYP DOE/S-0089P
- (DOE 1992a) — 1992, May. *Site-Wide Characterization Report, Remedial Investigation and Feasibility Study*. Fernald: DOE.
- (DOE 1992b) — 1992, June. *Operable Unit 3 Work Plan Addendum, Remedial Investigation and Feasibility Study*. Fernald: DOE.
- (DOE 1992c) — 1992, December. *Engineering Evaluation/Cost Analysis For Removal Action No. 27 Management of Contaminated Structures*. Fernald: DOE.
- (WEMCO 1991) Westinghouse Environmental Management Company of Ohio, 1991, September. *Fernald Environmental Management Project Roadmap*. Fernald: WEMCO

Appendix A

FACILITY DATABASE AND DEFINITIONS
(sorted by facility number)

FACILITY UTILIZATION FIELD DEFINITIONS

Facility Numbers

Existing facility numbers are consistent with the OU-3 WP Addendum.

Facility Names

Existing facility names are consistent with the OU-3 WP Addendum. New facilities are named appropriately.

Coordinates

Provides an alpha-numeric reference coordinate to locate each facility on the attached facility maps.

Current Use / Users / End Date

Identifies the current temporary facility use, the organization responsible for that use, and the projected completion of the current use.

Future Use / User / Start and End Dates

Identifies a projected temporary use for each facility, the organization which will be using each facility, and the projected start and end dates.

Category

Lists the utilization category which has been assigned to each facility by this report. Categories are "Not Needed," "New," and "Needed" and are defined in Section 2 of this report.

Phase

Recommends a time period and method through which the not needed facility could be removed. Phase 1 facilities are those identified in the Removal Action 27 EE/CA (DOE 1992c).

Phase 1 Potential removal actions prior to OU-3 ROD (May 1997).

Phase 2 Remedial Action(s) subsequent to the OU-3 ROD.

Status

Facilities which are "Not Needed" are assigned status codes as appropriate. The possible status codes are listed below:

- A) Candidate for immediate removal.
Facilities meeting both of the following criteria:
 - (1) Not currently in use, or has a current use which can be easily relocated to another facility.
 - (2) Safe shutdown activities are complete or not required.

- B) Pending completion of safe-shutdown.
Safe shutdown activities are planned or underway but have not been completed.

- C) Supporting temporary function.
Facility supports a temporary function, the relocation of which would impact budget and schedule, and for which a facility would otherwise have to be constructed.

Past Facility Use

Provides a brief description of the historical uses of the facility. This information is derived primarily from the OU-3 WP Addendum.

Equipment/Contents

Provides a brief description of the equipment and contents of the facility, including any large or unusual equipment, but generally not minor or support equipment. This information is derived primarily from the OU-3 WP Addendum.

Size

Overall dimensions of width, length, and height are provided for each facility. Dimensions are given in feet.

Stories

Lists the number of floors a facility has. M/L indicates a multi-level structure without a clearly defined number of floors. N/A indicates a facility for which this information is not applicable.

Facility Condition Codes

- 1) Facility requires regular maintenance for continued operation and may require some upgrading in the future. Facility can be used to support remediation activities with little or no modifications.
- 2) Facility may be used to support remedial activities, however, it will require continued maintenance and substantial modification or refurbishment depending on the proposed use.
- 3) Facility is inappropriate for any future use.

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
P-16	PREPARATION PLANT	1A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SAMPLING OF CONTAINERS - (DRUMS)	SITE SERVICES		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	2			
<i>Past Facility Use</i>	DRUM SAMPLING, CRUSHING/MILLING, ENRICHED MATERIALS RECLAMATION, DRUM WASHING, SOLVENT RECLAMATION, WASTEWATER HANDLING AND REPACKAGING.			
<i>Equipment/Contents</i>	JAW CRUSHERS, RING ROLLER MILLS, CONVEYORS, THAW TUNNEL, HAMMER MILL, PIN CUTTER, SAFE GEOMETRY DIGESTION SYSTEM, LAB DIGESTION, DRUM WASHERS, DETREX SOLVENT STILL, FILTERS, STORAGE TANKS.			
<i>Size (WxLxH)</i>	82 x 202 x 50			
<i>Stories</i>	4			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-16	PLANT 1 STORAGE SHELTER	1B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE	WASTE MANAGEMENT		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	COVERED STORAGE, COPPER SHREDDING AND DRUM STRAIGHTENING			
<i>Equipment/Contents</i>	DRUM STORAGE, SHREDDER/CLASSIFIER AND (30/55 GALLON DRUM EXPANDERS AND RE-ROLLERS - THESE WERE REMOVED)			
<i>Size (WxLxH)</i>	90 x 142 x 18			
<i>Stories</i>	1			
<i>Construction Date</i>	1965			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-16	PLANT 1 ORE SILOS	1C
<i>Uses</i>		<i>User</i>
<i>Current</i>	NONE	<i>Start Date</i>
<i>Future</i>	NONE IDENTIFIED	<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.A. HILL	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	MILLED ORE STORAGE	
<i>Equipment/Contents</i>	14 ORE STORAGE VESSELS AND SUPPORT STRUCTURE (REMOVAL SCHEDULED FOR FY-93)	
<i>Size (WxLxH)</i>	54 x 115 x 80	
<i>Stories</i>	4	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q-17	ORE REFINERY PLANT	2A
<i>Uses</i>		<i>User</i>
<i>Current</i>	LLW STORAGE/OFFICES	<i>Start Date</i>
<i>Future</i>	NONE IDENTIFIED	<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	DIGESTION, DRUM DIGESTION, EXTRACTION, DENITRATION, ENRICHED CALCINING	
<i>Equipment/Contents</i>	DGSTR, TANKS, DUST COLLECT EQUIP, FUME SCRUBBERS, PORT STLESS STEEL DRUMS USED FOR DGSTN, FILTERS, EXTN COLUMNS, PULSE GNRTRS & CENTRIFUGES, DEIONIZED WATER GNRTRS, DEN POTS, EVAPORATOR, HAMMER MILLS, ELEC. HEATED ROTARY CALCINER & PUMPS	
<i>Size (WxLxH)</i>	60 x 380 x 40	
<i>Stories</i>	3	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-17	GENERAL/REFINERY SUMP CTRL BUILDING	2B
	<i>Uses</i>	<i>User</i>
<i>Current</i>	USED TO OPERATE GENERAL SUMP	OPERATION/WATER TREATMENT
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	SUMP CONTROL	
<i>Equipment/Contents</i>	THERE IS A 20' X 20' ANNEX. MgO SLURRY TANK, CONTROL PANELS	
<i>Size (WxLxH)</i>	39 x 43 x 20	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q-16	BULK LIME HANDLING BUILDING	2C
	<i>Uses</i>	<i>User</i>
<i>Current</i>	LIME HANDLING	PROCESS WATER TREATMENT
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	BULK LIME HANDLING	
<i>Equipment/Contents</i>	STORAGE HOPPER, CONVEYOR, SLURRY TANK, AND UNLOADING STATION	
<i>Size (WxLxH)</i>	17 x 28 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>		<i>Facility Name</i>	<i>Facility Number</i>	
Q-16		METAL DISSOLVER BUILDING	2D	
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE	SITE SERVICES		10/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.L. KNIGHT			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	METAL DISSOLUTION, URANIUM OXIDE DISSOLUTION, CHARCOAL TREATMENT			
<i>Equipment/Contents</i>	METAL DISSOLVER TANK, HEAT EXCHANGER, DRUM DUMPER, ROTARY VACUUM FILTER, TANKS AND FILTER PRECOAT TANK, 2 OXIDE DISSOLVER TANKS			
<i>Size (WxLxH)</i>	39 x 50 x 20			
<i>Stories</i>	2			
<i>Construction Date</i>	1953			

<i>Coordinate</i>		<i>Facility Name</i>	<i>Facility Number</i>	
P-16		NFS STORAGE & PUMP HOUSE	2E	
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE	SITE SERVICES		10/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.L. KNIGHT			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	URANYL NITRATE SOLUTION STORAGE			
<i>Equipment/Contents</i>	(PLUS 51' X 61' X 9' CONCRETE DIKED AREA) 4 TEMPERATURE-CONTROLLED URANYL NITRATE STORAGE TANKS			
<i>Size (WxLxH)</i>	51 x 61 x 9			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q-16	COLD SIDE ORE CONVEYOR	2F
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	NONE NONE IDENTIFIED	
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 PENDING COMPLETION OF SAFE SHUTDOWN J.L. KNIGHT 3	
<i>Past Facility Use</i>	FEED DRUMS OF URANIUM CONCENTRATES TO DIGESTION	
<i>Equipment/Contents</i>	BUCKET ELEVATOR, DRUM CONVEYOR, DRUM DUMPER, SCREW CONVEYOR, CONVEYOR SHED AND DRUM DUMPER BUILDING	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	15 x 100 x 4 N/A 1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q-16	HOT SIDE ORE CONVEYOR	2G
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	NONE NONE IDENTIFIED	
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 CANDIDATE FOR IMMEDIATE REMOVAL J.L. KNIGHT 3	
<i>Past Facility Use</i>	FEED DRUMS OF URANIUM ORE CONCENTRATES TO DIGESTION	
<i>Equipment/Contents</i>	2 BUCKET ELEVATORS, DRUM CONVEYORS, 2 DRUM DUMPERS, 2 SCREW CONVEYORS, CONVEYOR SHED, AND DRUM DUMPER BUILDING	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	15 x 100 x 4 N/A 1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-16	CONVEYOR TUNNEL (FROM PLT. 1)	2H
<i>Uses</i>		<i>User</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	ORE CONVEYING FROM PLANT 1 SILOS TO PLANT 2 BUCKET ELEVATOR PIT	
<i>Equipment/Contents</i>	4 CHAIN CONVEYORS (EQUIPMENT NEVER USED, CHAINS ARE NOT PRESENT)	
<i>Size (WxLxH)</i>	15 x 190 x 4	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-17	MAINTENANCE BUILDING	3A
<i>Uses</i>		<i>User</i>
<i>Current</i>	SITE MAINTENANCE	
<i>Future</i>	NONE IDENTIFIED	SITE SERVICES
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	MAINTENANCE AND SPARE PARTS STORAGE	
<i>Equipment/Contents</i>	SPARE PARTS, MISCELLANEOUS TOOLS AND EQUIPMENT, AND OFFICES	
<i>Size (WxLxH)</i>	60 x 60 x 14	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-17	OZONE BUILDING	3B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE		
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	OZONE GENERATION FOR OXIDATION OF NITROGEN OXIDE (NO)	
<i>Equipment/Contents</i>	OFFICE EQUIPMENT, 2 REFRIGERATORS	
<i>Size (WxLxH)</i>	27 x 33 x 14	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-17	NAR CONTROL HOUSE	3C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> TRAINING AND BREAK ROOM	SITE SERVICES	12/31/97
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	NAR CONTROL-ELECTRICAL CONTROL PANELS FOR THE NITRIC ACID RECOVERY SYSTEM ARE HOUSED IN THIS BUILDING IN ADDITION TO A SMALL CONFERENCE BLDG AND OFFICES	
<i>Equipment/Contents</i>	ELECTRICAL CONTROL PANELS, OFFICES	
<i>Size (WxLxH)</i>	24 x 108 x 20	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-17	NAR TOWERS	3D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> J.L. KNIGHT <i>Condition Code</i> 1		
<i>Past Facility Use</i>	NITRIC ACID RECOVERY - CONCENTRATOR	
<i>Equipment/Contents</i>	2 ABSORBER TOWERS, STORAGE TANKS, CONCENTRATOR, SURGE STORAGE TANKS, AND BLOWERS. (THESE TOWERS AND TANKS ARE LOCATED IN A 70' X 108' DIKED AREA)	
<i>Size (WxLxH)</i> 70 x 108 x 60 <i>Stories</i> 4 <i>Construction Date</i> 1953		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-16	HOT RAFFINATE BUILDING	3E
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> J.L. KNIGHT <i>Condition Code</i> 3		
<i>Past Facility Use</i>	K-65 RAFFINATE FILTRATION	
<i>Equipment/Contents</i>	(THIS BUILDING WAS SPECIALLY DESIGNED TO HANDLE HIGHER RADIATION MATERIALS) 2 ROTARY DRUM FILTERS, 3 RECEIVER TANKS, 2 SLURRY TANKS, 2 FILTRATE TANKS AND SUPPORT TANKS	
<i>Size (WxLxH)</i> 52 x 91 x 60 <i>Stories</i> 3 <i>Construction Date</i> 1953		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-16	HARSHAW SYSTEM	3F
<i>Uses</i>		<i>User</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	HARSHAW FUME RECOVERY	
<i>Equipment/Contents</i>	ABSORBER TOWERS, TANKS, OPEN STEEL CONSTRUCTION	
<i>Size (WxLxH)</i>	19 x 40 x 35	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-16	REFRIGERATION BUILDING	3G
<i>Uses</i>		<i>User</i>
<i>Current</i>	FILE STORAGE & SMALL EQUIPMENT REPAIRS	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	10/31/93
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	REFRIGERATION - PROVIDED COOLING FOR THE HARSHAW NOx FUME SCRUBBER SYSTEM IN FACILITY 3F	
<i>Equipment/Contents</i>	ALL EQUIPMENT REMOVED	
<i>Size (WxLxH)</i>	16 x 44 x 11	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-18	REFINERY SUMP	3H
	<i>Uses</i>	<i>User</i>
<i>Current</i>	SUPPORT BUILDING MAINTENANCE	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		10/31/93
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	PRECIPITATE URANIUM COMPOUNDS FROM SUMP WATER GENERATED IN THE REFINERY	
<i>Equipment/Contents</i>	2 SUMP RECEIVING TANKS, PRECIPITATOR TANKS, EFFLUENT TANKS, THICKENER TANKS & FILTERS	
<i>Size (WxLxH)</i>	55 x 100 x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-16	COMBINED RAFFINATE TANKS	3J
	<i>Uses</i>	<i>User</i>
<i>Current</i>	RAINWATER OVERFLOW STORAGE	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		05/31/97
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	COMBINED RAFFINATE, SPRAY CALCINATION, CONTAMINATED OIL STORAGE	
<i>Equipment/Contents</i>	EVAPORATOR WITH TUBE TYPE HEAT EXCHANGER AND 17 TANKS (TANKS ARE ABOUT 3000 GAL. EACH, STAINLESS STEEL CONSTRUCTION)	
<i>Size (WxLxH)</i>	39 x 169 x 20	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-16	OLD COOLING WATER TOWER	3K
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	PROCESS WATER COOLING	
<i>Equipment/Contents</i>	EQUIPMENT REMOVED - CONCRETE BASIN AND DIKED PAD REMAIN	
<i>Size (WxLxH)</i>	30 x 50 x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-17	ELECTRICAL POWER CENTER BUILDING	3L
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i>	REDUCES 13.2KV VOLT SERVICE TO 480 VOLT SERVICE IN FACILITIES	SITE SERVICES 12/31/17
<i>Future</i>	NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	ELECTRICAL DISTRIBUTION	
<i>Equipment/Contents</i>	TRANSFORMERS, CIRCUIT BREAKERS, DISCONNECTS	
<i>Size (WxLxH)</i>	24 x 91 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
Q-19	GREEN SALT PLANT	4A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	DRUM STORAGE NONE IDENTIFIED	WASTE MANAGEMENT		05/31/97
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	1			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.L. KNIGHT			
<i>Condition Code</i>	2			
<i>Past Facility Use</i>	PRODUCED UF4 FROM U OXIDES, AMMONIA DISSOC, HYDROFLUORINATION, AHF VAPORIZATION, HYDROFLUORIC ACID RCVRY, UF4 REPKG, MVG BED EXP REACTOR, NITROGEN GNRTN, HF REFRIGERATION, THORIUM TETRAFLUORIDE, WATER TREATMENT, STORAGE			
<i>Equipment/Contents</i>	CATALYTIC AMMON DISSOC, FLUID-BED RCTRS, HORIZONTAL RIBBON-SCREW RCTRS, BLENDING EQUIP, EXCESS H2 BURNER, VAPORIZERS, SUPERHTRS, FILTERS, CONDENSRS, SCRUBBERS, MTL HANDLING EQUIP ING EQUIP, RCTR, EXIST RCTR BNK EQUIP			
<i>Size (WxLxH)</i>	120 x 168 x 80			
<i>Stories</i>	4			
<i>Construction Date</i>	1954			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-19	PLANT 4 WAREHOUSE	4B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	DRUM STORAGE MATERIAL STAGING	WASTE MANAGEMENT WASTE MANAGEMENT	12/31/97	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.L. KNIGHT			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	UF4 STORAGE			
<i>Equipment/Contents</i>	UF4 STORED IN 10 GALLON CANS			
<i>Size (WxLxH)</i>	60 x 202 x 13			
<i>Stories</i>	1			
<i>Construction Date</i>	1989			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-19	PLANT 4 MAINTENANCE BUILDING	4C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> SITE MAINTENANCE <i>Future</i> NONE IDENTIFIED	SITE SERVICES	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	MAINTENANCE - MAINTAIN EQUIPMENT FROM THE CHEMICAL AREAS, PRIMARILY PLANT 4	
<i>Equipment/Contents</i>	TOOLS, EQUIPMENT, SPARE PARTS & OFFICES	
<i>Size (WxLxH)</i>	80 x 60 x 14	
<i>Stories</i>	1	
<i>Construction Date</i>	1954	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q,R,S-20	METALS PRODUCTION PLANT	5A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> DRUM STORAGE <i>Future</i> NONE IDENTIFIED	WASTE MANAGEMENT	12/31/97
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	PRODUCED U METAL FROM UF4, RECAST AND MACHINED U INGOTS, STAGING&STORAGE, REDUCTION, CASTING (REMELT), INGOT CROPPING, SAW SHARPENING, MOLD PREP & RECOND, HILCO OIL RECLAIMER, GRAPHITE MACHINING, H2O TRTMNT, PLASMA SPRAYING&MAINTENANCE	
<i>Equipment/Contents</i>	4 BINS MGF2, 11 SLG LNR JLTRS, 4 CHG BLENDERS IN 4 F MACHINES, 49 RCKWL FURNACES, 2 AIR COOL WELLS, 2 H2O COOL WELLS, 2 BKOUT SYST, DC EQUIP, 2 VAC INDUCT FURNACE LINES, BKOUT BOOTHS, MOLD PTG AREA COV UNITS, 2 3 FT DIAM COLD SAWS, ETC	
<i>Size (WxLxH)</i>	100 x 560 x 34	
<i>Stories</i>	3	
<i>Construction Date</i>	1952	

9211

Coordinate	Facility Name	Facility Number
Q-20	PLANT 5 INGOT PICKLING	5B
<i>Uses</i>		<i>User</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	INGOT SEPARATION AND PICKLING	
<i>Equipment/Contents</i>	(PARTIAL BASEMENT, THIS FACILITY WAS NEVER USED) INGOT PICKLING TANKS, NITRIC ACID TANK, WASH WATER TANK, INGOT CONVEYOR, SCRUBBER, INGOT ROBOT, MOLD SEPARATION/CLEANING BOOTH	
<i>Size (WxLxH)</i>	28 x 62 x 15	
<i>Stories</i>	2	
<i>Construction Date</i>	1990	

Coordinate	Facility Name	Facility Number
R-20	PLANT 5 ELECTRICAL SUBSTATION	5C
<i>Uses</i>		<i>User</i>
<i>Current</i>	REDUCES 13.2 KV SERVICE TO 480 VOLT SERVICE IN FACILITIES	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	ELECTRICAL DISTRIBUTION	
<i>Equipment/Contents</i>	TRANSFORMERS, CIRCUIT BREAKERS, DISCONNECTS	
<i>Size (WxLxH)</i>	15 x 20 x 19	
<i>Stories</i>	1	
<i>Construction Date</i>	1952	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-20	WEST DERBY BREAKOUT/SLAG MILLING	5D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> A. ELAM <i>Condition Code</i> 2		
<i>Past Facility Use</i>	SLAG MILLING, DERBY BREAKOUT	
<i>Equipment/Contents</i>	BINS, CONVEYORS, SCREENS, BALL MILL, BUCKET ELEVATORS, DUST COLLECTORS, POT CONVEYORS, JOLTER, GRIZZLY CONVEYOR, SCREEN, CRUSHER, DUST COLLECTOR	
<i>Size (WxLxH)</i> 41 x 160 x 50 <i>Stories</i> M/L <i>Construction Date</i> 1989		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-20	PLANT 5 FILTER BUILDING	5E
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> A. ELAM <i>Condition Code</i> 3		
<i>Past Facility Use</i>	STORAGE	
<i>Equipment/Contents</i>	MISCELLANEOUS STORAGE, EXCESS EQUIPMENT, NEW STORES	
<i>Size (WxLxH)</i> 54 x 70 x 22 <i>Stories</i> 1 <i>Construction Date</i> 1952		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
Q-20	PLANT 5 COVERED STORAGE PAD	5F		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE	WASTE MANAGEMENT		12/31/97
<i>Future</i>	MATERIAL STAGING	CRU-3	12/31/97	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	STORAGE			
<i>Equipment/Contents</i>	DRUMS			
<i>Size (WxLxH)</i>	85 x 142 x N/A			
<i>Stories</i>	1			
<i>Construction Date</i>	COVER ADDED, 1988			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
Q-21	PLANT 5 INGOT STORAGE SHELTER	5G		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	INGOTS, DRUM STORAGE AND EQUIPMENT STORAGE	WASTE MANAGEMENT		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	2			
<i>Past Facility Use</i>	URANIUM METAL INGOT STORAGE			
<i>Equipment/Contents</i>	DERBIES, BRIQUETTES, AND OTHER URANIUM METALS			
<i>Size (WxLxH)</i>	30 x 62 x 10			
<i>Stories</i>	1			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q,R,S-21&22	METALS FABRICATION PLANT	6A
	<i>Uses</i>	<i>User</i>
<i>Current</i>	DRUM STORAGE	WASTE MANAGEMENT
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/97
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	RLG MILL, CORE MACH, MISC MACH, COOL CLARIFIERS, CHP BRIQ TG, SCRAP METAL PCKLG, SLUG PCKLG, TOCCO FN/OIL QUENCH, SALT H2O (NU-SAL) HT TREAT, SALT-OIL HT TREAT, NOX DSCTR, INSP, STG, RBT, PCHD H2O, H2O TREAT, TOOL FAB RM, BRZ/TIN HT TREAT	
<i>Equipment/Contents</i>	BLT CONV, INGOT FN, BLOOMING MILL, FINISH MILL, CROP SHRS, EQUAL FN, STAMP-STRAIGHTNR, RLT-COOL TABLE, OH CRANE, CRTL BOOTHS, 2 B&O LATHES, 3 A-G MACH, W-S MACH, SURF MACH, 3 CLAR, CHIP CONV, CRUSH/SCRN, PROC CAROUSEL, HYD PRESS, ETC	
<i>Size (WxLxH)</i>	400 x 600 x 45	
<i>Stories</i>	2	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-22	PLANT 6 COVERED STORAGE AREA	6B
	<i>Uses</i>	<i>User</i>
<i>Current</i>	B-25 AND WOODEN CRATES	OPERATIONS
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/02
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	STORAGE - STORED URANIUM CHIPS, TURNINGS, BRIQUETTES, AND RESIDUES FOR PROCESSING IN PLANT 6 OR SHIPMENT TO PLANT 8	
<i>Equipment/Contents</i>	STORING EXCESS EQUIPMENT	
<i>Size (WxLxH)</i>	42 x 60 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1987	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-22	PLANT 6 ELECTROSTATIC PRECIP., SOUTH	6C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current Future</i>	NONE NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	PRECIPITRON - ELECTROSTATIC PRECIPITATOR FOR EXHAUSTS VENTED FROM MACHINING EQUIPMENT	
<i>Equipment/Contents</i>	PRECIPITATOR, AIR FILTERS	
<i>Size (WxLxH)</i>	16 x 30 x 14	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-22	PLANT 6 ELECTROSTATIC PRECIP., CENTRAL	6D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current Future</i>	NONE NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	PRECIPITRON - ELECTROSTATIC PRECIPITATOR FOR EXHAUSTS VENTED FROM MACHINING EQUIPMENT	
<i>Equipment/Contents</i>	2 CYCLONIC SEPARATORS, PRECIPITATOR, FILTERS	
<i>Size (WxLxH)</i>	12 x 20 x 15	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-22	PLANT 6 ELECTROSTATIC PRECIP., NORTH	6E
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> A. ELAM <i>Condition Code</i> 3		
<i>Past Facility Use</i>	PRECIPITRON - ELECTROSTATIC PRECIPITATOR FOR EXHAUSTS VENTED FROM MACHINING EQUIPMENT	
<i>Equipment/Contents</i>	PRECIPITATOR, FILTERS	
<i>Size (WxLxH)</i> 16 x 30 x 14 <i>Stories</i> 1 <i>Construction Date</i> 1953		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-22	PLANT 6 SALT OIL HEAT TREAT BUILDING	6F
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> A. ELAM <i>Condition Code</i> 3		
<i>Past Facility Use</i>	SALT-OIL HEAT TREATING OF URANIUM INGOTS	
<i>Equipment/Contents</i>	FURNACE, QUENCH TANK	
<i>Size (WxLxH)</i> 25 x 45 x 20 <i>Stories</i> 1 <i>Construction Date</i> 1953		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
Q-21	PLANT 6 SUMP BUILDING	6G		
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	NONE			
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	WATER TREATMENT			
<i>Equipment/Contents</i>	NEW UNUSED WATER TREATMENT EQUIPMENT			
<i>Size (WxLxH)</i>	42 x 90 x 39			
<i>Stories</i>	M/L			
<i>Construction Date</i>	1988			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-19	PLANT 7	7A		
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE AND UF4 STORAGE	LLW PROGRAM		06/30/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	1			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	J.L. KNIGHT			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	UF6 TO UF4 REDUCTION			
<i>Equipment/Contents</i>	(BUILDING SCHEDULED TO BE REMOVED IN FY-94) STORAGE OF MISCELLANEOUS MATERIALS. CONTAINS APPROX. 4000 CANS OF GREEN SALT ON THE SECOND FLOOR.			
<i>Size (WxLxH)</i>	80 x 110 x 80			
<i>Stories</i>	7			
<i>Construction Date</i>	1954			

42

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-18	PLANT 7 OVERHEAD CRANE	7B
	<i>Uses</i>	<i>User</i>
<i>Current</i>	MATERIAL HANDLING	N/A
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	12	
<i>Past Facility Use</i>	UF6 CYLINDERS AND DEPLETED UF4 HOPPERS WERE SHIPPED AND RECEIVED BY TRUCK OR RAILROAD CARS	
<i>Equipment/Contents</i>	20 TON CRANE (RAIL SPUR SERVING CRANE WAS UPGRADED IN 1988)	
<i>Size (WxLxH)</i>	75 x 350 x 20	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1954	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-17	RECOVERY PLANT	8A
	<i>Uses</i>	<i>User</i>
<i>Current</i>	WASTE WATER PROCESSING	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	DRYING (ROTARY KILN), MULTIPLE HEARTH VERTICAL FURNACING, SINGLE HEARTH FURNACING, CRUSHING BALL MILL, ROTEXING, HYDROMETALLURGICAL SYSTEM, WINLO, WATER TREATMENT AND FILTRATION, OIL CENTRIFUGE, THORIUM TETRAFLUORIDE REVERSION	
<i>Equipment/Contents</i>	CALCINER FURNACE, SCRUBBER, DUST COLLECTOR, MAGNETIC SEPARATOR, GYRACONE CRUSHER, WET CAKE FEEDER, FEED HOPPERS, FEED BIN, ROLLER MILL, VIBRATING SCREEN, DIGESTER TANKS, HCI TANK, FEED TANKS, PRECIPITATOR TANKS, ROTARY FILTERS	
<i>Size (WxLxH)</i>	120 x 280 x 30	
<i>Stories</i>	2	
<i>Construction Date</i>	1954	

1500A

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-16	PLANT 8 MAINTENANCE BUILDING	8B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> MAINTENANCE	SITE SERVICES	12/31/17
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	MAINTENANCE	
<i>Equipment/Contents</i>	TOOLS, EQUIPMENT, SPARE PARTS	
<i>Size (WxLxH)</i>	30 x 42 x 13	
<i>Stories</i>	1	
<i>Construction Date</i>	1954	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-17	ROTARY KILN/DRUM RECONDITIONING (NEW)	8C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> SOIL TREATABILITY TESTING	CRU-5	12/31/97
<i>Future</i> RECEIVE AND DRY WASTE RESIDUALS	WASTE MANAGEMENT	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	THIS IS A NEW STRUCTURE CONTAINING THE NEW UNUSED ROTARY KILN AND DRUM RECONDITIONING EQUIPMENT.	
<i>Equipment/Contents</i>	ROTARY KILN, DUST COLLECTION EQUIPMENT, DRUM RECONDITIONING EQUIPMENT	
<i>Size (WxLxH)</i>	50 x 100 x 33	
<i>Stories</i>	M/L	
<i>Construction Date</i>	1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-18	PLANT 8 RAILROAD FILTER BUILDING	8D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE		
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	FILTRATION OF WATER FROM ADJACENT PIT AROUND RAILROAD SPUR.	
<i>Equipment/Contents</i>	SUBGRADE SETTLING BASINS, SAND FILTER, PUMP, AGITATOR, CAR WASH PIT	
<i>Size (WxLxH)</i>	8 x 10 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1954	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-16	DRUM CONVEYOR SHELTER	8E
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> SOIL TREATABILITY - DRUM STORAGE	CRU-5	12/31/97
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	N/A	
<i>Equipment/Contents</i>	CRANE, CONVEYORS (WEST 19X69 SOUTH 14X62)	
<i>Size (WxLxH)</i>	19 x 69 x 10	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1954	

520A

Coordinate		Facility Name	Facility Number	
S-16		PLANT 8 OLD DRUM WASHER	8F	
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	NONE			
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN			
<i>Facility Owner</i>	J.L. KNIGHT			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	DRUM WASHING			
<i>Equipment/Contents</i>	DRUM WASHER			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1954			

Coordinate		Facility Name	Facility Number	
P-22		SPECIAL PRODUCTS PLANT	9A	
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE	WASTE MANAGEMENT		12/31/17
<i>Future</i>	STORAGE, MINIMUM ADDITIVE WASTE STABILIZATION PROGRAM	CRU-1	01/01/93	05/03/94
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	2			
<i>Past Facility Use</i>	ENRICHED URANIUM CASTING, ZIRNLO DECLADDING, URANIUM MACHINING, DERBY CLEANING, TRIPLE BETA HEAT TREATING, THORIUM METAL, URANIUM REDUCTION, I&E REMELT FURNACES, BRIQUETTING, SCRAP METAL PICKLING			
<i>Equipment/Contents</i>	2 INDUCTION FURNACES, DUST COLLECTION EQUIPMENT, VACUUM SYSTEM AND OIL RECLAIMER, RECIPROCATING SAW, OPEN TANKS, HOLDING TANKS, LATHES, DRILLS, 8 RESISTANCE ELEMENT FURNACES, INGOT HEAT TREATING FURNACE, 3 JOLTERS, 6 LINER HOPPERS			
<i>Size (WxLxH)</i>	201 x 261 x 20			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-21	PLANT 9 SUMP TREATMENT FACILITY	9B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> A. ELAM <i>Condition Code</i> 3		
<i>Past Facility Use</i>	WATER TREATMENT	
<i>Equipment/Contents</i>	DECANT TANK, ACID TANK, MIX TANK, 2 PLATE & FRAME FILTERS, 3 FILTRATE TANKS	
<i>Size (WxLxH)</i> 20 x 30 x 20 <i>Stories</i> 1 <i>Construction Date</i> 1953		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-21	PLANT 9 DUST COLLECTOR	9C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> A. ELAM <i>Condition Code</i> 3		
<i>Past Facility Use</i>	DUST COLLECTION	
<i>Equipment/Contents</i>	DUST COLLECTOR, HOFFMAN VACUUM PUMP, 2 CYCLONES	
<i>Size (WxLxH)</i> 20 x 35 x 25 <i>Stories</i> 1 <i>Construction Date</i> 1953		

5-2004

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-21	PLANT 9 SUBSTATION	9D
	<i>Uses</i>	<i>User</i>
<i>Current</i>	REDUCES 13.2 KV SERVICE TO 480 VOLT SERVICE IN FACILITIES	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	ELECTRICAL DISTRIBUTION	
<i>Equipment/Contents</i>	TRANSFORMERS, CIRCUIT BREAKERS, DISCONNECTS	
<i>Size (WxLxH)</i>	25 x 40 x 20	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-21	PLANT 9 CYLINDER SHED	9E
	<i>Uses</i>	<i>User</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	CYLINDER STORAGE	
<i>Equipment/Contents</i>	EMPTY CYLINDER RACKS	
<i>Size (WxLxH)</i>	5 x 10 x 8	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-22	PLANT 9 ELECTROSTATIC PRECIPITATOR	9F
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE		
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	PRECIPITRON	
<i>Equipment/Contents</i>	ELECTROSTATIC PRECIPITATOR, AIR FILTERS	
<i>Size (WxLxH)</i>	16 x 30 x 14	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
N-19	BOILER PLANT	10A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> SITEWIDE STEAM SUPPLY, PLANT AIR SUPPLY, BREATHING AIR	SITE SERVICES	12/31/17
<i>Future</i> SUPPLY		
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	STEAM PRODUCTION, AIR PRODUCTION	
<i>Equipment/Contents</i>	(2 STORIES + BASEMENT) 4 COAL-FIRED BOILERS, ELECTROSTATIC PRECIPITATOR, FEED CONVEYORS (CURRENTLY TWO OPERATIONAL BOILERS)	
<i>Size (WxLxH)</i>	70 x 140 x 36	
<i>Stories</i>	3	
<i>Construction Date</i>	1952	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-18	BOILER PLANT MAINTENANCE BUILDING	10B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	MAINTENANCE FOR THE EXISTING BOILER PLANT	SITE SERVICES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	BOILER PLANT MAINTENANCE			
<i>Equipment/Contents</i>	EQUIPMENT, TOOLS, VENTED BASIN			
<i>Size (WxLxH)</i>	40 x 60 x 16			
<i>Stories</i>	1			
<i>Construction Date</i>	1988			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
M-18	WET SALT STORAGE BIN	10C		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SALT STORAGE FOR ZEOLITE SOFTENERS	SITE SERVICES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	WET SALT STORAGE			
<i>Equipment/Contents</i>	SALT STORAGE BINS, SALT SOLUTION			
<i>Size (WxLxH)</i>	17 x 42 x 20			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
M-20	CONTAMINATED OIL/GRAPHITE BURN PAD	10D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE		
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	GRAPHITE BURNER - SMALL, OPEN, GAS-FIRED FURNACE USED FOR OXIDIZING SCRAP GRAPHITE CRUCIBLES/MOLDS FOR URANIUM RECOVERY	
<i>Equipment/Contents</i>	GRAPHITE BURNER	
<i>Size (WxLxH)</i>	55 x 85 x N/A	
<i>Stories</i>		
<i>Construction Date</i>	1952	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
M-19	UTILITIES HEAVY EQUIPMENT GARAGE	10E
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> STORE HEAVY EQUIPMENT		
<i>Future</i> NONE IDENTIFIED	UTILITIES	12/31/17
<i>Category</i>	NEW	
<i>Phase</i>	N/A	
<i>Status</i>		
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	N/A	
<i>Equipment/Contents</i>	SUPERSUCKER VACUUM TRUCK AND MISCELLANEOUS HEAVY EQUIPMENT	
<i>Size (WxLxH)</i>	40 x 40 x 17	
<i>Stories</i>	1	
<i>Construction Date</i>	1993	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-19	SERVICE BUILDING	11		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	CAFETERIA, CHANGING AREA, OFFICES, ETC.	SITE SERVICES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	LAUNDRY, LOCKER ROOMS, CAFETERIA			
<i>Equipment/Contents</i>	WASHERS, DRYERS, DRY CLEANERS, LOCKER AND SHOWER FACILITIES, CAFETERIA EQUIPMENT			
<i>Size (WxLxH)</i>	180 x 310 x 30			
<i>Stories</i>	2			
<i>Construction Date</i>	1956			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
P-20	MAIN MAINTENANCE BUILDING	12A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SITE MAINTENANCE SHOPS	SITE SERVICES		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	MAIN MAINTENANCE, STORES, AND OFFICES			
<i>Equipment/Contents</i>	HEAVY-DUTY MAINTENANCE EQUIPMENT, SPARE PARTS, PARTS CLEANER			
<i>Size (WxLxH)</i>	60 x 492 x 27			
<i>Stories</i>	2			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
O-20	CYLINDER STORAGE BUILDING	12B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE		
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	K.H. SCHAEFER	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	CYLINDER STORAGE	
<i>Equipment/Contents</i>	FULL AND EMPTY CYLINDERS (ARGON, CHLORINE, AND OTHER GAS CYLINDERS USED ON SITE)	
<i>Size (WxLxH)</i>	31 x 47 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1952	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
O-20	LUMBER STORAGE BUILDING	12C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> STORAGE OF LUMBER & ELECTRIC MOTORS	SITE SERVICES	12/31/17
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	K.H. SCHAEFER	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	LUMBER STORAGE	
<i>Equipment/Contents</i>	PLYWOOD, LUMBER, ELECTRIC MOTORS	
<i>Size (WxLxH)</i>	40 x 50 x 14	
<i>Stories</i>	1	
<i>Construction Date</i>	1952	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-19	MAINTENANCE WAREHOUSE	12D		
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	STORAGE OF SUPPLIES & EQUIPMENT NONE IDENTIFIED	MAINTENANCE		12/31/17
<i>Category Phase Status Facility Owner Condition Code</i>	NEW N/A L. PENNINGTON 1			
<i>Past Facility Use</i>	N/A			
<i>Equipment/Contents</i>	MAINTENANCE SUPPLIES AND EQUIPMENT			
<i>Size (WxLxH) Stories Construction Date</i>	60 x 100 x 14 1 1993			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-15	PILOT PLANT, WET SIDE	13A		
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	NONE NONE IDENTIFIED			
<i>Category Phase Status Facility Owner Condition Code</i>	NOT NEEDED 2 PENDING COMPLETION OF SAFE SHUTDOWN J.L. KNIGHT 2			
<i>Past Facility Use</i>	SOLVENT EXTRACTION, SUMP PROCESS, THORIUM DIGESTION, THORIUM OXALATE, THORIA GEL, THORIUM TETRAFLUORIDE PRECIPITATION, ZNF2 PRECIPITATION, POT LINER PREPARATIONS, DECLADDING FUEL ELEMENTS, ENRICHED OXIDATION FURNACE.			
<i>Equipment/Contents</i>	(53' HIGH IN EXTRACTION AREA) THREE 6-IN. COLUMNS, ONE 10-IN. COLUMN, CENTRIFUGE, 2 PULSE GENERATES, 2-IN. PYREX EXTRACTION COLUMNS, 2 NEUTRALIZER TANKS			
<i>Size (WxLxH) Stories Construction Date</i>	63 x 155 x 35 M/L 1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-15	PILOT PLANT MAINTENANCE BUILDING	13B
	<i>Uses</i>	<i>User</i>
<i>Current</i>	MAINTENANCE & OFFICES	CONST. RAD. SAFETY
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/97
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	MAINTENANCE	
<i>Equipment/Contents</i>	TOOLS, EQUIPMENT, SPARE PARTS	
<i>Size (WxLxH)</i>	30 x 60 x 11	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-15	SUMP PUMP HOUSE	13C
	<i>Uses</i>	<i>User</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	SUMP PUMP HOUSE	
<i>Equipment/Contents</i>	TANKS	
<i>Size (WxLxH)</i>	12 x 16 x 8	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-15	THORIUM TANK FARM	13D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> J.L. KNIGHT <i>Condition Code</i> 3		
<i>Past Facility Use</i>	THORIUM TANK FARM - USED FOR STORAGE OF THORIUM NITRATE TETRAHYDRATE AND WATER. ALSO CONTAINED A DUST COLLECTOR, PACKED TOWER FUME SCRUBBER, AND AN EXTRACTION PRODUCT RECEIVING TANK.	
<i>Equipment/Contents</i>	TANKS, DUST COLLECTOR, FUME SCRUBBER (ABOUT 6000 GAL. OF THORIUM NITRATE TETRAHYDRATE REMAIN IN T-2)	
<i>Size (WxLxH)</i> 50 x 75 x N/A <i>Stories</i> N/A <i>Construction Date</i> 1953		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
U-19	ADMINISTRATION BUILDING	14A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> OFFICE SPACE <i>Future</i> NONE IDENTIFIED	DOE/FERMCO	12/31/17
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> SUPPORTING TEMPORARY FUNCTION <i>Facility Owner</i> R.E. MERHLEY <i>Condition Code</i> 1		
<i>Past Facility Use</i>	OFFICES - MAIN OFFICES FOR SITE MANAGEMENT, MAILROOM, CENTRAL REPRODUCTION, CENTRAL COMPUTING, AND FILES STORAGE	
<i>Equipment/Contents</i>	OFFICE EQUIPMENT, STORED DOCUMENTS, COMPUTER HARDWARE	
<i>Size (WxLxH)</i> 143 x 240 x 24 <i>Stories</i> 2 <i>Construction Date</i> 1953		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-18	BUILDING 14 EOC GENERATOR SET	14B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SITE SUPPORT	SITE SERVICES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	UNIT CONSISTS OF A DIESEL ENGINE, FUEL TANK AND ELECTRICAL GENERATOR FOR USE IN EMERGENCY SITUATIONS TO POWER THE EMERGENCY OPERATIONS CENTER (EOC)			
<i>Equipment/Contents</i>	ELECTRICAL GENERATOR ON PAD. ENGINE, DIESEL TANK, GENERATOR			
<i>Size (WxLxH)</i>	10 x 10 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-17	LABORATORY	15		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LABORATORY OFFICES	FERMCO		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	W.J. BURK			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	LABORATORIES - ANALYTICAL, METALLURGICAL, CHEMICAL & PHOTOGRAPHY LAB., LIBRARY AND OFFICES			
<i>Equipment/Contents</i>	(148' X 293' X 11' BASEMENT UNDER THE WEST CORRIDOR) LABORATORY EQUIPMENT, OFFICE EQUIPMENT. ANALYTICAL LAB ADDED 1992.			
<i>Size (WxLxH)</i>	253 x 292 x 20			
<i>Stories</i>	2			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-20	MAIN ELECTRICAL STATION	16A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	INCOMING ELECTRIC 13.2 KV SERVICE AND DISTRIBUTE		UTILITIES	12/13/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.L. MOORE			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	ELECTRICAL DISTRIBUTION - RECEIVES 132 KV FEEDS AND TRANSFORMS TO 13.2 KV FEEDS TO LOCAL SUBSTATION THROUGHOUT THE FACILITY			
<i>Equipment/Contents</i>	STEEL FRAMES, 3 TRANSFORMERS, 9 CIRCUIT BREAKERS, AND DISCONNECTS			
<i>Size (WxLxH)</i>	200 x 200 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-20	ELECTRICAL SUBSTATION	16B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	REDUCES 13.2 KV SERVICE TO 480 VOLT SERVICE IN FACILITIES		UTILITIES	12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.L. MOORE			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	ELECTRICAL DISTRIBUTION - RECEIVES 13.2 KV FEEDS AND TRANSFORMS TO 480 VOLT FEEDS TO LOCAL MOTOR CONTROL CENTERS THROUGHOUT THE FACILITY			
<i>Equipment/Contents</i>	TRANSFORMERS, CIRCUIT BREAKERS, AND DISCONNECTS			
<i>Size (WxLxH)</i>	15 x 30 x 12			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
U-21	ELECTRICAL PANELS & TRANSFORMER	16C
	<i>Uses</i>	<i>User</i>
<i>Current</i>	REDUCES 13.2 KV SERVICE TO 480 VOLT SERVICE IN FACILITIES	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	R.L. MOORE	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	ELECTRICAL DISTRIBUTION - RECEIVES 13.2 KV FEEDS AND TRANSFORMS TO 480 VOLT FEEDS TO LOCAL MOTOR CONTROL CENTERS THROUGHOUT THE FACILITY	
<i>Equipment/Contents</i>	TRANSFORMERS, CIRCUIT BREAKERS, AND DISCONNECTS	
<i>Size (WxLxH)</i>	6 x 15 x 10	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-22	MAIN ELECTRICAL SWITCH HOUSE	16D
	<i>Uses</i>	<i>User</i>
<i>Current</i>	REDUCES 13.2 KV SERVICE TO 480 VOLT SERVICE IN FACILITIES	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	R.L. MOORE	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	ELECTRICAL DISTRIBUTION - RECEIVES 13.2 KV FEEDS AND TRANSFORMS TO 480 VOLT FEEDS TO LOCAL MOTOR CONTROL CENTERS THROUGHOUT THE FACILITY	
<i>Equipment/Contents</i>	TRANSFORMERS, CIRCUIT BREAKERS, AND DISCONNECTS	
<i>Size (WxLxH)</i>	15 x 20 x 10	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

8809

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-22	MAIN ELECTRICAL TRANSFORMERS	16E
<i>Uses</i>		<i>User</i>
<i>Current</i>	REDUCES 132 KV SERVICE TO 13.2 VOLT SERVICE IN FACILITIES	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
<i>Start Date</i>		12/31/17
<i>End Date</i>		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	R.L. MOORE	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	ELECTRICAL DISTRIBUTION - RECEIVES 132 KV FEEDS AND TRANSFORMS TO 13.2 VOLT FEEDS TO LOCAL MOTOR CONTROL CENTERS THROUGHOUT THE FACILITY	
<i>Equipment/Contents</i>	TRANSFORMERS, CIRCUIT BREAKERS, AND DISCONNECTS	
<i>Size (WxLxH)</i>	15 x 15 x 20	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
U-21	TRAILER SUBSTATION #1	16F
<i>Uses</i>		<i>User</i>
<i>Current</i>	SITE SUPPORT, TRAILERS	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
<i>Start Date</i>		12/31/17
<i>End Date</i>		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	R.L. MOORE	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	RECEIVES 480 VOLT FEEDS AND TRANSFORMS TO 220 VOLT FEEDS FOR THE LOCAL OFFICE TRAILERS.	
<i>Equipment/Contents</i>	A SMALL FIBERGLASS ENCLOSURE FOR ELECTRICAL TRANSFORMER. TRANSFORMER, DISCONNECT.	
<i>Size (WxLxH)</i>	10 x 30 x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1986	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
U-22	TRAILER SUBSTATION #2	16G
<i>Uses</i>	<i>User</i>	<i>Start Date</i>
<i>Current</i> <i>Future</i>	SITE SUPPORT, TRAILERS NONE IDENTIFIED	UTILITIES
		12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION R.L. MOORE 1	
<i>Past Facility Use</i>	RECEIVES 480 VOLT FEEDS AND TRANSFORMS TO 220 VOLT FEEDS FOR THE LOCAL OFFICE TRAILERS.	
<i>Equipment/Contents</i>	A SMALL FIBERGLASS ENCLOSURE FOR ELECTRICAL TRANSFORMER. TRANSFORMER, DISCONNECT.	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	10 x 30 x N/A N/A 1986	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-11	BDN SURGE LAGOON	18A
<i>Uses</i>	<i>User</i>	<i>Start Date</i>
<i>Current</i> <i>Future</i>	BIODENITRIFICATION SYSTEM NONE IDENTIFIED	UTILITIES
		12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION L. PENNINGTON 1	
<i>Past Facility Use</i>	LAGOON - THE BIODENITRIFICATION SURGE LAGOON HOLDS GENERAL SUMP EFFLUENTS WAITING PROCESSING FOR NITRATE REMOVAL IN THE BDN TOWERS	
<i>Equipment/Contents</i>	(PLUS A 50,000 GAL. STEEL TANK WITH AN INTEGRAL FLOATING ROOF) LAGOON/15' ABOVE GRADE	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	400 x 400 x 15 N/A 1955	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-17	GENERAL SUMP	18B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	PROCESS WASTE WATER NONE IDENTIFIED	UTILITIES 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION B. PERKINS 1	
<i>Past Facility Use</i>	GENERAL SUMP - PROVIDES TREATMENT OF SITE EFFLUENTS OTHER THAN SEWAGE PRIOR TO DISCHARGE TO PITS OR RIVER.	
<i>Equipment/Contents</i>	FIVE 56,000 GAL. TANKS, TWO 15,000 GAL. TANKS, THREE 20,000 GAL. TANKS, ONE 12,000 GAL. TANK, AND ONE 5,000 GAL. TANK	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	100 x 200 x 25 2 1955	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
O-19	COAL PILE RUNOFF BASIN	18C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	RAINWATER RUNOFF FROM COAL PILE NONE IDENTIFIED	UTILITIES 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION K.H. SCHAEFER 1	
<i>Past Facility Use</i>	RUNOFF RETENTION - THIS 25,000 GAL. BASIN COLLECTS STORMWATER RUNOFF FROM COAL PILE P-018 FOR TREATMENT	
<i>Equipment/Contents</i>	(6' ABOVE GRADE AND 12' DEEP) RUNOFF WATER FROM THE ABOVE LISTED COAL PILE AND CONTINUOUS BLOWDOWN FROM BOILER OPERATIONS	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	150 x 300 x 18 N/A 1955	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-15	BIODENITRIFICATION TOWERS	18D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> BDN <i>Future</i> NONE IDENTIFIED	UTILITIES	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	B. PERKINS	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	BIODENITRIFICATION - THE PROCESS SUPPORTS BIO-MASS ON FLUIDIZED COAL PARTICLES TO OBTAIN DENITRIFICATION OF LIQUID EFFLUENTS	
<i>Equipment/Contents</i>	FOUR 30 FT. TOWERS, SCREENS	
<i>Size (WxLxH)</i>	72 x 79 x 67	
<i>Stories</i>	6	
<i>Construction Date</i>	1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Y-17	STORM WATER RETENTION BASIN	18E
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> COLLECT STORMWATER RUNOFF <i>Future</i> NONE IDENTIFIED	UTILITIES	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	STORM WATER RETENTION	
<i>Equipment/Contents</i>	2 LINED COLLECTION BASINS 300' X 300' AND 200' X 550'. RAINWATER, 4 UNDERDRAIN PUMPS, 2 DECANT PUMPS, SAMPLING STATION BUILDING	
<i>Size (WxLxH)</i>	300 x 300 x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1955	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-8	CLEARWELL PUMP HOUSE	18G		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	TRANSFER DECANT WATER FROM THE PIT AREA	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	CLEARWELL PUMPING - PUMPS CLEAR SAMPLED PIT SURFACE RUNOFF WATER TO BIODENITRIFICATION SURGE LAGOON			
<i>Equipment/Contents</i>	2 PUMPS			
<i>Size (WxLxH)</i>	10 x 22 x 15			
<i>Stories</i>	1			
<i>Construction Date</i>	1955			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-16	BDN EFFLUENT TREATMENT FACILITY	18H		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	WASTE WATER SYSTEM	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	EFFLUENT TREATMENT			
<i>Equipment/Contents</i>	PUMPS, TANKS, CHLORINATORS, FILTER PRESS, COMPRESSORS, & AERATORS (INCLUDES IAWWT BDN)			
<i>Size (WxLxH)</i>	30 x 50 x 15			
<i>Stories</i>	1			
<i>Construction Date</i>	1989			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q-12	METHANOL TANK (BDN)	18J
	<i>Uses</i>	<i>User</i>
<i>Current</i>	METHANOL STORAGE - USED AS PRIMARY FEED FOR THE BIO- MASS	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	METHANOL STORAGE	
<i>Equipment/Contents</i>	5' DIAMETER SS TANK (THIS IS LOCATED ON AN 31' X 41' CONCRETE PAD)	
<i>Size (WxLxH)</i>	5 x 31 x 41	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-13	LOW NITRATE TANK (BDN)	18K
	<i>Uses</i>	<i>User</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	1,000,000 GAL CAPACITY LOW NITRATE TANK	
<i>Equipment/Contents</i>	(POLYMER-LINED STEEL SIDED RESERVOIR) 1 LINED STEEL-SIDED BASIN	
<i>Size (WxLxH)</i>	180 x 180 x 4	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1990	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q-13	HIGH NITRATE TANK (BDN)	18L
<i>Uses</i>		<i>User</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	1,000,000 GAL. CAPACITY HIGH NITRATE TANK	
<i>Equipment/Contents</i>	(POLYMER-LINED STEEL SIDED RESERVOIR) 1 LINED STEEL-SIDED BASIN	
<i>Size (WxLxH)</i>	180 x 180 x 4	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1990	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-13	HIGH NITRATE STORAGE TANK (BDN)	18M
<i>Uses</i>		<i>User</i>
<i>Current</i>	HN STORAGE	UTILITIES
<i>Future</i>	NONE IDENTIFIED	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	500,000 GAL. CAPACITY HIGH NITRATE STORAGE	
<i>Equipment/Contents</i>	(THIS SETS ON A 112' X 112' PADDED DIKED AREA) 60' DIAMETER VERTICAL STEEL TANK	
<i>Size (WxLxH)</i>	1120 x 112 x 20	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1955	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-18	WASTE PIT STORM WATER RUN OFF CONTROL	18N
	<i>Uses</i>	<i>User</i>
<i>Current</i>	WASTE WATER TREATMENT	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>		
<i>Equipment/Contents</i>		
<i>Size (WxLxH)</i>	N/A x N/A x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1955	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-19	MAIN TANK FARM	19A
	<i>Uses</i>	<i>User</i>
<i>Current</i>	ONE TANK USED FOR AREA STORM WATER TREATMENT	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.L. KNIGHT	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>		
<i>Equipment/Contents</i>		
	(OPEN AREA CONCRETE DIKED AREA) 5 36,000 CARBON STEEL TANKS WITH LOAD CELLS, PIPING, CONTROL EQUIPMENT, LOADING/UNLOADING STATIONS, GAS SCRUBBERS, WATER TREATMENT (TANKS INSTALLED 1988, NEVER USED. RAIL AND TRUCK UNLOADING FACILITIES.)	
<i>Size (WxLxH)</i>	140 x 190 x 20	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-15	PILOT PLANT AMMONIA TANK FARM	19B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> J.L. KNIGHT <i>Condition Code</i> 1		
<i>Past Facility Use</i>	AMMONIA STORAGE	
<i>Equipment/Contents</i>	(OPEN AREA CONCRETE DIKED STRUCTURE) 2 TANKS, CARBON STEEL CONSTRUCTION (TANKS INSTALLED 1988)	
<i>Size (WxLxH)</i> 40 x 51 x 25 <i>Stories</i> N/A <i>Construction Date</i> 1988		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-19	TANK FARM CONTROL HOUSE	19C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> RADIOLOGICAL TECHNICIAN OFFICES <i>Future</i> NONE IDENTIFIED	RADIOLOGICAL	12/31/97
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> J.L. KNIGHT <i>Condition Code</i> 1		
<i>Past Facility Use</i>	OFFICES	
<i>Equipment/Contents</i>	ELECTRICAL CONTROL PANELS, OFFICE EQUIPMENT	
<i>Size (WxLxH)</i> 25 x 43 x 10 <i>Stories</i> 1 <i>Construction Date</i> 1988		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
R-19	OLD NORTH TANK FARM	19D		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE (CONSTRUCTION RUBBLE)	LLW PROGRAM		10/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	J.L. KNIGHT			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	BULK STORAGE, SUMP			
<i>Equipment/Contents</i>	(OLD TANKS TO BE REMOVED IN 1992) 7 HORIZONTAL AND 1 VERTICAL STEEL TANK (OUT OF SERVICE), RUNOFF WATER, RUBBER-LINED TANK			
<i>Size (WxLxH)</i>	130 x 130 x 20			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1954			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-19	PUMP STATION POWER CENTER	20A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	PUMPING SITE SANITARY WATER	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	HOUSES THE PUMPS FOR THE SANITARY SYSTEM AND CHLORINATOR AND UNIT SUB-STATION			
<i>Equipment/Contents</i>	STEAM TURBINE, PUMP, CHLORINATOR			
<i>Size (WxLxH)</i>	17 x 83 x 12			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-19	WATER PLANT	20B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	PROVIDES PRIMARY WATER SUPPLY TO THE SITE NONE IDENTIFIED	UTILITIES		12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	PROVIDES TREATMENT OF ALL SITE WATER USING ALUM AND LIME			
<i>Equipment/Contents</i>	9 SAND FILTERS (PRESSURIZED), 2 LIME FILTERS, 2 PUMPS, 2 ALUM FEEDERS, 2 PUMPS			
<i>Size (WxLxH)</i>	50 x 78 x 19			
<i>Stories</i>	2			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-19	COOLING TOWERS	20C		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	SUPPLIES SITE COOLING WATER NONE IDENTIFIED	UTILITIES		12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	WATER COOLING			
<i>Equipment/Contents</i>	WOODEN STRUCTURE. 4 FORCED-DRAFT COOLING TOWER ASSEMBLIES, 4 ELECTRIC PUMPS, STEAM TURBINE. UPDATED 1987.			
<i>Size (WxLxH)</i>	31 x 96 x 42			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-23	ELEVATED POTABLE STORAGE TANK	20D		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	PROVIDES STOR. CAPACITY/MAINTAINS PRESSURE IN SITE POTABLE WATER SYS.	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	WATER STORAGE - POTABLE WATER STORAGE CAPACITY OF 210,000 GALS. FOR ON-SITE FIRE PROTECTION AND POTABLE USES.			
<i>Equipment/Contents</i>	STEEL TANK STRUCTURE. WATER TOWER			
<i>Size (WxLxH)</i>	30 x 40 x 100			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
Q-15	WELL HOUSE #1	20E		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SITE WATER SOURCE	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	WATER PUMPING FOR FIRE PROTECTION. ALL SITE WATER			
<i>Equipment/Contents</i>	PUMP (ONE OF 3 WELL PUMPS)			
<i>Size (WxLxH)</i>	11 x 20 x 9			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-15	WELL HOUSE #2	20F
	<i>Uses</i>	<i>User</i>
<i>Current</i>	SITE WATER SOURCE	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	WATER PUMPING FOR FIRE PROTECTION AND ALL SITE WATER	
<i>Equipment/Contents</i>	PUMP (ONE OF 3 WELL PUMPS)	
<i>Size (WxLxH)</i>	11 x 20 x 9	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-15	WELL HOUSE #3	20G
	<i>Uses</i>	<i>User</i>
<i>Current</i>	SITE WATER SOURCE	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	WATER PUMPING FOR FIRE PROTECTION AND ALL SITE WATER	
<i>Equipment/Contents</i>	PUMP (ONE OF THREE WELL PUMPS)	
<i>Size (WxLxH)</i>	11 x 20 x 9	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-19	PROCESS WATER STORAGE TANK	20H		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	STORES TREATED WATER FROM THE WATER PLANT	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	WATER STORAGE - 750,000 GAL. CAPACITY			
<i>Equipment/Contents</i>	80' DIAMETER REINFORCED CONCRETE TANK WITH FLEXIBLE MEMBRANE LINER 20FT HIGH			
<i>Size (WxLxH)</i>	20 x	80 x	N/A	
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
Q-23	GAS METER BUILDING	22A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	HOUSES GAS METERS FOR INCOMING NATURAL GAS	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	HOUSES THE MAIN GAS METER AND DISTRIBUTION PIPING FOR THE SITE			
<i>Equipment/Contents</i>	2 GAS METERS, INCOMING DISTRIBUTION PIPING			
<i>Size (WxLxH)</i>	16 x	20 x	11	
<i>Stories</i>	1			
<i>Construction Date</i>	1954			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
X-18	STORM SEWER LIFT STATION	22B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> PUMPS SITE STORM WATER <i>Future</i> NONE IDENTIFIED	UTILITIES	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	PUMPS STORMWATER RUNOFF TO RIVER	
<i>Equipment/Contents</i>	2 ELECTRIC PUMPS, SAMPLING EQUIPMENT	
<i>Size (WxLxH)</i>	10 x 16 x 8	
<i>Stories</i>	1	
<i>Construction Date</i>	1954	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-23	TRUCK SCALE (NEW)	22C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> WEIGH VEHICLES <i>Future</i> NONE IDENTIFIED	SITE SERVICES	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>		
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	WEIGH INCOMING AND OUTGOING TRUCKS	
<i>Equipment/Contents</i>	STRUCTURE, 2' BELOW GRADE. TRUCK SCALE	
<i>Size (WxLxH)</i>	12 x 52 x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q-15	SCALE HOUSE & WEIGH SCALE	22D
<i>Uses</i>	<i>User</i>	<i>Start Date</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	B. PERKINS	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	SCALE OPERATION	
<i>Equipment/Contents</i>	OLD TRUCK SCALE	
<i>Size (WxLxH)</i>	12 x 52 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1955	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-11	UTILITY TRENCH TO PIT AREA	22E
<i>Uses</i>	<i>User</i>	<i>Start Date</i>
<i>Current</i>	ACCESS TO UTILITY LINES	
<i>Future</i>	NONE IDENTIFIED	
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	AIR TRANSFER AND SLURRY TRANSFER LINES ORIGINALLY USED TO FILL THE STORAGE SILOS IN THE K-65 AREA.	
<i>Equipment/Contents</i>	CONCRETE TRENCH 3' WIDE BY APPROX. 1500' LONG. 3 TRANSFER LINES: GENERAL SUMP OR HOT RAFFINATE - PITS ON SILO 3, BDN SURGE LAGOON - BDN TOWERS, CLEARWELL- MANHOLE 175	
<i>Size (WxLxH)</i>	3 x 1500 x 3	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1952	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Y-15	METEOROLOGICAL TOWER	23
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	WEATHER MONITORING NONE IDENTIFIED	SECURITY/IRST 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION R.E. MERHLEY 1	
<i>Past Facility Use</i>	CONSTRUCTED TO PROVIDE SITE SPECIFIC WEATHER INFORMATION DURING EMERGENCIES AND FOR DISPERSION MODELING	
<i>Equipment/Contents</i>	STEEL TOWER, METEOROLOGICAL INSTRUMENTS. 3 FEET AT THE BASE, 14 FT AT THE TOP, 60 METERS (197 FT) TALL	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	3 x 197 x 14 N/A 1981	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
K-16	RAILROAD SCALE HOUSE	24A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	WEIGH RAILROAD CARS NONE IDENTIFIED	TRANSPORTATION/ WAREHOUSING 12/31/97
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION 1	
<i>Past Facility Use</i>	PROVIDE WEIGHING OF INCOMING AND OUTGOING RAILCARS	
<i>Equipment/Contents</i>	SCALE	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	13 x 14 x 9 1 1954	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-20	RAILROAD ENGINE HOUSE	24B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	STORAGE AND MAINTENANCE ON ENGINE	N/A		12/31/01
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	PROVIDES COVERED STORAGE AND UNDERCARRIAGE MAINTENANCE ACCESS FOR THE SITES LOCOMOTIVE			
<i>Equipment/Contents</i>	ETHYLENE GLYCOL, LUBRICATING OIL (ACCESS TO ENGINE HOUSE ELIMINATED DUE TO EXCAVATION OF TRACKS NEARBY)			
<i>Size (WxLxH)</i>	27 x 45 x 16			
<i>Stories</i>	1			
<i>Construction Date</i>	1954			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-27	CHLORINATION BUILDING	25A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SANITARY WASTE WATER TREATMENT	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	CHLORINATION			
<i>Equipment/Contents</i>	CHLORINE FEEDER			
<i>Size (WxLxH)</i>	6 x 8 x 8			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-27	M.H. #175/EFF. LINE/SAMPLING BUILDING	25B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> WASTE WATER TREATMENT <i>Future</i> NONE IDENTIFIED	UTILITIES	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	MANHOLE 175 HANDLES ALL NORMAL SITE EFFLUENT FLOWS. EFFLUENT LINE TO THE GREAT MIAMI RIVER IS INTENDED TO HANDLE ALL SITE LIQUID EFFLUENTS.	
<i>Equipment/Contents</i>	18 IN. DIAMETER PIPELINE	
<i>Size (WxLxH)</i>	12 x 12 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-23	SEWAGE LIFT STATION BUILDING	25C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> SITE SEWAGE TREATMENT SYSTEM <i>Future</i> NONE IDENTIFIED	UTILITIES	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	LIFT STATION - PUMPS SANITARY WASTES FROM THE SITE TO THE SEWAGE PLANT FOR TREATMENT	
<i>Equipment/Contents</i>	2 ELECTRIC PUMPS	
<i>Size (WxLxH)</i>	15 x 20 x 9	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

78

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-27	U.V. DISINFECTION BUILDING	25D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	SANITARY WASTE WATER TREATMENT NONE IDENTIFIED	UTILITIES 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION L. PENNINGTON 1	
<i>Past Facility Use</i>	ULTRAVIOLET DISINFECTION	
<i>Equipment/Contents</i>	POURED CONCRETE BUILDING. 2 UV DISINFECTION UNITS, SAMPLER, FLOWMETER.	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	13 x 15 x 9 1 1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-28	DIGESTER AND CONTROL BUILDING	25E
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	SANITARY WASTE WATER TREATMENT NONE IDENTIFIED	UTILITIES 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION L. PENNINGTON 1	
<i>Past Facility Use</i>	ANAEROBIC SEWAGE DIGESTION - HOUSES THE ANAEROBIC BACTERIAL DIGESTER FOR SITE SEWAGE TREATMENT AND THE CONTROL ROOM FOR THE OPERATION.	
<i>Equipment/Contents</i>	MULTILEVEL. TANK, PUMPS, SEWAGE HEATER, CONTROL PANEL	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	40 x 61 x 16 N/A 1962	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-28	SLUDGE DRYING BEDS	25F		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SANITARY WASTE WATER TREATMENT		UTILITIES	12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	SLUDGE SETTLING - SLUDGES FROM SITE SEWAGE ARE SETTLED IN ONE OF TWO CONCRETE BASINS.			
<i>Equipment/Contents</i>	TWO CONCRETE TANKS. 2 SETTLING BASINS			
<i>Size (WxLxH)</i>	30 x 80 x 2			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-28	PRIMARY SETTLING BASINS	25G		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SANITARY WASTE WATER TREATMENT		UTILITIES	12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	CLARIFIERS - 2 CONCRETE TANKS UTILIZED AS SLUDGE FILTERS FROM ANAEROBIC DIGESTER.			
<i>Equipment/Contents</i>	TWO BASINS. 2 SAND FILTERS			
<i>Size (WxLxH)</i>	12 x 30 x 3			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

80

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T & S-27	TRICKLING FILTERS	25H		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	SANITARY WASTE WATER TREATMENT NONE IDENTIFIED	UTILITIES		12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	TRICKLING FILTERS - 2 TANKS PROVIDE AEROBIC BACTERIAL DIGESTION OF SEWAGE FROM THE SITE.			
<i>Equipment/Contents</i>	TWO 40' DIAMETER CONCRETE TANKS			
<i>Size (WxLxH)</i>	40 x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
R-15	PUMP HOUSE, HP FIRE PROTECTION	26A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	HIGH PRESSURE FIRE PROTECTION WATER NONE IDENTIFIED	UTILITIES		12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	FIRE PROTECTION WATER PUMPING			
<i>Equipment/Contents</i>	3 PUMPS, STEEL TANK			
<i>Size (WxLxH)</i>	26 x 50 x 11			
<i>Stories</i>	1			
<i>Construction Date</i>	1961			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q-15	ELEVATED WATER STORAGE TANK	26B
	<i>Uses</i>	<i>User</i>
<i>Current</i>	FIRE WATER STORAGE	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	WATER STORAGE (CAPACITY OF 350,000 GAL.)	
<i>Equipment/Contents</i>	60' DIAMETER ELEVATED STEEL TANK, 265' ABOVE GRADE. WATER TOWER	
<i>Size (WxLxH)</i>	60 x N/A x 265	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1961	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-22	MAIN ELECTRICAL STRAINER HOUSE	26C
	<i>Uses</i>	<i>User</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	R.L. MOORE	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	MAIN ELECTRICAL DELUGE SYSTEM	
<i>Equipment/Contents</i>	AUTOMATIC SPRINKLER CONTROL VALVE	
<i>Size (WxLxH)</i>	10 x 12 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1961	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-20	SECURITY BUILDING	28A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OFFICE SPACE	FACILITIES ENGINEERING		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	SECURITY SERVICES			
<i>Equipment/Contents</i>	COMMUNICATION CENTER, OFFICE EQUIPMENT & CLASSIFIED DOCUMENT VAULT			
<i>Size (WxLxH)</i>	82 x 109 x 10			
<i>Stories</i>	1			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-20	HUMAN RESOURCES BUILDING	28B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OFFICE SPACE	FACILITIES ENGINEERING		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	OFFICES			
<i>Equipment/Contents</i>	OFFICE EQUIPMENT			
<i>Size (WxLxH)</i>	80 x 100 x 10			
<i>Stories</i>	1			
<i>Construction Date</i>	1952			

0200

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
U-21	GUARD POST, SOUTH END OF "D" STREET	28C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> R.E. MERHLEY <i>Condition Code</i> 3		
<i>Past Facility Use</i>	CHECKPOINT - USED TO STORE PROTECTIVE CLOTHING FOR OFF-SITE DRIVERS ENTERING THE PROCESS AREA	
<i>Equipment/Contents</i>	PROTECTIVE CLOTHING	
<i>Size (WxLxH)</i> 10 x 10 x 10 <i>Stories</i> 1 <i>Construction Date</i> 1952		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-15	GUARD POST WEST END OF 2ND STREET	28D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> D.A. NIXON <i>Condition Code</i> 3		
<i>Past Facility Use</i>	CHECKPOINT PRIOR TO ENTERING K-65 SILO AREA	
<i>Equipment/Contents</i>	PROTECTIVE CLOTHING	
<i>Size (WxLxH)</i> 15 x 15 x 10 <i>Stories</i> 1 <i>Construction Date</i> 1952		

0203

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
P-17	CHEMICAL WAREHOUSE	30A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	STORAGE	RECEIVING		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	CHEMICAL STORAGE			
<i>Equipment/Contents</i>	(INCLUDES RAIL DOCK ON EAST SIDE) AEROSOL PAINT CANS, LIME, DICALITE, GRAPHITE CRUCIBLES, AND OTHER MISC. MATERIAL			
<i>Size (WxLxH)</i>	82 x 321 x 16			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
P-16	DRUM STORAGE WAREHOUSE	30B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SATELLITE CLOTHING CHANGE AREA	SITE SERVICES		10/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	DRUM STORAGE			
<i>Equipment/Contents</i>	PROTECTIVE CLOTHING, RADIATION MONITORS			
<i>Size (WxLxH)</i>	20 x 33 x 12			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
O-18	OLD TEN TON SCALE	30C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE		
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J.A. HILL	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	SCALE OPERATIONS - RECEIVED MATERIALS WERE WEIGHED	
<i>Equipment/Contents</i>	A DRIVE-ON PALLET-SIZE SCALE	
<i>Size (WxLxH)</i>	N/A x N/A x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-21	ENGINE HOUSE/GARAGE	31A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> VEHICLE MAINTENANCE		
<i>Future</i> NONE IDENTIFIED	SITE SERVICES	12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	GARAGE - THIS STRUCTURE HOUSES OFFICES, AND AREAS FOR VEHICLE REPAIR. IT ALSO HOUSES THE AMBULANCE AND ONE FIRE TRUCK.	
<i>Equipment/Contents</i>	VEHICLE REPAIR EQUIPMENT, OFFICES, FIRE & AMBULANCE VEHICLES	
<i>Size (WxLxH)</i>	62 x 123 x 17	
<i>Stories</i>	1	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-21	OLD TRUCK SCALE PLATFORM	31B
	<i>Uses</i>	<i>User</i>
<i>Current</i>	NONE	<i>Start Date</i>
<i>Future</i>	NONE IDENTIFIED	<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	A. ELAM	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	SCALE OPERATION	
<i>Equipment/Contents</i>	CONCRETE PLATFORM. CONCRETE RAMPS	
<i>Size (WxLxH)</i>	15 x 140 x 3	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
N-22	MAGNESIUM STORAGE BUILDING	32A
	<i>Uses</i>	<i>User</i>
<i>Current</i>	NONE	<i>Start Date</i>
<i>Future</i>	NONE IDENTIFIED	<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	E. ALLEN	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	MAGNESIUM STORAGE	
<i>Equipment/Contents</i>		
<i>Size (WxLxH)</i>	52 x 103 x 17	
<i>Stories</i>	1	
<i>Construction Date</i>	1952	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
-------------------	----------------------	------------------------

N-22	BUILDING 32 COVERED LOADING DOCK	32B
------	----------------------------------	-----

<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
-------------	-------------	-------------------	-----------------

<i>Current</i>	NONE		
<i>Future</i>	NONE IDENTIFIED		

<i>Category</i>	NOT NEEDED
<i>Phase</i>	1
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL
<i>Facility Owner</i>	E. ALLEN
<i>Condition Code</i>	3

<i>Past Facility Use</i>	COVERED LOADING DOCK
--------------------------	----------------------

Equipment/Contents

<i>Size (WxLxH)</i>	20 x 60 x 20
<i>Stories</i>	1
<i>Construction Date</i>	1952

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
-------------------	----------------------	------------------------

R-9	K-65 STORAGE TANK NORTH (SILO 2)	34A
-----	----------------------------------	-----

<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
-------------	-------------	-------------------	-----------------

<i>Current</i>	STORAGE OF K-65 RESIDUE		
<i>Future</i>	OU-4 REMEDIATION	CRU-4	10/31/97 07/31/03

<i>Category</i>	NOT NEEDED
<i>Phase</i>	2
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION
<i>Facility Owner</i>	D.A. NIXON
<i>Condition Code</i>	3

<i>Past Facility Use</i>	STORAGE OF K-65 RESIDUE
--------------------------	-------------------------

Equipment/Contents 80' DIAMETER, APPROX 26'TALL, SURROUNDED BY SOIL BERM

<i>Size (WxLxH)</i>	80 x N/A x 26
<i>Stories</i>	N/A
<i>Construction Date</i>	1953-54

88

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-9	K-65 STORAGE TANK SOUTH (SILO 1)	34B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current Future</i>	STORAGE OF K-65 RESIDUE OU-4 REMEDIATION	CRU-4 10/31/97 10/31/97 07/31/03
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	D.A. NIXON	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	STORAGE OF K-65 RESIDUE	
<i>Equipment/Contents</i>	80' DIAMETER, APPROX 26' TALL, SURROUNDED BY SOIL BERM	
<i>Size (WxLxH)</i>	80 x N/A x 26	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953-54	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-9	METAL OXIDE STORAGE TANK NORTH (SILO 4)	35A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current Future</i>	NONE TEST BED FOR RESIDUE REMOVAL EQUIP	CRU-4 07/01/93 12/31/95
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	D.A. NIXON	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	EMPTY SILO, NEVER USED	
<i>Equipment/Contents</i>	1 SILO, 80' DIAMETER, APPROX 26'TALL, FREE STANDING	
<i>Size (WxLxH)</i>	80 x N/A x 26	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1953-54	

0205

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
Q-9	METAL OXIDE STORAGE TANK SOUTH (SILO 3)	35B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	STORAGE OF METAL OXIDES			
<i>Future</i>	OU-4 REMEDIATION	CRU-4	12/31/99	12/31/99 07/31/03
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	D.A. NIXON			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	STORAGE OF CALCINED METAL OXIDES			
<i>Equipment/Contents</i>	1 SILO, 80' DIAMETER, APPROX 26' TALL, FREE STANDING			
<i>Size (WxLxH)</i>	80 x N/A x 26			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1954			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-16	PILOT PLANT ANNEX	37		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE			
<i>Future</i>	NONE IDENTIFIED	LLW PROGRAM		10/31/93
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.L. KNIGHT			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	GRIT-BLASTING FURNACE CRUCIBLES, PLASMA SPRAYING OF CRUCIBLES, OIL RECLAIMER, DE-ZINCING FURNACE, BRIQUETTING, URANIUM DERBY CLEANING, MILLING THORIUM TETRAFLUORIDE, CALCIUM METAL STORAGE, BOX FURNACE, FLATS OUTGASSINGS, NUSAL HEAT TRMT			
<i>Equipment/Contents</i>	GRIT-BLASTER UNIT, DUST COLLECTOR, PLASMA SPRAY UNIT, OIL RECLAIMER, P-2 FURNACE, BRIQUETTING, ROTOBLASTER, NUSAL SALT FURNACE, QUENCH TANK, AHF STORAGE TANK OUTSIDE EAST WALL			
<i>Size (WxLxH)</i>	52 x 122 x 25			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

1059

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
N-20	PROPANE STORAGE	38A
<i>Uses</i>		<i>User</i>
<i>Current</i>	PROPANE STORAGE	UTILITIES
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	PROPANE STORAGE - PROPANE DISTRIBUTION	
<i>Equipment/Contents</i>	2 PROPANE TANKS, VAPORIZER AND FILLING EQUIPMENT FOR SMALL TANKS.	
<i>Size (WxLxH)</i>	23 x 33 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1952	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
N-20	CYLINDER FILLING STATION	38B
<i>Uses</i>		<i>User</i>
<i>Current</i>	PROPANE CYLINDER FILLING	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	PROPANE CYLINDER FILLING	
<i>Equipment/Contents</i>	CYLINDER FILLING STATION	
<i>Size (WxLxH)</i>	6 x 10 x 8	
<i>Stories</i>	1	
<i>Construction Date</i>	1952	



<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-16	INCINERATOR BUILDING	39A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	INCINERATION/COMPACTION NONE IDENTIFIED	SITE SERVICES 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 1 PENDING COMPLETION OF SAFE SHUTDOWN J.L. KNIGHT 1	
<i>Past Facility Use</i>	TRASH BALER OPERATION, SOLID WASTE INCINERATOR, LIQUID WASTE INCINERATOR, DRUM DRYER.	
<i>Equipment/Contents</i>	TRASH BALER, INCINERATOR, FEED CONVEYOR	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	52 x 54 x 37 2 1979	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-16	WASTE OIL DECANT SHELTER	39B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	OIL WATER SEPARATION NONE IDENTIFIED	SITE SERVICES 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION J.L. KNIGHT 1	
<i>Past Facility Use</i>	OIL-WATER SEPARATION	
<i>Equipment/Contents</i>	2 TANKS	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	18 x 28 x 12 1 1979	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-16	INCINERATOR SPRINKLER RISER HOUSE	39C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> J.L. KNIGHT <i>Condition Code</i> 1		
<i>Past Facility Use</i>	INCINERATOR SPRINKLER RISER - FIRE PROTECTION	
<i>Equipment/Contents</i>	PUMP	
<i>Size (WxLxH)</i> 6 x 8 x 8 <i>Stories</i> 1 <i>Construction Date</i> 1979		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-27	SEWAGE TREATMENT PLANT INCINERATOR	39D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 1 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> J.L. KNIGHT <i>Condition Code</i> 1		
<i>Past Facility Use</i>	WASTE INCINERATION	
<i>Equipment/Contents</i>	OUTDOOR WASTE INCINERATOR EQUIPMENT SITUATED ON A CONCRETE PAD. INCINERATOR & STACK	
<i>Size (WxLxH)</i> 16 x 20 x N/A <i>Stories</i> N/A <i>Construction Date</i> 1979		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
U-21	TRAILER COMPLEX (6 PLEX), T-1	44A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> OFFICE SPACE	FACILITIES ENGINEERING	12/31/17
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>		
<i>Facility Owner</i>	R.E. MERHLEY	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	OFFICE SPACE	
<i>Equipment/Contents</i>	OFFICE EQUIPMENT	
<i>Size (WxLxH)</i>	40 x 60 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
U-18	TRAILER COMPLEX (7-PLEX S.), T-25	44C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> OFFICE SPACE	FACILITIES ENGINEERING	12/31/17
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	R.E. MERHLEY	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	OFFICE SPACE	
<i>Equipment/Contents</i>	OFFICE EQUIPMENT	
<i>Size (WxLxH)</i>	40 x 70 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-18	TRAILER COMPLEX (7-PLEX N.), T-24	44D		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OFFICE SPACE	FACILITIES ENGINEERING		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	OFFICE SPACE			
<i>Equipment/Contents</i>	OFFICE EQUIPMENT			
<i>Size (WxLxH)</i>	40 x 70 x 10			
<i>Stories</i>	1			
<i>Construction Date</i>	1986			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-19	TRAILER COMPLEX (10-PLEX), T-23	44E		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OFFICE SPACE	FACILITIES ENGINEERING		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	OFFICE SPACE			
<i>Equipment/Contents</i>	OFFICE EQUIPMENT			
<i>Size (WxLxH)</i>	40 x 100 x 10			
<i>Stories</i>	1			
<i>Construction Date</i>	1986			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-15	RUST ENGINEERING BUILDING	45A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> CONSTRUCTION OFFICES & FABRICATION SHOP AND WAREHOUSE	FERMCO	06/30/93
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	R. NICHOLS	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	OFFICES (CONSTRUCTION), WAREHOUSE, AND FABRICATION SHOP	
<i>Equipment/Contents</i>	OFFICE EQUIPMENT AND CONSTRUCTION TOOLS	
<i>Size (WxLxH)</i>	121 x 150 x 14	
<i>Stories</i>	1	
<i>Construction Date</i>	1958	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-15	UTILITY SHED, EAST OF RUST TRAILERS	45B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE		
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	R. NICHOLS	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	STORAGE	
<i>Equipment/Contents</i>	NONE	
<i>Size (WxLxH)</i>	15 x 15 x 10	
<i>Stories</i>	1	
<i>Construction Date</i>	1958	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-22	HEAVY EQUIPMENT BUILDING	46
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	HEAVY EQUIPMENT STORAGE NONE IDENTIFIED	TRANSPORTATION 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION S. SCHONEGG 1	
<i>Past Facility Use</i>	HEAVY EQUIPMENT STORAGE	
<i>Equipment/Contents</i>	FIRE EQUIPMENT, STREET AND YARD MAINTENANCE VEHICLES, FORK TRUCKS, ETC.	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	60 x 221 x 17 1 1954	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
U-14	6 TO 4 REDUCTION FACILITY #2	51
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	NONE ADVANCED WASTE WATER TREATMENT FACILITY	03/01/94 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION J.R. HUGHES 2	
<i>Past Facility Use</i>	UF6 TO UF4, ADVANCED WASTE WATER TREATMENT	
<i>Equipment/Contents</i>	NEW, UNUSED UF6 TO UF4 PROCESS EQUIPMENT OWNED BY THE U.S. ARMY (SPILL CONTAINMENT IN CERTAIN AREAS)	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	165 x 244 x 30 1 1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-20	HEALTH & SAFETY BUILDING	53A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OFFICES, MEDICAL SERVICES, SECURITY	FACILITIES ENGINEERING		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	OFFICES, MEDICAL SERVICES, SECURITY			
<i>Equipment/Contents</i>	OFFICE EQUIPMENT, MEDICAL EQUIPMENT, X-RAY MACHINE, COMMUNICATIONS CONSOLE, ADDITION ADDED 1989.			
<i>Size (WxLxH)</i>	89 x 221 x 22			
<i>Stories</i>	2			
<i>Construction Date</i>	1957			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-20	IN-VIVO BUILDING	53B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	IN-VIVO MONITORING	DOSIMETRY		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	IN-VIVO MONITORING			
<i>Equipment/Contents</i>	MONITORING EQUIPMENT			
<i>Size (WxLxH)</i>	36 x 72 x 15			
<i>Stories</i>	1			
<i>Construction Date</i>	1989			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-15	6 TO 4 REDUCTION FAC. #1	54A		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE	LLW PROGRAM		10/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	UF6 TO UF4, JOLTER, FURNACE POT LOADING, REDUCTION FURNACES, THORIUM DERBY SAMPLING, DE-ZINCING ZN-TH DERBIES, THF4 DEHYDRATION, ORIGINAL UF6 TO UF4 REDUCTION PROCESS, PLT FURNACE, CASTING. EQUIP INSTALLED 1984.			
<i>Equipment/Contents</i>	2 BRIDGE CRANES, 3 AUTOCLAVES, 2 TUBULAR REACTORS, 3 CATALYTIC AMMONIA DISSOCIATORS, 3 SCRUBBER TANKS, REFRIGERATED UNIT, DUST COLLECTION EQUIPMENT, AHF STORAGE TANK, DHF STORAGE TANK, 1 FURNACE, PER CHLOROETHYLENE TANK, 2 TRAY DRIERS			
<i>Size (WxLxH)</i>	62 x 80 x 44			
<i>Stories</i>	M/L			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-16	PILOT PLANT SHELTER	54B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE	WASTE MANAGEMENT		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	UF4 DRUM STORAGE			
<i>Equipment/Contents</i>	NONE			
<i>Size (WxLxH)</i>	50 x 74 x 10			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
T-15	PILOT PLANT DISSOCIATOR SHELTER	54C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> J.A. HILL <i>Condition Code</i> 3		
<i>Past Facility Use</i>	HYDROGEN PRODUCTION BY AMMONIA DISSOCIATION	
<i>Equipment/Contents</i>	(3) 2000 CFH CATALYTIC AMMONIA DISSOCIATORS	
<i>Size (WxLxH)</i> 20 x 48 x 19 <i>Stories</i> 1 <i>Construction Date</i> 1984		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-21	SLAG RECYCLING BUILDING	55A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> A. ELAM <i>Condition Code</i> 3		
<i>Past Facility Use</i>	MAGNESIUM FLUORIDE MILLING	
<i>Equipment/Contents</i>	CONVEYORS (VIBRATING, FLIGHT AND PNEUMATIC) BUCKET ELEVATORS, STORAGE BINS, BALL MILL AND ROTEX (VIBRATING) SCREEN	
<i>Size (WxLxH)</i> 32 x 62 x 42 <i>Stories</i> 3 <i>Construction Date</i> 1957		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
R-21	SLAG RECYCLING PIT/ELEVATOR	55B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> PENDING COMPLETION OF SAFE SHUTDOWN <i>Facility Owner</i> A. ELAM <i>Condition Code</i> 3		
<i>Past Facility Use</i>	SLAG PROCESSING	
<i>Equipment/Contents</i>	CONVEYORS, BUCKET ELEVATOR, STORAGE BIN	
<i>Size (WxLxH)</i> 12 x 12 x 38 <i>Stories</i> 3 <i>Construction Date</i> 1957		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
M-17	CP STORAGE WAREHOUSE	56A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> RCRA WAREHOUSE <i>Future</i> STAGING & STORAGE	SITE SERVICES SITE SERVICES	12/31/97 12/31/97 12/31/97 12/31/17
<i>Category</i> NOT NEEDED <i>Phase</i> 2 <i>Status</i> SUPPORTING TEMPORARY FUNCTION <i>Facility Owner</i> J.A. HILL <i>Condition Code</i> 3		
<i>Past Facility Use</i>	STORAGE	
<i>Equipment/Contents</i>	CURRENTLY STORING RCRA DRUMS	
<i>Size (WxLxH)</i> 50 x 180 x 14 <i>Stories</i> 1 <i>Construction Date</i> 1957		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
M-16	STORAGE SHED, WEST	56B
	<i>Uses</i>	<i>User</i>
<i>Current</i>	MAINTENANCE SHOP	RUST
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/97
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	R. NICHOLS	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	CONSTRUCTION TOOL STORAGE	
<i>Equipment/Contents</i>	CONSTRUCTION TOOLS	
<i>Size (WxLxH)</i>	24 x 36 x 14	
<i>Stories</i>	1	
<i>Construction Date</i>	1957	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
M-16	STORAGE SHED, EAST	56C
	<i>Uses</i>	<i>User</i>
<i>Current</i>	MAINTENANCE SHOP	RUST
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/92
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	R. NICHOLS	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	CONSTRUCTION TOOL STORAGE	
<i>Equipment/Contents</i>	CONSTRUCTION TOOLS	
<i>Size (WxLxH)</i>	30 x 50 x 14	
<i>Stories</i>	1	
<i>Construction Date</i>	1957	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
K-17	QUONSET HUT #1	60		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	THORIUM STORAGE	WASTE MANAGEMENT		08/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	STORAGE OF NEW EQUIPMENT			
<i>Equipment/Contents</i>	DRUMS (THORIUM COMPOUNDS FROM PLT. 8 SILOS)			
<i>Size (WxLxH)</i>	41 x 121 x 20			
<i>Stories</i>	1			
<i>Construction Date</i>	1954			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
K-17	QUONSET HUT #2	61		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	MATERIAL FROM PLT. 8 SILO DEMO	WASTE MANAGEMENT		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	E. ALLEN			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	STORAGE			
<i>Equipment/Contents</i>	THORIUM CONTAMINATED EQUIPMENT			
<i>Size (WxLxH)</i>	41 x 60 x 20			
<i>Stories</i>	1			
<i>Construction Date</i>	1954			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
K-16	QUONSET HUT #3	62
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> THORIUM STORAGE <i>Future</i> NONE IDENTIFIED	WASTE MANAGEMENT	09/30/92
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.A. HILL	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	STORAGE	
<i>Equipment/Contents</i>	DRUMS	
<i>Size (WxLxH)</i>	41 x 60 x 20	
<i>Stories</i>	1	
<i>Construction Date</i>	1954	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
K-19	KC-2 WAREHOUSE	63
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> RCRA STORAGE <i>Future</i> NONE IDENTIFIED	SITE SERVICES	12/31/97
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.A. HILL	
<i>Condition Code</i>	2	
<i>Past Facility Use</i>	STORAGE	
<i>Equipment/Contents</i>	DRUMS, EQUIPMENT, BULK INVENTORY ITEMS, AND WORK ORDER MATERIALS	
<i>Size (WxLxH)</i>	79 x 346 x 16	
<i>Stories</i>	1	
<i>Construction Date</i>	1954	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-21	THORIUM WAREHOUSE	64		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	THORIUM STORAGE/THORIUM OVERPACK AREA	WASTE MANAGEMENT		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	2			
<i>Past Facility Use</i>	STORAGE & OVERPACKING DETERIORATED DRUMS OF THORIUM MATERIAL			
<i>Equipment/Contents</i>	DRUMS, URANIUM INGOTS, URANIUM DERBIES, OVERPACKING CONTROL STATION, INERT GAS BLANKETING EQUIPMENT, ROBUST FORK TRUCK			
<i>Size (WxLxH)</i>	50 x 320 x 22			
<i>Stories</i>	1			
<i>Construction Date</i>	1954			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-21	PLANT 5 WAREHOUSE (OLD)	65		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	THORIUM STORAGE	WASTE MANAGEMENT	08/31/94	08/31/94
<i>Future</i>	STORAGE AND STAGING	WASTE MANAGEMENT	08/31/94	12/31/97
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	1			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	STORAGE			
<i>Equipment/Contents</i>	STORED DRUMMED THORIUM COMPOUNDS			
<i>Size (WxLxH)</i>	50 x 210 x 22			
<i>Stories</i>	1			
<i>Construction Date</i>	1954			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
O-16	DRUM RECONDITIONING BUILDING	66
	<i>Uses</i>	<i>User</i>
<i>Current</i>	DRUM CRUSHER & TO OVERPACK	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/97
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	J.A. HILL	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	DRUM RECONDITIONING	
<i>Equipment/Contents</i>	SHOT BLASTER, DUST COLLECTOR, PAINT SPRAY BOOTH, CONTINUOUS DRUM DRYING OVEN, AND SCRAP DRUM CRUSHER/BALER	
<i>Size (WxLxH)</i>	38 x 101 x 13	
<i>Stories</i>	1	
<i>Construction Date</i>	1956	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-15	PLANT 1 THORIUM WAREHOUSE	67
	<i>Uses</i>	<i>User</i>
<i>Current</i>	STORAGE OF THORIUM	WASTE MANAGEMENT
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/97
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN	
<i>Facility Owner</i>	J.A. HILL	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	STORAGE	
<i>Equipment/Contents</i>	THORIUM COMPOUNDS IN DRUMS	
<i>Size (WxLxH)</i>	40 x 100 x 22	
<i>Stories</i>	1	
<i>Construction Date</i>	1954	

001

106

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-15	PILOT PLANT WAREHOUSE	68		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	RCRA WAREHOUSE	WASTE MANAGEMENT	12/31/97	12/31/97
<i>Future</i>	STAGING & STORAGE	WASTE MANAGEMENT	12/31/97	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	1			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	STORED A CO-80 SOURCE, THORIUM COMPOUNDS, PILOT PLANT EQUIPMENT, AND RCRA WASTE DRUMS			
<i>Equipment/Contents</i>	STORED DRUMS			
<i>Size (WxLxH)</i>	50 x 100 x 14			
<i>Stories</i>	1			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
M-22	DECONTAMINATION BUILDING	69		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	NONE			
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	1			
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	DECONTAMINATION			
<i>Equipment/Contents</i>	TANKS, VATS, SPRAY UNITS			
<i>Size (WxLxH)</i>	43 x 83 x 18			
<i>Stories</i>	1			
<i>Construction Date</i>	1957			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>	
O-17	GENERAL IN-PROCESS WAREHOUSE	71	
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>	
<i>Current</i>	PREPARE LOW LEVEL WASTE SHIPMENTS (WHITE METAL BOXES B-25)	WASTE MANAGEMENT	12/31/17
<i>Future</i>	NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED		
<i>Phase</i>	2		
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION		
<i>Facility Owner</i>	J.A. HILL		
<i>Condition Code</i>	1		
<i>Past Facility Use</i>	STORAGE, ISOTOPIC VERIFICATION, FUEL DISASSEMBLY		
<i>Equipment/Contents</i>	DRUMS FOR RCRA SAMPLING, LOFT FUEL RODS, ISOTOPIC VERIFICATION EQUIPMENT		
<i>Size (WxLxH)</i>	100 x 241 x 13		
<i>Stories</i>	1		
<i>Construction Date</i>	1966		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>	
P-16	DRUM STORAGE BUILDING	72	
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>	
<i>Current</i>	LLW STORAGE	LLW PROGRAM	12/31/17
<i>Future</i>	NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED		
<i>Phase</i>	1		
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL		
<i>Facility Owner</i>	J.A. HILL		
<i>Condition Code</i>	3		
<i>Past Facility Use</i>	STORED INDUSTRIAL CLEANING EQUIPMENT AND CONTROL PANELS FOR ORE SILO OPERATION		
<i>Equipment/Contents</i>	ENRICHED URANIUM MATERIAL IN DRUMS		
<i>Size (WxLxH)</i>	31 x 41 x 11		
<i>Stories</i>	1		
<i>Construction Date</i>	1953		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
H-18	FIRE BRIGADE TRAINING CENTER BLDG.	73A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 1 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> W.T. PRUES <i>Condition Code</i> 3		
<i>Past Facility Use</i>	FIRE BRIGADE TRAINING - POND, TANK, BURN TROUGH	
<i>Equipment/Contents</i>	MULTILEVEL BLDG. EMPTY & CONDEMNED.	
<i>Size (WxLxH)</i> 20 x 30 x 14 <i>Stories</i> M/L <i>Construction Date</i> 1966		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
H-19	FIRE TRAINING POND	73B
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 1 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> W.T. PRUES <i>Condition Code</i> 3		
<i>Past Facility Use</i>	TRAINING BRIGADE MEMBERS IN FIGHTING COMBUSTIBLE LIQUID FIRES	
<i>Equipment/Contents</i>	WATER, EMPTY TANK	
<i>Size (WxLxH)</i> 40 x N/A x N/A <i>Stories</i> N/A <i>Construction Date</i> 1966		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
H-19	FIRE TRAINING TANK	73C
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 1 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> W.T. PRUES <i>Condition Code</i> 3		
<i>Past Facility Use</i>	USED FOR TRAINING BRIGADE MEMBERS IN FIGHTING COMBUSTIBLE LIQUID FIRES.	
<i>Equipment/Contents</i>	WATER, EMPTY TANK	
<i>Size (WxLxH)</i> 4 x 6 x N/A <i>Stories</i> N/A <i>Construction Date</i> 1966		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
H-19	FIRE TRAINING BURN TROUGH	73D
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		
<i>Category</i> NOT NEEDED <i>Phase</i> 1 <i>Status</i> CANDIDATE FOR IMMEDIATE REMOVAL <i>Facility Owner</i> W.T. PRUES <i>Condition Code</i> 3		
<i>Past Facility Use</i>	VOLATILE LIQUID FIRE TRAINING, USED OIL WAS IGNITED FOR EXTINGUISHER TRAINING	
<i>Equipment/Contents</i>	BURN TROUGH, WATER	
<i>Size (WxLxH)</i> 10 x 30 x 2 <i>Stories</i> N/A <i>Construction Date</i> 1966		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
H-18	CONFINED SPACE BURN TANK	73E
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE		
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	1	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	W.T. PRUES	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	SIMULATED RESCUE TRAINING	
<i>Equipment/Contents</i>	TANK FROM TANK FARM (END REMOVED)	
<i>Size (WxLxH)</i>	8 x 20 x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1966	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Q-18	PLANT 2 EAST PAD	74A
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> DRUM STORAGE	WASTE MANAGEMENT	10/31/93
<i>Future</i> NONE IDENTIFIED		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	PENDING COMPLETION OF SAFE SHUTDOWN, SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	B. PERKINS	
<i>Condition Code</i>	N/A	
<i>Past Facility Use</i>	USED AS TEMPORARY STORAGE OF PRODUCT UO3 AND WASTE RESIDUES	
<i>Equipment/Contents</i>	5,000 FT2 OF OPEN CONTROLLED CONCRETE STORAGE PAD, DRUMS, SUBSURFACE DRAINAGE PUMP, AND FILTER, SEA/LAND CONTAINERS	
<i>Size (WxLxH)</i>	60 x 90 x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1952	

0125

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
Q-16	PLANT 2 WEST PAD	74B		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SEA/LAND CONTAINERS, RADIOACTIVE LSA	WASTE MANAGEMENT		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	STORAGE OF FEED MATERIALS SCHEDULED FOR CONSUMPTION IN REFINERY PROCESS			
<i>Equipment/Contents</i>	10,000 FT2 OF OPEN CONTROLLED CONCRETE STORAGE PAD. DRUMS, METAL SKIDS, EXCESS EQUIPMENT			
<i>Size (WxLxH)</i>	90 x 100 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-17	PLANT 8 EAST PAD	74C		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE	LLW PROGRAM		10/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	STORAGE, AIRPORT SCRAP, PYROPHORIC DRUM SPRINKLER			
<i>Equipment/Contents</i>	DRUMMED RESIDUES, DRUMMED OIL, EXCESS EQUIPMENT, SPRINKLER SYSTEM			
<i>Size (WxLxH)</i>	70 x 150 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
R-16	PLANT 8 WEST PAD	74D		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE	WASTE MANAGEMENT		10/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	OPEN STORAGE OF DRUMMED RESIDUES, AND EMPTY DRUMS, BOTH DIRTY & CLEAN			
<i>Equipment/Contents</i>	CONCRETE STORAGE PAD. DRUMMED RESIDUES, DRUM WASHER, SUBSURFACE DRAINAGE PUMP AND FILTER			
<i>Size (WxLxH)</i>	40 x	60 x	N/A	
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
R-19	PLANT 4 PAD	74E		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE	LLW PROGRAM		10/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	TEMPORARY STORAGE OF MOBILE HOPPERS OR UO3 AND DEPLETED UF4			
<i>Equipment/Contents</i>	15,000 FT2 CONCRETE PAD - UNCONTROLLED. T-HOPPERS, J-HOPPERS, PIPE RACK, OFFICE TRAILER, NITROGEN STORAGE TANKS, NITROGEN GENERATOR AND DRUMMED WASTE			
<i>Size (WxLxH)</i>	60 x	120 x	N/A	
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

SSC

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-19	PLANT 7 PAD	74F		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	HOPPER STORAGE	SITE SERVICES		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	STORAGE - USED FOR RECEIVING, SHIPPING AND STORAGE OF UF6 CYLINDERS AND T-HOPPERS			
<i>Equipment/Contents</i>	CONCRETE AREAS WEST & SOUTH OF PLT. 7. EMPTY MOBILE HOPPERS, WASTE, EMPTY UF4 CANS, J-HOPPERS, CYLINDER DOLLY, 3 STORAGE TANKS, AND SCALE (ACCESS TO RAIL AND OVERHEAD 20 TON BRIDGE CRANE ON WEST SIDE)			
<i>Size (WxLxH)</i>	50 x 100 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
R-21	PLANT 5 EAST PAD	74G		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE	WASTE MANAGEMENT		12/31/97
<i>Future</i>	STAGING AND STORAGE	WASTE MANAGEMENT	12/31/97	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	STORED PLANT 5 DRUMMED RESIDUES, REDUCTION POTS, PLANT 5 RESIDUES			
<i>Equipment/Contents</i>	5,000 FT2 OPEN CONCRETE STORAGE AREA. EMPTY DRUMS, EXCESS EQUIPMENT, METAL SKIDS, URANIUM METAL			
<i>Size (WxLxH)</i>	50 x 200 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-20	PLANT 5 SOUTH PAD	74H		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE	LLW PROGRAM	10/31/97	10/31/97
<i>Future</i>	STAGING AND STORAGE	LLW PROGRAM	10/31/97	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	THIS AREA WAS USED FOR TEMPORARY STORAGE OF FEED MATERIALS ENTERING THE SOUTH END OF PLT. 5			
<i>Equipment/Contents</i>	2,000 FT2 OF OPEN CONCRETE DRIVEWAY. DICALITE, SEA/LAND CONTAINERS, STRUCTURAL STEEL, PIPE RACK			
<i>Size (WxLxH)</i>	30 x 60 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
Q-21 & 22	PLANT 6 PADS (E&N)	74J		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	STORAGE	ENVIRONMENTAL MANAGEMENT		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	STORED PLANT 6 PRODUCTS AND RESIDUES			
<i>Equipment/Contents</i>	CONCRETE PAD- EAST, WEST & NORTH SIDES OF PLT. 6. EAST PAD-OVERPACKS, EXCESS EQUIPMENT. WEST PAD-COOLING WATER TANKS IN DIKE. NORTH PAD-TANK.			
<i>Size (WxLxH)</i>	30 x 30 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>	
P-22 & 23	PLANT 9 PAD	74K	
<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i> <i>Future</i>	STORAGE OF WASTE BOXES NONE IDENTIFIED	WASTE MANAGEMENT	12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION K.H. SCHAEFER N/A		
<i>Past Facility Use</i>	STORAGE OF PROCESS RESIDUES, THORIUM & URANIUM CHIPS.		
<i>Equipment/Contents</i>	15,000 FT2 REINFORCED CONCRETE STORAGE PADS. METAL PALLETS, EMPTY DRUMS, PIPE RACK, COOLANT TANK, PALLETS, BASKETS, OVERPACKS, PORTABLE TANKS, FILTRATE TANKS, DUST COLLECTOR		
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	60 x 200 x N/A N/A 1952		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>	
N-21	BUILDING 65 WEST PAD	74L	
<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i> <i>Future</i>	STORAGE OF WASTE BOXES NONE IDENTIFIED	WASTE MANAGEMENT	12/31/97
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION K.H. SCHAEFER N/A		
<i>Past Facility Use</i>	USED TO STORE BALED SCRAP DRUMS, SCRAP METAL, AND URANIUM & THORIUM RESIDUES		
<i>Equipment/Contents</i>	20,000 FT2 CONCRETE STORAGE PAD. EXCESS EQUIPMENT, OVERPACKS, CONCRETE SHIELDING		
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	50 x 250 x N/A N/A 1952		

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-22	BUILDING 64 EAST PAD & RR DOCK	74M		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE	WASTE MANAGEMENT		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	USED FOR LOADING/UNLOADING TRAILERS. (ACCESS TO RR ON EAST SIDE)			
<i>Equipment/Contents</i>	20,000 FT2 CONCRETE PAD. DRUM STORAGE, J-HOPPERS, WOODEN BOXES, BILLET TUBES, EXCESS EQUIP., SCRAP FURNACE POTS, AND UO3 POT BURNERS			
<i>Size (WxLxH)</i>	70 x 300 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
P-19 & 20	BUILDING 12 NORTH PAD	74N		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUMS & EQUIPMENT FROM PLANT 12 MAINTENANCE BUILDING	MAINTENANCE		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	USED BY PLANT STORES FOR STORAGE OF PIPE, DRUMMED OILS, AND NON-RADIOACTIVE MATERIALS FOR ON-SITE USE.			
<i>Equipment/Contents</i>	7,000 FT2 CONCRETE PAD. DIESEL FUEL TANK, PIPE, RETURNABLE DRUMS, SKIDS			
<i>Size (WxLxH)</i>	50 x 150 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
M-22	DECONTAMINATION PAD (SMP)	74P		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	STORAGE FOR CONTAMINATED METAL	CRU-3		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	THE SCRAP METAL IS PRIMARILY CONTAINED ON THIS PAD.			
<i>Equipment/Contents</i>	50,000 FT2 CONTROLLED, CURBED CONCRETE COVERED STORAGE PAD. SCRAP PILE. COVER WILL BE BUILT UNDER RA-17			
<i>Size (WxLxH)</i>	220 x 220 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-16	PLANT 8 OLD METAL DISSOLVER PAD	74Q		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE	LLW PROGRAM		10/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	METAL DISSOLVER			
<i>Equipment/Contents</i>	1,500 FT2 OF ACID BRICKED CONCRETE PAD. COLLECTED WATER (ALL EQUIPMENT REMOVED).			
<i>Size (WxLxH)</i>	45 x 60 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
R-19	PLANT 8 NORTH PAD	74R		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	LLW STORAGE	LLW PROGRAM		10/31/93
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	USED FOR STORAGE OF DRUMMED RESIDUES AND SCRAP METAL.			
<i>Equipment/Contents</i>	5,000 FT2 CONCRETE PAD. 2 NAOH TANKS, 1 NA2C2O4 TANK, TANK PIT, DRUMS OF RESIDUES, PUMP HOUSE AND EFFLUENT TANKS, AND EMPTY DRUMS.			
<i>Size (WxLxH)</i>	60 x 80 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
K-19	BUILDING 63 WEST PAD	74S		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	PIPE RACK STORAGE	SITE SERVICES		12/31/02
<i>Future</i>	STAGING AND STORAGE	CRU-3	12/31/02	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	STORAGE			
<i>Equipment/Contents</i>	2,000 FT2 CONCRETE PAD. PIPE RACK, EXCESS EQUIPMENT, REFRACTORY BRICK			
<i>Size (WxLxH)</i>	90 x 15 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-15	PLANT 1 STORAGE PAD (NORTH OF PLANT 1)	74T		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE AND SCRAP METAL COPPER PILE (P-017)	WASTE MANAGEMENT		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	PRIMARILY OPEN STORAGE OF DRUMS, HOPPERS AND SCRAP PALLETS			
<i>Equipment/Contents</i>	375,000 FT2 CONCRETE STORAGE PAD. DRUMS, HOPPERS AND SCRAP PALLETS			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-15	PILOT PLANT PAD	74U		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE, B-25 BOXES	WASTE MANAGEMENT		12/31/97
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	STORAGE OF UF6 CYLINDERS			
<i>Equipment/Contents</i>	5,000 FT2 CONCRETE PAD (ACCESS TO RAIL SIDING ON PAD), WITH CRANE			
<i>Size (WxLxH)</i>	60 x 150 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-16	LABORATORY PAD	74V		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	DRUM STORAGE, CONST. LAYDOWN LOADING DOCK	LAB.		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	TEMPORARY STORAGE OF DRUMMED LAB. MATERIALS AND WASTES			
<i>Equipment/Contents</i>	1,500 FT2 CONCRETE OPEN STORAGE AND DOCK AREA WEST OF BLDG. 15. DRUMS, CONSTRUCTION EQUIPMENT, SEA/LAND CONTAINERS, LIQUID N2 AND ARGON TANKS			
<i>Size (WxLxH)</i>	40 x 60 x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
P-23	FINISHED PRODUCT WAREHOUSE (4A)	77		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	RCRA STORAGE	WASTE MANAGEMENT	12/31/97	12/31/97
<i>Future</i>	STAGING AND STORAGE	WASTE MANAGEMENT	12/31/97	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	A. ELAM			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	USED FOR A URANIUM METAL STORAGE FACILITY FOR FLAT INGOT PRODUCTS BEFORE SHIPMENT, REJECT PRODUCTS, MATERIAL AWAITING PROCESSING.			
<i>Equipment/Contents</i>	FLAT URANIUM INGOTS, DRUMMED URANIUM METAL			
<i>Size (WxLxH)</i>	120 x 162 x 12			
<i>Stories</i>	1			
<i>Construction Date</i>	1987			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-23	D&D BUILDING	78		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	DECONTAMINATION NONE IDENTIFIED	WASTE MANAGEMENT		12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	DECONTAMINATION - THIS FACILITY IS UNDER CONSTRUCTION			
<i>Equipment/Contents</i>	CONSTRUCTION EQUIPMENT			
<i>Size (WxLxH)</i>	80 x 100 x 21			
<i>Stories</i>	2			
<i>Construction Date</i>	1992			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
R-23	PLANT 6 WAREHOUSE	79		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	RCRA STORAGE STAGING AND STORAGE	WASTE MANAGEMENT WASTE MANAGEMENT	12/31/97	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	HAZARDOUS WASTE STORAGE			
<i>Equipment/Contents</i>	RCRA DRUMS			
<i>Size (WxLxH)</i>	100 x 170 x 15			
<i>Stories</i>	1			
<i>Construction Date</i>	1988			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-21	PLANT 8 WAREHOUSE	80		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	RCRA STORAGE	WASTE MANAGEMENT	12/31/97	12/31/97
<i>Future</i>	STAGING & STORAGE	WASTE MANAGEMENT	12/31/97	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	HAZARDOUS WASTE STORAGE			
<i>Equipment/Contents</i>	RCRA DRUMS			
<i>Size (WxLxH)</i>	60 x 170 x 15			
<i>Stories</i>	1			
<i>Construction Date</i>	1989			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-21	PLANT 9 WAREHOUSE	81		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	RCRA STORAGE	WASTE MANAGEMENT	12/31/97	12/31/97
<i>Future</i>	STAGING AND STORAGE	WASTE MANAGEMENT	12/31/97	12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	J.A. HILL			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	HAZARDOUS WASTE STORAGE			
<i>Equipment/Contents</i>	DRUMS OF HAZARDOUS WASTE			
<i>Size (WxLxH)</i>	80 x 100 x 15			
<i>Stories</i>	1			
<i>Construction Date</i>	1988			

5003

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-23	RECEIVING/INCOMING MATERIAL INSPECTION	82
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current Future</i>	RECEIVING OF INCOMING MATERIALS NONE IDENTIFIED	SITE SERVICES 12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	R.E. MERHLEY	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	RECEIVING, INSPECTION OF NON-RADIOACTIVE SUPPLIES AND EQUIPMENT	
<i>Equipment/Contents</i>	OFFICES, DAILY RECEIPTS	
<i>Size (WxLxH)</i>	100 x 100 x 17	
<i>Stories</i>	1	
<i>Construction Date</i>	1988	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
0-8,9,&10	CLEARWELL LINE	88
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current Future</i>	TRANSFER DECANT WATER NONE IDENTIFIED	SITE SERVICES/UTILITIES 12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	L. PENNINGTON	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	RAINWATER COLLECTION AND TRANSFER	
<i>Equipment/Contents</i>	A PRESSURIZED TRANSFER LINE APPROXIMATELY 2,000 FT. LONG FROM CLEARWELL TO THE BDN SURGE BASIN.	
<i>Size (WxLxH)</i>	N/A x N/A x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1955	

5003

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
V,W,X- 18,19,20,21, 22	PARKING LOTS	89
	<i>Uses</i>	<i>User</i>
<i>Current</i>	PARKING CARS	SITE SERVICES
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	R.E. MERHLEY	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	PARKING LOTS	
<i>Equipment/Contents</i>	2 ASPHALT-PAVED CAR PARKING LOTS, 1 APPROXIMATELY 425x550 FT. (EAST) AND 1 APPROXIMATELY 500x700 FT. (WEST)	
<i>Size (WxLxH)</i>	N/A x N/A x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1952	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
W-25	TRAP RANGE BUILDING	90
	<i>Uses</i>	<i>User</i>
<i>Current</i>	NONE	
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	J. LESLIE	
<i>Condition Code</i>	3	
<i>Past Facility Use</i>	STORAGE BUILDING FOR THE TRAP RANGE	
<i>Equipment/Contents</i>	UNKNOWN	
<i>Size (WxLxH)</i>	15 x 15 x 8	
<i>Stories</i>	1	
<i>Construction Date</i>	1960	

401

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	RAILROAD TRACKS	G-001		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	TRANSPORTATION, RAIL	SITE SERVICES/UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	S. SCHONEGG			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	RAIL SERVICE IS PROVIDED TO THE MAJORITY OF THE PROCESS AREA BY A CONNECTION WITH CSX NORTHWEST OF THE SITE			
<i>Equipment/Contents</i>	APPROX. 3 MILES OF TRACK & ASSOCIATED HARDWARE. TRACK, SWITCHES, CROSSINGS, 1 ENGINE, AND ASSOCIATED HARDWARE			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1953			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	SITE ROADS	G-002		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	TRANSPORTATION, TRUCK	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	ROUTES OF TRANSPORTATION			
<i>Equipment/Contents</i>	5.5 MI. PAVED ROADS. ASPHALT & CONCRETE			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

126

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	STORM SEWER SYSTEM	G-003		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	COLLECT SITE RAINWATER	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	STORM SEWERS			
<i>Equipment/Contents</i>	SUBGRADE PIPING AND PUMPS FOR HANDLING STORM WATER RUNOFF. DRAINAGE LINES, 2 LIFT STATION PUMPS, AND DIVERTER VALVE			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1952			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	SUMPS	G-004		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	RESIDUAL WATER REMOVAL	REMEDIAL SITE OPERATIONS		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS/L. MOODY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	RESIDUAL WATER REMOVAL			
<i>Equipment/Contents</i>	PUMPS & PIPING			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	VARIOUS			

081 7.1

127

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	DIKES	G-005		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	RUN-OFF CONTROL	VARIOUS		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	VARIOUS			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	RUN-OFF CONTROL			
<i>Equipment/Contents</i>	N/A			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	VARIOUS			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	UNDERGROUND UTILITY LINES	G-006		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	IN SERVICE	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	UTILITIES LINES			
<i>Equipment/Contents</i>	UNDERGROUND UTILITIES - UTILITY PIPING, WIRES, CONDUIT, INSULATION AND METERS.			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	VARIOUS			

128

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	UNDERGROUND STORAGE TANKS	G-007		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	STORAGE OF HAZARDOUS MATERIAL	WASTE MANAGEMENT		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	VARIOUS (J. ECKSTEIN)			
<i>Condition Code</i>	3			
<i>Past Facility Use</i>	STORAGE OF GAS, DIESEL FUEL, KEROSENE, ETC.			
<i>Equipment/Contents</i>	TWO TANKS & PIPING			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	VARIOUS			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	ABOVE GROUND STORAGE TANKS	G-008		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	IN SERVICE	VARIOUS		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	VARIOUS			
<i>Condition Code</i>	2			
<i>Past Facility Use</i>	PROCESSING OF VARIOUS MATERIALS AND WATER			
<i>Equipment/Contents</i>	TANKS, PIPING AND PUMP			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	VARIOUS			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
VARIOUS	PROCESS TRAILERS	G-009
	<i>Uses</i>	<i>User</i>
<i>Current</i>	OFFICE SPACE	VARIOUS
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	VARIOUS	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	OFFICE SPACE & STORAGE AREAS	
<i>Equipment/Contents</i>	BASIC OFFICE EQUIPMENT (DESKS, CHAIRS, COMPUTERS, ETC.)	
<i>Size (WxLxH)</i>	N/A x N/A x N/A	
<i>Stories</i>	1	
<i>Construction Date</i>	VARIOUS	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
VARIOUS	NON-PROCESS TRAILERS	G-010
	<i>Uses</i>	<i>User</i>
<i>Current</i>	STORAGE AND OFFICE SPACE	VARIOUS
<i>Future</i>	NONE IDENTIFIED	
	<i>Start Date</i>	<i>End Date</i>
		12/31/17
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>	VARIOUS	
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	OFFICE SPACE	
<i>Equipment/Contents</i>	BASIC OFFICE EQUIPMENT (DESKS, COMPUTERS, ETC.)	
<i>Size (WxLxH)</i>	N/A x N/A x N/A	
<i>Stories</i>	1	
<i>Construction Date</i>	VARIOUS	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	PIPE BRIDGES & ABOVE GROUND UTILITIES	G-011		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	SUPPLIES UTILITIES TO SITE FACILITIES.	UTILITIES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	STRUCTURAL STEEL SUPPORTS ARE USED EXTENSIVELY THROUGHOUT THE FACILITY FOR UTILITY LINES, AND PROCESS PIPING.			
<i>Equipment/Contents</i>	STRUCTURAL STEEL PIPE BRIDGES THROUGHOUT PROCESS AREA. STEEL SUPPORTS AND TRUSSES.			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	VARIOUS			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	DRUMS (NON-RCRA)	G-012		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	NONE	VARIOUS		12/31/96
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	VARIOUS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>				
<i>Equipment/Contents</i>	APPROXIMATELY 60000 DRUMS			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	N/A			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
VARIOUS	RCRA DRUMS	G-013
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED	VARIOUS	12/31/96
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	VARIOUS	
<i>Condition Code</i>	N/A	
<i>Past Facility Use</i>		
<i>Equipment/Contents</i> APPROXIMATELY 12000 DRUMS		
<i>Size (WxLxH)</i>	N/A x N/A x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	N/A	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
VARIOUS	INVENTORY	G-014
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> NONE <i>Future</i> NONE IDENTIFIED		12/31/96
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	VARIOUS	
<i>Condition Code</i>	N/A	
<i>Past Facility Use</i> SITE PROCESSING OF ENRICHED MATERIALS		
<i>Equipment/Contents</i> 23000 CONTAINERS OF INVENTORY		
<i>Size (WxLxH)</i>	N/A x N/A x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	N/A	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
VARIOUS	MOBILE CONTAINERS (SEA-LAND)	G-015		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	STORAGE & DISPOSAL	VARIOUS		12/31/17
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	VARIOUS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	STORAGE AND DISPOSAL			
<i>Equipment/Contents</i>	100 ON SITE			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	N/A			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
S-16	DIRT PILE SOUTH OF PLANT 8 (WEST)	P-002		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	SOLID WASTE DESTINED FOR CSF		03/01/93	01/01/94
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	N/A			
<i>Equipment/Contents</i>	307 CUBIC YARDS OF SOIL, CONCRETE, MASONRY, <35 PCI/GM AND 35-100 PCI/GM.			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	N/A			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
S-16	DIRT PILE SOUTH OF BUILDING 80	P-005
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> DESTINED FOR CSF		01/01/94
<i>Future</i>		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	B. PERKINS	
<i>Condition Code</i>	N/A	
<i>Past Facility Use</i>	327 CUBIC YARDS OF SOIL, CHARACTERIZATION PENDING	
<i>Equipment/Contents</i>	N/A	
<i>Size (WxLxH)</i>	15 x 84 x 7	
<i>Stories</i>	N/A	
<i>Construction Date</i>	N/A	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
M-17	COPPER METAL SCRAP PILE	P-017
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> SCRAP COPPER	N/A	12/31/94
<i>Future</i>		
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL	
<i>Facility Owner</i>	B. PERKINS	
<i>Condition Code</i>	N/A	
<i>Past Facility Use</i>	N/A	
<i>Equipment/Contents</i>	SITE GENERATED COPPER SCRAP	
<i>Size (WxLxH)</i>	N/A x N/A x N/A	
<i>Stories</i>	N/A	
<i>Construction Date</i>	N/A	

281
101

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-20	COAL PILE	P-018		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	COAL STORAGE NONE IDENTIFIED	SITE SERVICES		12/31/95
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	COAL STORAGE			
<i>Equipment/Contents</i>	COAL PILE			
<i>Size (WxLxH)</i>	N/A x N/A x N/A			
<i>Stories</i>	N/A			
<i>Construction Date</i>	N/A			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
L-17	THIRD STREET DIRT PILE	P-019		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	DESTINED FOR CSF	N/A		01/01/94
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	PAD UPGRADE PROJECT			
<i>Equipment/Contents</i>	75200 CUBIC YARDS OF SOIL, 35-100 PCI/GM			
<i>Size (WxLxH)</i>	24 x 423 x 20			
<i>Stories</i>	N/A			
<i>Construction Date</i>	N/A			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U-16	DIRT PILE SOUTHWEST CORNER OF LAB	P-021		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	DESTINED FOR CSF	N/A		01/01/94
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	J. APPLE			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	N/A			
<i>Equipment/Contents</i>	142 CUBIC YARDS OF SOIL, CHARACTERIZATION PENDING, <35 PCI/GM			
<i>Size (WxLxH)</i>	15 x	51 x	5	
<i>Stories</i>	N/A			
<i>Construction Date</i>	N/A			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-15	DIRT PILE NORTH OF BUILDING 67	P-022		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	DESTINED FOR CSF	N/A		01/01/94
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	CANDIDATE FOR IMMEDIATE REMOVAL			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	N/A			
<i>Equipment/Contents</i>	3 CUBIC YARDS OF SOIL, CHARACTERIZATION PENDING			
<i>Size (WxLxH)</i>	8 x	9 x	3	
<i>Stories</i>	N/A			
<i>Construction Date</i>	N/A			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
L-21	SCRAP METAL PILE	P-023
<i>Uses</i>		<i>User</i>
<i>Current</i> <i>Future</i>	DESTINED FOR CSF REMOTE	METAL DEPT. D&D
		12/31/93
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 CANDIDATE FOR IMMEDIATE REMOVAL K.H. SCHAEFER N/A	
<i>Past Facility Use</i>	N/A	
<i>Equipment/Contents</i>	STEEL	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	75 x 150 x 30 N/A N/A	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
	NW RUBBLE PILES	P-024
<i>Uses</i>		<i>User</i>
<i>Current</i> <i>Future</i>	DESTINED FOR DISPOSAL	N/A
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 CANDIDATE FOR IMMEDIATE REMOVAL B. PERKINS N/A	
<i>Past Facility Use</i>	N/A	
<i>Equipment/Contents</i>	N/A	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	N/A x N/A x N/A N/A N/A	

Number

Facility Name	Facility Number
OUTSIDE EQUIPMENT STORAGE AREA	P-025

Current	Uses	User	Start Date	End Date
Future	SCRAP EQUIP. & VEHICLE STORAGE NONE IDENTIFIED	WASTE MANAGEMENT		12/31/17

Category NOT NEEDED
Phase 2
Status CANDIDATE FOR IMMEDIATE REMOVAL
Facility Owner K.H. SCHAEFER
Condition Code N/A

Past Facility Use STORAGE OF CONTAMINATED PROCESS EQUIPMENT & VEHICLES

Equipment/Contents VARIOUS TYPES OF EQUIPMENT & VEHICLES

Size (WxLxH) N/A x N/A x N/A
Stories N/A
Construction Date N/A

Coordinate	Facility Name	Facility Number
N-16&17	TENSION SUPPORT STRUCTURE #1	TS-1

Current	Uses	User	Start Date	End Date
Future	PROVIDE COVER FOR DRUMMED MATERIAL NONE IDENTIFIED	WASTE MANAGEMENT		12/31/17

Category NOT NEEDED
Phase 2
Status SUPPORTING TEMPORARY FUNCTION
Facility Owner B. PERKINS
Condition Code 1

Past Facility Use DRUM STORAGE

Equipment/Contents DRUMS

Size (WxLxH) 90 x 300 x N/A
Stories 1
Construction Date 1989

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-17	TENSION SUPPORT STRUCTURE #2	TS-2		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	COVER FOR DRUMMED MATERIAL	WASTE MANAGEMENT		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	DRUM STORAGE			
<i>Equipment/Contents</i>	DRUMS			
<i>Size (WxLxH)</i>	90 x 300 x N/A			
<i>Stories</i>	1			
<i>Construction Date</i>	1989			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
N-17	TENSION SUPPORT STRUCTURE #3	TS-3		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	COVER FOR DRUMMED MATERIAL	WASTE MANAGEMENT		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	B. PERKINS			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	COVER FOR DRUMMED MATERIAL			
<i>Equipment/Contents</i>	DRUMS			
<i>Size (WxLxH)</i>	60 x 90 x N/A			
<i>Stories</i>	1			
<i>Construction Date</i>	1989			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
P-17	TENSION SUPPORT STRUCTURE #4	TS-4
	<i>Uses</i>	<i>User</i>
<i>Current</i>	VEHICLE LOADING	TRANSPORTATION
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>		
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	N/A	
<i>Equipment/Contents</i>	N/A	
<i>Size (WxLxH)</i>	85 x 100 x 20	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1992	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
N-15	TENSION SUPPORT STRUCTURE #5	TS-5
	<i>Uses</i>	<i>User</i>
<i>Current</i>	DRUM STORAGE	WASTE MANAGEMENT
<i>Future</i>	NONE IDENTIFIED	
		<i>Start Date</i>
		<i>End Date</i>
<i>Category</i>	NOT NEEDED	
<i>Phase</i>	2	
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION	
<i>Facility Owner</i>		
<i>Condition Code</i>	1	
<i>Past Facility Use</i>	N/A	
<i>Equipment/Contents</i>	DRUMS	
<i>Size (WxLxH)</i>	90 x 410 x 20	
<i>Stories</i>	N/A	
<i>Construction Date</i>	1992	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
N-15	TENSION SUPPORT STRUCTURE #6	TS-6
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	DRUM STORAGE NONE IDENTIFIED	WASTE MANAGEMENT 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NOT NEEDED 2 SUPPORTING TEMPORARY FUNCTION 1	
<i>Past Facility Use</i>	N/A	
<i>Equipment/Contents</i>	N/A	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	90 x 410 x 20 N/A 1992	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>
Y-16, VARIOUS	SOUTH PLUME GROUNDWATER RECOVERY SYSTEM	N8
<i>Uses</i>	<i>User</i>	<i>Start Date</i> <i>End Date</i>
<i>Current</i> <i>Future</i>	SOUTH GROUNDWATER CONTAMINATION PLUME, RA-1B	CRU-5 08/01/92 12/31/17
<i>Category</i> <i>Phase</i> <i>Status</i> <i>Facility Owner</i> <i>Condition Code</i>	NEW N/A SUPPORTING TEMPORARY FUNCTION B. SKALKA N/A	
<i>Past Facility Use</i>	NONE	
<i>Equipment/Contents</i>	4-785 GPM PUMPS IN PUMPHOUSE, 1-50000 GALLON (MIN) SURGE TANK, UNDER CONSTRUCTION, PIPELINE FROM RECOVERY WELLS TO MIAMI RIVER	
<i>Size (WxLxH)</i> <i>Stories</i> <i>Construction Date</i>	N/A x N/A x N/A N/A 1993 (UNDER CONST.)	

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
U&V-14	AWWT, PHASE I&II	N9		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	TREATMENT OF PROCESS WASTEWATER AND STORMWATER	CRU-5	02/01/96	12/31/17
<i>Future</i>				
<i>Category</i>	NEW			
<i>Phase</i>	N/A			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>				
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	PLANT BUILDING 51 PLUS AN AREA 200'x 200' TO THE SOUTH			
<i>Equipment/Contents</i>	UNDER CONSTRUCTION, FY92			
<i>Size (WxLxH)</i>	165 x 244 x 30			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1993			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
X-18	IAWWT - SWRB	N10		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	TREAT SITE STORMWATER AND WASTEWATER	CRU-5		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	N/A			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	L. PENNINGTON			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	NONE			
<i>Equipment/Contents</i>	CONSTRUCTION TRAILERS(2) AND 1 SMALL PRE-CHEMICAL BUILDING (APPROX 15' x 30') WATER TREATMENT/FILTRATION EQUIPMENT			
<i>Size (WxLxH)</i>	15 x 30 x 15			
<i>Stories</i>	1			
<i>Construction Date</i>	1992			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
L-15&16	SOIL AND RUBBLE PILE COVER	N28		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OU-3 REMEDIATION	CRU-3	10/01/93	01/30/95
<i>Future</i>				
<i>Category</i>	NEW			
<i>Phase</i>	N/A			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	NEW			
<i>Equipment/Contents</i>	THIS WILL BE A COVERED STORAGE STRUCTURE CONSTRUCTED UNDER RA-17. CONTAINS BULK STOCKPILED SOIL AND DEBRIS, STORED UNTIL REMEDIATION CAPACITY EXISTS.			
<i>Size (WxLxH)</i>	100 x 400 x 30			
<i>Stories</i>	1			
<i>Construction Date</i>	SCHEDULED CFC - 5/93			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
J-23	CENTRAL STORAGE FACILITY (CSF)	N29		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	COVERED STORAGE	CRU-3		12/31/17
<i>Future</i>				
<i>Category</i>	NEW			
<i>Phase</i>	N/A			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	N/A			
<i>Past Facility Use</i>	NEW			
<i>Equipment/Contents</i>	THIS WILL BE A COVERED STORAGE STRUCTURE CONSTRUCTED UNDER RA-17. CONTAINS CURBED CONCRETE STORAGE PAD WITH TEMPORARY STRUCTURE FOR COVER AND A MODULAR OFFICE, NO EQUIPMENT. SECONDARY CONTAINMENT TO SUPPORT FUTURE REMD.			
<i>Size (WxLxH)</i>	100 x 400 x 30			
<i>Stories</i>	1			
<i>Construction Date</i>	SCHEDULED CFC - 5/93			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
T-14	NEW BOILER PLANT	N30		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	SITE SUPPORT, PROVIDE STEAM FOR THE SITE	UTILITIES	06/30/94	12/31/19
<i>Category</i>	NEW			
<i>Phase</i>	N/A			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	NEW			
<i>Equipment/Contents</i>	(2ND BLDG. 100 X 30 X 25) 3 BOILERS, 1 GENERATOR, AIR COMPRESSOR, INSTRUMENT AIR, DEAIRATOR, CHEM. TREATMENT, ELECTRICAL SUBSTATION			
<i>Size (WxLxH)</i>	80 x 150 x 25			
<i>Stories</i>	N/A			
<i>Construction Date</i>	1993			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
O-23	DECONTAMINATION FACILITY PAD (DFP)	N50		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current Future</i>	STORE MATERIALS FOR DECONTAMINATION	CRU-3	10/01/93	12/31/17
<i>Category</i>	NEW			
<i>Phase</i>	N/A			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	NONE			
<i>Equipment/Contents</i>	SHORT TERM STORAGE OF RECOVERABLE MATERIALS AND EQUIPMENT FOR DECONTAMINATION IN THE DECONTAMINATION FACILITY. PAD IS LOCATED SOUTH OF THE NEW DECON FACILITY (BLDG 78).			
<i>Size (WxLxH)</i>	100 x 100 x 30			
<i>Stories</i>				
<i>Construction Date</i>	1993			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
L-21	SCRAP METAL PAD COVER (SMPC)	N51		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	COVERED STORAGE	CRU-3	10/01/93	12/31/17
<i>Future</i>				
<i>Category</i>	NEW			
<i>Phase</i>	N/A			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	K.H. SCHAEFER			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	STORE CONTAMINATED SOIL			
<i>Equipment/Contents</i>	COVERED STORAGE FOR RADIOACTIVELY CONTAMINATED DEBRIS ON EXISTING SMP UNTIL DECON OR OFF-SITE SHIPMENT.			
<i>Size (WxLxH)</i>	100 x 160 x 30			
<i>Stories</i>				
<i>Construction Date</i>	SCHEDULED CFC - 5/93			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
V-17	TRAILER COMPLEX	T-76		
	<i>Uses</i>	<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OFFICE SPACE	SITE SERVICES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	N/A			
<i>Equipment/Contents</i>	OFFICE EQUIPMENT			
<i>Size (WxLxH)</i>	66 x 137 x 12			
<i>Stories</i>	1			
<i>Construction Date</i>	1992			

<i>Coordinate</i>		<i>Facility Name</i>	<i>Facility Number</i>	
V-17		TRAILER COMPLEX	T-77	
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OFFICE SPACE	SITE SERVICES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	N/A			
<i>Equipment/Contents</i>	OFFICE EQUIPMENT			
<i>Size (WxLxH)</i>	66 x 137 x 12			
<i>Stories</i>	1			
<i>Construction Date</i>	1992			

<i>Coordinate</i>		<i>Facility Name</i>	<i>Facility Number</i>	
V-17		TRAILER COMPLEX	T-80	
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OFFICE SPACE	SITE SERVICES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	N/A			
<i>Equipment/Contents</i>	OFFICE EQUIPMENT (SOUTHWEST)			
<i>Size (WxLxH)</i>	66 x 137 x 12			
<i>Stories</i>	1			
<i>Construction Date</i>	1992			

<i>Coordinate</i>	<i>Facility Name</i>	<i>Facility Number</i>		
V-17	TRAILER COMPLEX	T-81		
<i>Uses</i>		<i>User</i>	<i>Start Date</i>	<i>End Date</i>
<i>Current</i>	OFFICE SPACE	SITE SERVICES		12/31/17
<i>Future</i>	NONE IDENTIFIED			
<i>Category</i>	NOT NEEDED			
<i>Phase</i>	2			
<i>Status</i>	SUPPORTING TEMPORARY FUNCTION			
<i>Facility Owner</i>	R.E. MERHLEY			
<i>Condition Code</i>	1			
<i>Past Facility Use</i>	N/A			
<i>Equipment/Contents</i>	OFFICE EQUIPMENT (SOUTHEAST)			
<i>Size (WxLxH)</i>	66 x 137 x 12			
<i>Stories</i>	1			
<i>Construction Date</i>	1992			

Appendix B

FACILITY INDEX
(sorted alphabetically by facility name)

Appendix B

Facility Index

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
54A	6 TO 4 REDUCTION FAC. #1	T-15	A-77	NOT NEEDED - 2
51	6 TO 4 REDUCTION FACILITY #2	U-14	A-75	NOT NEEDED - 2
G-008	ABOVE GROUND STORAGE TANKS	VARIOUS	A-107	NOT NEEDED - 2
14A	ADMINISTRATION BUILDING	U-19	A-34	NOT NEEDED - 2
N9	AWWT, PHASE I&II	U&V-14	A-120	NEW - N/A
18H	BDN EFFLUENT TREATMENT FACILITY	S-16	A-42	NOT NEEDED - 2
18A	BDN SURGE LAGOON	P-11	A-39	NOT NEEDED - 2
18D	BIODENITRIFICATION TOWERS	R-15	A-41	NOT NEEDED - 2
10A	BOILER PLANT	N-19	A-27	NOT NEEDED - 2
10B	BOILER PLANT MAINTENANCE BUILDING	N-18	A-28	NOT NEEDED - 2
74N	BUILDING 12 NORTH PAD	P-19 & 20	A-95	NOT NEEDED - 2
14B	BUILDING 14 EOC GENERATOR SET	U-18	A-35	NOT NEEDED - 2
32B	BUILDING 32 COVERED LOADING DOCK	N-22	A-66	NOT NEEDED - 1
74S	BUILDING 63 WEST PAD	K-19	A-97	NOT NEEDED - 2
74M	BUILDING 64 EAST PAD & RR DOCK	N-22	A-95	NOT NEEDED - 2
74L	BUILDING 65 WEST PAD	N-21	A-94	NOT NEEDED - 2
2C	BULK LIME HANDLING BUILDING	Q-16	A-3	NOT NEEDED - 2
N29	CENTRAL STORAGE FACILITY (CSF)	J-23	A-121	NEW - N/A
30A	CHEMICAL WAREHOUSE	P-17	A-63	NOT NEEDED - 2
25A	CHLORINATION BUILDING	S-27	A-55	NOT NEEDED - 2
88	CLEARWELL LINE	O-8,9,&10	A-102	NOT NEEDED - 2
18G	CLEARWELL PUMP HOUSE	O-8	A-42	NOT NEEDED - 2
P-018	COAL PILE	N-20	A-113	NOT NEEDED - 2

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
18C	COAL PILE RUNOFF BASIN	O-19	A-40	NOT NEEDED - 2
2F	COLD SIDE ORE CONVEYOR	Q-16	A-5	NOT NEEDED - 2
3J	COMBINED RAFFINATE TANKS	R-16	A-10	NOT NEEDED - 2
73E	CONFINED SPACE BURN TANK	H-18	A-89	NOT NEEDED - 1
10D	CONTAMINATED OIL/GRAPHITE BURN PAD	M-20	A-29	NOT NEEDED - 1
2H	CONVEYOR TUNNEL (FROM PLT. 1)	P-16	A-6	NOT NEEDED - 2
20C	COOLING TOWERS	O-19	A-48	NOT NEEDED - 2
P-017	COPPER METAL SCRAP PILE	M-17	A-112	NOT NEEDED - 2
56A	CP STORAGE WAREHOUSE	M-17	A-79	NOT NEEDED - 2
38B	CYLINDER FILLING STATION	N-20	A-69	NOT NEEDED - 2
12B	CYLINDER STORAGE BUILDING	O-20	A-31	NOT NEEDED - 2
78	D&D BUILDING	N-23	A-100	NOT NEEDED - 2
69	DECONTAMINATION BUILDING	M-22	A-85	NOT NEEDED - 1
N50	DECONTAMINATION FACILITY PAD (DFP)	O-23	A-122	NEW - N/A
74P	DECONTAMINATION PAD (SMP)	M-22	A-96	NOT NEEDED - 2
25E	DIGESTER AND CONTROL BUILDING	T-28	A-57	NOT NEEDED - 2
G-005	DIKES	VARIOUS	A-106	NOT NEEDED - 2
P-022	DIRT PILE NORTH OF BUILDING 67	O-15	A-114	NOT NEEDED - 2
P-005	DIRT PILE SOUTH OF BUILDING 80	S-16	A-112	NOT NEEDED - 2
P-002	DIRT PILE SOUTH OF PLANT 8 (WEST)	S-16	A-111	NOT NEEDED - 2
P-021	DIRT PILE SOUTHWEST CORNER OF LAB	U-16	A-114	NOT NEEDED - 2
8E	DRUM CONVEYOR SHELTER	S-16	A-23	NOT NEEDED - 2
66	DRUM RECONDITIONING BUILDING	O-16	A-84	NOT NEEDED - 2
72	DRUM STORAGE BUILDING	P-16	A-86	NOT NEEDED - 1
30B	DRUM STORAGE WAREHOUSE	P-16	A-63	NOT NEEDED - 2
G-012	DRUMS (NON-RCRA)	VARIOUS	A-109	NOT NEEDED - 2
16C	ELECTRICAL PANELS & TRANSFORMER	U-21	A-37	NOT NEEDED - 2

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
3L	ELECTRICAL POWER CENTER BUILDING	R-17	A-11	NOT NEEDED - 2
16B	ELECTRICAL SUBSTATION	U-20	A-36	NOT NEEDED - 2
20D	ELEVATED POTABLE STORAGE TANK	S-23	A-49	NOT NEEDED - 2
26B	ELEVATED WATER STORAGE TANK	Q-15	A-60	NOT NEEDED - 2
31A	ENGINE HOUSE/GARAGE	T-21	A-64	NOT NEEDED - 2
77	FINISHED PRODUCT WAREHOUSE (4A)	P-23	A-99	NOT NEEDED - 2
73A	FIRE BRIGADE TRAINING CENTER BLDG.	H-18	A-87	NOT NEEDED - 1
73D	FIRE TRAINING BURN TROUGH	H-19	A-88	NOT NEEDED - 1
73B	FIRE TRAINING POND	H-19	A-87	NOT NEEDED - 1
73C	FIRE TRAINING TANK	H-19	A-88	NOT NEEDED - 1
22A	GAS METER BUILDING	Q-23	A-51	NOT NEEDED - 2
71	GENERAL IN-PROCESS WAREHOUSE	O-17	A-86	NOT NEEDED - 2
18B	GENERAL SUMP	R-17	A-40	NOT NEEDED - 2
2B	GENERAL/REFINERY SUMP CTRL BUILDING	R-17	A-3	NOT NEEDED - 2
4A	GREEN SALT PLANT	Q-19	A-12	NOT NEEDED - 1
28D	GUARD POST WEST END OF 2ND STREET	P-15	A-62	NOT NEEDED - 2
28C	GUARD POST, SOUTH END OF "D" STREET	U-21	A-62	NOT NEEDED - 2
3F	HARSHAW SYSTEM	R-16	A-9	NOT NEEDED - 1
53A	HEALTH & SAFETY BUILDING	T-20	A-76	NOT NEEDED - 2
46	HEAVY EQUIPMENT BUILDING	T-22	A-75	NOT NEEDED - 2
18M	HIGH NITRATE STORAGE TANK (BDN)	R-13	A-44	NOT NEEDED - 2
18L	HIGH NITRATE TANK (BDN)	Q-13	A-44	NOT NEEDED - 1
3E	HOT RAFFINATE BUILDING	R-16	A-8	NOT NEEDED - 2
2G	HOT SIDE ORE CONVEYOR	Q-16	A-5	NOT NEEDED - 2
28B	HUMAN RESOURCES BUILDING	U-20	A-61	NOT NEEDED - 2
N10	IAWWT - SWRB	X-18	A-120	NOT NEEDED - N/A

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
53B	IN-VIVO BUILDING	U-20	A-76	NOT NEEDED - 2
39A	INCINERATOR BUILDING	R-16	A-70	NOT NEEDED - 1
39C	INCINERATOR SPRINKLER RISER HOUSE	R-16	A-71	NOT NEEDED - 2
G-014	INVENTORY	VARIOUS	A-110	NOT NEEDED - 2
34A	K-65 STORAGE TANK NORTH (SILO 2)	R-9	A-66	NOT NEEDED - 2
34B	K-65 STORAGE TANK SOUTH (SILO 1)	R-9	A-67	NOT NEEDED - 2
63	KC-2 WAREHOUSE	K-19	A-82	NOT NEEDED - 2
15	LABORATORY	T-17	A-35	NOT NEEDED - 2
74V	LABORATORY PAD	T-16	A-99	NOT NEEDED - 2
18K	LOW NITRATE TANK (BDN)	P-13	A-43	NOT NEEDED - 1
12C	LUMBER STORAGE BUILDING	O-20	A-31	NOT NEEDED - 2
25B	M.H. #175/EFF. LINE/SAMPLING BUILDING	T-27	A-56	NOT NEEDED - 2
32A	MAGNESIUM STORAGE BUILDING	N-22	A-65	NOT NEEDED - 1
16A	MAIN ELECTRICAL STATION	U-20	A-36	NOT NEEDED - 2
26C	MAIN ELECTRICAL STRAINER HOUSE	T-22	A-60	NOT NEEDED - 2
16D	MAIN ELECTRICAL SWITCH HOUSE	T-22	A-37	NOT NEEDED - 2
16E	MAIN ELECTRICAL TRANSFORMERS	T-22	A-38	NOT NEEDED - 2
12A	MAIN MAINTENANCE BUILDING	P-20	A-30	NOT NEEDED - 2
19A	MAIN TANK FARM	P-19	A-45	NOT NEEDED - 2
3A	MAINTENANCE BUILDING	R-17	A-6	NOT NEEDED - 2
12D	MAINTENANCE WAREHOUSE	O-19	A-32	NEW - N/A
2D	METAL DISSOLVER BUILDING	Q-16	A-4	NOT NEEDED - 2
35A	METAL OXIDE STORAGE TANK NORTH (SILO 4)	P-9	A-67	NOT NEEDED - 2
35B	METAL OXIDE STORAGE TANK SOUTH (SILO 3)	Q-9	A-68	NOT NEEDED - 2
6A	METALS FABRICATION PLANT	Q,R,S-21& 22	A-17	NOT NEEDED - 2
5A	METALS PRODUCTION PLANT	Q,R,S-20	A-13	NOT NEEDED - 2

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
23	METEOROLOGICAL TOWER	Y-15	A-54	NOT NEEDED - 2
18J	METHANOL TANK (BDN)	Q-12	A-43	NOT NEEDED - 2
G-015	MOBILE CONTAINERS (SEA-LAND)	VARIOUS	A-111	NOT NEEDED - 2
3C	NAR CONTROL HOUSE	R-17	A-7	NOT NEEDED - 2
3D	NAR TOWERS	R-17	A-8	NOT NEEDED - 2
N30	NEW BOILER PLANT	T-14	A-122	NEW - N/A
2E	NFS STORAGE & PUMP HOUSE	P-16	A-4	NOT NEEDED - 2
G-010	NON-PROCESS TRAILERS	VARIOUS	A-108	NOT NEEDED - 2
P-024	NW RUBBLE PILES		A-115	NOT NEEDED - 2
3K	OLD COOLING WATER TOWER	R-16	A-11	NOT NEEDED - 2
19D	OLD NORTH TANK FARM	R-19	A-47	NOT NEEDED - 2
30C	OLD TEN TON SCALE	O-18	A-64	NOT NEEDED - 2
31B	OLD TRUCK SCALE PLATFORM	T-21	A-65	NOT NEEDED - 2
2A	ORE REFINERY PLANT	Q-17	A-2	NOT NEEDED - 2
P-025	OUTSIDE EQUIPMENT STORAGE AREA	L-21 & 22	A-116	NOT NEEDED - 2
3B	OZONE BUILDING	R-17	A-7	NOT NEEDED - 2
89	PARKING LOTS	V,W,X-18, 19,20,21,2 2	A-103	NOT NEEDED - 2
19B	PILOT PLANT AMMONIA TANK FARM	T-15	A-46	NOT NEEDED - 2
37	PILOT PLANT ANNEX	T-16	A-68	NOT NEEDED - 2
54C	PILOT PLANT DISSOCIATOR SHELTER	T-15	A-78	NOT NEEDED - 2
13B	PILOT PLANT MAINTENANCE BUILDING	T-15	A-33	NOT NEEDED - 1
74U	PILOT PLANT PAD	U-15	A-98	NOT NEEDED - 2
54B	PILOT PLANT SHELTER	T-16	A-77	NOT NEEDED - 2
68	PILOT PLANT WAREHOUSE	U-15	A-85	NOT NEEDED - 1
13A	PILOT PLANT, WET SIDE	T-15	A-32	NOT NEEDED - 2
G-011	PIPE BRIDGES & ABOVE GROUND UTILITIES	VARIOUS	A-109	NOT NEEDED - 2

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
1C	PLANT 1 ORE SILOS	P-16	A-2	NOT NEEDED - 1
74T	PLANT 1 STORAGE PAD (NORTH OF PLANT 1)	O-15	A-98	NOT NEEDED - 2
1B	PLANT 1 STORAGE SHELTER	O-16	A-1	NOT NEEDED - 2
67	PLANT 1 THORIUM WAREHOUSE	P-15	A-84	NOT NEEDED - 1
74A	PLANT 2 EAST PAD	Q-18	A-89	NOT NEEDED - 2
74B	PLANT 2 WEST PAD	Q-16	A-90	NOT NEEDED - 2
4C	PLANT 4 MAINTENANCE BUILDING	R-19	A-13	NOT NEEDED - 1
74E	PLANT 4 PAD	R-19	A-91	NOT NEEDED - 2
4B	PLANT 4 WAREHOUSE	S-19	A-12	NOT NEEDED - 2
5F	PLANT 5 COVERED STORAGE PAD	Q-20	A-16	NOT NEEDED - 2
74G	PLANT 5 EAST PAD	R-21	A-92	NOT NEEDED - 2
5C	PLANT 5 ELECTRICAL SUBSTATION	R-20	A-14	NOT NEEDED - 2
5E	PLANT 5 FILTER BUILDING	R-20	A-15	NOT NEEDED - 2
5B	PLANT 5 INGOT PICKLING	Q-20	A-14	NOT NEEDED - 2
5G	PLANT 5 INGOT STORAGE SHELTER	Q-21	A-16	NOT NEEDED - 2
74H	PLANT 5 SOUTH PAD	S-20	A-93	NOT NEEDED - 2
65	PLANT 5 WAREHOUSE (OLD)	N-21	A-83	NOT NEEDED - 1
6B	PLANT 6 COVERED STORAGE AREA	S-22	A-17	NOT NEEDED - 2
6D	PLANT 6 ELECTROSTATIC PRECIP., CENTRAL	S-22	A-18	NOT NEEDED - 2
6E	PLANT 6 ELECTROSTATIC PRECIP., NORTH	R-22	A-19	NOT NEEDED - 2
6C	PLANT 6 ELECTROSTATIC PRECIP., SOUTH	S-22	A-18	NOT NEEDED - 2
74J	PLANT 6 PADS (E&N)	Q-21 & 22	A-93	NOT NEEDED - 2
6F	PLANT 6 SALT OIL HEAT TREAT BUILDING	S-22	A-19	NOT NEEDED - 2
6G	PLANT 6 SUMP BUILDING	Q-21	A-20	NOT NEEDED - 2
79	PLANT 6 WAREHOUSE	R-23	A-100	NOT NEEDED - 2
7A	PLANT 7	S-19	A-20	NOT NEEDED - 1
7B	PLANT 7 OVERHEAD CRANE	S-18	A-21	NOT NEEDED - 2

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
74F	PLANT 7 PAD	S-19	A-92	NOT NEEDED - 2
74C	PLANT 8 EAST PAD	S-17	A-90	NOT NEEDED - 2
8B	PLANT 8 MAINTENANCE BUILDING	S-16	A-22	NOT NEEDED - 2
74R	PLANT 8 NORTH PAD	R-19	A-97	NOT NEEDED - 2
8F	PLANT 8 OLD DRUM WASHER	S-16	A-24	NOT NEEDED - 2
74Q	PLANT 8 OLD METAL DISSOLVER PAD	S-16	A-96	NOT NEEDED - 2
8D	PLANT 8 RAILROAD FILTER BUILDING	S-18	A-23	NOT NEEDED - 2
80	PLANT 8 WAREHOUSE	O-21	A-101	NOT NEEDED - 2
74D	PLANT 8 WEST PAD	R-16	A-91	NOT NEEDED - 2
9E	PLANT 9 CYLINDER SHED	P-21	A-26	NOT NEEDED - 2
9C	PLANT 9 DUST COLLECTOR	P-21	A-25	NOT NEEDED - 2
9F	PLANT 9 ELECTROSTATIC PRECIPITATOR	P-22	A-27	NOT NEEDED - 2
74K	PLANT 9 PAD	P-22 & 23	A-94	NOT NEEDED - 2
9D	PLANT 9 SUBSTATION	P-21	A-26	NOT NEEDED - 2
9B	PLANT 9 SUMP TREATMENT FACILITY	P-21	A-25	NOT NEEDED - 2
81	PLANT 9 WAREHOUSE	O-21	A-101	NOT NEEDED - 2
1A	PREPARATION PLANT	P-16	A-1	NOT NEEDED - 2
25G	PRIMARY SETTLING BASINS	T-28	A-58	NOT NEEDED - 2
G-009	PROCESS TRAILERS	VARIOUS	A-108	NOT NEEDED - 2
20H	PROCESS WATER STORAGE TANK	N-19	A-51	NOT NEEDED - 2
38A	PROPANE STORAGE	N-20	A-69	NOT NEEDED - 2
26A	PUMP HOUSE, HP FIRE PROTECTION	R-15	A-59	NOT NEEDED - 2
20A	PUMP STATION POWER CENTER	O-19	A-47	NOT NEEDED - 2
60	QUONSET HUT #1	K-17	A-81	NOT NEEDED - 2
61	QUONSET HUT #2	K-17	A-81	NOT NEEDED - 2
62	QUONSET HUT #3	K-16	A-82	NOT NEEDED - 2
24B	RAILROAD ENGINE HOUSE	O-20	A-55	NOT NEEDED - 2

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
24A	RAILROAD SCALE HOUSE	K-16	A-54	NOT NEEDED - 2
G-001	RAILROAD TRACKS	VARIOUS	A-104	NOT NEEDED - 2
G-013	RCRA DRUMS	VARIOUS	A-110	NOT NEEDED - 2
82	RECEIVING/INCOMING MATERIAL INSPECTION	S-23	A-102	NOT NEEDED - 2
8A	RECOVERY PLANT	S-17	A-21	NOT NEEDED - 2
3H	REFINERY SUMP	R-18	A-10	NOT NEEDED - 2
3G	REFRIGERATION BUILDING	R-16	A-9	NOT NEEDED - 1
8C	ROTARY KILN/DRUM RECONDITIONING (NEW)	S-17	A-22	NOT NEEDED - 2
45A	RUST ENGINEERING BUILDING	S-15	A-74	NOT NEEDED - 2
22D	SCALE HOUSE & WEIGH SCALE	Q-15	A-53	NOT NEEDED - 2
N51	SCRAP METAL PAD COVER (SMPC)	L-21	A-123	NEW - N/A
P-023	SCRAP METAL PILE	L-21	A-115	NOT NEEDED - 2
28A	SECURITY BUILDING	U-20	A-61	NOT NEEDED - 2
11	SERVICE BUILDING	T-19	A-30	NOT NEEDED - 2
25C	SEWAGE LIFT STATION BUILDING	T-23	A-56	NOT NEEDED - 2
39D	SEWAGE TREATMENT PLANT INCINERATOR	S-27	A-71	NOT NEEDED - 1
G-002	SITE ROADS	VARIOUS	A-104	NOT NEEDED - 2
55A	SLAG RECYCLING BUILDING	R-21	A-78	NOT NEEDED - 2
55B	SLAG RECYCLING PIT/ELEVATOR	R-21	A-79	NOT NEEDED - 2
25F	SLUDGE DRYING BEDS	S-28	A-58	NOT NEEDED - 2
N28	SOIL AND RUBBLE PILE COVER	L-15&16	A-121	NEW - N/A
N8	SOUTH PLUME GROUNDWATER RECOVERY SYSTEM	Y-16, VARIOUS	A-119	NEW - N/A
9A	SPECIAL PRODUCTS PLANT	P-22	A-24	NOT NEEDED - 2
56C	STORAGE SHED, EAST	M-16	A-80	NOT NEEDED - 2
56B	STORAGE SHED, WEST	M-16	A-80	NOT NEEDED - 2
22B	STORM SEWER LIFT STATION	X-18	A-52	NOT NEEDED - 2

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
G-003	STORM SEWER SYSTEM	VARIOUS	A-105	NOT NEEDED - 2
18E	STORM WATER RETENTION BASIN	Y-17	A-41	NOT NEEDED - 2
13C	SUMP PUMP HOUSE	T-15	A-33	NOT NEEDED - 1
G-004	SUMPS	VARIOUS	A-105	NOT NEEDED - 2
19C	TANK FARM CONTROL HOUSE	P-19	A-46	NOT NEEDED - 2
TS-1	TENSION SUPPORT STRUCTURE #1	N-16&17	A-116	NOT NEEDED - 2
TS-2	TENSION SUPPORT STRUCTURE #2	N-17	A-117	NOT NEEDED - 2
TS-3	TENSION SUPPORT STRUCTURE #3	N-17	A-117	NOT NEEDED - 2
TS-4	TENSION SUPPORT STRUCTURE #4	P-17	A-118	NOT NEEDED - 2
TS-5	TENSION SUPPORT STRUCTURE #5	N-15	A-118	NOT NEEDED - 2
TS-6	TENSION SUPPORT STRUCTURE #6	N-15	A-119	NOT NEEDED - 2
P-019	THIRD STREET DIRT PILE	L-17	A-113	NOT NEEDED - 2
13D	THORIUM TANK FARM	T-15	A-34	NOT NEEDED - 2
64	THORIUM WAREHOUSE	N-21	A-83	NOT NEEDED - 2
T-76	TRAILER COMPLEX	V-17	A-123	NOT NEEDED - 2
T-77	TRAILER COMPLEX	V-17	A-124	NOT NEEDED - 2
T-80	TRAILER COMPLEX	V-17	A-124	NOT NEEDED - 2
T-81	TRAILER COMPLEX	V-17	A-125	NOT NEEDED - 2
44E	TRAILER COMPLEX (10-PLEX), T-23	U-19	A-73	NOT NEEDED - 2
44A	TRAILER COMPLEX (6 PLEX), T-1	U-21	A-72	NOT NEEDED - 2
44D	TRAILER COMPLEX (7-PLEX N.), T-24	U-18	A-73	NOT NEEDED - 2
44C	TRAILER COMPLEX (7-PLEX S.), T-25	U-18	A-72	NOT NEEDED - 2
16F	TRAILER SUBSTATION #1	U-21	A-38	NOT NEEDED - 2
16G	TRAILER SUBSTATION #2	U-22	A-39	NOT NEEDED - 2
90	TRAP RANGE BUILDING	W-25	A-103	NOT NEEDED - 2
25H	TRICKLING FILTERS	T & S-27	A-59	NOT NEEDED - 2
22C	TRUCK SCALE (NEW)	T-23	A-52	NOT NEEDED - 2

NO.	NAME	COORD	PAGE	CATEGORY/ PHASE
25D	U.V. DISINFECTION BUILDING	T-27	A-57	NOT NEEDED - 2
G-007	UNDERGROUND STORAGE TANKS	VARIOUS	A-107	NOT NEEDED - 2
G-006	UNDERGROUND UTILITY LINES	VARIOUS	A-106	NOT NEEDED - 2
10E	UTILITIES HEAVY EQUIPMENT GARAGE	M-19	A-29	NEW - N/A
45B	UTILITY SHED, EAST OF RUST TRAILERS	R-15	A-74	NOT NEEDED - 2
22E	UTILITY TRENCH TO PIT AREA	R-11	A-53	NOT NEEDED - 2
39B	WASTE OIL DECANT SHELTER	P-16	A-70	NOT NEEDED - 2
18N	WASTE PIT STORM WATER RUN OFF CONTROL	T-18	A-45	NOT NEEDED - 2
20B	WATER PLANT	N-19	A-48	NOT NEEDED - 2
20E	WELL HOUSE #1	Q-15	A-49	NOT NEEDED - 2
20F	WELL HOUSE #2	R-15	A-50	NOT NEEDED - 2
20G	WELL HOUSE #3	T-15	A-50	NOT NEEDED - 2
5D	WEST DERBY BREAKOUT/SLAG MILLING	R-20	A-15	NOT NEEDED - 2
10C	WET SALT STORAGE BIN	M-18	A-28	NOT NEEDED - 2

Appendix C


FACILITY MAPS

Appendix C

Facility Maps

The drawings listed below have been prepared to show the locations of the facilities described in this report. To allow a drawing scale which accurately displays the facilities, the site is divided into four quadrants. Each category of facility (Needed, Not Needed, New) is displayed on a different set of drawings. Specific facility locations are given by the coordinates listed in the main body of the report.

<u>Drawing Title</u>		<u>Drawing Number</u>
Site Overview		SK-X-01107
Site Facilities	North Quad	SK-X-01086
	West Quad	SK-X-01087
	East Quad	SK-X-01088
	South Quad	SK-X-01089

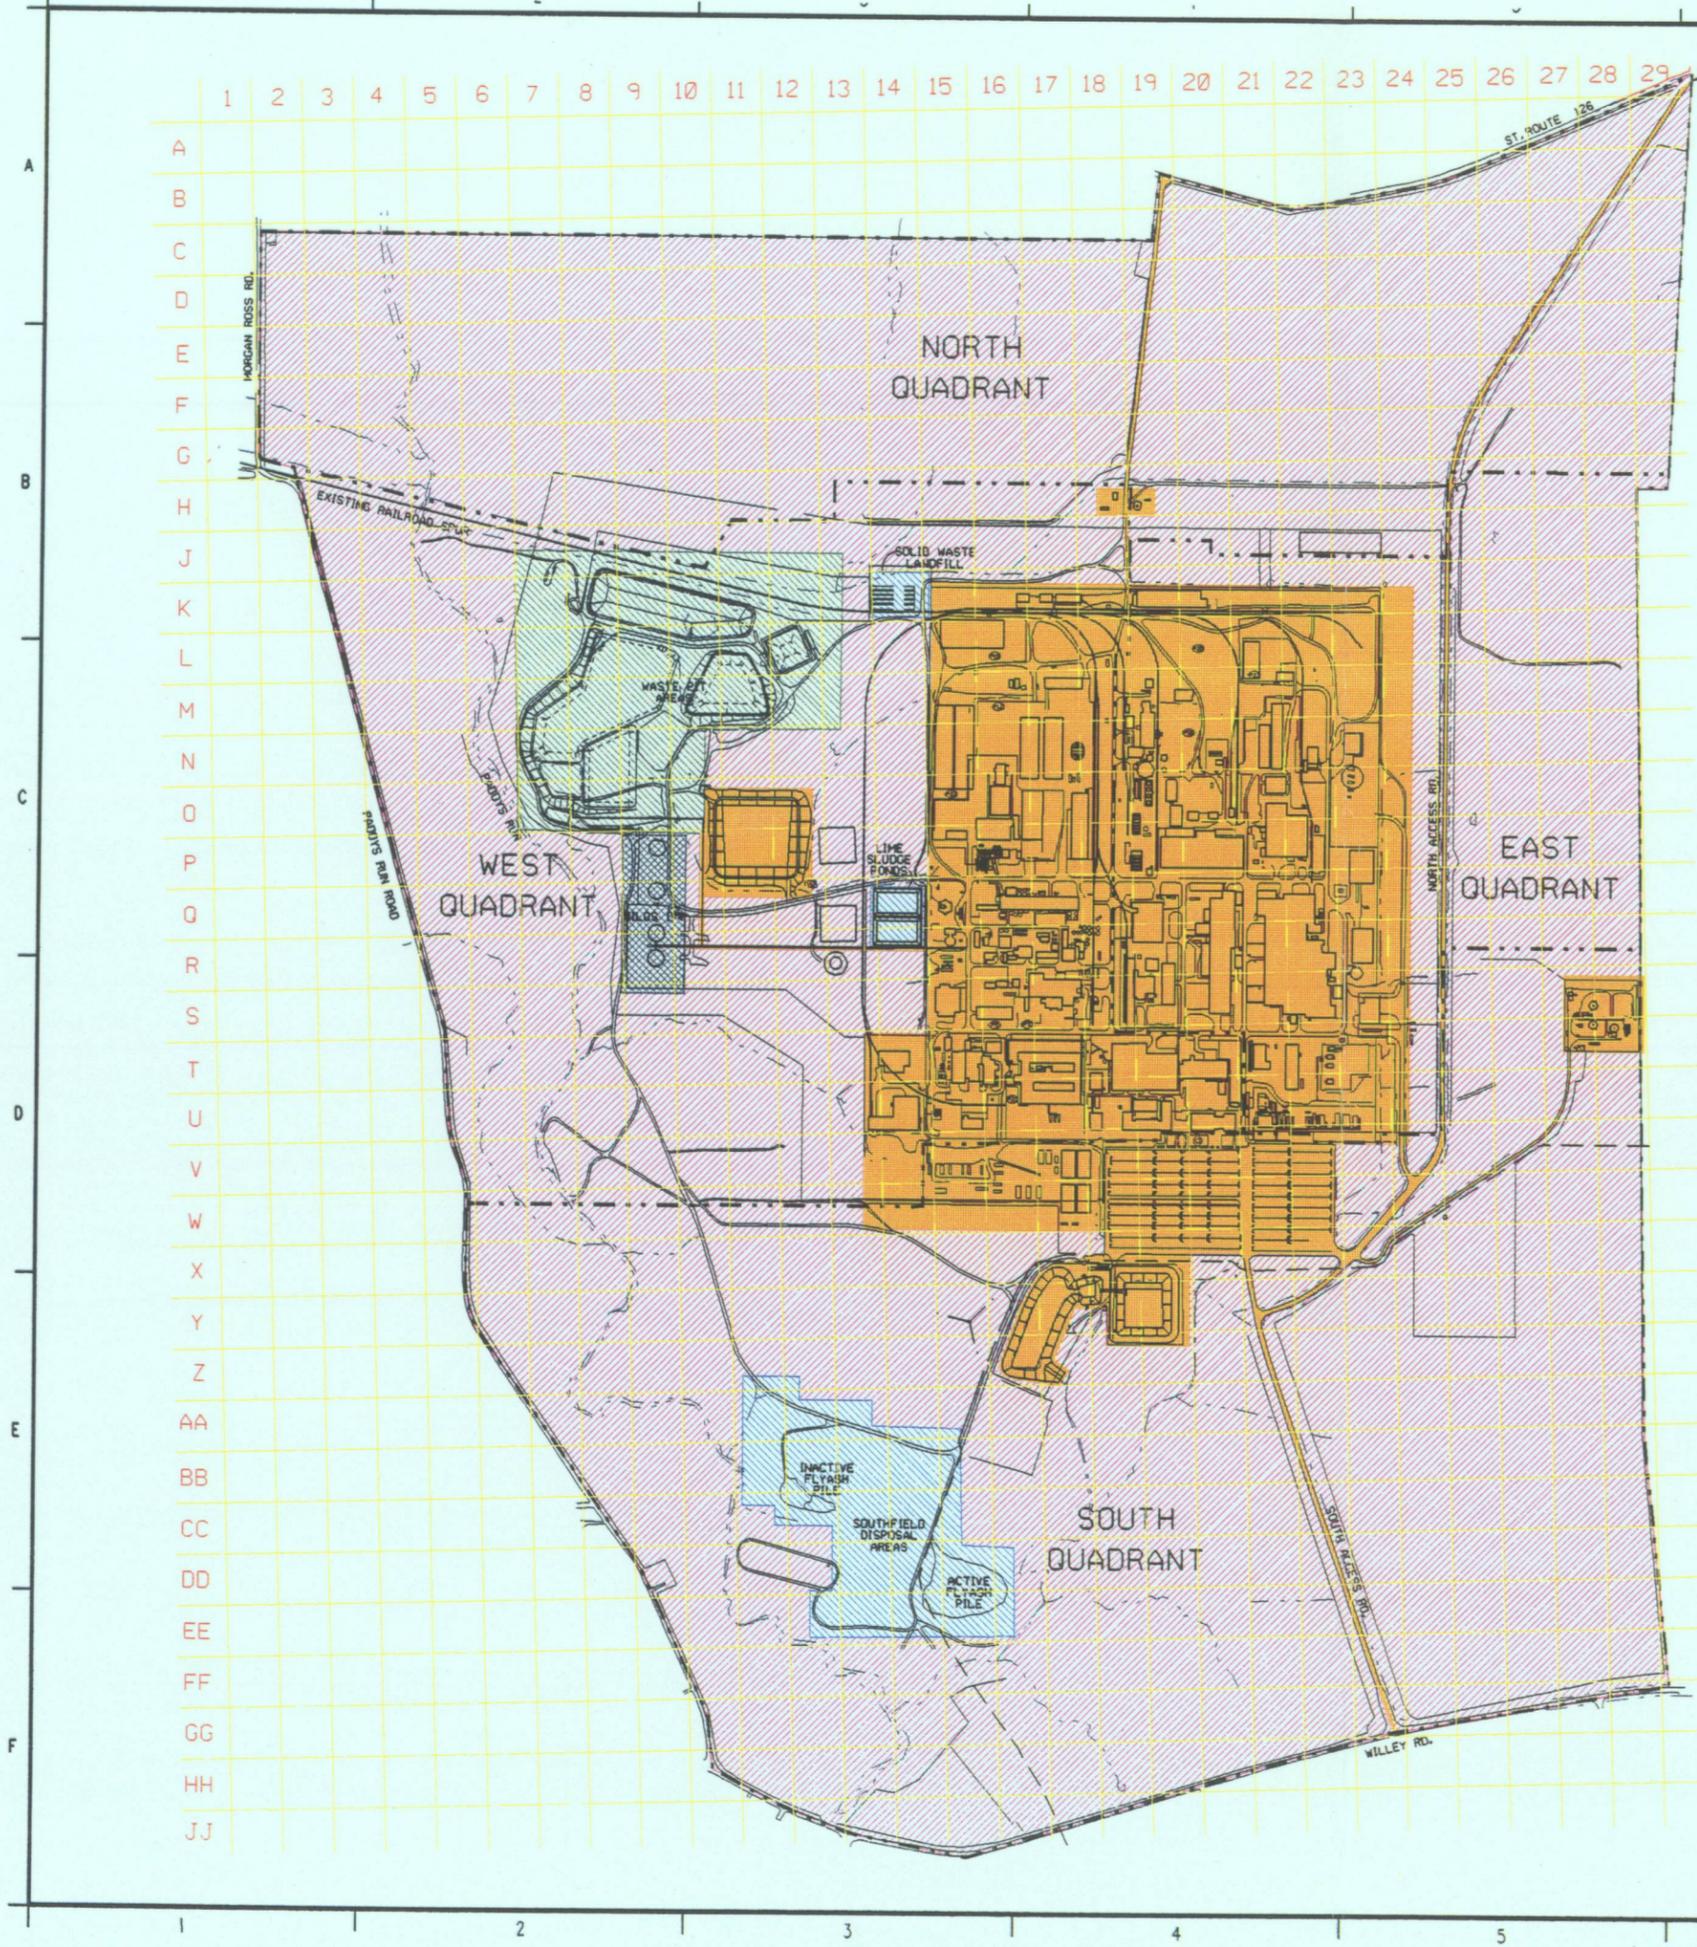

LEGEND

- OU-1 WASTE PIT AREAS
- OU-2 OTHER WASTE UNITS
- OU-3 PRODUCTION AREA
- OU-4 SILOS 1-4
- OU-5 ENVIRONMENTAL MEDIA

- GENERAL NOTES:
1. REFERENCE GRID SYSTEM IS BASED ON THE OHIO STATE PLANNER COORDINATE SYSTEM. GRID LINES ARE SPACE AT 250 FOOT INCREMENTS
 2. THE FOLLOWING DRAWINGS DEPICT FACILITY USAGE BY CATEGORY AND QUADRANT
 3. FACILITIES ARE NUMBER PER FERMCO DRAWING FILE SITELIST.DGN, MAINTAINED BY FEMP SITE DRAFTING SUPERVISOR.


**UNITED STATES
DEPARTMENT OF ENERGY
FERNALD ENVIRONMENTAL MANAGEMENT PROJECT**

THIS DRAWING PREPARED BY
PARSONS
THE RALPH M. PARSONS CO. - CHAS. T. MAN, INC. - ENGINEERING-SCIENCE, INC.
CINCINNATI, OHIO

PROJECT NAME
FACILITY UTILIZATION REPORT
FRIP/PO40

DRAWING TITLE
SITE OVERVIEW

DRAWN BY T.A. ROBERTS	DATE	DESIGNED, CHECKED BY	DATE	CHECKED BY	DATE
PLANT/FIELD NO.	FLOOR	SCALE	CLASS		
SUBMITTED FOR APPROVAL		APPROVAL RECOMMENDED		DRAWING APPROVED	
DATE	DATE	DATE	DATE	DATE	DATE
PROJECT NO.	OPERATING CONTRACTOR	DATE	DATE	SHEET NO.	REV. NO.
WBS 111.6.1.2.0 00-90701	SK-X-01107	00001	A		

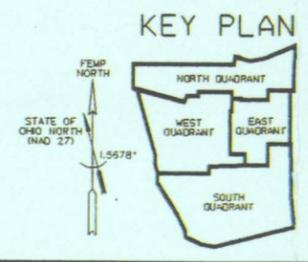




NORTH QUADRANT FACILITY SCHEDULE

NO.	NAME (DESCRIPTION)	COORD
73B	FIRE TRAINING POND	H-19
73C	FIRE TRAINING TANK	H-19
73D	FIRE TRAINING BURN TROUGH	H-19
N29	CENTRAL STORAGE FACILITY (CSF)	J-23

LEGEND

	NEW FACILITIES
	PHASE 1 'NOT NEEDED' FACILITIES
	PHASE 2 'NOT NEEDED' FACILITIES
	DIRTPILES
	WATER (RIVERS, DITCHES, ETC.)

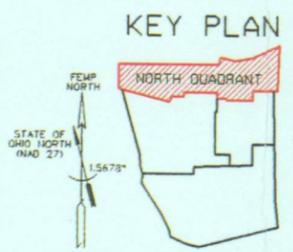

UNITED STATES DEPARTMENT OF ENERGY
FERNALD ENVIRONMENTAL MANAGEMENT PROJECT

THIS DRAWING PREPARED BY
PARSONS
 THE RALPH M. PARSONS CO. - CHAS. T. MAIN, INC. - ENGINEERING-SCIENCE, INC.
 CINCINNATI, OHIO

PROJECT NAME
 FACILITY UTILIZATION REPORT
 FRIP/P040

DRAWING TITLE
 SITE FACILITIES
 NORTH QUADRANT


DRAWN BY	DATE	DESIGNED, CHECKED BY	DATE	CHECKED BY	DATE
T.A. ROBERTS	10/30/92				

PLANT/BLDG. NO.	FLOOR	SCALE	CLASS

DATE	OPERATING CONTRACTOR	DATE	DOE	DATE	REV. NO.
11.1.1.2.0					
00-90701	SK-X-01086				A


WEST QUADRANT FACILITY SCHEDULE

NO.	NAME DESCRIPTION	COORD	NO.	NAME DESCRIPTION	COORD
1A	PREPARATION PLANT	P-16	30A	CHEMICAL WAREHOUSE	P-17
1B	PLANT 1 STORAGE SHELTER	O-16	30B	DRUM STORAGE WAREHOUSE	P-16
1C	PLANT 1 ORE SILOS	P-16	30C	OLD TEN TON SCALE	O-18
2A	ORE REFINERY PLANT	O-17	34A	K-65 STORAGE TANK (NORTH)	R-9
2B	GENERAL/REFINERY SUMP CONTROL BUILDING	R-17	34B	K-65 STORAGE TANK (SOUTH)	R-9
2C	BULK LIME HANDLING BUILDING	O-16	35A	MIXED OXIDE STORAGE TANK (NORTH)	P-9
2D	METAL DISSOLVER BUILDING	O-16	35B	MIXED OXIDE STORAGE TANK (SOUTH)	O-9
2E	NFS STORAGE & PUMP HOUSE	P-16	37	PILOT PLANT ANNEX	T-16
2F	COLD SIDE ORE CONVEYOR	O-16	39A	INCINERATOR BUILDING	R-16
2G	HOT SIDE ORE CONVEYORS	O-16	39B	WASTE OIL DECONTAMINATION SHELTER	P-15
2H	CONVEYOR TUNNEL (FROM PLT II)	P-16	39C	INCINERATOR BUILDING	R-16
3A	MAINTENANCE BUILDING	R-17	44C	TRAILER COMPLEX (7-PLEX, SOUTH, T-25)	U-18
3B	OZONE BUILDING	R-17	44D	TRAILER COMPLEX (7-PLEX, NORTH, T-24)	U-18
3C	NAR CONTROL BUILDING	R-17	44E	TRAILER COMPLEX (10-PLEX, NORTH, T-23)	U-19
3D	NAR TOWERS	R-17	45A	RUST ENGINEERING BUILDING	S-15
3E	HOT RAFFINATE BUILDING	R-16	45B	UTILITY SHED, EAST OF RUST TRAILERS	R-15
3F	HARSHAM SYSTEM	R-16	51	6 TO 4 REDUCTION FACILITY NO. 2	U-14
3G	REFRIGERATION BUILDING	R-16	53A	HEALTH & SAFETY BUILDING	T-20
3H	REFINERY SUMP	R-18	53B	IN-VIVO BUILDING	U-20
3J	COMBINED RAFFINATE TANKS	R-16	54A	6 TO 4 REDUCTION FACILITY NO. 1	T-15
3K	OLD COOLING WATER TOWER	R-16	54B	PILOT PLANT SHELTER	T-16
3L	ELECTRICAL POWER CENTER BUILDING	R-17	54C	PILOT PLANT DISSOCIATOR SHELTER	T-15
8A	RECOVERY PLANT	S-17	56A	CP STORAGE WAREHOUSE	M-17
8B	PLANT 8 MAINTENANCE BUILDING	S-16	56B	STORAGE SHED, WEST	M-16
8C	ROTARY KILN/DRUM RECONDITIONING (NEW)	S-17	56C	STORAGE SHED, EAST	M-16
8D	PLANT 8 RAILROAD FILTER BUILDING	S-18	60	QUONSET HUT NO. 1	K-17
8E	DRUM CONVEYOR SHELTER	S-16	61	QUONSET HUT NO. 2	K-17
8F	PLANT 8 OLD DRUM WASHER	S-16	62	QUONSET HUT NO. 3	K-16
11	SERVICE BUILDING	T-19	66	DRUM RECONDITIONING BUILDING	O-16
13A	PILOT PLANT, WET SIDE	T-15	67	PLANT 1 THORIUM WAREHOUSE	P-15
13B	PILOT PLANT MAINTENANCE BUILDING	T-15	68	PILOT PLANT WAREHOUSE	U-15
13C	SUMP PUMP HOUSE	T-15	71	GENERAL IN-PROCESS WAREHOUSE	O-17
13D	PILOT PLANT THORIUM TANK FARM	T-15	72	DRUM STORAGE WAREHOUSE	P-16
14A	ADMINISTRATION BUILDING	U-19	73A	FIRE BRIGADE TRAINING CENTER BUILDING	H-18
14B	BUILDING 4 EDC GENERATOR SET	U-18	73C	CONFINED SPACE BURN TANK	H-18
15	LABORATORY	T-17	74A	PLANT 2 EAST PAD	O-18
16B	ELECTRICAL SUBSTATION	T-21	74B	PLANT 2 WEST PAD	O-16
18A	BON SURGE LAGOON	P-11	74C	PLANT 8 EAST PAD	S-17
18B	GENERAL SUMP	R-17	74D	PLANT 8 OLD METAL DISSOLVER PAD	S-16
18D	BIODENITRIFICATION FACILITY	R-15	74E	PLANT 8 NORTH PAD	R-19
18G	CLEARWELL PUMP HOUSE	O-8	74T	PLANT 1 STORAGE PAD, (NORTH OF PLANT II)	O-15
18H	BON EFFLUENT TREATMENT FACILITY	S-16	74U	PILOT PLANT PAD	U-15
18J	METHANOL TANK (BON)	O-12	74V	LABORATORY PAD	T-16
18K	LOW NITRATE TANK (BON)	P-13	80	PLANT 8 WAREHOUSE	O-21
18L	HIGH NITRATE TANK (BON)	O-13	88	CLEARWELL LINE	O-9
18M	HIGH NITRATE STORAGE TANK (BON)	R-13	N2B	SOIL AND RUBBLE PILE COVER	L-15
18N	WASTE PIT STORM WATER RUNOFF CONTROL	O-7	N2C	NEW BOILER PLANT	T-14
19B	PILOT PLANT AMMONIA TANK FARM	U-15	P-2	DIRT PILE SOUTH OF PLANT 8 (WEST)	S-16
20E	WELL HOUSE #1	O-15	P-5	DIRT PILE SOUTH OF BUILDING 80	S-16
20F	WELL HOUSE #2	R-15	P-17	COPPER METAL SCRAP PILE	M-16
20G	WELL HOUSE #3	T-15	P-19	THIRD STREET DIRT PILE	L-16
20J	LIME SLUDGE PITS	O-14	P-21	DIRT PILE SOUTHWEST CORNER OF LAB	U-16
22D	SCALE HOUSE & WEIGH SCALE	U-15	P-22	DIRT PILE NORTH OF BUILDING 67	O-15
22E	UTILITY TRENCH TO PIT AREA	R-11	P-24	NW RUBBLE PILES	
24A	RAILROAD SCALE HOUSE	K-16	TS-1	TENSION SUPPORT STRUCTURE #1	N-16
25A	PUMP HOUSE, HP FIRE PROTECTION	R-15	TS-2	TENSION SUPPORT STRUCTURE #2	N-17
25B	ELEVATED WATER STORAGE TANK	O-15	TS-3	TENSION SUPPORT STRUCTURE #3	N-17
28A	SECURITY BUILDING	U-20	TS-4	TENSION SUPPORT STRUCTURE #4	P-17
28B	HUMAN RESOURCES BUILDING	U-20	TS-5	TENSION SUPPORT STRUCTURE #5	N-15
28D	GUARD POST, WEST END OF 2ND STREET	P-15	TS-6	TENSION SUPPORT STRUCTURE #6	N-15

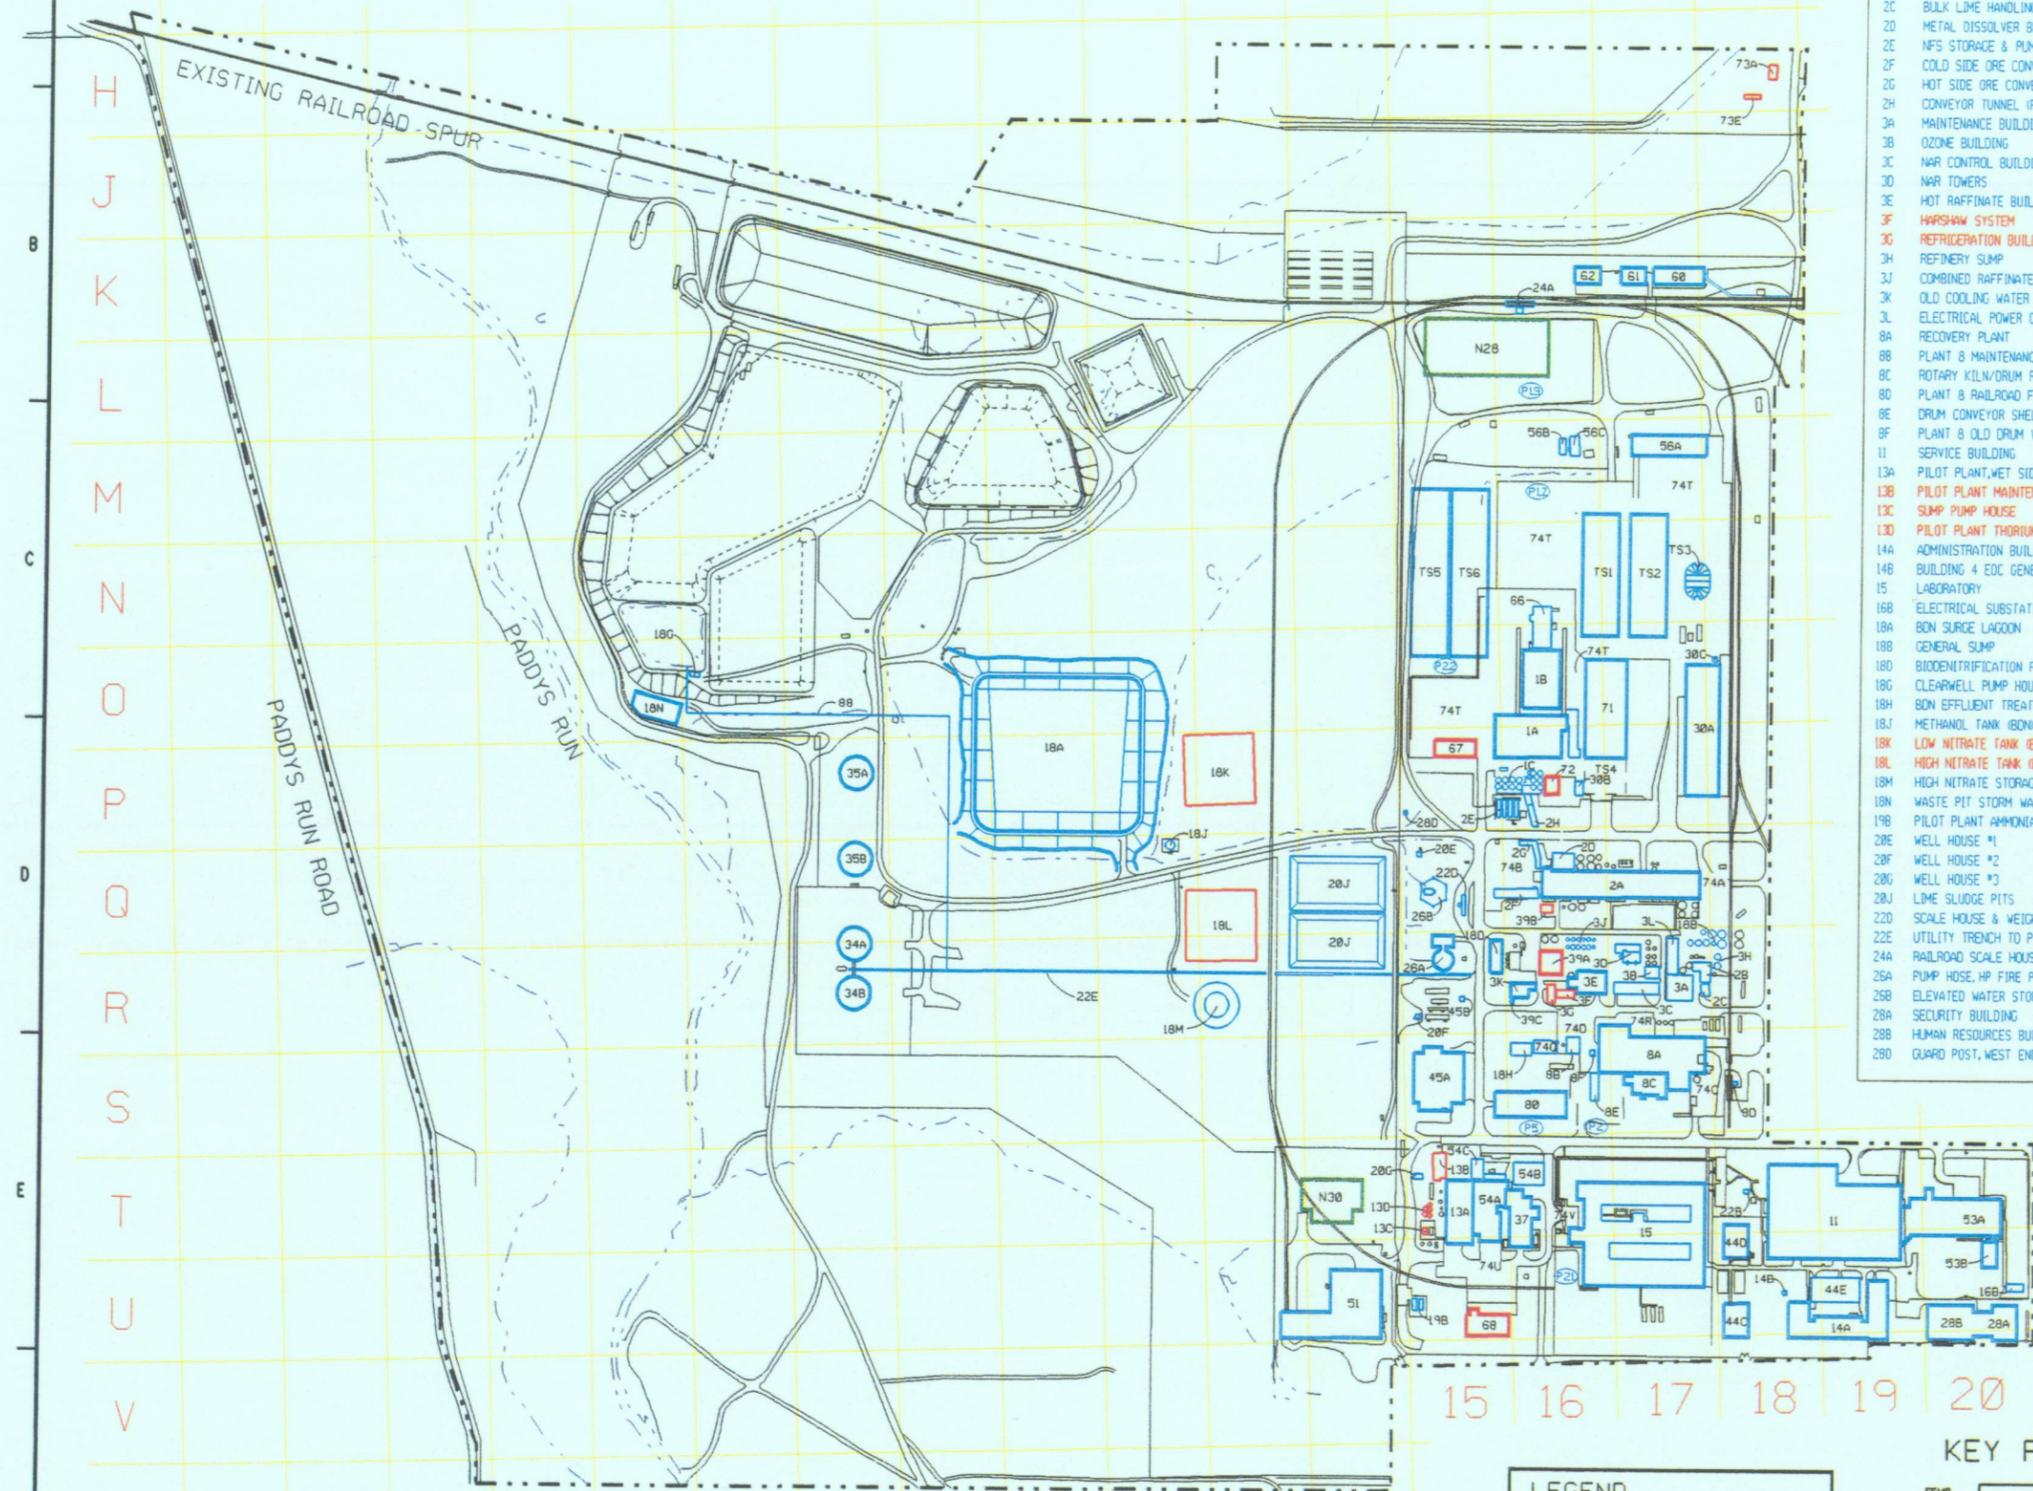

LEGEND

- NEW FACILITIES
- PHASE 1 'NOT NEEDED' FACILITIES
- PHASE 2 'NOT NEEDED' FACILITIES
- DIRTPILES
- WATER (RIVERS, DITCHES, ETC.)

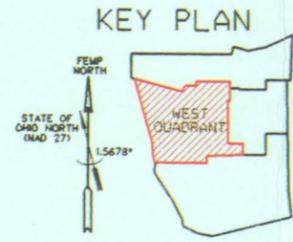

UNITED STATES DEPARTMENT OF ENERGY
FERNALD ENVIRONMENTAL MANAGEMENT PROJECT

THIS DRAWING PREPARED BY
PARSONS
 THE RALPH M. PARSONS CO. - CHAS. T. MAIN, INC. - ENGINEERING-SCIENCE, INC.
 CINCINNATI, OHIO

PROJECT NAME
FACILITY UTILIZATION REPORT
 FRIP/P040

DRAWING TITLE
SITE FACILITIES
WEST QUADRANT

DESIGN BY T.A. ROBERTS	DATE 10/30/82	DESIGNED, CHECKED BY	DATE	CHECKED BY	DATE
PLANT/SECT. NO.	FLOOR	SCALE	CLASS		
SUBMITTED FOR APPROVAL	APPROVAL RECOMMENDED	DESIGNING APPROVED			
DATE PROJECT IN.	DATE	OPERATING CONTRACTOR	DATE	DATE	DATE
WBS 1.1.1.6.1.2.0 00-90701		SK-X-01087			


SHEET NO. **A**

EAST QUADRANT FACILITY SCHEDULE


NO.	NAME (DESCRIPTION)	COORD	NO.	NAME (DESCRIPTION)	COORD
4A	GREEN SALT PLANT	0-19	20C	COOLING TOWERS	0-19
4B	PLANT 4 WAREHOUSE	S-19	200	ELEVATED POTABLE STORAGE TANK	S-23
4C	PLANT 4 MAINTENANCE BUILDING	R-19	20H	PROCESS WATER STORAGE TANK	N-19
5A	METALS PRODUCTION PLANT	R-20	22A	GAS METER BUILDING	0-23
5B	PLANT 5 INGOT PICKLING BUILDING	0-20	22C	TRUCK SCALE 'NEW'	T-23
5C	PLANT 5 ELECTRICAL SUBSTATION	R-20	24B	RAILROAD ENGINE HOUSE	0-20
5D	WEST DERBY BREAKOUT/SLAG MILLING	R-20	25C	SEWAGE LIFT STATION BLDG.	T-23
5E	PLANT 5 FILTER BUILDING	R-20	26C	MAIN ELECTRICAL STRAINER HOUSE	T-22
5F	PLANT 5 COVERED STORAGE PLANT	0-20	31A	ENGINE HOUSE/GARAGE	T-21
5G	PLANT 5 INGOT STORAGE SHELTER	0-21	31B	OLD TRUCK SCALE	T-21
6A	METALS FABRICATING BUILDING	R-21	32A	MAGNESIUM STORAGE BUILDING	N-22
6B	PLANT 6 COVERED STORAGE AREA	S-22	32B	BUILDING 32 COVERED LOADING DOCK	N-22
6C	PLANT 6 ELECTROSTATIC PRECIPITATOR, SOUTH	S-22	38A	PROPANE STORAGE	N-20
6D	PLANT 6 ELECTROSTATIC PRECIPITATOR, CENTRAL	S-22	38B	CYLINDER FILLING STATION	N-20
6E	PLANT 6 ELECTROSTATIC PRECIPITATOR, NORTH	R-22	46	HEAVY EQUIPMENT BUILDING	T-22
6F	PLANT 6 SALT OIL HEAT TREATMENT BUILDING	S-22	44A	TRAILER COMPLEX (6 PLEX) T-1	U-21
6G	PLANT 6 SUMP BUILDING	0-21	55A	SLAG RECYCLING BUILDING	R-21
7A	PLANT 7	S-19	55B	SLAG RECYCLING PIT/ELEVATOR	R-22
7B	PLANT 7 OVERHEAD CRANE	S-18	63	KC-2 WAREHOUSE	K-19
9A	SPECIAL PRODUCTS PLANT	P-22	64	THORIUM WAREHOUSE	N-21
9B	PLANT 9 SUMP TREATMENT FACILITY	P-21	65	PLANT 5 WAREHOUSE (OLD)	N-21
9C	PLANT 9 DUST COLLECTOR	P-21	69	DECONTAMINATION BUILDING	M-22
9D	PLANT 9 ELECTRICAL SUBSTATION	P-21	74E	PLANT 4 PAD	R-19
9E	PLANT 9 CYLINDER SHED	P-21	74F	PLANT 7 PAD	S-19
9F	PLANT 9 ELECTROSTATIC PRECIPITATOR	P-22	74G	PLANT 5 EAST PAD	R-21
10A	BOILER PLANT	N-19	74H	PLANT 5 SOUTH PAD	S-20
10B	BOILER PLANT MAINTENANCE BUILDING	N-18	74J	PLANT 6 PADS (E&N)	0-21
10C	WET SALT STORAGE BIN	M-18	74K	PLANT 9 PAD	P-22
10D	CONTAMINATED OIL/GRAPHITE BURN PAD	M-20	74L	BUILDING 65 WEST PAD	N-21
10E	UTILITIES HEAVY EQUIPMENT GARAGE	M-19	74M	BUILDING 64 EAST PAD & RR DOCK	N-22
12A	MAIN MAINTENANCE BUILDING	P-20	74N	BUILDING 12 NORTH PAD	P-19
12B	CYLINDER STORAGE BUILDING	0-20	74P	DECONTAMINAT PAD (SMP)	M-22
12C	LUMBER STORAGE BUILDING	0-20	74S	BUILDING 63 WEST PAD	K-19
12D	MAINTENANCE WAREHOUSE	0-19	77	FINISHED PRODUCT WAREHOUSE (4A)	P-23
16A	MAIN ELECTRICAL STATION	U-20	78	D&D BUILDING	N-23
16C	ELECTRICAL PANELS & TRANSFORMER	U-21	79	PLANT 6 WAREHOUSE	R-23
16D	MAIN ELECTRICAL SWITCH HOUSE	T-22	81	PLANT 9 WAREHOUSE	0-21
16E	MAIN ELECTRICAL TRANSFORMERS	T-22	82	RECEIVING/INCOMING MATERIAL ISPECTION	S-23
16F	TRAILER SUBSTATION #1	U-21	N50	DECONTAMINATION FACILITY PAD (OFF)	0-23
16G	TRAILER SUBSTATION #2	U-22	N51	SCRAP METAL PAD COVER (SMPC)	L-21
18C	COAL PILE RUNOFF BASIN	0-19	P-18	COAL PILE	N-20
19A	MAIN TANK FARM	P-19	P-23	SCRAP METAL PILE	M-21
19C	TANK FARM CONTROL HOUSE	P-19	P-25	OUTSIDE EQUIPMENT STORAGE AREA	L-20
19D	OLD NORTH TANK FARM	R-19			
20A	PUMP STATION & POWER PLANT	0-19			
20B	WATER PLANT	N-19			

LEGEND

- NEW FACILITIES
- PHASE 1 'NOT NEEDED' FACILITIES
- PHASE 2 'NOT NEEDED' FACILITIES
- DIRTPILES
- WATER (RIVERS, DITCHES, ETC.)

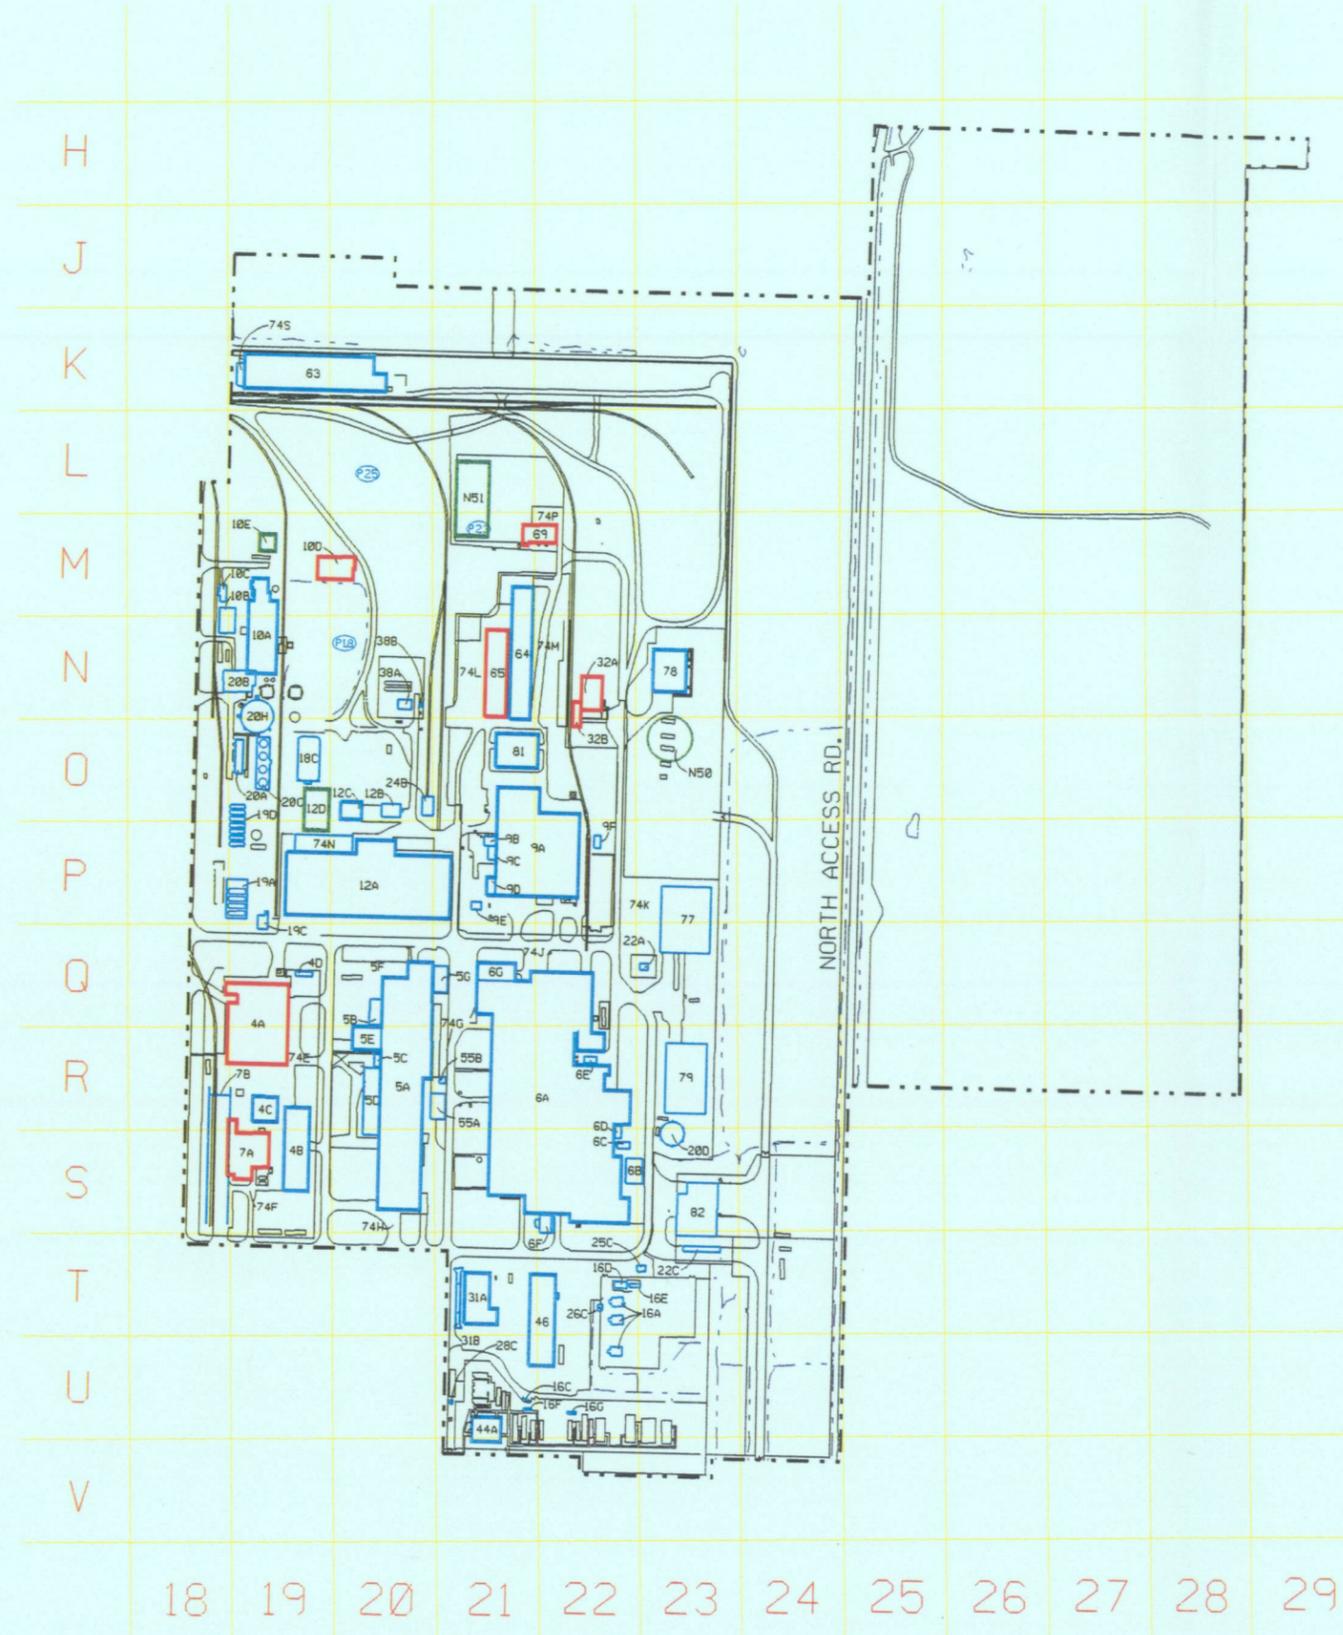

KEY PLAN

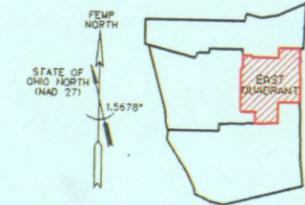

UNITED STATES DEPARTMENT OF ENERGY
FERNALD ENVIRONMENTAL MANAGEMENT PROJECT

THIS DRAWING PREPARED BY
PARSONS
 THE RALPH M. PARSONS CO. - CHAS. T. MAN, INC. - ENGINEERING-SCIENCE, INC.
 CINCINNATI, OHIO


PROJECT NAME
FACILITY UTILIZATION REPORT
 FRIP/P040

DRAWING TITLE
SITE FACILITIES
 EAST QUADRANT

DRAWN BY T.A. ROBERTS	DATE 10/30/72	DESIGNED/CHECKED BY	DATE	CHECKED BY	DATE
PLANT/BUILDING NO.	FLOOR	SCALE	CLASS		
SUBMITTED FOR APPROVAL		APPROVAL RECORDED	DRAWING APPROVED		
DATE	OPERATING CONTRACTOR	DATE	DATE	DATE	REV. NO.
DOE PROJECT NO. WBS 1.1.1.2.0	OPERATING CONTRACTOR 00-90701	DATE SK-X-01088	DATE	DATE	REV. NO. A


SOUTH QUADRANT FACILITY SCHEDULE

NO.	NAME (DESCRIPTION)	COORD
18E	STORM WATER RETENTION BASIN	Y-17
22B	STORM SEWER LIFT STATION	X-18
23	METEOROLOGICAL TOWER	Y-15
25A	CHLORINATION BUILDING	S-27
25B	M.H. #175/EFF. LINE/SAMPLING BUILDING	T-27
25D	U.V. DISINFECTION BUILDING	T-27
25E	DIGESTER AND CONTROL BUILDING	T-27
25F	SLUDGE DRYING BEDS	S-28
25G	PRIMARY SETTLING BASINS	T-28
25H	TRICKLING FILTERS	T&S-27
39D	SEWAGE TREATMENT PLANT INCINERATOR	S-27
89	PARKING LOTS	W-20
90	TRAP RANGE BUILDING	W-25
N8	SOUTH PLUME GROUNDWATER RECOVERY SYSTEM	Y-16
N10	IAWWT-SWRB	X-18
T76	TRAILER COMPLEX	V-17
T77	TRAILER COMPLEX	V-17
T80	TRAILER COMPLEX	W-17
T81	TRAILER COMPLEX	W-17

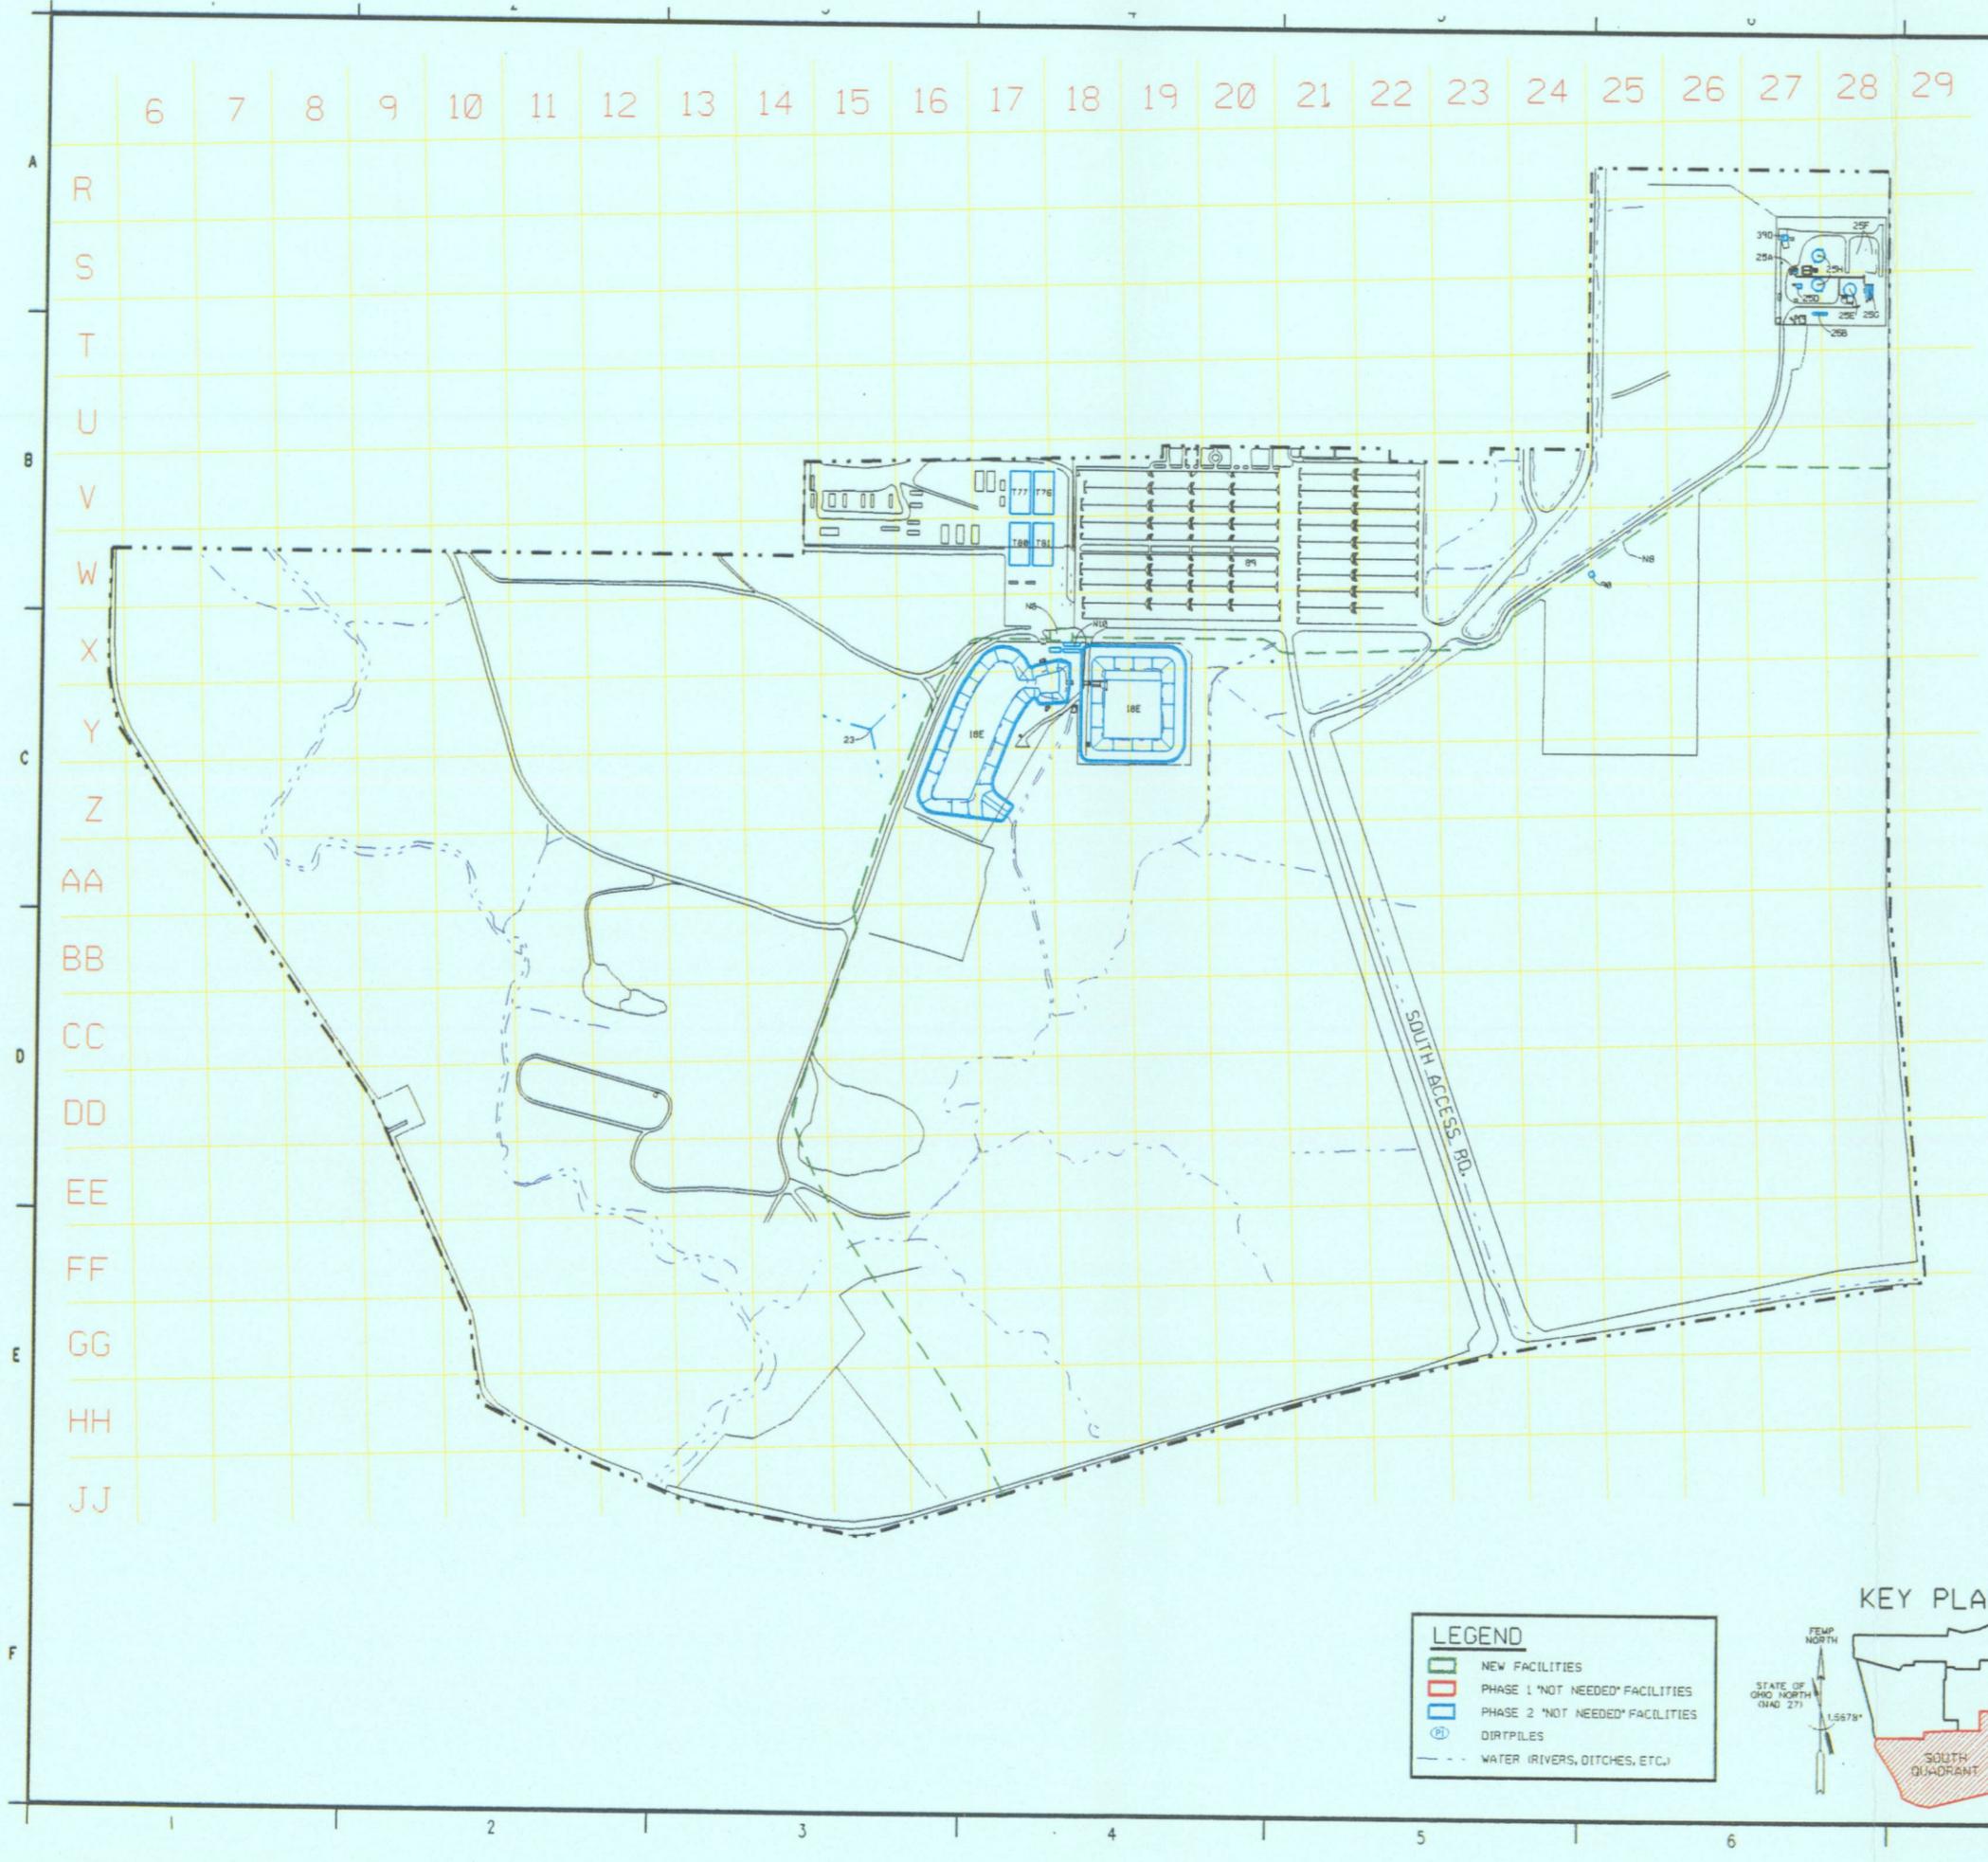

LEGEND

- NEW FACILITIES
- PHASE 1 "NOT NEEDED" FACILITIES
- PHASE 2 "NOT NEEDED" FACILITIES
- DIRTPILES
- WATER RIVERS, DITCHES, ETC.

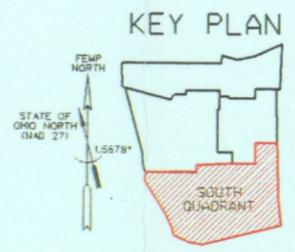

UNITED STATES DEPARTMENT OF ENERGY
FERNALD ENVIRONMENTAL MANAGEMENT PROJECT

THIS DRAWING PREPARED BY
PARSONS
 THE RALPH M. PARSONS CO. - CHAS. T. MAIN, INC. - ENGINEERING-SCIENCE, INC.
 CINCINNATI, OHIO

PROJECT NAME
FACILITY UTILIZATION REPORT
 FRIP/PO40

DRAWING TITLE
SITE FACILITIES
 SOUTH QUADRANT

DESIGNED BY T.A. ROBERTS	DATE 10/30/92	CHECKED BY	DATE
PLANT/BLDG. NO.	FLOOR	SCALE	CLASS
SUBMITTED FOR APPROVAL		APPROVAL RECOMMENDED	DRAWING APPROVED
DATE	OPERATING CONTRACTOR	DATE	DATE
PROJECT NO. WB5 1.1.1.6.1.2.0 00-90701	DRAWING NO. SK-X-01039	SHEET NO.	REV. NO. A