


**PROJECT SPECIFIC PLAN FOR
SAMPLING AREA 3A
MISCELLANEOUS STOCKPILES
FOR OSDF WAC ATTAINMENT**

SOIL AND DISPOSAL FACILITY PROJECT

**FERNALD ENVIRONMENTAL MANAGEMENT PROJECT
FERNALD, OHIO**

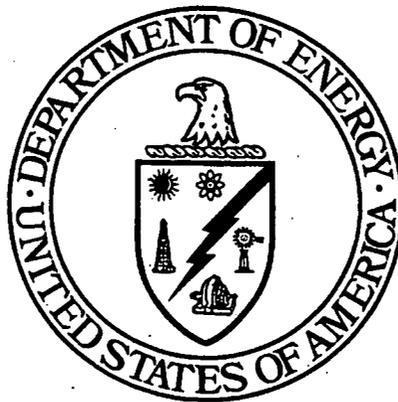

**INFORMATION
ONLY**

MAY 18, 2000

**U.S. DEPARTMENT OF ENERGY
FERNALD AREA OFFICE**

**20200-PSP-0007
REVISION A
DRAFT**

000061

**PROJECT SPECIFIC PLAN FOR
SAMPLING AREA 3A
MISCELLANEOUS STOCKPILES
FOR OSDF WAC ATTAINMENT**

Document Number 20200-PSP-0007

**Revision A
Draft**

May 18, 2000

APPROVAL:

Rich Abitz, Area 3A Project Manager Date
Soil and Disposal Facility Project

Christine Messerly, Area 3A Characterization Lead Date
Soil and Disposal Facility Project

Linda Barlow, Excavation Manager Date
Waste Acceptance Organization

Frank Thompson, Quality Assurance Date
Soil and Water Projects

FERNALD ENVIRONMENTAL MONITORING PROJECT

**Fluor Fernald, Inc.
P.O. Box 538704
Cincinnati, Ohio 45253-8704**

TABLE OF CONTENTS

1.0	Introduction.....	1-1
1.1	Purpose.....	1-1
1.2	Stockpile Histories.....	1-1
1.3	Determination of Stockpile-Specific WAC COCs	1-2
1.3.1	Stockpiles HIS-008 and A3A-006.....	1-2
1.3.2	Stockpile BPW-005.....	1-3
1.4	Scope.....	1-3
1.5	Key Project Personnel.....	1-3
2.0	Sampling Strategy.....	2-1
2.1	Determination of Number of Samples.....	2-1
2.2	Selection of Sample Locations.....	2-1
2.3	Sample Collection Methods.....	2-2
2.3.1	Geoprobe® Methods.....	2-3
2.3.2	Manual Sampling Methods.....	2-3
2.3.3	Biased Sample Selection.....	2-3
2.3.4	Soil Sample Processing and Analysis.....	2-4
2.4	Sample Identification.....	2-5
2.5	Equipment Decontamination	2-6
2.6	Sample Handling and Shipping	2-6
3.0	Real-Time Radiological Scanning	3-1
3.1	Radiation Measurement System Scanning Coverage	3-1
3.2	HPGe Detector Measurements.....	3-2
3.3	Determining Need for Additional HPGe Measurements.....	3-2
3.4	Real-Time Measurement Identification.....	3-3
3.5	Data Mapping.....	3-4
3.6	Sample Collection Based on RMS and HPGe Measurements.....	3-4
4.0	Quality Assurance/Quality Control Requirements	4-1
4.1	Field Quality Control Samples, Analytical Requirements, and Data Validation	4-1
4.2	Applicable Procedures, Documents, and Manuals	4-1
4.3	Project Requirements for Independent Assessments.....	4-2
4.4	Implementation of Field Changes.....	4-3
5.0	Health and Safety.....	5-1
6.0	Data Management	6-1
Appendix A	Data Quality Objectives SL-048, Rev. 5 and SL-055, Rev. 0	
Appendix B	Target Analyte Lists	
Appendix C	Summary of Existing Data on BPW-005	
Appendix D	Primary/Secondary Soil Samples	

LIST OF TABLES

Table 1-1	Stockpile-Specific Constituents of Concern
Table 1-2	Key Project Personnel
Table 2-1	Sampling and Analytical Requirements

LIST OF FIGURES

Figure 1-1	Locations of Area 3A Miscellaneous Stockpiles
Figure 2-1	Sampling Locations for HIS-008
Figure 2-2	Sampling Locations for A3A-006
Figure 2-3	Sampling Locations for BPW-005

LIST OF ACRONYMS AND ABBREVIATIONS

ASL	analytical support level
ccpm	corrected counts per minute
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
COCs	constituents of concern
DQO	Data Quality Objectives
FACTS	Fernald Analytical Customer Tracking System
GPC	Gas Proportional Count
GPS	Global Positioning System
HPGe	high-purity germanium (detector)
ICP/MS	Inductively Coupled Plasma/Mass Spectroscopy
LAN	Local Area Network
µg/kg	micrograms per kilogram
mg/kg	milligrams per kilogram
mL	milliliter
NaI	sodium iodide
OSDF	On-Site Disposal Facility
OU5	Operable Unit 5
pCi/g	picoCuries per gram
PID	photoionization detector
ppm	parts per million
PQL	practical quantitation limit
PSP	Project Specific Plan
QA	Quality Assurance
RCRA	Resource Conservation and Recovery Act
RI/FS	Remedial Investigation/Feasibility Study
RMS	Radiation Measurement System
RSS	Radiation Scanning System
RTIMP	Real-Time Instrumentation Measurement Program
RTRAK	Real Time Radiation Tracking System
RWP	Radiological Work Permit
SCQ	Sitewide CERCLA Quality Assurance Project Plan
SDFP	Soil and Disposal Facility Project
SED	Sitewide Environmental Database
SEP	Sitewide Excavation Plan
SVOC	semi-volatile organic compound
TAL	Target Analyte List
TCLP	toxicity characteristic leaching procedure
V/FCN	Variance/Field Change Notice
VOC	volatile organic compound
WAC	waste acceptance criteria
WAO	Waste Acceptance Organization

1 **1.0 INTRODUCTION**

2
3 **1.1 PURPOSE**

4 This project specific plan (PSP) has been developed to evaluate attainment of the On-Site Disposal
5 Facility (OSDF) waste acceptance criteria (WAC) for soil contained in three miscellaneous stockpiles in
6 Remediation Area 3A, as required by the Sitewide Excavation Plan (SEP) and the WAC Attainment Plan
7 for the OSDF. The stockpile locations are shown on Figure 1-1. The sampling strategy presented in this
8 PSP includes random and biased physical sampling throughout the stockpile and real-time gamma
9 spectrometry measurements over the stockpile surfaces. This approach is identical to the WAC
10 attainment sampling performed on other stockpiles in Area 3A.

11
12 Characterization of these piles is necessary prior to excavation to evaluate WAC attainment and, if
13 needed, to develop the excavation monitoring PSP for the stockpiles. If all sampling results for a
14 stockpile are below the OSDF WAC, then bulk excavation can be conducted without the use of
15 real-time *in situ* gamma monitoring.

16
17 This PSP fulfills the requirements of the SEP and the WAC Attainment Plan for the OSDF for
18 developing predesign investigation plans and for documenting the justification for selection of
19 stockpile-specific WAC constituents of concern (COCs). The data generated under this PSP will be used
20 to 1) demonstrate that soil meeting the OSDF WAC may be bulk excavated and placed in the OSDF,
21 2) identify areas of soil which exceed the OSDF WAC, if any, and 3) determine the excavation approach
22 to these stockpiles.

23
24 **1.2 STOCKPILE HISTORIES**

25 Stockpile HIS-008 is located southeast of Building 64 and consists of approximately 72 cubic yards of
26 soil and debris. Stockpile A3A-006 is located southeast of the former KC-2 Warehouse and north of the
27 Impacted Material Haul Road. It consists of approximately 210 cubic yards of soil and gravel. The
28 origin of these stockpiles is not known and there are no associated historical data.

29
30 Stockpile BPW-005 is located in the northern portion of the old Coal Pile area and consists of
31 approximately 460 cubic yards of coal, soil, gravel, and concrete pieces. This pile was created in 1998
32 from material generated during the decontamination and dismantlement of the Boiler Plant and from

1 dredging the Coal Pile runoff basin. The majority of the existing data on this pile were collected from
 2 the area of the Boiler Plant between 1989 and 1993, with a small portion being collected in 1999 during
 3 Area 3A predesign activities. These data for the WAC COCs are presented in Appendix C.

4
 5 **1.3 DETERMINATION OF STOCKPILE-SPECIFIC WAC COCS**

6 The OSDF WAC Attainment Plan requires that all 18 WAC COCs and Resource Conservation and
 7 Recovery Act (RCRA) toxicity characteristic COCs be considered when sampling is conducted on
 8 stockpiles. The following discussion evaluates these constituents and proposes the final list of WAC
 9 attainment COCs for each miscellaneous stockpile.

10
 11 A number of constituents have OSDF WAC limits that are much higher than detected levels at the site.
 12 These include the following:

Constituent	WAC Limit	Highest Detected Level at the Site
Neptunium-237	3.12×10^9 pCi/g	37.2 pCi/g
Strontium-90	5.67×10^{10} pCi/g	47.6 pCi/g
Carbazole	7.27×10^4 mg/kg	89 mg/kg
Boron	1,040 mg/kg	36 mg/kg
Mercury	56,000 mg/kg	130.9 mg/kg

14
 15 Because the highest site activities or concentrations for these constituents are significantly lower than the
 16 OSDF WAC limits, these constituents will not be WAC COCs for any of the miscellaneous stockpiles.

17
 18 **1.3.1 Stockpiles HIS-008 and A3A-006**

19 Because there are no existing data on HIS-008 and A3A-006 and the origin of the piles is unknown,
 20 samples from the piles will be analyzed for the full list of WAC COCs (excluding the five eliminated
 21 above) and RCRA toxicity characteristic leaching procedure (TCLP). The practical quantitation limits
 22 (PQL) for two of the WAC COCs, 4-nitroaniline and bis(2-chloroisopropyl)ether, are well above the
 23 WAC established for these two compounds. Since it is not feasible with current analytical methods to
 24 achieve detection limits at the WAC established for these two semi-volatile organic compounds
 25 (SVOCs), the default WAC attainment values for 4-nitroaniline and bis(2-chloroisopropyl)ether will be
 26 the EPA Contract Laboratory Program contract required detection limits of 830 micrograms per

1 kilogram ($\mu\text{g}/\text{kg}$) and 330 $\mu\text{g}/\text{kg}$, respectively. Table 1-1 presents the complete list of stockpile-specific
2 WAC COCs for stockpiles HIS-008 and A3A-006.

3 4 1.3.2 Stockpile BPW-005

5 The existing data on stockpile BPW-005 are presented in Appendix B and consist mainly of samples that
6 were collected from the Boiler Plant area during the RI/FS and analyzed for organics, radionuclides,
7 metals, and RCRA TCLP. No results exceeded the OSDF WAC, and all but the total uranium results
8 were several orders of magnitude lower than the WAC limits. Likewise, the TCLP results were
9 significantly lower than the regulatory limit for toxicity characteristic waste. However, there was only
10 one sample analyzed for technetium-99, a widespread contaminant at the site. Based on these existing
11 data, samples from BPW-005 will be analyzed for total uranium and technetium-99 only. These COCs
12 are listed on Table 1-1.

13 14 1.4 SCOPE

15 Under this PSP, real-time measurements and physical sampling will be performed on Stockpiles
16 HIS-008, A3A-006, and BPW-005 to identify and bound soil with contaminant concentrations above the
17 OSDF WAC. Following review of the sample results, additional samples may be collected beyond those
18 identified in this PSP if the extent of above-WAC material has not been adequately bound. In this
19 situation, a variance to this PSP will be written. Sampling activities carried out under this PSP will be
20 performed in accordance with the Sitewide Comprehensive Environmental Response, Compensation, and
21 Liability Act (CERCLA) Quality Assurance Project Plan (SCQ), the SEP, the WAC Attainment Plan for
22 the OSDF, and Data Quality Objectives (DQO) SL-048, Revision 5 (see Appendix A), and
23 DQO SL-055, Revision 0 (see Appendix A).

24 25 1.5 KEY PROJECT PERSONNEL

26 Team members responsible for coordination of work in accordance with this PSP are listed in Table 1-2.

TABLE 1-1
STOCKPILE-SPECIFIC CONSTITUENTS OF CONCERN

HIS-008	A3A-006	BPW-005
Total Uranium	Total Uranium	Total Uranium
Technetium-99	Technetium-99	Technetium-99
Bromodichloromethane	Bromodichloromethane	
Cloroethane	Cloroethane	
1,1-Dichloroethene	1,1-Dichloroethene	
1,2-Dichloroethene	1,2-Dichloroethene	
Tetrachloroethene	Tetrachloroethene	
Trichloroethene	Trichloroethene	
Vinyl Chloride	Vinyl Chloride	
Alpha-chlordane	Alpha-chlordane	
Toxaphene	Toxaphene	
Carbazole	Carbazole	
4-Nitroaniline	4-Nitroaniline	
Bis(2-chloroisopropyl)ether	Bis(2-chloroisopropyl)ether	
TCLP	TCLP	

000009

1
2
3

TABLE 1-2
KEY PROJECT PERSONNEL


Title	Primary	Alternate
DOE Contact	Rob Janke	Kathi Nickel
Area 3A Project Manager	Rich Abitz	Jyh-Dong Chiou
Area 3A Characterization Lead	Christine Messerly	Bill Westerman
Real-Time Characterization Lead	Joan White	Dave Allen/Brian McDaniel
Field Sampling Lead	Tom Buhrlage	Jim Hey
Surveying Lead	Jim Schwing	Jim Capannari
Waste Acceptance Organization (WAO) Stockpile Contact	Linda Barlow	Christa Walls
FEMP Sample Management Office Contact	Audrey Hannum	Grace Ruesink
Data Management Lead	Bill Westerman	Christine Messerly
Field Data Validation Contact	Jenine Rogers	Jim Cross
Data Validation Contact	Jim Chambers	Jim Cross
Quality Assurance Contact	Reinhard Friske	Mary Eleton
Health and Safety Contact	Debbie Grant	Lewis Wiedeman

4

v:\650131\edg\edg\p\3a_001.dgn

STATE PLANAR COORDINATE SYSTEM 1983

02-MAY-2000

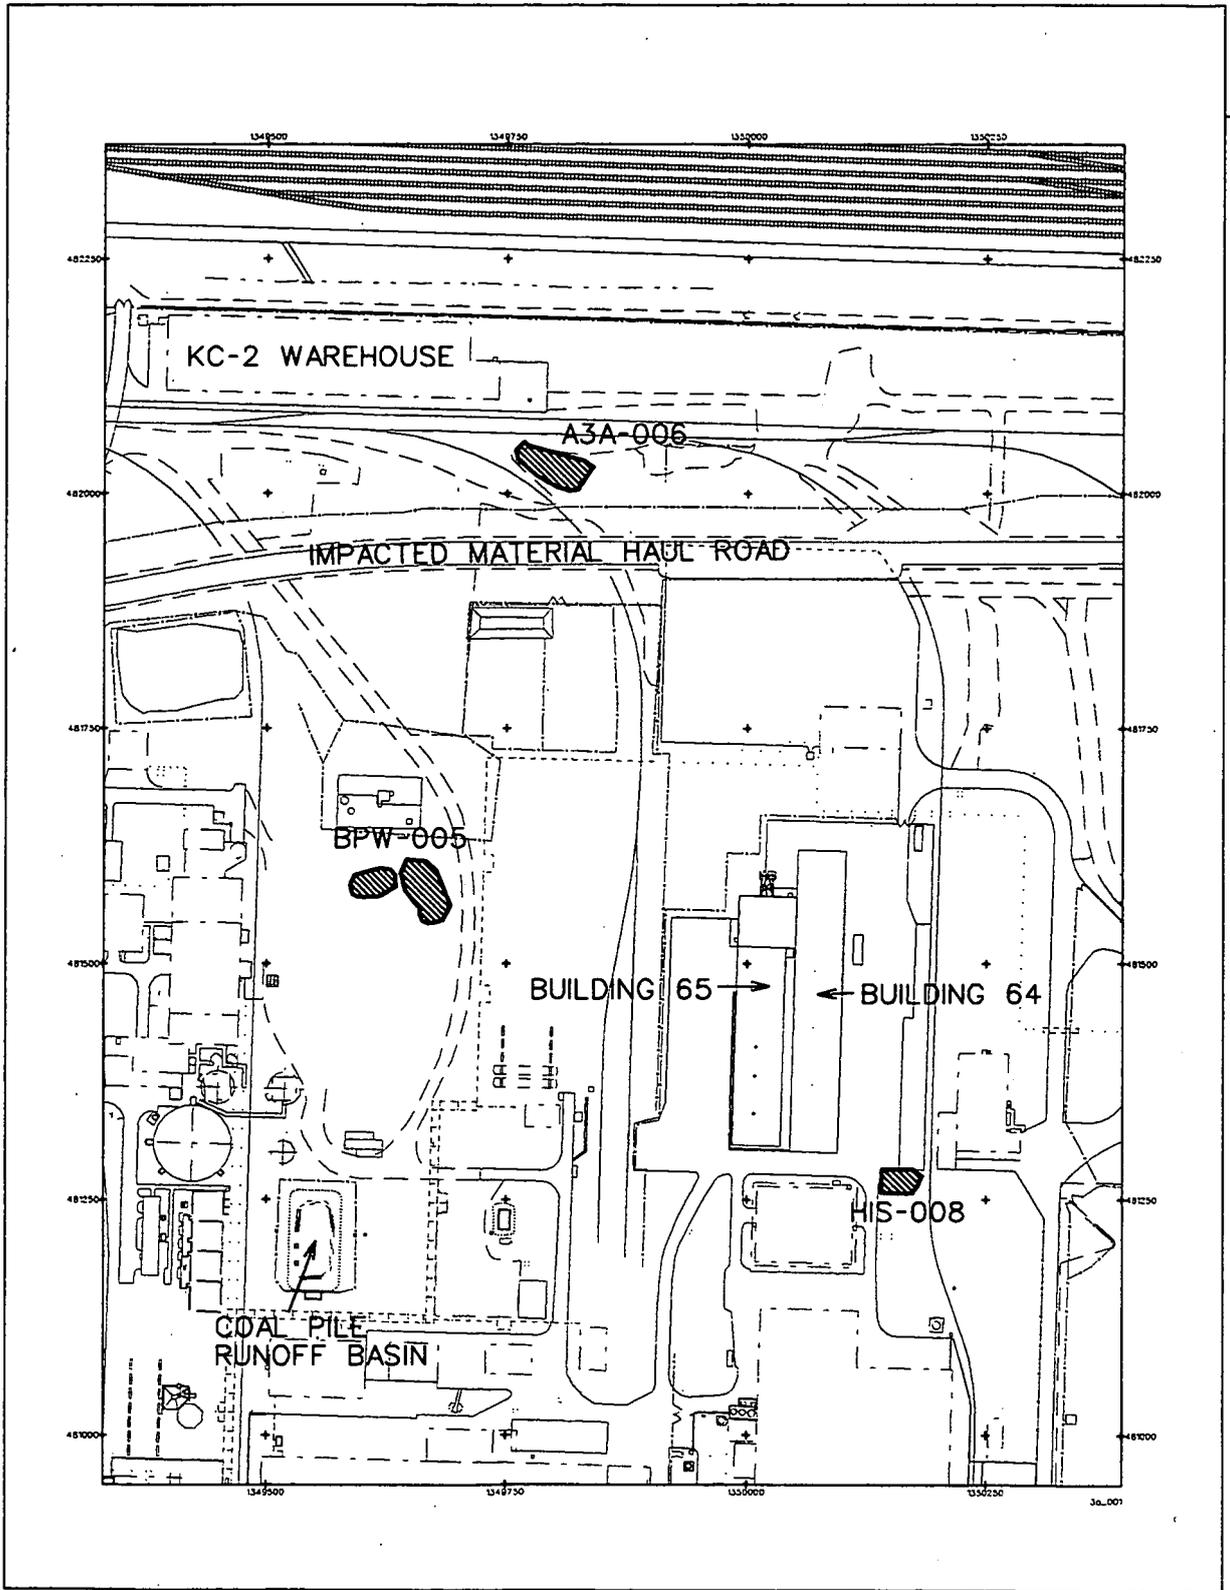

LEGEND:



SOIL PILE

DRAFT

SCALE




FIGURE 1-1. LOCATIONS OF AREA 3A MISCELLANEOUS STOCKPILES

000011

2.0 SAMPLING STRATEGY

2.1 DETERMINATION OF NUMBER OF SAMPLES

In accordance with the SEP and OSDF WAC Attainment Plan, the number of samples determined to adequately characterize Stockpiles HIS-008, A3A-006, and BPW-005 is based on the current data set, the Operable Unit 5 (OU5) Remedial Investigation/Feasibility Study (RI/FS) sampling density in the Former Production Area, process knowledge of the stockpiles, and sampling density in previous soil stockpile sampling projects. Based on these requirements, a minimum of three samples each will be collected from HIS-008, and A3A-006, and a minimum of four samples from BPW-005. All samples will be analyzed for the stockpile-specific COCs presented in Section 1.3.

The sample density for these stockpiles translates to an average of one sample per 82 cubic yards, which is a higher density relative to the WAC attainment sampling activities performed for other soil piles (i.e., Stockpile 2, Stockpile 4 and the eastern section of Stockpile 1 had sample density of one sample per 230 cubic yards, Area 1, Phase I West Impacted Soil Stockpile had one sample per 420 cubic yards, and Removal Action 17 Stockpile 5 had one sample per 350 cubic yards). These piles have a higher sampling density to ensure that each pile has a statistically significant number of samples.

2.2 SELECTION OF SAMPLE LOCATIONS

Sample locations and depths are based on both a combination of systematic grid/random approach and biased sampling at the random boring locations. A minimum of ten samples will be collected from the stockpiles; other samples may be collected from the soil cores, depending on field beta/gamma and photoionization detector (PID) readings (see Section 2.3.3.). Additional surface soil samples may be collected based on scanning results from the sodium iodide (NaI) and high-purity germanium (HPGe) detector systems (see Section 3.0).

A systematic approach was used to establish a sample grid over the stockpile surface. The grid pattern was based on surface area and consists of three grid blocks on HIS-008 and A3A-006 and 4 grid blocks on BPW-005 of approximately equal size. A primary random sample location (northing and easting coordinate) and depth interval was selected within each block as shown on Figures 2-1 through 2-3. Secondary random sample locations and depths were also selected in the event that the primary sample cannot be taken. The primary and secondary random sample and depth intervals are presented in

1 Appendix D. Sample locations will be surveyed (northing, easting, and elevation) and that information
2 will be recorded.

3 4 2.3 SAMPLE COLLECTION METHODS

5 Samples will be collected using the Geoprobe® Model 5400 in accordance with procedure EQT-06,
6 Geoprobe® Model 5400 B Operation and Maintenance, where locations support the safe operation of the
7 Geoprobe® vehicle. Otherwise, hand augering or direct-push liner sampling will be conducted, in
8 accordance with procedure SMPL-01, Solids Sampling. At each sampling location, the surface
9 vegetation within a 6-inch radius of the sample point will be removed using a stainless steel trowel or by
10 hand with clean nitrile gloves while taking care to minimize the removal of any soil.

11
12 Soil samples will be collected from the 1-foot intervals identified in Appendix D. If additional volume is
13 necessary, the sample interval may be extended an additional 6 inches. If this is not possible
14 (e.g., samples interval is at the bottom of the boring), then additional cores will be collected. The sample
15 depth intervals will be recorded on the appropriate field documentation.

16
17 All borings will be taken completely through the soil pile, from the surface of the pile to a depth of 1 foot
18 below the base of the pile, for field screening purposes. Estimated boring depths for each sample
19 location are listed in Appendix D. If the primary random sample location cannot be collected, the
20 secondary random sample location will be selected. If refusal or resistance is encountered during the
21 secondary soil boring location, additional borings within a 3-foot radius will be attempted to collect the
22 specified samples. If this is necessary, borings will not be moved across grid lines. All encounters with
23 subsurface debris will be noted in the field log in order to characterize the pile for debris content. All
24 debris will be discarded from the sample volume. Disposition of excess soil and decontamination water
25 will be determined by the Field Sampling Lead and the WAO stockpile contact.

26 27 2.3.1 Geoprobe® Methods

28 A Geoprobe® Macro-Core sampler will be advanced in approximately 12 to 48-inch increments to collect
29 the target depth intervals for the soil samples specified in Appendix D. The Macro-Core collects a
30 1.5-inch diameter soil core. Multiple cores may be collected at each sampling location (not to exceed
31 1 foot apart) to obtain sufficient sample volume for analysis or if complete sample recovery is not
32 obtained. Borehole collapse will be monitored during core sampling to ensure minor sidewall slough is

1 accounted for during coring and sample collection. If significant borehole collapse occurs, a closed-tube,
2 piston-type core sampler (Macro-Core) will be employed which is closed during advancement to the
3 sample interval, then opened to collect the discrete interval of interest. The Macro-Core sampling
4 method will utilize a disposable plastic liner insert in which the soil core is recovered.

6 2.3.2 Manual Sampling Methods

7 If Geoprobe® accessibility is not possible, soil samples will be collected using a hand auger (typically
8 3-inch diameter) or other methods in specified in SMPL-01. The hand auger will be advanced in
9 approximately 1-foot increments down to the target depth intervals for the soil samples specified in
10 Appendix D. As with core sampling, multiple holes at one sampling location (not to exceed 1 foot apart)
11 may have to be augered to obtain sufficient volume for laboratory analysis. Borehole collapse will be
12 monitored during core sampling to ensure sidewall slough is accounted for during augering and sample
13 collection. The borehole will be manually collapsed following sample collection to eliminate the
14 possibility of injury to workers. For shallow borings or surface samples, a direct-push liner may be used.
15 Surface samples may be required as a result of real-time radiological scanning, as discussed in
16 Section 3.0.

18 2.3.3 Biased Sample Selection

19 Each boring location will be screened for volatile organic compounds (VOCs) using a PID and for
20 radionuclides using a beta/gamma (Geiger-Mueller) survey meter. Any concrete and debris will be
21 removed from the samples to the extent practical prior to screening.

23 The entire length of each boring will be screened using a PID. For hand auger borings, each 1-foot push
24 will be placed in a clean tray prior to PID screening. For Geoprobe® cores, the core liners will be opened
25 for PID screening. Any 1-foot sample interval with an above-background reading on the PID will be
26 subjected to a headspace analysis in accordance with procedure EQT-04, Photoionization Detector. If
27 the result of the headspace analysis is above 10 parts per million (ppm), the 1-foot sample interval will
28 be submitted for total VOC analysis. If the entire boring is below background on the initial PID
29 screening or if all headspace analysis results are less than 10 ppm, no biased sample will be collected
30 from that boring for VOC analysis. If four or more consecutive 1-foot intervals have head-space analysis
31 results above 10 ppm, the following samples will be sent to the lab:

- 1 • The shallowest and deepest samples that exceeded 10 ppm head-space analysis in order
2 to bound the area
- 3
- 4 • The sample between the two bounding samples with the highest concentration from the
5 head-space analysis
- 6
- 7 • If the samples between the two bounding intervals have the same head-space analysis
8 results, randomly choose an interval.
- 9

10 If biased VOC samples are being collected from a boring and if the designated random sample interval is
11 not above background on the PID scan or does not exceed 10 ppm head-space analysis, the biased sample
12 interval will replace the random interval for total VOC analysis only. All other analytes will be collected
13 from the designated random sample interval.

14

15 The entire length of the soil core, or the cuttings in the case of augering, will be surveyed to determine
16 the intervals with beta/gamma readings above 400 corrected counts per minute (ccpm). The identified
17 1-foot intervals will be sampled and analyzed for total uranium only. If the entire soil core is found to be
18 less than 400 ccpm, then no high-biased sample will be collected from that boring for total uranium
19 analysis [Target Analyte List (TAL) B]. Archive samples will be collected from the 1-foot intervals
20 above and below any sample intervals that are above 400 ccpm. If the interval above or below is already
21 designated for sampling, then no additional archive sample will be necessary in that direction. In the
22 event that biased sample intervals are above the total uranium WAC, the archive samples may be
23 submitted for analysis in an attempt to vertically bound the contamination. Excess sample material
24 collected for analysis and archive purposes will be returned to the stockpiles prior to completion of the
25 soil pile excavation. All biased samples and associated analysis will be documented in a Variance/Field
26 Change Notice (V/FCN).

27

28 2.3.4 Soil Sample Processing and Analysis

29 The Geoprobe® soil cores will be laid out on clean plastic, and the appropriate sample intervals will be
30 separated from the core to obtain the necessary samples. Any debris (e.g., wood, concrete, metal)
31 contained in a sample interval will be removed from the sample in the field. For hand augering sampling
32 locations, the soil cuttings collected from the target sample interval will be placed in a clean tray prior to
33 transfer to a sample container so that the interval can be screened with a PID as described in
34 Section 2.3.3. VOC samples from hand augering locations will be immediately placed in the sample
35 container following screening. Sample volume and analysis information is summarized in Table 2-1.

1 Samples to be analyzed for radiological constituents and TCLP metals will be sent to the on-site
2 laboratory for analysis. The VOC, SVOC, pesticide, TCLP VOC, and TCLP SVOC/pesticide/herbicide
3 samples will be sent to the Sample Processing Laboratory, where they will be prepared for shipment to
4 an approved off-site laboratory. One alpha/beta screening sample will be collected and analyzed on site
5 for any sample interval being sent off site for analysis. The laboratories will analyze the samples for the
6 appropriate TAL, as identified in Appendix C.

8 2.4 SAMPLE IDENTIFICATION

9 All physical soil samples collected for laboratory analysis will be assigned a unique sample identifier, as
10 listed in Appendix C. This identifier will consist of a prefix designating the area name (HIS-008,
11 A3A-006, or BPW-005) followed by the sample point number (1 through x), followed by a depth interval
12 (one for a sample beginning at 0 feet, two for a sample beginning at 0.5 feet, etc.) followed by a letter
13 designating the type of sample ("R" for radionuclides, "L" for VOCs, "S" for SVOCs, "P" for pesticides,
14 "TL" for TCLP VOC, "TS" for TCLP SVOC, pesticide, and herbicide, "TM" for TCLP metals, and
15 "AB" for alpha/beta). For example:

16
17 HIS-008-2-5-P is the sample collected from 2 to 3 feet below the surface at sample point 2 in
18 HIS-008 and is being analyzed for pesticides.

19
20 Biased samples collected as a result of PID and beta/gamma surveys will have a "B" inserted after the
21 depth interval. For example:

22
23 HIS-008-2-8-B-R is a biased sample collected from 3.5 to 4 feet below the surface at sample
24 point 2 in HIS-008 and is being analyzed for radionuclides.

25
26 Any archive samples collected will be assigned a "V" suffix (e.g., HIS-008-2-8-B-R-V) to designate an
27 archive. Trip blanks will be labeled with the area name and the suffix "TB." For example, HIS-008-TB2
28 is the second trip blank from HIS-008.

29
30 If a boring location requires multiple borings due to subsurface refusal, or if a boring is moved after
31 attempting the original location, the boring grid identifier will be designated with an alphabetic suffix
32 (e.g., 7A, 7B, etc.) Therefore, a random sample collected during the third attempt at sample point 2 at
33 HIS-008 would be HIS-008-2C-5-R.

1 **2.5 EQUIPMENT DECONTAMINATION**

2 Sampling equipment will be decontaminated before transporting to the sampling site. Additionally,
3 equipment that comes into contact with sample media at the target sample interval must be
4 decontaminated, including the core sampler cutting shoe, hand auger buckets, and other sample
5 collection tools. All decontamination will be Level II decontamination as specified in SMPL-01. The
6 core barrel portion of the core sampler will be wiped down between sample intervals and locations to
7 remove visible soil or material. Decontamination of the core barrel will not be necessary because the
8 core barrel will not come into contact with the sample when using a liner insert.

9
10 **2.6 SAMPLE HANDLING AND SHIPPING**


11 Samples will be processed in accordance with SMPL-01, to ensure that samples are documented properly
12 and custody and sample integrity are maintained. All samples will be transported from the field to the
13 on-site Sample Processing Laboratory.

1
2
3

TABLE 2-1
SAMPLING AND ANALYTICAL REQUIREMENTS

Analyte	Sample Matrix	Lab	ASL	Preserve	Holding Time	Container	Required Sample Mass
Total Uranium Technetium-99 (TALs A and B)	Solid	On-site	B	None	12 months	250-mL widemouth glass	40g
Total VOCs (TAL C)	Solid	Off-site	B	Cool to 4°C	14 days	60-mL Septa widemouth glass with Teflon-lined lid	fill container to top (no head space)
Total SVOCs (TAL D)	Solid	Off-site	B	Cool to 4°C	14 days	120-mL Septa widemouth glass with Teflon-lined lid	Fill container
Total Pesticides (TAL E)	Solid	Off-site	B	Cool to 4°C	14 days	120-mL widemouth glass with Teflon-lined lid	90g
TCLP VOCs (TAL F)	Solid	Off-site	B	Cool to 4°C	14 days	60-mL glass with Teflon-lined lid	fill container to top (no head space)
TCLP SVOCs/ Pesticides/ Herbicides (TAL G)	Solid	Off-site	B	Cool to 4°C	14 days	8-oz. glass with Teflon-lined lid	300g
TCLP Metals (TAL H)	Solid	On-site	B	Cool to 4°C	6 months	250-mL glass with Teflon-lined lid	200g
Alpha/Beta Screen	Solid	On-site	N/A	None	None	Any container	10g
Trip Blank	Liquid	Off-site	B	Cool to 4°C; pH <2 by HCl or H ₂ SO ₄	14 days	3 x 40-mL glass with Teflon-lined lid	fill to top
Archive	Solid	N/A	N/A	None	12 months	250-mL widemouth glass	N/A


4
5 Note: Off-site samples will be recorded on a separate Chain of Custody form from the on-site samples.

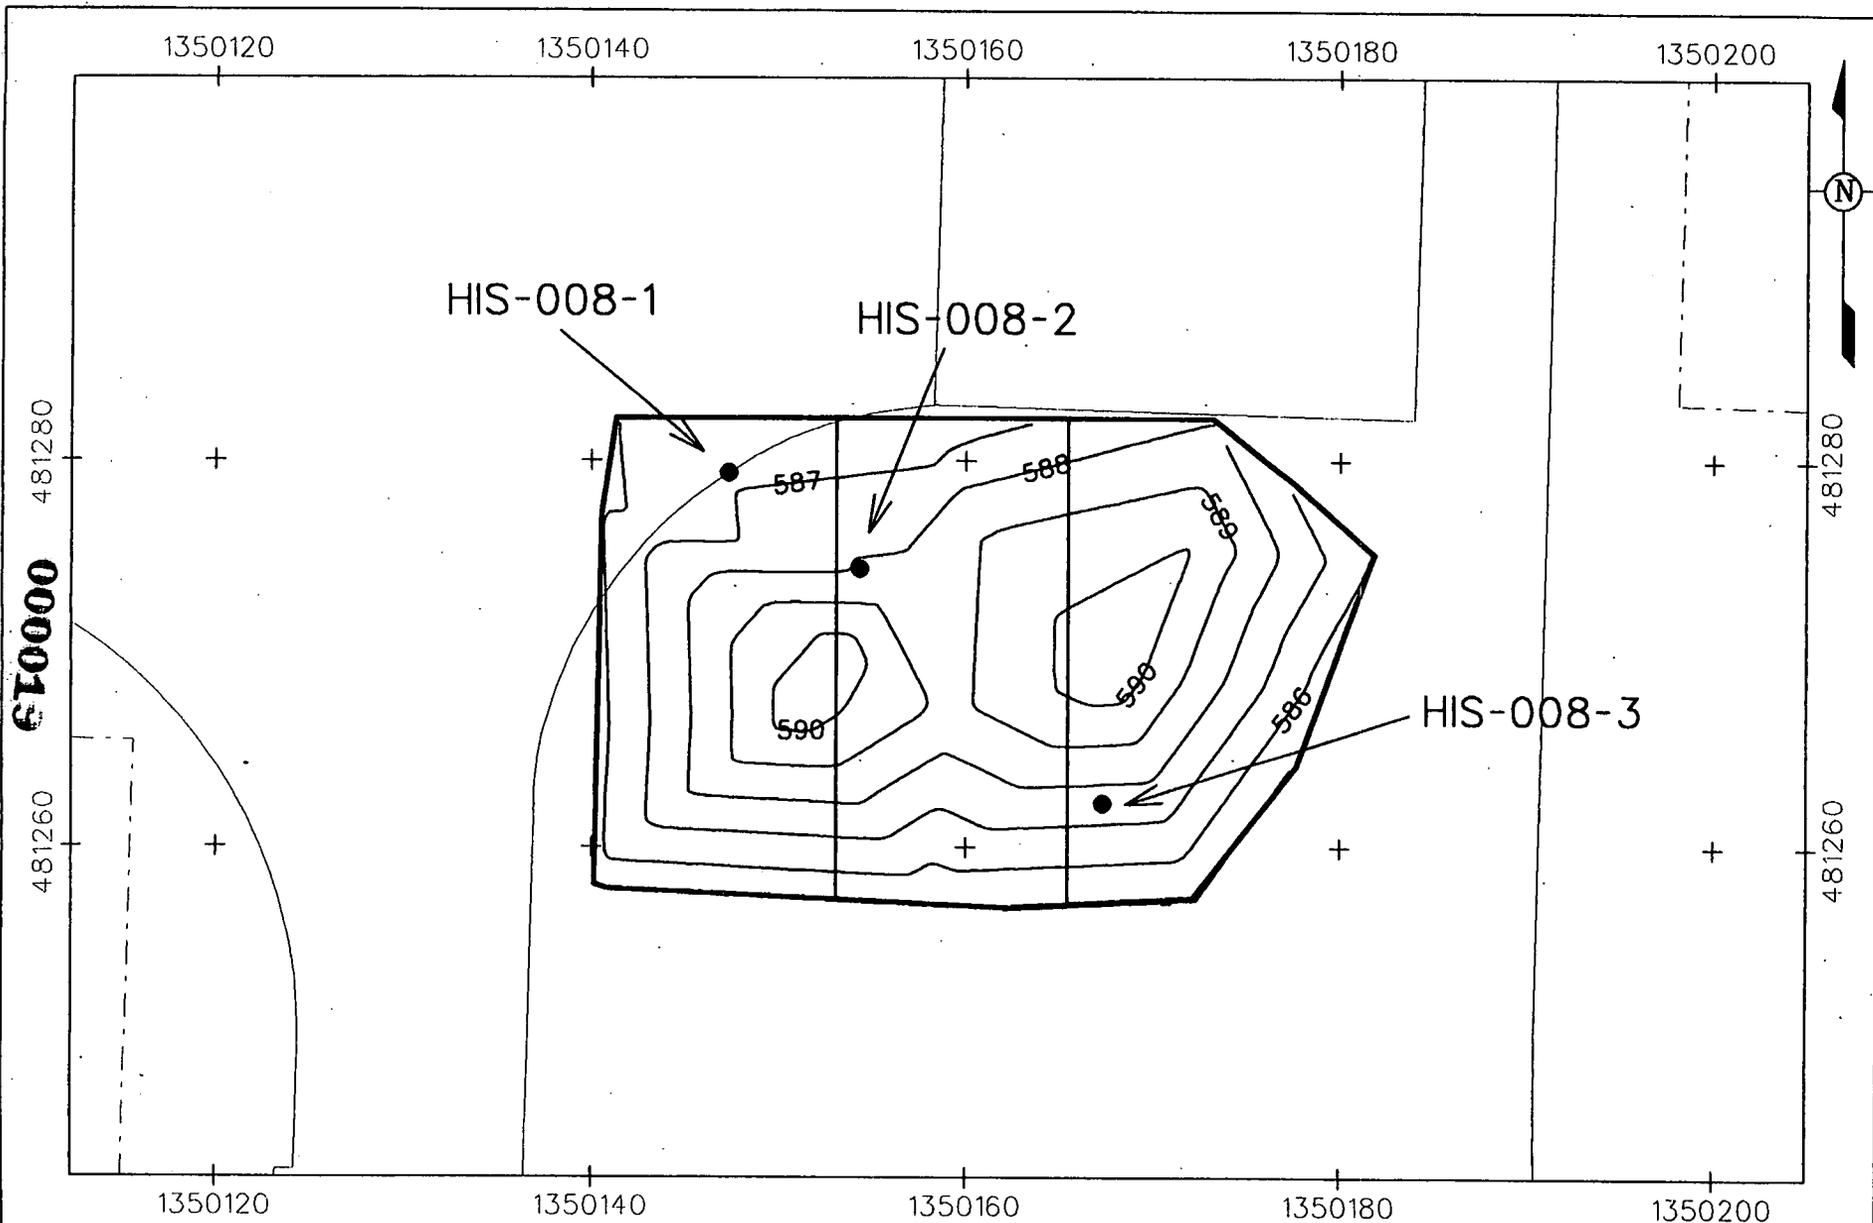


LEGEND:

-  SOIL PILE BOUNDARY
-  RANDOM SAMPLE LOCATION

SCALE




DRAFT

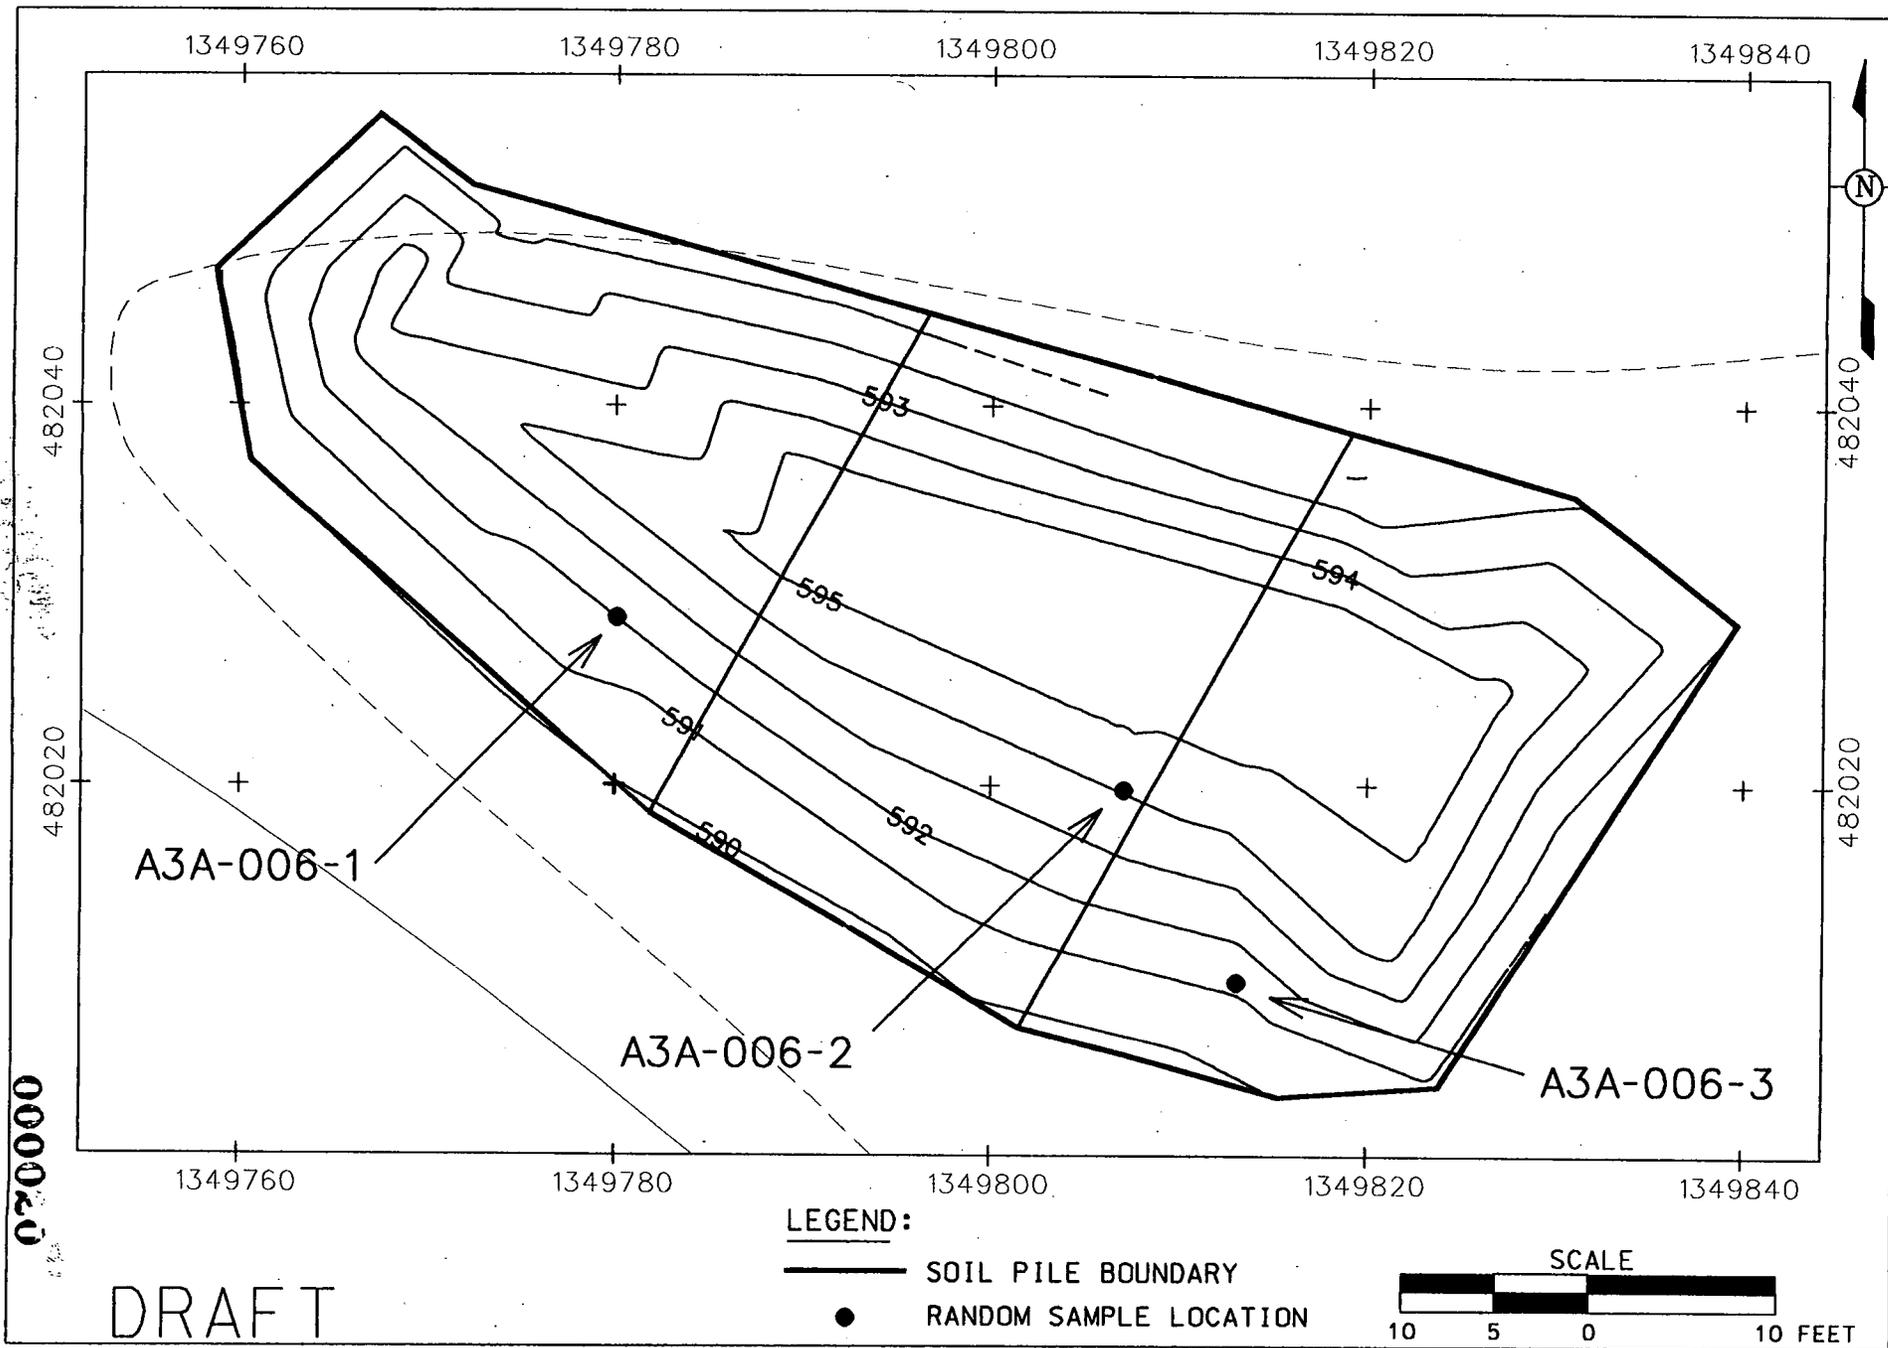

020000


2997

FIGURE 2-2. SAMPLING LOCATIONS FOR A3A-006

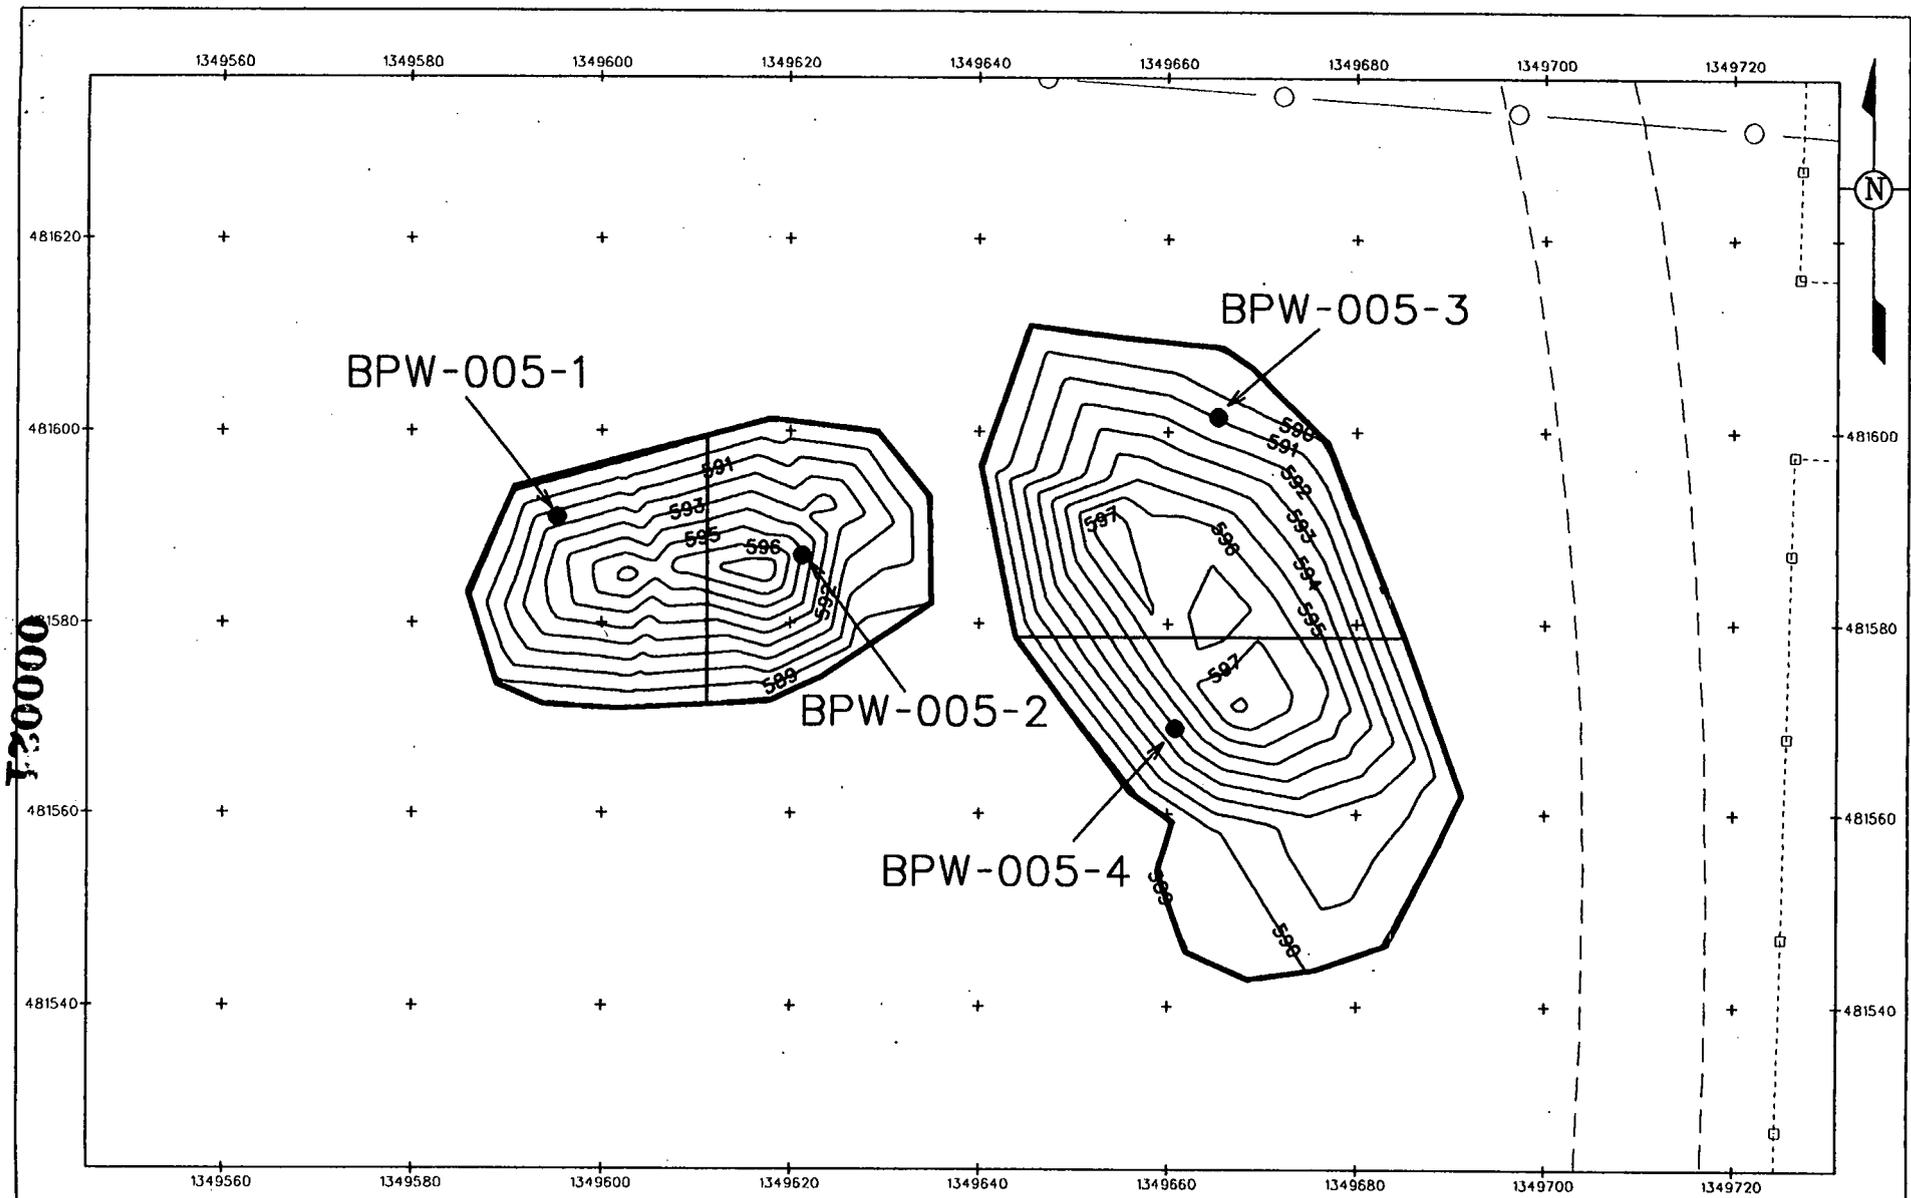

LEGEND:

- SOIL PILE BOUNDARY
- RANDOM SAMPLE LOCATION

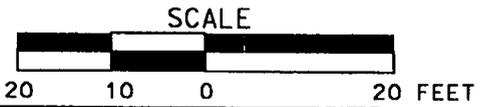

DRAFT

02-MAY-2000 **FIGURE 2-3. SAMPLING LOCATIONS FOR BPW-005**

3.0 REAL-TIME RADIOLOGICAL SCANNING

The real-time WAC investigation of surface soil total uranium contamination in stockpiles HIS-008, A3A-006, and BPW-005 will be performed to cover as much of the stockpile surface as practical using the HPGe portable detectors or a mobile NaI detector, referred to as the Radiation Measurement System (RMS). The RMS can be the Radiation Tracking System (RTRAK), the Radiation Scanning System (RSS), or the Gator. The final aerial coverage will be documented and reported upon completion of the real-time measurement scanning.

Real-time data gathered during this activity will be reported on an IIMS Data Group Form (FS-F-5157). The Characterization Lead and WAO representatives or designees will complete this form for each real-time measurement. The original forms and color maps will be placed in the WAO files.

3.1 RADIATION MEASUREMENT SYSTEM SCANNING COVERAGE

Real-time NaI detector system coverage using the RMS will be limited to safely accessible surfaces and will be as extensive as possible without jeopardizing worker safety. The real-time field team, supervisor, and project health and safety representative will jointly determine which areas are accessible based on field conditions at the time of measurements.

The spectral acquisition time for the NaI detector will be set to 4 seconds and the data will be collected at a vehicle speed of 1 mile per hour. The onboard Global Positioning System (GPS) will be used to obtain positioning information with each detector measurement. The RMS scan data will be reviewed to determine if any single measurement exceeds 721 milligrams per kilogram (mg/kg) total uranium, the trigger level established for NaI WAC measurements. If this trigger is exceeded, an HPGe measurement may be taken to confirm the RMS measurement, as discussed in Section 3.3.

A minimum of two Troxler® or Zeltex® Infrared Moisture Meter soil moisture measurements will be collected per acre in the area covered by the RMS. These moisture measurements are necessary because spectral data from HPGe and RMS detectors need to be adjusted to take into account the soil moisture. If a moisture measurement cannot be taken due to the surface of the stockpile being covered with gravel or other non-soil material, a default moisture value of 20 percent will be used.

1 3.2 HPGe DETECTOR MEASUREMENTS

2 The HPGe portable detector systems will be used to obtain gamma measurements in those areas that
3 cannot be safely accessed by the RMS but are accessible to the HPGe detector (e.g., steep side slopes).

4 The objective of the HPGe measurements is to cover the areas of the pile that were not scanned by RMS,
5 with the goal of covering as much of the surface of the pile as possible using real-time methods.

6
7 The spectral acquisition time for the HPGe detector system will be set to 300 seconds (5 minutes). The
8 detector height will be set at 1 meter above ground surface. All HPGe locations will be surveyed and
9 marked. Each HPGe measurement will be identified as specified in Section 3.3. One Troxler® or
10 Zeltex® Infrared Moisture Meter soil moisture measurement will be collected in each grid block covered
11 by the HPGe measurements. If a moisture measurement cannot be taken, a default moisture value of
12 20 percent may be used.

13
14 One duplicate measurement will be taken for every 20 HPGe measurements collected for this project.
15 The duplicate measurement will immediately follow the original measurement and will be conducted
16 using the same detector with the same height and spectral acquisition time.

17
18 The HPGe data will be reviewed to determine if any single measurement exceeds 400 mg/kg total
19 uranium, the trigger level established for 5-minute HPGe WAC measurements at a 1-meter height. If
20 this trigger is exceeded, an additional HPGe measurement at a lower detector height will be taken, as
21 discussed in Section 3.3.

22
23 3.3 DETERMINING NEED FOR ADDITIONAL HPGe MEASUREMENTS

24 If RMS scans or 1-meter detector height HPGe measurements are greater than trigger level
25 concentrations, confirmation and delineation will be required. This confirmation and delineation process
26 is documented in Section 3.4 of the User Guidelines, Measurement Strategies, and Operational Factors
27 for Deployment of In-Situ Gamma Spectrometry at the Fernald Site (Users Manual). The circumscribed
28 boundary of the RMS or 1-meter HPGe measurement above trigger limits will be located and marked
29 (flags and/or stakes) on the surface of the stockpile by the Characterization and/or Survey Lead or
30 designee. The location of the maximum activity will be identified in the field using a hand-held frisker
31 or equivalent instrument. HPGe detectors will be used for all confirmation and delineation
32 measurements. Confirmation measurements shall be made using detector heights of 15 cm and/or 31 cm

1 (depending on required field of view) and a spectral acquisition time of five minutes at the suspect
2 above-WAC location to reliably determine above-WAC boundaries. If either confirmation measurement
3 exceeds the trigger level of 928 mg/kg, then the area exceeding the trigger level (i.e., above-WAC) shall
4 be further delineated with the HPGe. The boundary of confirmed above-WAC material area shall be
5 refined (delineated) using a detector height of 15 cm with a spectral acquisition time of 5 minutes on a
6 2-meter triangular grid covering the entire area indicated by the detection and confirmation
7 measurements. The limits of the above-WAC area will be defined by HPGe measurements that are lower
8 than the HPGe WAC trigger levels.

9
10 Confirming and delineating the extent of contamination with 31-cm and 15-cm HPGe measurements is at
11 the discretion of the Characterization Lead or designee. Conditions may arise which warrant a different
12 decision process for defining the extent of contamination (i.e., cost effectiveness, need for timely
13 response, obvious discoloration in the soil, or other suspect above-WAC material may require physical
14 sampling). The decision process for the unusual condition will be documented in applicable field
15 activity logs and, if determined to be appropriate by the Characterization Lead or designee, with a
16 V/FCN as described in Section 4.4.

17
18 Duplicate measurements will be performed in the same manner described in Section 3.2, one per
19 20 measurements taken.

21 3.4 REAL-TIME MEASUREMENT IDENTIFICATION

22 The data from each run of the RMS will be uniquely identified. This identifier will consist of a prefix
23 designating the area name (HIS-008, A3A-006, or BPW-005) followed by the batch run number, which
24 is assigned by the real-time scanning personnel. For example, HIS-008-265 would be batch run #265 on
25 HIS-008.

26
27 Each HPGe measurement will have a unique identifier. This identifier will consist of a prefix
28 designating the area name (HIS-008, A3A-006, or BPW-005), followed by the sample number within the
29 area (1 through x), followed by a letter designating the type of sample ("G" for gamma). A "D" will be
30 used to designate the duplicate measurements. For example:

31
32 HIS-008-1-G-D is the first HPGe reading taken on HIS-008 and is a duplicate measurement.

1 3.5 DATA MAPPING

2 As the measurements are acquired by the Survey and Real-Time Teams, the data will be electronically
3 loaded into mapping software through manual file transfer or Ethernet. A set of maps and/or data
4 summaries will be given to the Characterization Lead and WAO. Maps will be generated showing
5 Northing (Y) and Easting (X) coordinate values (Ohio South Zone, #3402) and elevation (Z) as
6 determined using standard survey practices and standard positioning instrumentation (electronic total
7 stations and GPS receivers). The map will depict the following:

8
9 Surface Scan Coverage Map(s)

- 10
- 11 • RMS Location Map - showing field of view squares that are color-coded for total
12 uranium concentration and denotes batch numbers in title.
 - 13
 - 14 • HPGe Location Map - showing field of view circles that are color-coded for total
15 uranium concentration and that denotes identification number for each HPGe
16 measurement. Also attach data printout that summarizes each HPGe measurement
17 parameter and shows total uranium concentration.

18
19 (Note: Both results can be shown on the same map.)

20
21 HPGe Confirmation/Delineation Map(s)

- 22
- 23 • HPGe Location Map - showing field of view circles that are color-coded for total
24 uranium concentration and that denotes identification number for each HPGe
25 measurement. Also attach data printout that summarizes each HPGe measurement
26 parameter and shows total uranium concentration.

27
28 The map and/or HPGe data summary printouts will be used to provide the Characterization Lead or
29 designee with information to determine if additional scanning, confirmation, or delineation
30 measurements are required.

31
32 3.6 SAMPLE COLLECTION BASED ON RMS AND HPGe MEASUREMENTS

33 If RMS identifies an area of surface soil above the trigger level discussed in Section 3.1 and the stockpile
34 slope prohibits the use of HPGe to confirm and delineate the potential above-WAC area, a surface soil
35 sample (0 to 6 inches) will be collected from a location within that RMS measurement area that exhibits
36 the highest gross beta/gamma reading based on a portable survey meter/probe. This surface soil sample

1 will be analyzed for total uranium (TAL B). If a surface sample is collected, it will be assigned a unique
2 sample identifier consisting of a prefix designating the area name (HIS-008, A3A-006, or BPW-005),
3 followed by "RMS" to indicate that the sample was collected based on elevated RMS measurement, and
4 followed by the consecutive sample point number (B1, B2, etc.) to indicate a biased sample. For
5 example:

6

7 HIS-008-RMS-B1 is the first biased sample collected from stockpile HIS-008 as a result of RMS
8 measurements.

9

10 The sample location (northing and easting) will be documented on a V/FCN.

4.0 QUALITY ASSURANCE/QUALITY CONTROL REQUIREMENTS

4.1 FIELD QUALITY CONTROL SAMPLES, ANALYTICAL REQUIREMENTS, AND DATA VALIDATION

In accordance with the requirements of DQO SL-048, Revision 5 and DQO SL-055, Revision 0, the field quality control, analytical, and data validation requirements are as follows:

- All laboratory analyses will be performed at Analytical Support Level (ASL) B.
- One trip blank will be taken each day that VOC samples are collected, or one per 20 VOC samples that are collected, or one per sample transport cooler, whichever is more frequent. In addition, laboratory matrix spike and matrix spike duplicate sample volumes will be collected for each VOC release or one per 20 VOC samples that are collected, whichever is more frequent.
- All ASL B field data will be validated. All analytical data will require a certificate of analysis and 10 percent of the analytical data will also require the associated quality assurance/quality control results. A minimum of 10 percent of the analytical data from each laboratory will be validated to ASL B.
- Real-time measurements will be performed at ASL A.
- One in 20 HPGe measurements will require a duplicate.

If any sample collection or analysis methods are used that are not in accordance with the SCQ, the Project Manager and Characterization Lead must determine if the qualitative data from the samples will be beneficial to predesign decision making. If the data will be beneficial, the Project Manager and Characterization Lead will ensure that:

- The PSP is revised to include references confirming that the new method is sufficient to support data needs,
- variations from the SCQ methodology are documented in the PSP, or
- data validation of the affected samples is requested or qualifier codes of J (estimated) and R (rejected) be attached to detected and nondetected results, respectively.

9824

1 4.2 APPLICABLE PROCEDURES, DOCUMENTS, AND MANUALS

2 To assure consistency and data integrity, field activities in support of this PSP will follow the
3 requirements and responsibilities outlined in controlled procedures and manufacturer operational
4 manuals. Applicable procedures and manuals include:

- 5
- 6 • SMPL-01, Solids Sampling
- 7
- 8 • SMPL-21, Collection of Field Quality Control Samples
- 9
- 10 • EQT-04, Photoionization Detector
- 11
- 12 • EQT-05, Geodimeter® 4000 Survey System B Operation, Maintenance, and Calibration
- 13
- 14 • EQT-06, Geoprobe® Model 5400 Operation and Maintenance Manual
- 15
- 16 • EQT-22, Characterization of Gamma Sensitive Detectors
- 17
- 18 • EQT-23, Operation of ADCAM Series Analyzers with Gamma Sensitive Detectors
- 19
- 20 • EQT-32, Troxler® 3440 Series Surface Moisture/Density Gauge -- Calibration,
21 Operation, and Maintenance
- 22
- 23 • EQT-33, Real-Time Differential Global Positioning System Operation
- 24
- 25 • EQT-39, Zeltex® Infrared Moisture Meter
- 26
- 27 • EQT-41, Radiation Measurement Systems
- 28
- 29 • EW-1023, Management of Stockpiles
- 30
- 31 • 34-10-501, Shipping Samples to Off-Site Laboratories
- 32
- 33 • Sitewide CERCLA Quality Assurance Project Plan (SCQ)
- 34
- 35 • Sitewide Excavation Plan
- 36
- 37 • WAC Attainment Plan for the OSDF
- 38
- 39 • User Guidelines, Measurement Strategies, and Operational Factors for Deployment of
40 In-Situ Gamma Spectrometry at the Fernald Site (Users Manual)
- 41
- 42

1 4.3 PROJECT REQUIREMENTS FOR INDEPENDENT ASSESSMENTS

2 Project management has ultimate responsibility for the quality of the work processes and the results of
3 the sampling activities covered by this PSP. The Quality Assurance (QA) organization may conduct
4 independent assessments of the work process and operations to assure the quality of performance.
5 Assessment will encompass technical and procedural requirements of this PSP and the SCQ.
6 Independent assessments will be performed by conducting a surveillance. Surveillances will be planned
7 and documented according to Section 12.3 of the SCQ.

8
9 4.4 IMPLEMENTATION OF FIELD CHANGES

10 If field conditions require changes or variances, the Field Sampling Lead must obtain written or verbal
11 approval (electronic mail is acceptable) from the Characterization Lead, QA, and WAO before the
12 changes may be implemented. If the change involves real-time scanning, the Real-Time Lead must also
13 give written or verbal approval before the change can be implemented. Changes to the PSP will be noted
14 in the applicable Field Activity Logs and on a V/FCN. QA must receive the completed V/FCN, which
15 includes the signatures of the Characterization Lead, Sampling Lead, Project Manager, WAO, QA, and
16 Real-Time Lead (as necessary) within seven working days of implementation of the change.

5.0 HEALTH AND SAFETY

1
2
3 The Health and Safety Lead, Field Sampling Leads, and team members will assess the safety of
4 performing sampling activities on the surface of the stockpiles. This will include vehicle positioning
5 limitations, slips/trips/falls hazards, and vehicle stability if Geoprobe® or real-time scanning work is
6 performed on the side slopes of the pile.

7
8 Technicians will conform to precautionary surveys performed by personnel representing the Radiological
9 Control, Safety, and Industrial Hygiene organizations. All work on this project will be performed in
10 accordance with applicable Environmental Monitoring procedures, RM-0020 (Radiological Control
11 Requirements Manual), RM-0021 (Safety Performance Requirements Manual), Fluor Fernald work
12 permit, Radiological Work Permit (RWP), penetration permits, and other applicable permits.
13 Concurrence with applicable safety permits (indicated by the signature of each field team member
14 assigned to this project) is required by each team member in the performance of their assigned duties.

15
16 The Field Sampling Lead will ensure that each technician performing sampling related to this project has
17 been trained to the relevant sampling procedures including safety precautions. Technicians who do not
18 sign project safety and technical briefing forms will not participate in the execution of sampling
19 activities related to the completion of assigned project responsibilities. A copy of applicable safety
20 permits/surveys issued for worker safety and health will be posted at each stockpile during sampling
21 activities.

22
23 A safety briefing will be conducted prior to the initiation of field activities. **All emergencies shall be**
24 **reported immediately on extension 911, or to the Site Communications Center at 648-6511 (if**
25 **using a cellular phone), or using a radio and contacting "CONTROL" on Channel 11.**

6.0 DATA MANAGEMENT

1
2
3 A data management process will be implemented so information collected during the investigation will
4 be properly managed to satisfy data end use requirements after completion of the field activities. As
5 specified in Section 5.1 of the SCQ, sampling teams will describe daily activities on a Field Activity
6 Log, which should be sufficiently detailed to allow accurate reconstruction of the events at a later date
7 without reliance on memory. Sample Collection Logs will be completed according to protocol specified
8 in Appendix B of the SCQ and in applicable procedures. These forms will be maintained in loose-leaf
9 form and uniquely numbered following the field sampling event. At least weekly, a copy of all field logs
10 will be sent to the Characterization Lead.

11
12 Samples will be assigned a unique sample identifier, as explained in Sections 2.4 and 3.4 and listed in
13 Appendix C. This unique sample identifier will appear on the Sample Collection Log and Chain of
14 Custody/Request for Analysis and will be used to identify the samples during analysis, data entry, and
15 data management.

16
17 Technicians will review all field data for completeness and accuracy and then forward all data packages
18 to the Data Validation Contact for final review. The field data package will be filed in the records of the
19 Environmental Management Project. All field data packages will be validated. QA will perform
20 validation on at least 10 percent of ASL B data packages, as designated by the Characterization Lead.

21
22 All field measurements, observations, and sample collection information associated with physical sample
23 collection will be recorded, as applicable, on the Sample Collection Log, the Field Activity Log, and the
24 Chain of Custody/Request for Analysis Form as required. The method of sample collection will be
25 specified in the Field Activity Log. Borehole Abandonment Logs will not be required. The PSP number
26 will be on all documentation associated with these sampling activities.

27
28 The Real-Time Instrumentation Measurement Program (RTIMP) group will provide hard copy maps
29 and/or summary reports to the Characterization Lead and Data Management Contact or designees. All
30 Real-Time data will be collected and reported at a minimum ASL A and require no data validation. All
31 physical samples and RTIMP confirmation/delineation measurements will be collected and reported at
32 ASL B and will require 10 percent data validation. All electronically recorded field data will have the

1 RMS or HPGe Data Verification Checklist (Section 5.4 of the Users Manual), which will be completed
2 after each data collection event. Field documentation, such as the Nuclear Field Density/Moisture
3 Worksheet, will undergo an internal review by the RTIMP.

4
5 Electronically recorded data from the GPS, HPGe, and RMS systems will be downloaded on a daily basis
6 to disks, or to the Local Area Network (LAN) using the ethernet connection. The Characterization Lead
7 or designee will be informed by the RTIMP Lead or designee when RTIMP equipment measurements do
8 not meet data quality control checklist criteria. The Characterization Lead or designee will determine
9 whether additional scanning, confirmation, or delineation measurements are required.

10
11 Once the survey and real-time electronic data have been placed on the LAN and Sitewide Environmental
12 Database (SED), the Data Management Contact will perform an evaluation prior to placement on the Soil
13 and Disposal Facility Project (SDFP) website. The evaluation may involve a comparison check between
14 the electronic data, hard copy maps and summary reports for accuracy and completeness. The evaluation
15 will be documented on the Real-Time Electronic Data Quality Control checklist, dated, and signed.

16
17 The Data Management organization will perform data entry into the SED. Field logs will be maintained
18 in loose-leaf form during the field recording activities. Analytical data from the off-site laboratory will
19 be reviewed by the Project Lead prior to entry or transfer of the data to the SED from the Fernald
20 Analytical Customer Tracking System (FACTS) database. The analytical data validation requirements
21 are outlined in Section 4.1. After the analytical and real-time data are in the SED, the Data Group Form
22 (FS-F-5157) will be completed by the Characterization Lead with concurrence from a WAO
23 representative.

APPENDIX A

**DATA QUALITY OBJECTIVES
SL-048, REV. 5 AND SL-055, REV. 0**

Control Number _____

Fernald Environmental Management Project

Data Quality Objectives

Title: Delineating the Extent of Constituents of Concern During Remediation Sampling

Number: SL-048

Revision: 5

Effective Date: February 26, 1999

Contact Name: Eric Kroger

Approval: (signature on file) _____ Date: 2/25/99
James E. Chambers
DQO Coordinator

Approval: (signature on file) _____ Date: 2/26/99
J.D. Chiou
SCEP Project Director

Rev. #	0	1	2	3	4	5	6
Effective Date:	9/19/97	10/3/97	4/15/98	6/17/98	7/14/98	2/26/99	

DATA QUALITY OBJECTIVES

Delineating the Extent of Constituents of Concern During Remediation Sampling

Members of Data Quality Objectives (DQO) Scoping Team

The members of the DQO team include a project lead, a project engineer, a field lead, a statistician, a lead chemist, a sampling supervisor, and a data management lead.

Conceptual Model of the Site

Media is considered contaminated if the concentration of a constituent of concern (COC) exceeds the final remediation levels (FRLs). The extent of specific media contamination was estimated and published in the Operable Unit 5 Feasibility Study (FS). These estimates were based on kriging analysis of available data for media collected during the Remedial Investigation (RI) effort and other FEMP environmental characterization studies. Maps outlining contaminated media boundaries were generated for the Operable Unit 5 FS by overlaying the results of the kriging analysis data with isoconcentration maps of the other constituents of concern (COCs), as presented in the Operable Unit 5 RI report, and further modified by spatial analysis of maps reflecting the most current media characterization data. A sequential remediation plan has been presented that subdivides the FEMP into seven construction areas. During the course of remediation, areas of specific media may require additional characterization so remediation can be carried out as thoroughly and efficiently as possible. As a result, additional sampling may be necessary to accurately delineate a volume of specific media as exceeding a target level, such as the FRL or the Waste Attainment Criterion (WAC). Each individual Project-Specific Plan (PSP) will identify and describe the particular media to be sampled. This DQO covers all physical sampling activities associated with Pre-design Investigations, precertification sampling, WAC attainment sampling or regulatory monitoring that is required during site remediation.

1.0 Statement of Problem

If the extent (depth and/or area) of the media COC contamination is unknown, then it must be defined with respect to the appropriate target level (FRL, WAC, or other specified media concentration).

2.0 Identify the Decision

Delineate the horizontal and/or vertical extent of media COC contamination in an area with respect to the appropriate target level.

3.0 Inputs That Affect the Decision

Informational Inputs - Historical data, process history knowledge, the modeled extent of COC contamination, and the origins of contamination will be required to

establish a sampling plan to delineate the extent of COC contamination. The desired precision of the delineation must be weighed against the cost of collecting and analyzing additional samples in order to determine the optimal sampling density. The project-specific plan will identify the optimal sampling density.

Action Levels - COCs must be delineated with respect to a specific action level, such as FRLs and On-Site Disposal Facility (OSDF) WAC concentrations. Specific media FRLs are established in the OU2 and OU5 RODs, and the WAC concentrations are published in the OU5 ROD. Media COCs may also require delineation with respect to other action levels that act as remediation drivers, such as Benchmark Toxicity Values (BTVs).

4.0 The Boundaries of the Situation

Temporal Boundaries - Sampling must be completed within a time frame sufficient to meet the remediation schedule. Time frames must allow for the scheduling of sampling and analytical activities, the collection of samples, analysis of samples and the processing of analytical data when received.

Scale of Decision Making - The decision made based upon the data collected in this investigation will be the extent of COC contamination at or above the appropriate action level. This delineation will result in media contaminant concentration information being incorporated into engineering design, and the attainment of established remediation goals.

Parameters of Interest - The parameters of interest are the COCs that have been determined to require additional delineation before remediation design can be finalized with the optimal degree of accuracy.

5.0 Decision Rule

If existing data provide an unacceptable level of uncertainty in the COC delineation model, then additional sampling will take place to decrease the model uncertainty. When deciding what additional data is needed, the costs of additional sampling and analysis must be weighed against the benefit of reduced uncertainty in the delineation model, which will eventually be used for assigning excavation, or for other purposes.

6.0 Limits on Decision Errors

In order to be useful, data must be collected with sufficient areal and depth coverage, and at sufficient density to ensure an accurate delineation of COC concentrations. Analytical sensitivity and reproducibility must be sufficient to differentiate the COC concentrations below their respective target levels.

Types of Decision Errors and Consequences

Decision Error 1 - This decision error occurs when the decision maker determines that the extent of media contaminated with COCs above action levels is not as extensive as it actually is. This error can result in a remediation design that fails to incorporate media contaminated with COC(s) above the action level(s). This could result in the re-mobilization of excavation equipment and delays in the remediation schedule. Also, this could result in media contaminated above action levels remaining after remediation is considered complete, posing a potential threat to human health and the environment.

Decision Error 2 - This decision error occurs when the decision maker determines that the extent of media contaminated above COC action levels is more extensive than it actually is. This error could result in more excavation than necessary, and this excess volume of materials being transferred to the OSDF, or an off-site disposal facility if contamination levels exceed the OSDF WAC.

True State of Nature for the Decision Errors - The true state of nature for Decision Error 1 is that the maximum extent of contamination above the FRL is more extensive than was determined. The true state of nature for Decision Error 2 is that the maximum extent of contamination above the FRL is not as extensive as was determined. Decision Error 1 is the more severe error.

7.0 Optimizing Design for Useable Data

7.1 Sample Collection

A sampling and analytical testing program will delineate the extent of COC contamination in a given area with respect to the action level of interest. Existing data, process knowledge, modeled concentration data, and the origins of contamination will be considered when determining the lateral and vertical extent of sample collection. The cost of collecting and analyzing additional samples will be weighed against the benefit of reduced uncertainty in the delineation model. This will determine the sampling density. Individual PSPs will identify the locations and depths to be sampled, the sampling density necessary to obtain the desired accuracy of the delineation, and if samples will be analyzed by the on-site or off-site laboratory. The PSP will also identify the sampling increments to be selectively analyzed for concentrations of the COC(s) of interest, along with field work requirements. Analytical requirements will be listed in the PSP. The chosen analytical methodologies are able to achieve a detection limit capable of resolving the COC action level. Sampling of groundwater monitoring wells may require different purge requirements than those stated in the SCQ (i.e., dry well definitions or small purge volumes). In order to accommodate sampling of wells that go dry prior to completing the purge of the necessary well volume, attempts to sample the

monitoring wells will be made 24 hours after purging the well dry. If, after the 24 hour period, the well does not yield the required volume, the analytes will be collected in the order stated in the applicable PSP until the well goes dry. Any remaining analytes will not be collected. In some instances, after the 24 hour wait the well may not yield any water. For these cases, the well will be considered dry and will not be sampled.

7.2 COC Delineation

The media COC delineation will use all data collected under the PSP, and if deemed appropriate by the Project Lead, may also include existing data obtained from physical samples, and if applicable, information obtained through real-time screening. The delineation may be accomplished through modeling (e.g. kriging) of the COC concentration data with a confidence limit specific to project needs that will reduce the potential for Decision Error 1. A very conservative approach to delineation may also be utilized where the boundaries of the contaminated media are extended to the first known vertical and horizontal sample locations that reveal concentrations below the desired action level.

7.3 QC Considerations

Laboratory work will follow the requirements specified in the SCQ. If analysis is to be carried out by an off-site laboratory, it will be a Fluor Daniel Fernald approved full service laboratory. Laboratory quality control measures include a media prep blank, a laboratory control sample (LCS), matrix duplicates and matrix spike. Typical Field QC samples are not required for ASL B analysis. However the PSPs may specify appropriate field QC samples for the media type with respect to the ASL in accordance with the SCQ, such as field blanks, trip blanks, and container blanks. All field QC samples will be analyzed at the associated field sample ASL. Data will be validated per project requirements, which must meet the requirements specified in the SCQ. Project-specific validation requirements will be listed in the PSP.

Per the Sitewide Excavation Plan, the following ASL and data validation requirements apply to all soil and soil field QC samples collected in association with this DQO:

- If samples are analyzed for Pre-design Investigations and/or Precertification, 100% of the data will be analyzed per ASL B requirements. For each laboratory used for a project, 90% of the data will require only a Certificate of Analysis, the other 10% will require the Certificate of Analysis and all associated QA/QC results, and will be validated to ASL B. Per Appendix H of the SEP, the minimum detection level (MDL) for these analyses will be established at approximately 10% of the action level (the action level for precertification is the

FRL; the action level for pre-design investigations can be several different action levels, including the FRL, the WAC, RCRA levels, ALARA levels, etc.). If this MDL is different from the SCQ-specified MDL, the ASL will default to ASL E, though other analytical requirements will remain as specified for ASL B.

- If samples are analyzed for WAC Attainment and/or RCRA Characteristic Areas Delineation, 100% of the data will be analyzed and reported to ASL B with 10% validated. The ASL B package will include a Certificate of Analysis along with all associated QA/QC results. Total uranium analyses using a higher detection limit than is required for ASL B (10 mg/kg) may be appropriate for WAC attainment purposes since the WAC limit for total uranium is 1,030 mg/kg. In this case, an ASL E designation will apply to the analysis and reporting to be performed under the following conditions:
 - ▶ all of the ASL B laboratory QA/QC methods and reporting criteria will apply with the exception of the total uranium detection limit
 - ▶ the detection limit will be $\leq 10\%$ of the WAC limit (e.g., ≤ 103 mg/kg for total uranium).
- If delineation data are also to be used for certification, the data must meet the data quality objectives specified in the Certification DQO (SL-043).
- Validation will include field validation of field packages for ASL B or ASL D data.

All data will undergo an evaluation by the Project Team, including a comparison for consistency with historical data. Deviations from QC considerations resulting from evaluating inputs to the decision from Section 3, must be justified in the PSP such that the objectives of the decision rule in Section 5 are met.

7.4 Independent Assessment

Independent assessment shall be performed by the FEMP QA organization by conducting surveillances. Surveillances will be planned and documented in accordance with Section 12.3 of the SCQ.

7.5 Data Management

Upon receipt from the laboratory, all results will be entered into the SED as qualified data using standard data entry protocol. The required ASL B, D or E data will undergo analytical validation by the FEMP validation team, as required (see Section 7.3). The Project Manager will be responsible to determine data usability as it pertains to supporting the DQO decision of determining delineation of media

COC's.

7.6 Applicable Procedures

Sample collection will be described in the PSP with a listing of applicable procedures. Typical related plans and procedures are the following:

- Sitewide Excavation Plan (SEP)
- Sitewide CERCLA Quality Assurance Project Plan (SCQ).
- SMPL-01, *Solids Sampling*
- SMPL-02, *Liquids and Sludge Sampling*
- SMPL-21, *Collection of Field Quality Control Samples*
- EQT-06, *Geoprobe® Model 5400 Operation and Maintenance*
- EQT-23, *Operation of High Purity Germanium Detectors*
- EQT-30, *Operation of Radiation Tracking Vehicle Sodium Iodide Detection System*

Data Quality Objectives
Delineating the Extent of Constituents of Concern During Remediation Sampling

1A. Task/Description: Delineating the extent of contamination above the FRLs

1.B. Project Phase: (Put an X in the appropriate selection.)

RI FS RD RA R_vA OTHER

1.C. DQO No.: SL-048, Rev. 5 DQO Reference No.: _____

2. Media Characterization: (Put an X in the appropriate selection.)

Air Biological Groundwater Sediment Soil
Waste Wastewater Surface water Other (specify) _____

3. Data Use with Analytical Support Level (A-E): (Put an X in the appropriate Analytical Support Level selection(s) beside each applicable Data Use.)

Site Characterization	Risk Assessment
A <input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/>	A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input type="checkbox"/> E <input type="checkbox"/>
Evaluation of Alternatives	Engineering Design
A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input type="checkbox"/> E <input type="checkbox"/>	A <input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/>
Monitoring during remediation	Other
A <input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D <input checked="" type="checkbox"/> E <input checked="" type="checkbox"/>	A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input type="checkbox"/> E <input type="checkbox"/>

4.A. Drivers: Remedial Action Work Plans, Applicable or Relevant and Appropriate Requirements (ARARs) and the OU2 and/or OU5 Record of Decision (ROD).

4.B. Objective: Delineate the extent of media contaminated with a COC (or COCs) with respect to the action level(s) of interest.

5. Site Information (Description):

6.A. Data Types with appropriate Analytical Support Level Equipment Selection and SCQ Reference: (Place an "X" to the right of the appropriate box or boxes selecting the type of analysis or analyses required. Then select the type of equipment to perform the analysis if appropriate. Please include a reference to the SCQ Section.)

- | | | | | | |
|----------------------|---------------------------------------|-------------------|---------------------------------------|--------------------|--------------------------|
| 1. pH | <input checked="" type="checkbox"/> * | 2. Uranium | <input checked="" type="checkbox"/> * | 3. BTX | <input type="checkbox"/> |
| Temperature | <input checked="" type="checkbox"/> * | Full Radiological | <input checked="" type="checkbox"/> * | TPH | <input type="checkbox"/> |
| Specific Conductance | <input checked="" type="checkbox"/> * | Metals | <input checked="" type="checkbox"/> * | Oil/Grease | <input type="checkbox"/> |
| Dissolved Oxygen | <input checked="" type="checkbox"/> * | Cyanide | <input type="checkbox"/> | | |
| Technetium-99 | <input checked="" type="checkbox"/> * | Silica | <input type="checkbox"/> | | |
| 4. Cations | <input type="checkbox"/> | 5. VOA | <input checked="" type="checkbox"/> * | 6. Other (specify) | |
| Anions | <input type="checkbox"/> | BNA | <input checked="" type="checkbox"/> * | | |
| TOC | <input type="checkbox"/> | Pesticides | <input checked="" type="checkbox"/> * | | |
| TCLP | <input checked="" type="checkbox"/> * | PCB | <input checked="" type="checkbox"/> * | | |
| CEC | <input type="checkbox"/> | COD | <input type="checkbox"/> | | |

*If constituent is identified for delineation in the individual PSP.

6.B. Equipment Selection and SCQ Reference:

Equipment Selection	Refer to SCQ Section
ASL A _____	SCQ Section: _____
ASL B <u>X</u>	SCQ Section: <u>App. G Tables G-1&G-3</u>
ASL C _____	SCQ Section: _____
ASL D <u>X</u>	SCQ Section: <u>App. G Tables G-1&G-3</u>
ASL E <u>X (See sect. 7.3, pg. 6)</u>	SCQ Section: <u>App. G Tables G-1&G-3</u>

7.A. Sampling Methods: (Put an X in the appropriate selection.)

- Biased Composite Environmental Grab Grid
- Intrusive Non-Intrusive Phased Source

DQO Number: SL-048, Rev. 5

7.B. Sample Work Plan Reference: This DQO is being written prior to the PSPs.

Background samples: OU5 RI

7.C. Sample Collection Reference:

Sample Collection Reference: SMPL-01, SMPL-02, EQT-06

8. Quality Control Samples: (Place an "X" in the appropriate selection box.)

8.A. Field Quality Control Samples:

Trip Blanks	<input checked="" type="checkbox"/>	*	Container Blanks	<input checked="" type="checkbox"/>	++
Field Blanks	<input checked="" type="checkbox"/>	+	Duplicate Samples	<input checked="" type="checkbox"/>	***
Equipment Rinsate Samples	<input checked="" type="checkbox"/>	***	Split Samples	<input checked="" type="checkbox"/>	**
Preservative Blanks	<input type="checkbox"/>		Performance Evaluation Samples	<input type="checkbox"/>	
Other (specify)					

* For volatile organics only

** Split samples will be collected where required by EPA or OEPA.

*** If specified in PSP.

+ Collected at the discretion of the Project Manager (if warranted by field conditions)

++ One per Area and Phase Area per container type (i.e. stainless steel core liner/plastic core liner/Geoprobe tube).

8.B. Laboratory Quality Control Samples:

Method Blank	<input checked="" type="checkbox"/>	Matrix Duplicate/Replicate	<input checked="" type="checkbox"/>
Matrix Spike	<input checked="" type="checkbox"/>	Surrogate Spikes	<input type="checkbox"/>
Tracer Spike	<input type="checkbox"/>		

Other (specify) Per SCQ

9. Other: Please provide any other germane information that may impact the data quality or gathering of this particular objective, task or data use.

Control Number _____

Fernald Environmental Management Project

Data Quality Objectives

Title: Real-Time Excavation Monitoring For Total Uranium Waste Acceptance Criteria (WAC)

Number: SL-055

Revision: 0

Final Draft: 6/8/99

Contact Name: Joan White

Approval: James E. Chambers **Date:** 6/8/99
James E. Chambers
DQO Coordinator

Approval: Joan White **Date:** 6/8/99
Joan White
Real-Time Instrumentation Measurement
Program Manager

Rev. #	0						
Effective Date:	6/8/99						

DATA QUALITY OBJECTIVES

Excavation Monitoring for Total Uranium Waste Acceptance Criteria (WAC)

Members of Data Quality Objectives (DQO) Scoping Team

The members of the scoping team included individuals with expertise in QA, analytical methods, field construction, statistics, laboratory analytical techniques, waste management, waste acceptance, data management, and excavation monitoring.

Conceptual Model of the Site

Fernald Environmental Management Project (FEMP) remediation includes the construction of an on-site disposal facility (OSDF) to be used for the safe permanent disposal of materials at or above the site final remediation levels (FRLs), but below the waste acceptance criteria (WAC) for constituents of concern (WAC COCs). The WAC concentrations for several constituents, including total uranium, were developed using fate and transport modeling, and were established to prevent a breakthrough of unacceptable levels of contamination (greater than a specified Maximum Contaminant Level to the underlying Great Miami Aquifer) over a 1000-year period of OSDF performance. The WAC for total uranium and other area-specific WAC COCs as referenced in the Operable Unit 5 (OU5) and Operable Unit 2 (OU2) Records Of Decision (RODs), the Waste Acceptance Plan for the On-Site Disposal Facility (WAC Plan), and the OSDF Impacted Materials Placement Plan (IMPP), must be achieved for all soil and soil-like materials that have been identified for disposal in the OSDF.

The extent of soil contamination requiring remediation was estimated and published in both the Operable Unit 5 and Operable Unit 2 Feasibility Studies (FS). These estimates were based on modeling analysis of available uranium data from soil samples collected during the Remedial Investigation (RI) efforts and from other environmental studies conducted at the FEMP. Maps outlining boundaries of soil contamination were generated for both the Operable Unit 5 and Operable Unit 2 FS documents by overlaying the results of the modeling analysis of uranium data with isoconcentration maps of other COCs. The soil contamination maps were further modified by conducting spatial analysis on the most current soil characterization data.

A sequential remediation plan has been presented which subdivides the FEMP into ten (10) independent remediation areas. Extensive historical sampling has demonstrated that in each of these 10 areas potentially above-WAC concentrations

may not be present, may be limited to one WAC COC, or consist of a subset of WAC COCs. According to the Sitewide Excavation Plan (SEP) only WAC COCs with a demonstrated or likely presence in an area will be evaluated during remedial design and implementation. This DQO will be used to define the WAC decision-making process using excavation monitoring instrumentation in areas where soil and soil-like material is being excavated and total uranium is a WAC COC.

1.0 Statement of Problem

Adequate information must be available to demonstrate excavated soils or soil-like material is acceptable or unacceptable for disposal in the OSDF, based on the total uranium WAC.

Available Resources

Time: WAC decision-making information of sufficient quality must be made available to the Project Manager (or designee), characterization representative, and Waste Acceptance Operations representative (decision makers) prior to excavation and disposition of soil and soil-like materials.

Project Constraints: WAC decision-making information must be collected and assimilated with existing manpower and instrumentation to support the remediation schedule. Successful remediation of applicable areas, including excavation and placement of soil and soil-like material in the OSDF, is dependent on the performance of this work.

Summary of the Problem

Excavated soil or soil-like material must be classified as either of the following:

1. Having concentrations of total uranium at or above the WAC, and therefore, unacceptable for disposal in the OSDF, or
2. Having concentrations of total uranium below the WAC, and therefore, acceptable for disposal in the OSDF.

2.0 Identify the Decision

Decision

The WAC decision-making process will result in the classification of defined soil or soil-like material volumes as either meeting or exceeding the 1,030 ppm total uranium WAC.

Possible Results

1. A defined volume of soil or soil-like material has a concentration of total uranium at or above the WAC. This material is classified as unacceptable for placement in the OSDF, and will be identified, excavated, and segregated pending off-site disposition.
2. A defined volume of soil or soil-like material has a concentration of total uranium below the total uranium WAC. This soil is classified as acceptable for placement in the OSDF and is transported directly from the excavation to the OSDF for placement.

3.0 Identify Inputs That Affect the Decision

Required Information

The total uranium WAC published in the Waste Acceptance Criteria Attainment Plan for the OSDF, historical data, pre-design investigation data, and in-situ gamma spectrometry information collected prior to and during excavation are required to determine whether a specified volume of soil or soil-like material meets or exceeds the total uranium WAC.

Source of Informational Input

The list of sitewide OSDF WAC COCs identified in the OU2 and OU5 RODs and the WAC Plan will be referenced. Historical area specific data from the Sitewide Environmental Database (SED) will also be retrieved and evaluated for both radiological and chemical WAC constituents. This information will be utilized to determine area specific WAC COCs.

Non-invasive real-time excavation monitoring in areas where total uranium is a WAC concern will involve measurements collected with mobile and/or stationary in-situ gamma spectrometry equipment. These measurements will be collected from the surface of each excavation lift prior to excavation. Information compiled from this real-time monitoring will be assimilated and reviewed by decision makers to classify lifts or sections of lifts as either acceptable or unacceptable for placement in the OSDF. These measurements may also be collected on soils exposed after the removal of suspect above WAC material to verify its removal.

Action Levels

To ensure no above WAC soil or soil-like material is sent to the OSDF, threshold values (trigger levels) have been set for NaI and HPGe Phase 1 and II measurements. These values are significantly lower than the 1030 ppm total uranium OSDF not-to-exceed (NTE) level. The WAC Phase I (detection phase) threshold value is 721 ppm total uranium for NaI instruments (31 cm detector height), and 400 ppm total uranium for the HPGe (1 meter detector height). The WAC Phase II (confirmation and delineation phase) threshold value is 928 ppm total uranium for the HPGe (31 cm and 15 cm detector heights).

Methods of Data Collection

WAC Phase 1 measurements will be collected to obtain as close to complete coverage of the areas of concern as possible using either the NaI Radiation Measurement Systems (RMS) or HPGe equipment to identify potential above WAC total uranium locations. WAC Phase II measurements will be collected with strategically placed HPGe equipment to confirm and delineate Phase I potential above WAC measurements, as needed. The project may decide not to collect Phase II measurements if the potential above WAC area boundary is discernable by visual observation (such as presence of process residue or other OSDF prohibited items, discoloration of soil or soil-like material, or other information).

The project will use the real-time WAC Phase I and Phase II data as ASL A, and will perform no data validation (however the data will be collected with ASL B quality control criteria, for real-time project internal quality control. All measurements will be performed in compliance with operating procedures identified in Section 7.5 of this DQO, the Real-Time User's Manual, and the SEP.

4.0 The Boundaries of the Situation

Spatial Boundaries

Domain of the Decision: The boundaries where excavation monitoring for total uranium will be used is limited to soils and/or soil-like material in remediation areas where total uranium is a WAC COC, excavation is planned, and material is designated for disposition in the OSDF.

Population of Soils:

Includes all at-and below-grade soil and soil-like material impacted with total uranium potentially exceeding the WAC and planned for disposition in the OSDF.

Scale of Decision Making

Areas designated for excavation will be evaluated as to whether the soil or soil-like material is below or above the OSDF WAC for total uranium. Excavation monitoring will be conducted on each excavation lift. Based on the information obtained as a result of reviewing and modeling existing data coupled with newly acquired excavation monitoring information, a decision will be made whether an individual excavation lift, or portion of a lift, meets or exceeds the OSDF WAC for total uranium.

Temporal Boundaries

Time Constraint: Real-time excavation monitoring information must be acquired and processed in time for review and use in decision making prior to excavation and disposition of excavated material. The scheduling of WAC excavation monitoring is directly tied to the excavation schedule. WAC excavation monitoring will be performed and a disposition decision made prior to excavation of each designated lift. Acquired information must be processed and reviewed by the project decision-makers prior to disposition of the lift being monitored. Time limits to complete measurements are specified in the excavation subcontracts.

Practical Considerations: Weather, moisture, field conditions, and unforeseen events affect the ability to perform excavation monitoring and meet the schedule. To maintain safe working conditions, excavation and construction activities will comply with all FEMP and project specific health and safety protocols.

5.0 Develop a Logic Statement

Parameter(s) of Interest

The parameter of interest is the concentration of total uranium in soil or soil-like material designated for disposition in the OSDF.

Waste Acceptance Criteria Concentration

The OSDF WAC concentration is 1,030 ppm for total uranium in soil and soil-like materials. This concentration is considered a NTE level for OSDF WAC attainment, and no real-time measurement data point, as defined by the instrument-specific threshold values, can meet or exceed this level in material destined for the OSDF.

Decision Rules

If excavation monitoring results are below the total uranium WAC for a specified

volume of soil or soil like material, then that soil is considered acceptable for final disposition in the OSDF. If monitoring results reveal concentrations at or above the total uranium WAC, as indicated by exceeding the instrument-specific threshold level, then the unacceptable soil will be delineated, removed, and segregated pending off-site disposal.

6.0 Limits on Decision Errors

Range of Parameter Limits

The area-specific total uranium soil concentrations anticipated in excavation areas will range from background levels (naturally-occurring soil concentrations) to concentrations greater than the total uranium WAC levels.

Types of Decision Errors and Consequences

Decision Error 1: This decision error occurs when the decision makers decide a specified volume of soil or soil-like material is below the WAC for total uranium, when in fact the uranium concentration in that soil is at or above the WAC. This error would result in soil or soil like material with concentrations above the WAC for total uranium being placed into the OSDF. Since the WAC is a NTE level, this error is unacceptable.

Decision Error 2: This decision error occurs when a volume of soil or soil-like material is identified as above WAC, excavated, and sent for off-site disposition when the material is actually below the WAC for total uranium. This error would result in added costs due to the unnecessary segregation and off-site disposition of material that is acceptable for disposal in the OSDF.

True State of Nature for the Decision Errors

The true state of nature for Decision Error 1 is that the actual concentration of total uranium in a volume of soil or soil-like material is greater than the WAC. The true state of nature for Decision Error 2 is that the actual concentration of total uranium in a volume of soil or soil-like material is below the WAC. Decision Error 1 is the more severe error.

7.0 Design for Obtaining Quality Data

7.1 WAC Attainment Excavation Monitoring

WAC attainment will be based on real-time excavation monitoring using the NaI and

HPGe measurement systems. Phase I (detection phase) measurements are collected with the NaI systems using a spectral acquisition time of 4 seconds, at a detector speed of 1 mile per hour (mph), and a detector height of 31 cm. These parameters achieve the required sensitivity, and are the best compromise of practical considerations such as detector speed and time in the field. In the NaI systems, the presence of thorium contamination can cause interferences which could affect total uranium concentration calculations. Uranium results associated with thorium values greater than 500 net counts per second will be reevaluated. The threshold value (trigger level) for Phase I NaI measurements is 721 ppm for total uranium (70% of the 1,030 ppm WAC concentration for soil, arrived at by agreement with the USEPA). Phase I measurements can also be collected with the HPGe systems using a spectral acquisition time of 5 minutes, and a detector height of 1 meter (the threshold value is lower than the NaI threshold value because of the larger field of view at the HPGe 1 meter detector height). (For more information reference the *RTRAK Applicability Study, 20701-RP-0003, Revision 1, May 1998*).

At the discretion of the characterization lead, Phase II confirmation and delineation measurements may be collected using the HPGe systems with a spectral acquisition time of 5 minutes at both the 31 cm and 15 cm detector heights. The HPGe detector will be placed directly over the zone of maximum activity identified by the Phase I measurements. The threshold value (trigger level) for Phase II measurements is 928 ppm for total uranium at either detector height. Lower (more conservative) threshold values may be defined in the PSP. (For more information reference the *User Guidelines, Measurement Strategies, and Operational Factors for Deployment of In-Situ Gamma Spectrometry at the Fernald Site, 20701-RP-0006, Revision A, May 8, 1998*.)

In the event the monitoring data exceeds the trigger levels (see above), the entire vertical thickness (3 ± 1 foot) of the areal extent of above-WAC material will be removed and segregated pending off-site disposal.

7.2 Interpretation of Results

The results obtained from real-time monitoring for purposes of WAC attainment will be compared to the published OSDF WAC concentration for total uranium. If results are equal to or greater than the WAC concentration (as defined by exceeding the specific threshold value level), the decision makers may take one of the following actions:

- Determine that the entire unit volume or "lift" subjected to excavation monitoring is at or above WAC and requires segregation pending off-site disposal.
- Based on adequacy of existing information (including visual inspection), excavate and

segregate the portion of the lift material that is at or above WAC pending off-site disposition.

- Perform additional real-time monitoring to more accurately delineate the areal extent of above-WAC contamination. Using this information, define the extent of removal efforts to be conducted.

7.3 QC Considerations

The following data management requirements will be met prior to evaluation of acquired WAC attainment information:

- 1) An excavation monitoring form will be completed and reviewed in the field.
- 2) WAC data and decision-making information will be assigned to respective soil profiles, so characterization and tracking information can be maintained and retrieved.
- 3) The mobile sodium iodide systems will generate ASL level A data, with no data validation. The HPGe detectors are capable of providing either ASL level A or B data, however for WAC determination only ASL A data will be generated.
- 4) When using the HPGe detectors, duplicate measurements will be taken at a frequency of one in twenty measurements or one per excavation lift, whichever is greater.

7.4 Independent Assessment

Independent assessment shall be performed by the FEMP QA organization by conducting surveillances. Surveillances shall be planned and documented in accordance with Section 12.3 of the SCQ.

7.5 Applicable Procedures

Real-time monitoring performed under the PSP shall follow the requirements outlined within the following procedures:

- ADM-16, In-Situ Gamma Spectrometry Quality Control Measurements
- EQT-22, High Purity Germanium Detector In-Situ Efficiency Calibration
- EQT-23, Operation of ADCAM Series Analyzers with Gamma Sensitive Detectors
- EQT-32, Troxler 3440 Series Surface Moisture/Density Gauge

- EQT-33, Real Time Differential Global Positioning System
- EQT-39, Zeltex Infrared Moisture Meter
- EQT-40, Satloc Real-time Differential Global Positioning System
- EQT-41, Radiation Measurement Systems
- 20300-PL-002, Real Time Instrumentation Measurement Program Quality Assurance Plan
- EW-1022, On-Site Tracking and Manifesting of Bulk Impacted Material

7.6 References

- Sitewide CERCLA Quality Assurance Project Plan (SCQ), May 1995, FD-1000
- Sitewide Excavation Plan, July 1998, 2500-WP-0028, Revision 0
- Waste Acceptance Criteria Attainment Plan for the On-Site Disposal Facility, June 1998, 20100-PL-0014, Revision 0
- Impacted Materials Placement Plan for the On-Site Disposal Facility, January 1998, 20100-PL-007, Revision 0
- Area 2, Phase 1 Southern Waste Units Implementation Plan for Operational Unit 2, July 1998, 2502-WP-0029, Revision 0
- RTRAK Applicability Study, May 1998, 20701-RP-0003, Revision 1
- User Guidelines, Measurement Strategies, and Operational Factors for Deployment of In-Situ Gamma Spectrometry at the Fernald Site, July 1998, 20701-RP-0006 Revision B

Data Quality Objectives
Excavation Monitoring for Total Uranium Waste Acceptance Criteria (WAC)

1A. Task/Description: Waste Acceptance Criteria Monitoring

1.B. Project Phase: (Put an X in the appropriate selection.)

RI FS RD RA R_vA OTHER

1.C. DQO No.: SL-055 DQO Reference No.: N/A

2. Media Characterization: (Put an X in the appropriate selection.)

Air Biological Groundwater Sediment

Soil and Soil Like Material

Waste Wastewater Surface water Other (specify) _____

3. Data Use with Analytical Support Level (A-E): (Put an X in the appropriate Analytical Support Level selection(s) beside each applicable Data Use.)

Site Characterization
A B C D E

Risk Assessment
A B C D E

Evaluation of Alternatives
A B C D E

Engineering Design
A B C D E

Monitoring during remediation activities
A B C D E

Other Waste Acceptance Evaluation
A B C D E

4.A. Drivers: Specific construction work plans, Applicable or Relevant and Appropriate Requirements (ARARs) and Operable Unit 2 and Operable Unit 5 Records of Decision (ROD).

4.B. Objective: To provide data for identification of soils and soil-like materials for compliance with Waste Acceptance Criteria.

5. Site Information (Description):

The RODs specify that FEMP soils will be below the WAC for disposal in the OSDF. WAC determination will be necessary for site soils and soil like material that is scheduled for excavation and potential OSDF disposition.

6.A. Data Types with appropriate Analytical Support Level Equipment Selection and SCQ Reference: (Place an "X" to the right of the appropriate box or boxes selecting the type of analysis or analyses required. Then select the type of equipment to perform the analysis if appropriate. Please include a reference to the SCQ Section.)

1. pH <input type="checkbox"/>	2. Uranium <input checked="" type="checkbox"/>	3. BTX <input type="checkbox"/>
Temperature <input type="checkbox"/>	Full Radiological <input type="checkbox"/>	TPH <input type="checkbox"/>
Specific Conductance <input type="checkbox"/>	Metals <input type="checkbox"/>	Oil/Grease <input type="checkbox"/>
Dissolved Oxygen <input type="checkbox"/>	Cyanide <input type="checkbox"/>	
Technetium-99 <input type="checkbox"/>	Silica <input type="checkbox"/>	
4. Cations <input type="checkbox"/>	5. VOA <input type="checkbox"/>	6. Other (specify) <input checked="" type="checkbox"/>
Anions <input type="checkbox"/>	BNA <input type="checkbox"/>	<u>Moisture</u>
TOC <input type="checkbox"/>	Pesticides <input type="checkbox"/>	
TCLP <input type="checkbox"/>	PCB <input type="checkbox"/>	
CEC <input type="checkbox"/>		
COD <input type="checkbox"/>		

6.B. Equipment Selection and SCQ Reference:

ASL A	<u>Nal and HPGe</u>	SCQ Section: <u>Appendix H</u>
ASL B	_____	SCQ Section: _____
ASL C	_____	SCQ Section: _____
ASL D	_____	SCQ Section: _____
ASL E	_____	SCQ Section: _____

DQO # SL-055, Rev. 0
Effective Date: 6/8/99

7.A. Sampling Methods: (Put an X in the appropriate selection.)

Biased	<input type="checkbox"/>	Composite	<input type="checkbox"/>	Environmental	<input type="checkbox"/>	Grab	<input type="checkbox"/>	Grid	<input type="checkbox"/>
Intrusive	<input type="checkbox"/>	Non-Intrusive	<input checked="" type="checkbox"/>	Phased	<input type="checkbox"/>	Source	<input type="checkbox"/>		

DQO Number: SL-055

7.B. Sample Work Plan Reference: The DQO is being established prior to completion of the PSP.

Background samples: SED

8. Quality Control Samples: (Place an "X" in the appropriate selection box.)

8.A. Field Quality Control Samples:

Trip Blanks	<input type="checkbox"/>	Container Blanks	<input type="checkbox"/>
Field Blanks	<input type="checkbox"/>	Duplicate Measurements	<input checked="" type="checkbox"/> *
Equipment Rinse Samples	<input type="checkbox"/>	Split Samples	<input type="checkbox"/>
Preservative Blanks	<input type="checkbox"/>	Performance Evaluation Samples	<input type="checkbox"/>
Other (specify) _____			

*For the HPGe detectors, duplicate measurements will be made every 1 in 20 or one per lift, whichever is greater.

8.B. Laboratory Quality Control Samples:

Method Blank	<input type="checkbox"/>	Matrix Duplicate/Replicate	<input type="checkbox"/>
Matrix Spike	<input type="checkbox"/>	Surrogate Spikes	<input type="checkbox"/>
Other (specify) <u>Per method</u>			

9. Other: Please provide any other germane information that may impact the data quality or gathering of this particular objective, task or data use.

APPENDIX B
TARGET ANALYTE LISTS

**APPENDIX B
TARGET ANALYTE LISTS**

TAL 20200-PSP-0007-A

Soil Analysis - ICP/MS and GPC		
1	ASL B	Total Uranium
2	ASL B	Technetium-99

TAL 20200-PSP-0007-B

Soil Analysis - ICP/MS		
1	ASL B	Total Uranium

TAL 20200-PSP-0007-C

Soil Analysis - Total VOCs		
1	ASL B	Bromodichloromethane
2	ASL B	Chloroethane
3	ASL B	1,1-Dichloroethene
4	ASL B	1,2-Dichloroethene
5	ASL B	Tetrachloroethene
6	ASL B	Trichloroethene
7	ASL B	Vinyl Chloride

TAL 20200-PSP-0007-D

Soil Analysis - Total SVOCs		
1	ASL B	Bis(2-chloroisopropyl)ether
2	ASL B	Carbazole
3	ASL B	4-Nitroaniline

TAL 20200-PSP-0007-E

Soil Analysis - Total Pesticides		
1	ASL B	Alpha-chlordane
2	ASL B	Toxaphene

TAL 20200-PSP-0007-F

Soil Analysis - TCLP VOCs		
1	ASL B	Benzene
2	ASL B	Carbon Tetrachloride
3	ASL B	Chlorobenzene
4	ASL B	Chloroform
5	ASL B	1,1-Dichloroethene
6	ASL B	1,2-Dichloroethene
7	ASL B	2-Butanone
8	ASL B	Tetrachloroethene
9	ASL B	Trichloroethene
10	ASL B	Vinyl Chloride

1
2

3
4
5

2997

TAL 20200-PSP-0007-G

Soil Analysis - TCLP SVOCs, Pesticides, Herbicides		
1	ASL B	Chlordane
2	ASL B	o-Cresol
3	ASL B	m-Cresol
4	ASL B	p-Cresol
5	ASL B	2,4-D
6	ASL B	1,4-Dichlorobenzene
7	ASL B	2,4-Dinitrotoluene
8	ASL B	Endrin
9	ASL B	Heptachlor
10	ASL B	Heptachlor Epoxide
11	ASL B	Hexachlorobenzene
12	ASL B	Hexachlorobutadiene
13	ASL B	Hexachloroethane
14	ASL B	Lindane
15	ASL B	Methoxychlor
16	ASL B	Nitrobenzene
17	ASL B	Pentachlorophenol
18	ASL B	Pyridine
19	ASL B	Toxaphene
20	ASL B	2,4,5-Trichlorophenol
21	ASL B	2,4,6-Trichlorophenol
22	ASL B	2,4,5-TP (Silvex)

1
2

TAL 20200-PSP-0007-H

1
2

Soil Analysis - TCLP Metals		
1	ASL B	Arsenic
2	ASL B	Barium
3	ASL B	Cadmium
4	ASL B	Chromium
5	ASL B	Lead
6	ASL B	Mercury
7	ASL B	Selenium
8	ASL B	Silver

APPENDIX C

SUMMARY OF EXISTING DATA ON BPW-005

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
1,1-Dichloroethene	50	ug/kg	U	12637-14-L	11/19/99	6.5	7	481630.47	1349670.84
1,1-Dichloroethene	50	ug/kg	U	12637-20-L	11/19/99	9.5	10	481630.47	1349670.84
1,1-Dichloroethene	45.4	ug/kg	U	12637-2-L	11/19/99	0.5	1	481630.47	1349670.84
1,1-Dichloroethene	45.4	ug/kg	U	12637-8-L	11/19/99	3.5	4	481630.47	1349670.84
1,1-Dichloroethene	38	ug/kg	UNV	12553-3B-L	10/20/99	1	1.5	481127.44	1349611.23
1,1-Dichloroethene	16	ug/kg	-	056668	9/24/90	4	4.5	481107.94	1349670.73
1,1-Dichloroethene	12	ug/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16
1,1-Dichloroethene	11	ug/kg	UJ	121670	7/13/93	0	0.5	481396.77	1349596.16
1,1-Dichloroethene	11	ug/kg	U	121679	7/13/93	2.5	3	481396.77	1349596.16
1,1-Dichloroethene	11	ug/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
1,1-Dichloroethene	6	ug/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
1,1-Dichloroethene	6	ug/kg	U	056484	9/27/90	0.5	1	481139.24	1349502.78
1,1-Dichloroethene	6	ug/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
1,1-Dichloroethene	6	ug/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
1,1-Dichloroethene	6	ug/kg	UJ	056982	11/4/90	0.5	1	481587.71	1349680.95
1,1-Dichloroethene	6	ug/kg	UJ	056573	9/24/90	0.5	1	481135.55	1349611.44
1,1-Dichloroethene	6	ug/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
1,1-Dichloroethene	6	ug/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
1,1-Dichloroethene	6	ug/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
1,1-Dichloroethene	6	ug/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79
1,1-Dichloroethene	6	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
1,1-Dichloroethene	6	ug/kg	UJ	056985	11/4/90	2	2.5	481587.71	1349680.95
1,1-Dichloroethene	6	ug/kg	U	056903	11/2/90	4	4.5	481666.29	1349483.48
1,1-Dichloroethene	6	ug/kg	U	056912	11/1/90	4	4.5	481621.03	1349517.53
1,1-Dichloroethene	6	ug/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
1,1-Dichloroethene	6	ug/kg	U	056491	10/2/90	4	4.5	481139.24	1349502.78
1,1-Dichloroethene	6	ug/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44
1,1-Dichloroethene	6	ug/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
1,1-Dichloroethene	6	ug/kg	U	056536	9/23/90	4	4.5	481110.16	1349642.79
1,1-Dichloroethene	6	ug/kg	U	056502	10/2/90	9.5	10	481139.24	1349502.78
1,1-Dichloroethene	6	ug/kg	U	056569	10/2/90	9.5	10	481138.11	1349580.59
1,1-Dichloroethene	6	ug/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
1,1-Dichloroethene	6	ug/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73

000063

2997

APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
1,1-Dichloroethene	6	ug/kg	UJ	057550	3/9/91	9.5	10	481216.91	1349510.38
1,1-Dichloroethene	5	ug/kg	U	056896	11/2/90	0.5	1	481666.29	1349483.48
1,1-Dichloroethene	5	ug/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
1,1-Dichloroethene	5	ug/kg	U	056661	9/24/90	0.5	1	481107.94	1349670.73
1,1-Dichloroethene	5	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
1,1-Dichloroethene	5	ug/kg	J	056899	11/2/90	2	2.5	481666.29	1349483.48
1,1-Dichloroethene	5	ug/kg	U	056554	10/2/90	2	2.5	481138.11	1349580.59
1,1-Dichloroethene	5	ug/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
1,1-Dichloroethene	5	ug/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73
1,1-Dichloroethene	5	ug/kg	U	056558	10/2/90	4	4.5	481138.11	1349580.59
1,1-Dichloroethene	5	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
1,1-Dichloroethene	5	ug/kg	U	056591	9/25/90	9.5	10	481135.55	1349611.44
1,1-Dichloroethene	5	ug/kg	U	056613	9/26/90	9.5	10	481133.83	1349644.52
1,1-Dichloroethene	5	ug/kg	UJ	057560	3/10/91	14.5	15	481216.91	1349510.38
1,2-Dichloroethene (Total)	12	ug/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16
1,2-Dichloroethene (Total)	11	ug/kg	UJ	121670	7/13/93	0	0.5	481396.77	1349596.16
1,2-Dichloroethene (Total)	11	ug/kg	U	121679	7/13/93	2.5	3	481396.77	1349596.16
1,2-Dichloroethene (Total)	11	ug/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
1,2-Dichloroethene (Total)	6	ug/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
1,2-Dichloroethene (Total)	6	ug/kg	U	056484	9/27/90	0.5	1	481139.24	1349502.78
1,2-Dichloroethene (Total)	6	ug/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
1,2-Dichloroethene (Total)	6	ug/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
1,2-Dichloroethene (Total)	6	ug/kg	UJ	056982	11/4/90	0.5	1	481587.71	1349680.95
1,2-Dichloroethene (Total)	6	ug/kg	UJ	056573	9/24/90	0.5	1	481135.55	1349611.44
1,2-Dichloroethene (Total)	6	ug/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
1,2-Dichloroethene (Total)	6	ug/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
1,2-Dichloroethene (Total)	6	ug/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
1,2-Dichloroethene (Total)	6	ug/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79
1,2-Dichloroethene (Total)	6	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
1,2-Dichloroethene (Total)	6	ug/kg	UJ	056899	11/2/90	2	2.5	481666.29	1349483.48
1,2-Dichloroethene (Total)	6	ug/kg	UJ	056985	11/4/90	2	2.5	481587.71	1349680.95
1,2-Dichloroethene (Total)	6	ug/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
1,2-Dichloroethene (Total)	6	ug/kg	U	056491	10/2/90	4	4.5	481139.24	1349502.78

000064

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
1,2-Dichloroethene (Total)	6	ug/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44
1,2-Dichloroethene (Total)	6	ug/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
1,2-Dichloroethene (Total)	6	ug/kg	U	056536	9/23/90	4	4.5	481110.16	1349642.79
1,2-Dichloroethene (Total)	6	ug/kg	U	056668	9/24/90	4	4.5	481107.94	1349670.73
1,2-Dichloroethene (Total)	6	ug/kg	UJ	056903	11/2/90	4	4.5	481666.29	1349483.48
1,2-Dichloroethene (Total)	6	ug/kg	U	056502	10/2/90	9.5	10	481139.24	1349502.78
1,2-Dichloroethene (Total)	6	ug/kg	U	056569	10/2/90	9.5	10	481138.11	1349580.59
1,2-Dichloroethene (Total)	6	ug/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
1,2-Dichloroethene (Total)	6	ug/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73
1,2-Dichloroethene (Total)	6	ug/kg	UJ	057550	3/9/91	9.5	10	481216.91	1349510.38
1,2-Dichloroethene (Total)	5	ug/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
1,2-Dichloroethene (Total)	5	ug/kg	U	056661	9/24/90	0.5	1	481107.94	1349670.73
1,2-Dichloroethene (Total)	5	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
1,2-Dichloroethene (Total)	5	ug/kg	UJ	056896	11/2/90	0.5	1	481666.29	1349483.48
1,2-Dichloroethene (Total)	5	ug/kg	U	056554	10/2/90	2	2.5	481138.11	1349580.59
1,2-Dichloroethene (Total)	5	ug/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
1,2-Dichloroethene (Total)	5	ug/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73
1,2-Dichloroethene (Total)	5	ug/kg	J	056912	11/1/90	4	4.5	481621.03	1349517.53
1,2-Dichloroethene (Total)	5	ug/kg	U	056558	10/2/90	4	4.5	481138.11	1349580.59
1,2-Dichloroethene (Total)	5	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
1,2-Dichloroethene (Total)	5	ug/kg	U	056591	9/25/90	9.5	10	481135.55	1349611.44
1,2-Dichloroethene (Total)	5	ug/kg	U	056613	9/26/90	9.5	10	481133.83	1349644.52
1,2-Dichloroethene (Total)	5	ug/kg	UJ	057560	3/10/91	14.5	15	481216.91	1349510.38
4-Nitroaniline	18000	ug/kg	U	056896	11/2/90	0.5	1	481666.29	1349483.48
4-Nitroaniline	10000	ug/kg	U	056899	11/2/90	2	2.5	481666.29	1349483.48
4-Nitroaniline	2100	ug/kg	UJ	056905	10/31/90	0.5	1	481621.03	1349517.53
4-Nitroaniline	2100	ug/kg	UJ	056573	9/24/90	0.5	1	481135.55	1349611.44
4-Nitroaniline	2000	ug/kg	UJ	056595	9/25/90	0.5	1	481133.83	1349644.52
4-Nitroaniline	2000	ug/kg	U	056985	11/4/90	2	2.5	481587.71	1349680.95
4-Nitroaniline	2000	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
4-Nitroaniline	2000	ug/kg	UJ	056908	11/1/90	2	2.5	481621.03	1349517.53
4-Nitroaniline	2000	ug/kg	UJ	056912	11/1/90	4	4.5	481621.03	1349517.53
4-Nitroaniline	1900	ug/kg	U	056982	11/4/90	0.5	1	481587.71	1349680.95

000065

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
4-Nitroaniline	1900	ug/kg	UJ	056484	9/27/90	0.5	1	481139.24	1349502.78
4-Nitroaniline	1900	ug/kg	UJ	056487	10/2/90	2	2.5	481139.24	1349502.78
4-Nitroaniline	1900	ug/kg	UJ	056598	9/25/90	2	2.5	481133.83	1349644.52
4-Nitroaniline	1900	ug/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
4-Nitroaniline	1900	ug/kg	UJ	056491	10/2/90	4	4.5	481139.24	1349502.78
4-Nitroaniline	1900	ug/kg	UJ	056513	10/3/90	4	4.5	481137.29	1349541.06
4-Nitroaniline	1900	ug/kg	UJ	056580	9/24/90	4	4.5	481135.55	1349611.44
4-Nitroaniline	1900	ug/kg	U	057550	3/9/91	9.5	10	481216.91	1349510.38
4-Nitroaniline	1900	ug/kg	UJ	056502	10/2/90	9.5	10	481139.24	1349502.78
4-Nitroaniline	1900	ug/kg	UJ	056524	10/3/90	9.5	10	481137.29	1349541.06
4-Nitroaniline	1900	ug/kg	UJ	056569	10/2/90	9.5	10	481138.11	1349580.59
4-Nitroaniline	1900	ug/kg	U	057560	3/10/91	14.5	15	481216.91	1349510.38
4-Nitroaniline	1800	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
4-Nitroaniline	1800	ug/kg	UJ	056506	10/3/90	0.5	1	481137.29	1349541.06
4-Nitroaniline	1800	ug/kg	UJ	056551	9/27/90	0.5	1	481138.11	1349580.59
4-Nitroaniline	1800	ug/kg	UJ	056529	9/21/90	0.5	1	481110.16	1349642.79
4-Nitroaniline	1800	ug/kg	UJ	056661	9/24/90	0.5	1	481107.94	1349670.73
4-Nitroaniline	1800	ug/kg	UJ	056576	9/24/90	2	2.5	481135.55	1349611.44
4-Nitroaniline	1800	ug/kg	UJ	056532	9/23/90	2	2.5	481110.16	1349642.79
4-Nitroaniline	1800	ug/kg	UJ	056664	9/24/90	2	2.5	481107.94	1349670.73
4-Nitroaniline	1800	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
4-Nitroaniline	1800	ug/kg	UJ	056602	9/26/90	4	4.5	481133.83	1349644.52
4-Nitroaniline	1800	ug/kg	UJ	056536	9/23/90	4	4.5	481110.16	1349642.79
4-Nitroaniline	1800	ug/kg	UJ	056668	9/24/90	4	4.5	481107.94	1349670.73
4-Nitroaniline	1800	ug/kg	UJ	056591	9/25/90	9.5	10	481135.55	1349611.44
4-Nitroaniline	1800	ug/kg	UJ	056613	9/26/90	9.5	10	481133.83	1349644.52
4-Nitroaniline	1800	ug/kg	UJ	056547	9/23/90	9.5	10	481110.16	1349642.79
4-Nitroaniline	1800	ug/kg	UJ	056679	9/25/90	9.5	10	481107.94	1349670.73
4-Nitroaniline	1700	ug/kg	UJ	056509	10/3/90	2	2.5	481137.29	1349541.06
4-Nitroaniline	1700	ug/kg	UJ	056554	10/2/90	2	2.5	481138.11	1349580.59
4-Nitroaniline	1700	ug/kg	UNV	056509	10/3/90	2	2.5	481137.29	1349541.06
4-Nitroaniline	1700	ug/kg	UJ	056558	10/2/90	4	4.5	481138.11	1349580.59
4-Nitroaniline	1000	ug/kg	UJ	121674	7/13/93	1	1.5	481396.77	1349596.16

990000

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
4-Nitroaniline	950	ug/kg	UJ	121679	7/13/93	2.5	3	481396.77	1349596.16
4-Nitroaniline	940	ug/kg	UJ	121685	7/13/93	4.5	5	481396.77	1349596.16
4-Nitroaniline	930	ug/kg	UJ	121670	7/13/93	0	0.5	481396.77	1349596.16
alpha-Chlordane	1100	ug/kg	U	056573	9/24/90	0.5	1	481135.55	1349611.44
alpha-Chlordane	900	ug/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
alpha-Chlordane	450	ug/kg	U	056591	9/25/90	9.5	10	481135.55	1349611.44
alpha-Chlordane	380	ug/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
alpha-Chlordane	380	ug/kg	U	056569	10/2/90	9.5	10	481138.11	1349580.59
alpha-Chlordane	370	ug/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73
alpha-Chlordane	370	ug/kg	U	056491	10/2/90	4	4.5	481139.24	1349502.78
alpha-Chlordane	370	ug/kg	U	056502	10/2/90	9.5	10	481139.24	1349502.78
alpha-Chlordane	370	ug/kg	U	056524	10/3/90	9.5	10	481137.29	1349541.06
alpha-Chlordane	350	ug/kg	U	056506	10/3/90	0.5	1	481137.29	1349541.06
alpha-Chlordane	350	ug/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
alpha-Chlordane	350	ug/kg	U	056554	10/2/90	2	2.5	481138.11	1349580.59
alpha-Chlordane	350	ug/kg	U	056558	10/2/90	4	4.5	481138.11	1349580.59
alpha-Chlordane	340	ug/kg	U	056509	10/3/90	2	2.5	481137.29	1349541.06
alpha-Chlordane	210	ug/kg	U	056899	11/2/90	2	2.5	481666.29	1349483.48
alpha-Chlordane	200	ug/kg	U	056985	11/4/90	2	2.5	481587.71	1349680.95
alpha-Chlordane	190	ug/kg	U	056982	11/4/90	0.5	1	481587.71	1349680.95
alpha-Chlordane	190	ug/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
alpha-Chlordane	190	ug/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44
alpha-Chlordane	180	ug/kg	U	056661	9/24/90	0.5	1	481107.94	1349670.73
alpha-Chlordane	180	ug/kg	U	056668	9/24/90	4	4.5	481107.94	1349670.73
alpha-Chlordane	100	ug/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
alpha-Chlordane	100	ug/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
alpha-Chlordane	100	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
alpha-Chlordane	100	ug/kg	U	056912	11/1/90	4	4.5	481621.03	1349517.53
alpha-Chlordane	98	ug/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
alpha-Chlordane	95	ug/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
alpha-Chlordane	95	ug/kg	U	057550	3/9/91	9.5	10	481216.91	1349510.38
alpha-Chlordane	94	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
alpha-Chlordane	93	ug/kg	U	056484	9/27/90	0.5	1	481139.24	1349502.78

00000

000067

2997

APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
alpha-Chlordane	93	ug/kg	U	056513	10/3/90	4	4.5	481137.29	1349541.06
alpha-Chlordane	93	ug/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
alpha-Chlordane	93	ug/kg	U	056536	9/23/90	4	4.5	481110.16	1349642.79
alpha-Chlordane	92	ug/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79
alpha-Chlordane	92	ug/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
alpha-Chlordane	92	ug/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73
alpha-Chlordane	92	ug/kg	U	057560	3/10/91	14.5	15	481216.91	1349510.38
alpha-Chlordane	91	ug/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
alpha-Chlordane	90	ug/kg	U	056896	11/2/90	0.5	1	481666.29	1349483.48
alpha-Chlordane	90	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
alpha-Chlordane	90	ug/kg	U	056613	9/26/90	9.5	10	481133.83	1349644.52
alpha-Chlordane	2.1	ug/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16
alpha-Chlordane	2	ug/kg	UNV	121679	7/13/93	2.5	3	481396.77	1349596.16
alpha-Chlordane	1.9	ug/kg	UJ	121670	7/13/93	0	0.5	481396.77	1349596.16
alpha-Chlordane	1.9	ug/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
bis(2-Chloroisopropyl) ether	3700	ug/kg	UJ	056896	11/2/90	0.5	1	481666.29	1349483.48
bis(2-Chloroisopropyl) ether	2100	ug/kg	UJ	056899	11/2/90	2	2.5	481666.29	1349483.48
bis(2-Chloroisopropyl) ether	430	ug/kg	UJ	056573	9/24/90	0.5	1	481135.55	1349611.44
bis(2-Chloroisopropyl) ether	420	ug/kg	UJ	056905	10/31/90	0.5	1	481621.03	1349517.53
bis(2-Chloroisopropyl) ether	420	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
bis(2-Chloroisopropyl) ether	420	ug/kg	UJ	056985	11/4/90	2	2.5	481587.71	1349680.95
bis(2-Chloroisopropyl) ether	410	ug/kg	UJ	121674	7/13/93	1	1.5	481396.77	1349596.16
bis(2-Chloroisopropyl) ether	410	ug/kg	UJ	056908	11/1/90	2	2.5	481621.03	1349517.53
bis(2-Chloroisopropyl) ether	410	ug/kg	UJ	056912	11/1/90	4	4.5	481621.03	1349517.53
bis(2-Chloroisopropyl) ether	390	ug/kg	UJ	056989	11/4/90	4	4.5	481587.71	1349680.95
bis(2-Chloroisopropyl) ether	390	ug/kg	U	057550	3/9/91	9.5	10	481216.91	1349510.38
bis(2-Chloroisopropyl) ether	390	ug/kg	UJ	056524	10/3/90	9.5	10	481137.29	1349541.06
bis(2-Chloroisopropyl) ether	390	ug/kg	UJ	056569	10/2/90	9.5	10	481138.11	1349580.59
bis(2-Chloroisopropyl) ether	380	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
bis(2-Chloroisopropyl) ether	380	ug/kg	UJ	056982	11/4/90	0.5	1	481587.71	1349680.95
bis(2-Chloroisopropyl) ether	380	ug/kg	UJ	056532	9/23/90	2	2.5	481110.16	1349642.79
bis(2-Chloroisopropyl) ether	380	ug/kg	UJ	056664	9/24/90	2	2.5	481107.94	1349670.73
bis(2-Chloroisopropyl) ether	380	ug/kg	UJ	121679	7/13/93	2.5	3	481396.77	1349596.16

00000

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
bis(2-Chloroisopropyl) ether	380	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
bis(2-Chloroisopropyl) ether	380	ug/kg	UJ	056513	10/3/90	4	4.5	481137.29	1349541.06
bis(2-Chloroisopropyl) ether	380	ug/kg	UJ	056580	9/24/90	4	4.5	481135.55	1349611.44
bis(2-Chloroisopropyl) ether	380	ug/kg	UJ	056536	9/23/90	4	4.5	481110.16	1349642.79
bis(2-Chloroisopropyl) ether	380	ug/kg	UJ	056502	10/2/90	9.5	10	481139.24	1349502.78
bis(2-Chloroisopropyl) ether	380	ug/kg	UJ	056547	9/23/90	9.5	10	481110.16	1349642.79
bis(2-Chloroisopropyl) ether	380	ug/kg	U	057560	3/10/91	14.5	15	481216.91	1349510.38
bis(2-Chloroisopropyl) ether	370	ug/kg	UJ	056661	9/24/90	0.5	1	481107.94	1349670.73
bis(2-Chloroisopropyl) ether	370	ug/kg	UJ	056576	9/24/90	2	2.5	481135.55	1349611.44
bis(2-Chloroisopropyl) ether	370	ug/kg	UJ	056668	9/24/90	4	4.5	481107.94	1349670.73
bis(2-Chloroisopropyl) ether	370	ug/kg	UJ	121685	7/13/93	4.5	5	481396.77	1349596.16
bis(2-Chloroisopropyl) ether	360	ug/kg	UJ	056506	10/3/90	0.5	1	481137.29	1349541.06
bis(2-Chloroisopropyl) ether	360	ug/kg	UJ	056554	10/2/90	2	2.5	481138.11	1349580.59
bis(2-Chloroisopropyl) ether	360	ug/kg	UJ	056558	10/2/90	4	4.5	481138.11	1349580.59
bis(2-Chloroisopropyl) ether	350	ug/kg	UJ	056509	10/3/90	2	2.5	481137.29	1349541.06
bis(2-Chloroisopropyl) ether	350	ug/kg	UNV	056509	10/3/90	2	2.5	481137.29	1349541.06
bis(2-Chloroisopropyl) ether	330	ug/kg	U	12459-1-S	8/3/99	0	0.5	481396.9	1349597.34
bis(2-Chloroisopropyl) ether	330	ug/kg	U	12460-1-S	8/3/99	0	0.5	481408.03	1349597
bis(2-Chloroisopropyl) ether	330	ug/kg	U	12461-1-S	8/3/99	0	0.5	481396.82	1349608.99
bis(2-Chloroisopropyl) ether	330	ug/kg	U	12462-1-S	8/3/99	0	0.5	481385.97	1349595.94
bis(2-Chloroisopropyl) ether	330	ug/kg	U	12463-1-S	8/3/99	0	0.5	481396.02	1349586.4
bis(2-Chloroisopropyl) ether	48	ug/kg	J	121670	7/13/93	0	0.5	481396.77	1349596.16
Bromodichloromethane	50	ug/kg	U	12637-14-L	11/19/99	6.5	7	481630.47	1349670.84
Bromodichloromethane	50	ug/kg	U	12637-20-L	11/19/99	9.5	10	481630.47	1349670.84
Bromodichloromethane	45.4	ug/kg	U	12637-2-L	11/19/99	0.5	1	481630.47	1349670.84
Bromodichloromethane	45.4	ug/kg	U	12637-8-L	11/19/99	3.5	4	481630.47	1349670.84
Bromodichloromethane	38	ug/kg	UNV	12553-3B-L	10/20/99	1	1.5	481127.44	1349611.23
Bromodichloromethane	12	ug/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16
Bromodichloromethane	11	ug/kg	UJ	121670	7/13/93	0	0.5	481396.77	1349596.16
Bromodichloromethane	11	ug/kg	U	121679	7/13/93	2.5	3	481396.77	1349596.16
Bromodichloromethane	11	ug/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
Bromodichloromethane	6	ug/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
Bromodichloromethane	6	ug/kg	U	056484	9/27/90	0.5	1	481139.24	1349502.78

69000

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Bromodichloromethane	6	ug/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
Bromodichloromethane	6	ug/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
Bromodichloromethane	6	ug/kg	UJ	056982	11/4/90	0.5	1	481587.71	1349680.95
Bromodichloromethane	6	ug/kg	U	056899	11/2/90	2	2.5	481666.29	1349483.48
Bromodichloromethane	6	ug/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
Bromodichloromethane	6	ug/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
Bromodichloromethane	6	ug/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
Bromodichloromethane	6	ug/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79
Bromodichloromethane	6	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
Bromodichloromethane	6	ug/kg	UJ	056985	11/4/90	2	2.5	481587.71	1349680.95
Bromodichloromethane	6	ug/kg	U	056903	11/2/90	4	4.5	481666.29	1349483.48
Bromodichloromethane	6	ug/kg	U	056912	11/1/90	4	4.5	481621.03	1349517.53
Bromodichloromethane	6	ug/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
Bromodichloromethane	6	ug/kg	U	056491	10/2/90	4	4.5	481139.24	1349502.78
Bromodichloromethane	6	ug/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44
Bromodichloromethane	6	ug/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
Bromodichloromethane	6	ug/kg	U	056668	9/24/90	4	4.5	481107.94	1349670.73
Bromodichloromethane	6	ug/kg	UJ	056536	9/23/90	4	4.5	481110.16	1349642.79
Bromodichloromethane	6	ug/kg	U	056502	10/2/90	9.5	10	481139.24	1349502.78
Bromodichloromethane	6	ug/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
Bromodichloromethane	6	ug/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73
Bromodichloromethane	6	ug/kg	UJ	056569	10/2/90	9.5	10	481138.11	1349580.59
Bromodichloromethane	6	ug/kg	UJ	057550	3/9/91	9.5	10	481216.91	1349510.38
Bromodichloromethane	5	ug/kg	U	056896	11/2/90	0.5	1	481666.29	1349483.48
Bromodichloromethane	5	ug/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
Bromodichloromethane	5	ug/kg	U	056661	9/24/90	0.5	1	481107.94	1349670.73
Bromodichloromethane	5	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
Bromodichloromethane	5	ug/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
Bromodichloromethane	5	ug/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73
Bromodichloromethane	5	ug/kg	UJ	056554	10/2/90	2	2.5	481138.11	1349580.59
Bromodichloromethane	5	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
Bromodichloromethane	5	ug/kg	UJ	056558	10/2/90	4	4.5	481138.11	1349580.59
Bromodichloromethane	5	ug/kg	U	056591	9/25/90	9.5	10	481135.55	1349611.44

0000

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Bromodichloromethane	5	ug/kg	U	056613	9/26/90	9.5	10	481133.83	1349644.52
Bromodichloromethane	5	ug/kg	UJ	057560	3/10/91	14.5	15	481216.91	1349510.38
Carbazole	410	ug/kg	UJ	121674	7/13/93	1	1.5	481396.77	1349596.16
Carbazole	380	ug/kg	UJ	121679	7/13/93	2.5	3	481396.77	1349596.16
Carbazole	370	ug/kg	UJ	121685	7/13/93	4.5	5	481396.77	1349596.16
Carbazole	65	ug/kg	J	121670	7/13/93	0	0.5	481396.77	1349596.16
Chloroethane	50	ug/kg	U	12637-14-L	11/19/99	6.5	7	481630.47	1349670.84
Chloroethane	50	ug/kg	U	12637-20-L	11/19/99	9.5	10	481630.47	1349670.84
Chloroethane	45.4	ug/kg	U	12637-2-L	11/19/99	0.5	1	481630.47	1349670.84
Chloroethane	45.4	ug/kg	U	12637-8-L	11/19/99	3.5	4	481630.47	1349670.84
Chloroethane	38	ug/kg	UNV	12553-3B-L	10/20/99	1	1.5	481127.44	1349611.23
Chloroethane	13	ug/kg	UJ	056573	9/24/90	0.5	1	481135.55	1349611.44
Chloroethane	13	ug/kg	U	056899	11/2/90	2	2.5	481666.29	1349483.48
Chloroethane	12	ug/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
Chloroethane	12	ug/kg	U	056484	9/27/90	0.5	1	481139.24	1349502.78
Chloroethane	12	ug/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
Chloroethane	12	ug/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16
Chloroethane	12	ug/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
Chloroethane	12	ug/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
Chloroethane	12	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
Chloroethane	12	ug/kg	UJ	056985	11/4/90	2	2.5	481587.71	1349680.95
Chloroethane	12	ug/kg	U	056912	11/1/90	4	4.5	481621.03	1349517.53
Chloroethane	11	ug/kg	UJ	121670	7/13/93	0	0.5	481396.77	1349596.16
Chloroethane	11	ug/kg	U	056896	11/2/90	0.5	1	481666.29	1349483.48
Chloroethane	11	ug/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
Chloroethane	11	ug/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
Chloroethane	11	ug/kg	U	056661	9/24/90	0.5	1	481107.94	1349670.73
Chloroethane	11	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
Chloroethane	11	ug/kg	UJ	056982	11/4/90	0.5	1	481587.71	1349680.95
Chloroethane	11	ug/kg	U	056554	10/2/90	2	2.5	481138.11	1349580.59
Chloroethane	11	ug/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
Chloroethane	11	ug/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
Chloroethane	11	ug/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79

10000

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Chloroethane	11	ug/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73
Chloroethane	11	ug/kg	U	121679	7/13/93	2.5	3	481396.77	1349596.16
Chloroethane	11	ug/kg	U	056903	11/2/90	4	4.5	481666.29	1349483.48
Chloroethane	11	ug/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
Chloroethane	11	ug/kg	U	056491	10/2/90	4	4.5	481139.24	1349502.78
Chloroethane	11	ug/kg	U	056558	10/2/90	4	4.5	481138.11	1349580.59
Chloroethane	11	ug/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44
Chloroethane	11	ug/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
Chloroethane	11	ug/kg	U	056536	9/23/90	4	4.5	481110.16	1349642.79
Chloroethane	11	ug/kg	U	056668	9/24/90	4	4.5	481107.94	1349670.73
Chloroethane	11	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
Chloroethane	11	ug/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
Chloroethane	11	ug/kg	U	056502	10/2/90	9.5	10	481139.24	1349502.78
Chloroethane	11	ug/kg	U	056569	10/2/90	9.5	10	481138.11	1349580.59
Chloroethane	11	ug/kg	U	056591	9/25/90	9.5	10	481135.55	1349611.44
Chloroethane	11	ug/kg	U	056613	9/26/90	9.5	10	481133.83	1349644.52
Chloroethane	11	ug/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
Chloroethane	11	ug/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73
Chloroethane	11	ug/kg	UJ	057550	3/9/91	9.5	10	481216.91	1349510.38
Chloroethane	11	ug/kg	UJ	057560	3/10/91	14.5	15	481216.91	1349510.38
Mercury	0.22	mg/kg	U	056536	9/23/90	4	4.5	481110.16	1349642.79
Mercury	0.21	mg/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73
Mercury	0.18	mg/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79
Mercury	0.18	mg/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
Mercury	0.15	mg/kg	-	056896	11/2/90	0.5	1	481666.29	1349483.48
Mercury	0.13	mg/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
Mercury	0.12	mg/kg	U	121670	7/13/93	0	0.5	481396.77	1349596.16
Mercury	0.12	mg/kg	U	056573	9/24/90	0.5	1	481135.55	1349611.44
Mercury	0.12	mg/kg	U	056899	11/2/90	2	2.5	481666.29	1349483.48
Mercury	0.12	mg/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
Mercury	0.111	mg/kg	UNV	056487	10/2/90	2	2.5	481139.24	1349502.78
Mercury	0.11	mg/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
Mercury	0.11	mg/kg	U	056484	9/27/90	0.5	1	481139.24	1349502.78

20000

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Mercury	0.11	mg/kg	U	056506	10/3/90	0.5	1	481137.29	1349541.06
Mercury	0.11	mg/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
Mercury	0.11	mg/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
Mercury	0.11	mg/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
Mercury	0.11	mg/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
Mercury	0.11	mg/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
Mercury	0.11	mg/kg	U	056903	11/2/90	4	4.5	481666.29	1349483.48
Mercury	0.11	mg/kg	U	056912	11/1/90	4	4.5	481621.03	1349517.53
Mercury	0.11	mg/kg	U	056491	10/2/90	4	4.5	481139.24	1349502.78
Mercury	0.11	mg/kg	U	056513	10/3/90	4	4.5	481137.29	1349541.06
Mercury	0.11	mg/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
Mercury	0.11	mg/kg	U	056502	10/2/90	9.5	10	481139.24	1349502.78
Mercury	0.11	mg/kg	U	056591	9/25/90	9.5	10	481135.55	1349611.44
Mercury	0.11	mg/kg	U	056613	9/26/90	9.5	10	481133.83	1349644.52
Mercury	0.11	mg/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73
Mercury	0.11	mg/kg	U	057550	3/9/91	9.5	10	481216.91	1349510.38
Mercury	0.11	mg/kg	U	057560	3/10/91	14.5	15	481216.91	1349510.38
Mercury	0.1	mg/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
Mercury	0.1	mg/kg	U	056661	9/24/90	0.5	1	481107.94	1349670.73
Mercury	0.1	mg/kg	U	056985	11/4/90	2	2.5	481587.71	1349680.95
Mercury	0.1	mg/kg	U	056509	10/3/90	2	2.5	481137.29	1349541.06
Mercury	0.1	mg/kg	U	056554	10/2/90	2	2.5	481138.11	1349580.59
Mercury	0.1	mg/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
Mercury	0.1	mg/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44
Mercury	0.1	mg/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
Mercury	0.1	mg/kg	U	056668	9/24/90	4	4.5	481107.94	1349670.73
Mercury	0.1	mg/kg	U	056524	10/3/90	9.5	10	481137.29	1349541.06
Mercury	0.1	mg/kg	U	056569	10/2/90	9.5	10	481138.11	1349580.59
Mercury	0.09	mg/kg	U	056982	11/4/90	0.5	1	481587.71	1349680.95
Mercury	0.09	mg/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
Mercury	0.09	mg/kg	U	056558	10/2/90	4	4.5	481138.11	1349580.59
Mercury	0.0881	mg/kg	UNV	056661	9/24/90	0.5	1	481107.94	1349670.73
Mercury	0.06	mg/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16

000073

2997

APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Mercury	0.06	mg/kg	U	121679	7/13/93	2.5	3	481396.77	1349596.16
Mercury	0.06	mg/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
Strontium-90	0.5	pCi/g	UJ	000831	8/25/91			481138.11	1349580.59
Tchnetium-99	0.9	pCi/g	U	000831	8/25/91			481138.11	1349580.59
Tetrachloroethene	50	ug/kg	U	12637-14-L	11/19/99	6.5	7	481630.47	1349670.84
Tetrachloroethene	50	ug/kg	U	12637-20-L	11/19/99	9.5	10	481630.47	1349670.84
Tetrachloroethene	45.4	ug/kg	U	12637-2-L	11/19/99	0.5	1	481630.47	1349670.84
Tetrachloroethene	45.4	ug/kg	U	12637-8-L	11/19/99	3.5	4	481630.47	1349670.84
Tetrachloroethene	44	ug/kg	J	056985	11/4/90	2	2.5	481587.71	1349680.95
Tetrachloroethene	38	ug/kg	UNV	12553-3B-L	10/20/99	1	1.5	481127.44	1349611.23
Tetrachloroethene	15	ug/kg	J	056982	11/4/90	0.5	1	481587.71	1349680.95
Tetrachloroethene	12	ug/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16
Tetrachloroethene	11	ug/kg	U	121679	7/13/93	2.5	3	481396.77	1349596.16
Tetrachloroethene	11	ug/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
Tetrachloroethene	6	ug/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
Tetrachloroethene	6	ug/kg	U	056484	9/27/90	0.5	1	481139.24	1349502.78
Tetrachloroethene	6	ug/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
Tetrachloroethene	6	ug/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
Tetrachloroethene	6	ug/kg	U	056899	11/2/90	2	2.5	481666.29	1349483.48
Tetrachloroethene	6	ug/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
Tetrachloroethene	6	ug/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
Tetrachloroethene	6	ug/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
Tetrachloroethene	6	ug/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79
Tetrachloroethene	6	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
Tetrachloroethene	6	ug/kg	U	056903	11/2/90	4	4.5	481666.29	1349483.48
Tetrachloroethene	6	ug/kg	U	056912	11/1/90	4	4.5	481621.03	1349517.53
Tetrachloroethene	6	ug/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44
Tetrachloroethene	6	ug/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
Tetrachloroethene	6	ug/kg	U	056536	9/23/90	4	4.5	481110.16	1349642.79
Tetrachloroethene	6	ug/kg	U	056668	9/24/90	4	4.5	481107.94	1349670.73
Tetrachloroethene	6	ug/kg	UJ	056491	10/2/90	4	4.5	481139.24	1349502.78
Tetrachloroethene	6	ug/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
Tetrachloroethene	6	ug/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73

000074

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Tetrachloroethene	6	ug/kg	UJ	056502	10/2/90	9.5	10	481139.24	1349502.78
Tetrachloroethene	6	ug/kg	UJ	056569	10/2/90	9.5	10	481138.11	1349580.59
Tetrachloroethene	6	ug/kg	UJ	057550	3/9/91	9.5	10	481216.91	1349510.38
Tetrachloroethene	5	ug/kg	U	056896	11/2/90	0.5	1	481666.29	1349483.48
Tetrachloroethene	5	ug/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
Tetrachloroethene	5	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
Tetrachloroethene	5	ug/kg	UJ	056661	9/24/90	0.5	1	481107.94	1349670.73
Tetrachloroethene	5	ug/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
Tetrachloroethene	5	ug/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73
Tetrachloroethene	5	ug/kg	UJ	056554	10/2/90	2	2.5	481138.11	1349580.59
Tetrachloroethene	5	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
Tetrachloroethene	5	ug/kg	UJ	056558	10/2/90	4	4.5	481138.11	1349580.59
Tetrachloroethene	5	ug/kg	U	056591	9/25/90	9.5	10	481135.55	1349611.44
Tetrachloroethene	5	ug/kg	U	056613	9/26/90	9.5	10	481133.83	1349644.52
Tetrachloroethene	5	ug/kg	UJ	057560	3/10/91	14.5	15	481216.91	1349510.38
Tetrachloroethene	3	ug/kg	J	121670	7/13/93	0	0.5	481396.77	1349596.16
Tetrachloroethene	1	ug/kg	J	056989	11/4/90	4	4.5	481587.71	1349680.95
Toxaphene	2100	ug/kg	U	056573	9/24/90	0.5	1	481135.55	1349611.44
Toxaphene	1800	ug/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
Toxaphene	900	ug/kg	U	056591	9/25/90	9.5	10	481135.55	1349611.44
Toxaphene	770	ug/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
Toxaphene	760	ug/kg	U	056569	10/2/90	9.5	10	481138.11	1349580.59
Toxaphene	750	ug/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73
Toxaphene	750	ug/kg	U	056524	10/3/90	9.5	10	481137.29	1349541.06
Toxaphene	740	ug/kg	U	056491	10/2/90	4	4.5	481139.24	1349502.78
Toxaphene	740	ug/kg	U	056502	10/2/90	9.5	10	481139.24	1349502.78
Toxaphene	710	ug/kg	U	056506	10/3/90	0.5	1	481137.29	1349541.06
Toxaphene	710	ug/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
Toxaphene	690	ug/kg	U	056554	10/2/90	2	2.5	481138.11	1349580.59
Toxaphene	690	ug/kg	U	056558	10/2/90	4	4.5	481138.11	1349580.59
Toxaphene	680	ug/kg	U	056509	10/3/90	2	2.5	481137.29	1349541.06
Toxaphene	420	ug/kg	U	056899	11/2/90	2	2.5	481666.29	1349483.48
Toxaphene	410	ug/kg	U	056985	11/4/90	2	2.5	481587.71	1349680.95

00005

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Toxaphene	370	ug/kg	U	056982	11/4/90	0.5	1	481587.71	1349680.95
Toxaphene	370	ug/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
Toxaphene	370	ug/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44
Toxaphene	370	ug/kg	U	056668	9/24/90	4	4.5	481107.94	1349670.73
Toxaphene	360	ug/kg	U	056661	9/24/90	0.5	1	481107.94	1349670.73
Toxaphene	210	ug/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
Toxaphene	210	ug/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16
Toxaphene	200	ug/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
Toxaphene	200	ug/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
Toxaphene	200	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
Toxaphene	200	ug/kg	UNV	121679	7/13/93	2.5	3	481396.77	1349596.16
Toxaphene	200	ug/kg	U	056912	11/1/90	4	4.5	481621.03	1349517.53
Toxaphene	190	ug/kg	UJ	121670	7/13/93	0	0.5	481396.77	1349596.16
Toxaphene	190	ug/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
Toxaphene	190	ug/kg	U	056513	10/3/90	4	4.5	481137.29	1349541.06
Toxaphene	190	ug/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
Toxaphene	190	ug/kg	U	056536	9/23/90	4	4.5	481110.16	1349642.79
Toxaphene	190	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
Toxaphene	190	ug/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
Toxaphene	190	ug/kg	U	057550	3/9/91	9.5	10	481216.91	1349510.38
Toxaphene	180	ug/kg	U	056896	11/2/90	0.5	1	481666.29	1349483.48
Toxaphene	180	ug/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
Toxaphene	180	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
Toxaphene	180	ug/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79
Toxaphene	180	ug/kg	U	056613	9/26/90	9.5	10	481133.83	1349644.52
Toxaphene	180	ug/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
Toxaphene	180	ug/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73
Toxaphene	180	ug/kg	U	057560	3/10/91	14.5	15	481216.91	1349510.38
Trichloroethene	50	ug/kg	U	12637-14-L	11/19/99	6.5	7	481630.47	1349670.84
Trichloroethene	50	ug/kg	U	12637-20-L	11/19/99	9.5	10	481630.47	1349670.84
Trichloroethene	45.4	ug/kg	U	12637-2-L	11/19/99	0.5	1	481630.47	1349670.84
Trichloroethene	38	ug/kg	UNV	12553-3B-L	10/20/99	1	1.5	481127.44	1349611.23
Trichloroethene	12	ug/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16

02000

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Trichloroethene	11	ug/kg	UJ	121670	7/13/93	0	0.5	481396.77	1349596.16
Trichloroethene	11	ug/kg	U	121679	7/13/93	2.5	3	481396.77	1349596.16
Trichloroethene	11	ug/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
Trichloroethene	7	ug/kg	J	056899	11/2/90	2	2.5	481666.29	1349483.48
Trichloroethene	6	ug/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
Trichloroethene	6	ug/kg	U	056484	9/27/90	0.5	1	481139.24	1349502.78
Trichloroethene	6	ug/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
Trichloroethene	6	ug/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
Trichloroethene	6	ug/kg	UJ	056982	11/4/90	0.5	1	481587.71	1349680.95
Trichloroethene	6	ug/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
Trichloroethene	6	ug/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
Trichloroethene	6	ug/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
Trichloroethene	6	ug/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79
Trichloroethene	6	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
Trichloroethene	6	ug/kg	UJ	056985	11/4/90	2	2.5	481587.71	1349680.95
Trichloroethene	6	ug/kg	U	056912	11/1/90	4	4.5	481621.03	1349517.53
Trichloroethene	6	ug/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
Trichloroethene	6	ug/kg	U	056491	10/2/90	4	4.5	481139.24	1349502.78
Trichloroethene	6	ug/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44
Trichloroethene	6	ug/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
Trichloroethene	6	ug/kg	U	056668	9/24/90	4	4.5	481107.94	1349670.73
Trichloroethene	6	ug/kg	UJ	056536	9/23/90	4	4.5	481110.16	1349642.79
Trichloroethene	6	ug/kg	U	056502	10/2/90	9.5	10	481139.24	1349502.78
Trichloroethene	6	ug/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
Trichloroethene	6	ug/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73
Trichloroethene	6	ug/kg	UJ	056569	10/2/90	9.5	10	481138.11	1349580.59
Trichloroethene	6	ug/kg	UJ	057550	3/9/91	9.5	10	481216.91	1349510.38
Trichloroethene	5	ug/kg	J	056896	11/2/90	0.5	1	481666.29	1349483.48
Trichloroethene	5	ug/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
Trichloroethene	5	ug/kg	U	056661	9/24/90	0.5	1	481107.94	1349670.73
Trichloroethene	5	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
Trichloroethene	5	ug/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
Trichloroethene	5	ug/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73

0000

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Uranium, Total	11	mg/kg	UNV	056864	10/3/90			481137.29	1349541.06
Uranium, Total	11	mg/kg	UNV	056865	10/2/90			481138.11	1349580.59
Uranium, Total	11	mg/kg	UNV	056860	9/25/90			481135.55	1349611.44
Uranium, Total	11	mg/kg	UNV	056862	9/26/90			481133.83	1349644.52
Uranium, Total	11	mg/kg	UNV	056861	9/25/90			481107.94	1349670.73
Uranium, Total	9.84	mg/kg	J	056504	10/3/90			481139.24	1349502.78
Uranium, Total	7.31	mg/kg	-	019267	1/17/90	5	5.5	481129.09	1349401.97
Uranium, Total	4.98	mg/kg	NV	055272	8/30/89	15	15.5	481429.62	1349710.06
Uranium, Total	4.96	mg/kg	J	056681	9/25/90			481107.94	1349670.73
Uranium, Total	4.75	mg/kg	J	056593	9/25/90			481135.55	1349611.44
Uranium, Total	4	mg/kg	UJ	050537	10/11/89	2	2.5	481333.31	1349371.45
Uranium, Total	4	mg/kg	J	050552	10/11/89	9.5	10	481333.31	1349371.45
Uranium, Total	3.99	mg/kg	NV	12600-1-M	10/7/99	0	0.5	481625.21	1349571.7
Uranium, Total	3.69	mg/kg	NV	055254	8/30/89	6	6.5	481429.62	1349710.06
Uranium, Total	3.65	mg/kg	NV	055262	8/30/89	10	10.5	481429.62	1349710.06
Uranium, Total	3.05	mg/kg	J	056526	10/3/90			481137.29	1349541.06
Uranium, Total	2.92	mg/kg	NV	055248	8/30/89	3	3.5	481429.62	1349710.06
Uranium, Total	2.9	mg/kg	-	121675	7/13/93	1	1.5	481396.77	1349596.16
Uranium, Total	2.78	mg/kg	J	056571	10/2/90			481138.11	1349580.59
Uranium, Total	2.6	mg/kg	-	121680	7/13/93	2.5	3	481396.77	1349596.16
Uranium, Total	2.4	mg/kg	-	121686	7/13/93	4.5	5	481396.77	1349596.16
Uranium, Total	1.66	mg/kg	NV	12600-11-M	10/7/99	5	5.5	481625.21	1349571.7
Uranium, Total	1.65	mg/kg	NV	12600-15-M	10/7/99	7	7.5	481625.21	1349571.7
Uranium, Total	1.52	mg/kg	NV	12548-15-M	10/6/99	7	7.5	481630.56	1349583.05
Uranium, Total	1.5	mg/kg	NV	12600-7-M	10/7/99	3	3.5	481625.21	1349571.7
Uranium, Total	1.43	mg/kg	NV	12548-13-M	10/6/99	6	6.5	481630.56	1349583.05
Uranium, Total	1.4	mg/kg	NV	12548-9-M	10/6/99	4	4.5	481630.56	1349583.05
Uranium, Total	1.36	mg/kg	NV	12600-5-M	10/7/99	2	2.5	481625.21	1349571.7
Uranium, Total	1.34	mg/kg	NV	12600-3-M	10/7/99	1	1.5	481625.21	1349571.7
Uranium, Total	1.26	mg/kg	NV	12600-9-M	10/7/99	4	4.5	481625.21	1349571.7
Uranium, Total	1.22	mg/kg	NV	12548-11-M	10/6/99	5	5.5	481630.56	1349583.05
Uranium, Total	1.22	mg/kg	NV	12600-13-M	10/7/99	6	6.5	481625.21	1349571.7
Vinyl chloride	50	ug/kg	U	12637-14-L	11/19/99	6.5	7	481630.47	1349670.84

62000

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Vinyl chloride	50	ug/kg	U	12637-20-L	11/19/99	9.5	10	481630.47	1349670.84
Vinyl chloride	45.4	ug/kg	U	12637-2-L	11/19/99	0.5	1	481630.47	1349670.84
Vinyl chloride	45.4	ug/kg	U	12637-8-L	11/19/99	3.5	4	481630.47	1349670.84
Vinyl chloride	38	ug/kg	UNV	12553-3B-L	10/20/99	1	1.5	481127.44	1349611.23
Vinyl chloride	13	ug/kg	UJ	056573	9/24/90	0.5	1	481135.55	1349611.44
Vinyl chloride	13	ug/kg	U	056899	11/2/90	2	2.5	481666.29	1349483.48
Vinyl chloride	12	ug/kg	U	056905	10/31/90	0.5	1	481621.03	1349517.53
Vinyl chloride	12	ug/kg	U	056484	9/27/90	0.5	1	481139.24	1349502.78
Vinyl chloride	12	ug/kg	U	056595	9/25/90	0.5	1	481133.83	1349644.52
Vinyl chloride	12	ug/kg	U	121674	7/13/93	1	1.5	481396.77	1349596.16
Vinyl chloride	12	ug/kg	U	056908	11/1/90	2	2.5	481621.03	1349517.53
Vinyl chloride	12	ug/kg	U	056487	10/2/90	2	2.5	481139.24	1349502.78
Vinyl chloride	12	ug/kg	U	057535	3/8/91	2	2.5	481216.91	1349510.38
Vinyl chloride	12	ug/kg	UJ	056985	11/4/90	2	2.5	481587.71	1349680.95
Vinyl chloride	12	ug/kg	U	056912	11/1/90	4	4.5	481621.03	1349517.53
Vinyl chloride	11	ug/kg	UJ	121670	7/13/93	0	0.5	481396.77	1349596.16
Vinyl chloride	11	ug/kg	U	056896	11/2/90	0.5	1	481666.29	1349483.48
Vinyl chloride	11	ug/kg	U	056551	9/27/90	0.5	1	481138.11	1349580.59
Vinyl chloride	11	ug/kg	U	056529	9/21/90	0.5	1	481110.16	1349642.79
Vinyl chloride	11	ug/kg	U	056661	9/24/90	0.5	1	481107.94	1349670.73
Vinyl chloride	11	ug/kg	U	057532	3/8/91	0.5	1	481216.91	1349510.38
Vinyl chloride	11	ug/kg	UJ	056982	11/4/90	0.5	1	481587.71	1349680.95
Vinyl chloride	11	ug/kg	U	056554	10/2/90	2	2.5	481138.11	1349580.59
Vinyl chloride	11	ug/kg	U	056576	9/24/90	2	2.5	481135.55	1349611.44
Vinyl chloride	11	ug/kg	U	056598	9/25/90	2	2.5	481133.83	1349644.52
Vinyl chloride	11	ug/kg	U	056532	9/23/90	2	2.5	481110.16	1349642.79
Vinyl chloride	11	ug/kg	U	056664	9/24/90	2	2.5	481107.94	1349670.73
Vinyl chloride	11	ug/kg	U	121679	7/13/93	2.5	3	481396.77	1349596.16
Vinyl chloride	11	ug/kg	U	056903	11/2/90	4	4.5	481666.29	1349483.48
Vinyl chloride	11	ug/kg	U	056989	11/4/90	4	4.5	481587.71	1349680.95
Vinyl chloride	11	ug/kg	U	056491	10/2/90	4	4.5	481139.24	1349502.78
Vinyl chloride	11	ug/kg	U	056558	10/2/90	4	4.5	481138.11	1349580.59
Vinyl chloride	11	ug/kg	U	056580	9/24/90	4	4.5	481135.55	1349611.44

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Vinyl chloride	11	ug/kg	U	056602	9/26/90	4	4.5	481133.83	1349644.52
Vinyl chloride	11	ug/kg	U	056536	9/23/90	4	4.5	481110.16	1349642.79
Vinyl chloride	11	ug/kg	U	056668	9/24/90	4	4.5	481107.94	1349670.73
Vinyl chloride	11	ug/kg	U	057539	3/9/91	4	4.5	481216.91	1349510.38
Vinyl chloride	11	ug/kg	U	121685	7/13/93	4.5	5	481396.77	1349596.16
Vinyl chloride	11	ug/kg	U	056502	10/2/90	9.5	10	481139.24	1349502.78
Vinyl chloride	11	ug/kg	U	056569	10/2/90	9.5	10	481138.11	1349580.59
Vinyl chloride	11	ug/kg	U	056591	9/25/90	9.5	10	481135.55	1349611.44
Vinyl chloride	11	ug/kg	U	056613	9/26/90	9.5	10	481133.83	1349644.52
Vinyl chloride	11	ug/kg	U	056547	9/23/90	9.5	10	481110.16	1349642.79
Vinyl chloride	11	ug/kg	U	056679	9/25/90	9.5	10	481107.94	1349670.73
Vinyl chloride	11	ug/kg	UJ	057550	3/9/91	9.5	10	481216.91	1349510.38
Vinyl chloride	11	ug/kg	UJ	057560	3/10/91	14.5	15	481216.91	1349510.38
TCLP RESULTS									
1,1-Dichloroethene	50	ug/L	U	000830	8/25/91			481139.24	1349502.78
1,1-Dichloroethene	50	ug/L	U	000831	8/25/91			481138.11	1349580.59
1,1-Dichloroethene	5	ug/L	U	057571	3/9/91			481216.91	1349510.38
1,1-Dichloroethene	5	ug/L	UJ	056503	10/3/90			481139.24	1349502.78
1,1-Dichloroethene	5	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
1,1-Dichloroethene	5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
1,1-Dichloroethene	5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
1,1-Dichloroethene	5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
1,1-Dichloroethene	5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
1,1-Dichloroethene	5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
1,2-Dichloroethane	50	ug/L	U	000830	8/25/91			481139.24	1349502.78
1,2-Dichloroethane	50	ug/L	U	000831	8/25/91			481138.11	1349580.59
1,2-Dichloroethane	5	ug/L	U	057571	3/9/91			481216.91	1349510.38
1,2-Dichloroethane	5	ug/L	UJ	056503	10/3/90			481139.24	1349502.78
1,2-Dichloroethane	5	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
1,2-Dichloroethane	5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
1,2-Dichloroethane	5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
1,2-Dichloroethane	5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
1,2-Dichloroethane	5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73

00008

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
1,2-Dichloroethane	5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
1,4-Dichlorobenzene	40	ug/L	U	000830	8/25/91			481139.24	1349502.78
1,4-Dichlorobenzene	40	ug/L	U	000831	8/25/91			481138.11	1349580.59
1,4-Dichlorobenzene	20	ug/L	U	057571	3/9/91			481216.91	1349510.38
1,4-Dichlorobenzene	20	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
1,4-Dichlorobenzene	20	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
1,4-Dichlorobenzene	20	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
1,4-Dichlorobenzene	20	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
1,4-Dichlorobenzene	20	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
1,4-Dichlorobenzene	20	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
2,4,5-TP (Silvex)	17	ug/L	U	000830	8/25/91			481139.24	1349502.78
2,4,5-TP (Silvex)	17	ug/L	U	000831	8/25/91			481138.11	1349580.59
2,4,5-TP (Silvex)	1.9	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
2,4,5-TP (Silvex)	1.8	ug/L	U	056503	10/3/90			481139.24	1349502.78
2,4,5-TP (Silvex)	1.8	ug/L	U	056570	10/2/90			481138.11	1349580.59
2,4,5-TP (Silvex)	1.8	ug/L	U	057571	3/9/91			481216.91	1349510.38
2,4,5-TP (Silvex)	1.8	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
2,4,5-TP (Silvex)	1.8	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
2,4,5-TP (Silvex)	1.7	ug/L	U	056614	9/26/90			481133.83	1349644.52
2,4,5-TP (Silvex)	1.7	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
2,4,5-TP (Silvex)	1.7	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
2,4,5-Trichlorophenol	100	ug/L	U	057571	3/9/91			481216.91	1349510.38
2,4,5-Trichlorophenol	100	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
2,4,5-Trichlorophenol	100	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
2,4,5-Trichlorophenol	100	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
2,4,5-Trichlorophenol	100	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
2,4,5-Trichlorophenol	100	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
2,4,5-Trichlorophenol	100	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
2,4,5-Trichlorophenol	40	ug/L	U	000830	8/25/91			481139.24	1349502.78
2,4,5-Trichlorophenol	40	ug/L	U	000831	8/25/91			481138.11	1349580.59
2,4,6-Trichlorophenol	40	ug/L	U	000830	8/25/91			481139.24	1349502.78
2,4,6-Trichlorophenol	40	ug/L	U	000831	8/25/91			481138.11	1349580.59
2,4,6-Trichlorophenol	20	ug/L	U	057571	3/9/91			481216.91	1349510.38

000082

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
2,4,6-Trichlorophenol	20	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
2,4,6-Trichlorophenol	20	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
2,4,6-Trichlorophenol	20	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
2,4,6-Trichlorophenol	20	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
2,4,6-Trichlorophenol	20	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
2,4,6-Trichlorophenol	20	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
2,4-D	120	ug/L	U	000830	8/25/91			481139.24	1349502.78
2,4-D	120	ug/L	U	000831	8/25/91			481138.11	1349580.59
2,4-D	13	ug/L	U	056570	10/2/90			481138.11	1349580.59
2,4-D	13	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
2,4-D	12.3	ug/L	U	056614	9/26/90			481133.83	1349644.52
2,4-D	12.2	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
2,4-D	12	ug/L	U	056503	10/3/90			481139.24	1349502.78
2,4-D	12	ug/L	U	057571	3/9/91			481216.91	1349510.38
2,4-D	12	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
2,4-D	12	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
2,4-D	12	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
2,4-Dinitrotoluene	40	ug/L	U	000830	8/25/91			481139.24	1349502.78
2,4-Dinitrotoluene	40	ug/L	U	000831	8/25/91			481138.11	1349580.59
2,4-Dinitrotoluene	20	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
2,4-Dinitrotoluene	20	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
2,4-Dinitrotoluene	20	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
2,4-Dinitrotoluene	20	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
2,4-Dinitrotoluene	20	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
2,4-Dinitrotoluene	20	ug/L	UJ	057571	3/9/91			481216.91	1349510.38
2,4-Dinitrotoluene	20	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
2-Butanone	100	ug/L	U	000830	8/25/91			481139.24	1349502.78
2-Butanone	100	ug/L	U	000831	8/25/91			481138.11	1349580.59
2-Butanone	10	ug/L	U	056503	10/3/90			481139.24	1349502.78
2-Butanone	10	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
2-Butanone	10	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
2-Butanone	10	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
2-Butanone	10	ug/L	UNV	057529	3/9/91			481212.2	1349591.6

00000000

00000000

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
2-Butanone	3	ug/L	U	056548	9/23/90			481110.16	1349642.79
2-Butanone	2	ug/L	U	056680	9/25/90			481107.94	1349670.73
alpha-Chlordane	0.5	ug/L	U	056503	10/3/90			481139.24	1349502.78
alpha-Chlordane	0.5	ug/L	U	056570	10/2/90			481138.11	1349580.59
alpha-Chlordane	0.5	ug/L	U	057571	3/9/91			481216.91	1349510.38
alpha-Chlordane	0.5	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
alpha-Chlordane	0.5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
alpha-Chlordane	0.5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
alpha-Chlordane	0.5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
alpha-Chlordane	0.5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
alpha-Chlordane	0.5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Arsenic	0.446	mg/L	-	057571	3/9/91			481216.91	1349510.38
Arsenic	0.325	mg/L	NV	057529	3/9/91			481212.2	1349591.6
Arsenic	0.25	mg/L	U	056525	10/3/90			481137.29	1349541.06
Arsenic	0.25	mg/L	U	056614	9/26/90			481133.83	1349644.52
Arsenic	0.25	mg/L	UJ	056592	9/25/90			481135.55	1349611.44
Arsenic	0.154	mg/L	U	056570	10/2/90			481138.11	1349580.59
Arsenic	0.1	mg/L	U	056503	10/3/90			481139.24	1349502.78
Arsenic	0.1	mg/L	U	056548	9/23/90			481110.16	1349642.79
Arsenic	0.0792	mg/L	U	056680	9/25/90			481107.94	1349670.73
Arsenic	0.047	mg/L	U	000830	8/25/91			481139.24	1349502.78
Arsenic	0.047	mg/L	U	000831	8/25/91			481138.11	1349580.59
Barium	1.26	mg/L	U	000830	8/25/91			481139.24	1349502.78
Barium	1.02	mg/L	J	056680	9/25/90			481107.94	1349670.73
Barium	0.958	mg/L	J	056592	9/25/90			481135.55	1349611.44
Barium	0.831	mg/L	-	057571	3/9/91			481216.91	1349510.38
Barium	0.783	mg/L	NV	057529	3/9/91			481212.2	1349591.6
Barium	0.763	mg/L	-	056614	9/26/90			481133.83	1349644.52
Barium	0.703	mg/L	-	056570	10/2/90			481138.11	1349580.59
Barium	0.646	mg/L	-	056503	10/3/90			481139.24	1349502.78
Barium	0.62	mg/L	U	000831	8/25/91			481138.11	1349580.59
Barium	0.572	mg/L	-	056548	9/23/90			481110.16	1349642.79
Barium	0.534	mg/L	-	056525	10/3/90			481137.29	1349541.06

480000

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Benzene	50	ug/L	U	000831	8/25/91			481138.11	1349580.59
Benzene	20	ug/L	U	000830	8/25/91			481139.24	1349502.78
Benzene	5	ug/L	U	057571	3/9/91			481216.91	1349510.38
Benzene	5	ug/L	UJ	056503	10/3/90			481139.24	1349502.78
Benzene	5	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
Benzene	5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Benzene	5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Benzene	5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Benzene	5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Benzene	5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Cadmium	0.0221	mg/L	-	056614	9/26/90			481133.83	1349644.52
Cadmium	0.018	mg/L	-	057571	3/9/91			481216.91	1349510.38
Cadmium	0.016	mg/L	NV	057529	3/9/91			481212.2	1349591.6
Cadmium	0.014	mg/L	-	056525	10/3/90			481137.29	1349541.06
Cadmium	0.0126	mg/L	J	056592	9/25/90			481135.55	1349611.44
Cadmium	0.0116	mg/L	-	056570	10/2/90			481138.11	1349580.59
Cadmium	0.00621	mg/L	-	056503	10/3/90			481139.24	1349502.78
Cadmium	0.00575	mg/L	J	056680	9/25/90			481107.94	1349670.73
Cadmium	0.00559	mg/L	-	056548	9/23/90			481110.16	1349642.79
Cadmium	0.004	mg/L	U	000830	8/25/91			481139.24	1349502.78
Cadmium	0.004	mg/L	U	000831	8/25/91			481138.11	1349580.59
Carbon Tetrachloride	50	ug/L	U	000830	8/25/91			481139.24	1349502.78
Carbon Tetrachloride	50	ug/L	U	000831	8/25/91			481138.11	1349580.59
Carbon Tetrachloride	5	ug/L	UJ	056503	10/3/90			481139.24	1349502.78
Carbon Tetrachloride	5	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
Carbon Tetrachloride	5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Carbon Tetrachloride	5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Carbon Tetrachloride	5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Carbon Tetrachloride	5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Carbon Tetrachloride	5	ug/L	UJ	057571	3/9/91			481216.91	1349510.38
Carbon Tetrachloride	5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Chlordane	1	ug/L	U	056503	10/3/90			481139.24	1349502.78
Chlordane	1	ug/L	U	056570	10/2/90			481138.11	1349580.59

000000

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Chlordane	1	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Chlordane	1	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Chlordane	1	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Chlordane	1	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Chlordane	1	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Chlordane	0.7	ug/L	U	000830	8/25/91			481139.24	1349502.78
Chlordane	0.7	ug/L	U	000831	8/25/91			481138.11	1349580.59
Chlorobenzene	50	ug/L	U	000830	8/25/91			481139.24	1349502.78
Chlorobenzene	50	ug/L	U	000831	8/25/91			481138.11	1349580.59
Chlorobenzene	5	ug/L	U	057571	3/9/91			481216.91	1349510.38
Chlorobenzene	5	ug/L	UJ	056503	10/3/90			481139.24	1349502.78
Chlorobenzene	5	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
Chlorobenzene	5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Chlorobenzene	5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Chlorobenzene	5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Chlorobenzene	5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Chlorobenzene	5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Chloroform	50	ug/L	U	000830	8/25/91			481139.24	1349502.78
Chloroform	50	ug/L	U	000831	8/25/91			481138.11	1349580.59
Chloroform	5	ug/L	U	057571	3/9/91			481216.91	1349510.38
Chloroform	5	ug/L	UJ	056503	10/3/90			481139.24	1349502.78
Chloroform	5	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
Chloroform	5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Chloroform	5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Chloroform	5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Chloroform	5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Chloroform	5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Chromium	0.124	mg/L	J	056592	9/25/90			481135.55	1349611.44
Chromium	0.102	mg/L	-	056614	9/26/90			481133.83	1349644.52
Chromium	0.096	mg/L	-	056525	10/3/90			481137.29	1349541.06
Chromium	0.079	mg/L	NV	057529	3/9/91			481212.2	1349591.6
Chromium	0.077	mg/L	-	057571	3/9/91			481216.91	1349510.38
Chromium	0.0474	mg/L	J	056680	9/25/90			481107.94	1349670.73

980000

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Chromium	0.02	mg/L	U	056503	10/3/90			481139.24	1349502.78
Chromium	0.02	mg/L	U	056570	10/2/90			481138.11	1349580.59
Chromium	0.02	mg/L	U	056548	9/23/90			481110.16	1349642.79
Chromium	0.003	mg/L	U	000830	8/25/91			481139.24	1349502.78
Chromium	0.003	mg/L	U	000831	8/25/91			481138.11	1349580.59
Endrin	0.3	ug/L	U	000830	8/25/91			481139.24	1349502.78
Endrin	0.3	ug/L	U	000831	8/25/91			481138.11	1349580.59
Endrin	0.11	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Endrin	0.1	ug/L	U	056503	10/3/90			481139.24	1349502.78
Endrin	0.1	ug/L	U	056570	10/2/90			481138.11	1349580.59
Endrin	0.1	ug/L	U	057571	3/9/91			481216.91	1349510.38
Endrin	0.1	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Endrin	0.1	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Endrin	0.1	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Endrin	0.1	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Endrin	0.1	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
gamma-BHC (Lindane)	0.2	ug/L	U	000830	8/25/91			481139.24	1349502.78
gamma-BHC (Lindane)	0.2	ug/L	U	000831	8/25/91			481138.11	1349580.59
gamma-BHC (Lindane)	0.075	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
gamma-BHC (Lindane)	0.05	ug/L	U	056503	10/3/90			481139.24	1349502.78
gamma-BHC (Lindane)	0.05	ug/L	U	056570	10/2/90			481138.11	1349580.59
gamma-BHC (Lindane)	0.05	ug/L	U	057571	3/9/91			481216.91	1349510.38
gamma-BHC (Lindane)	0.05	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
gamma-BHC (Lindane)	0.05	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
gamma-BHC (Lindane)	0.05	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
gamma-BHC (Lindane)	0.05	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
gamma-BHC (Lindane)	0.05	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
gamma-Chlordane	0.5	ug/L	U	056503	10/3/90			481139.24	1349502.78
gamma-Chlordane	0.5	ug/L	U	056570	10/2/90			481138.11	1349580.59
gamma-Chlordane	0.5	ug/L	U	057571	3/9/91			481216.91	1349510.38
gamma-Chlordane	0.5	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
gamma-Chlordane	0.5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
gamma-Chlordane	0.5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52

00000

00000

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
gamma-Chlordane	0.5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
gamma-Chlordane	0.5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
gamma-Chlordane	0.5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Heptachlor	0.15	ug/L	U	000830	8/25/91			481139.24	1349502.78
Heptachlor	0.15	ug/L	U	000831	8/25/91			481138.11	1349580.59
Heptachlor	0.05	ug/L	U	056503	10/3/90			481139.24	1349502.78
Heptachlor	0.05	ug/L	U	056570	10/2/90			481138.11	1349580.59
Heptachlor	0.05	ug/L	U	057571	3/9/91			481216.91	1349510.38
Heptachlor	0.05	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Heptachlor	0.05	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Heptachlor	0.05	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Heptachlor	0.05	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Heptachlor	0.05	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Heptachlor	0.043	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Heptachlor epoxide	4.2	ug/L	U	000830	8/25/91			481139.24	1349502.78
Heptachlor epoxide	4.2	ug/L	U	000831	8/25/91			481138.11	1349580.59
Heptachlor epoxide	0.053	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Heptachlor epoxide	0.05	ug/L	U	056503	10/3/90			481139.24	1349502.78
Heptachlor epoxide	0.05	ug/L	U	056570	10/2/90			481138.11	1349580.59
Heptachlor epoxide	0.05	ug/L	U	057571	3/9/91			481216.91	1349510.38
Heptachlor epoxide	0.05	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Heptachlor epoxide	0.05	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Heptachlor epoxide	0.05	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Heptachlor epoxide	0.05	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Heptachlor epoxide	0.05	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Hexachlorobenzene	40	ug/L	U	000830	8/25/91			481139.24	1349502.78
Hexachlorobenzene	40	ug/L	U	000831	8/25/91			481138.11	1349580.59
Hexachlorobenzene	20	ug/L	U	057571	3/9/91			481216.91	1349510.38
Hexachlorobenzene	20	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Hexachlorobenzene	20	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Hexachlorobenzene	20	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Hexachlorobenzene	20	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Hexachlorobenzene	20	ug/L	UJ	056680	9/25/90			481107.94	1349670.73

890000

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Hexachlorobenzene	20	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Hexachlorobutadiene	40	ug/L	U	000830	8/25/91			481139.24	1349502.78
Hexachlorobutadiene	40	ug/L	U	000831	8/25/91			481138.11	1349580.59
Hexachlorobutadiene	20	ug/L	U	057571	3/9/91			481216.91	1349510.38
Hexachlorobutadiene	20	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Hexachlorobutadiene	20	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Hexachlorobutadiene	20	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Hexachlorobutadiene	20	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Hexachlorobutadiene	20	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Hexachlorobutadiene	20	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Hexachloroethane	40	ug/L	U	000830	8/25/91			481139.24	1349502.78
Hexachloroethane	40	ug/L	U	000831	8/25/91			481138.11	1349580.59
Hexachloroethane	20	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Hexachloroethane	20	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Hexachloroethane	20	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Hexachloroethane	20	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Hexachloroethane	20	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Hexachloroethane	20	ug/L	UJ	057571	3/9/91			481216.91	1349510.38
Hexachloroethane	20	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Lead	0.2	mg/L	U	056614	9/26/90			481133.83	1349644.52
Lead	0.2	mg/L	U	057571	3/9/91			481216.91	1349510.38
Lead	0.2	mg/L	UJ	056525	10/3/90			481137.29	1349541.06
Lead	0.2	mg/L	UJ	056592	9/25/90			481135.55	1349611.44
Lead	0.2	mg/L	UNV	057529	3/9/91			481212.2	1349591.6
Lead	0.08	mg/L	U	056503	10/3/90			481139.24	1349502.78
Lead	0.08	mg/L	U	056570	10/2/90			481138.11	1349580.59
Lead	0.08	mg/L	U	056548	9/23/90			481110.16	1349642.79
Lead	0.04	mg/L	UJ	056680	9/25/90			481107.94	1349670.73
Lead	0.038	mg/L	U	000830	8/25/91			481139.24	1349502.78
Lead	0.038	mg/L	U	000831	8/25/91			481138.11	1349580.59
Mercury	0.001	mg/L	UJ	000830	8/25/91			481139.24	1349502.78
Mercury	0.001	mg/L	UJ	000831	8/25/91			481138.11	1349580.59
Mercury	0.0002	mg/L	U	056503	10/3/90			481139.24	1349502.78

680000

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Mercury	0.0002	mg/L	U	056570	10/2/90			481138.11	1349580.59
Mercury	0.0002	mg/L	U	056592	9/25/90			481135.55	1349611.44
Mercury	0.0002	mg/L	U	056614	9/26/90			481133.83	1349644.52
Mercury	0.0002	mg/L	U	056548	9/23/90			481110.16	1349642.79
Mercury	0.0002	mg/L	U	056680	9/25/90			481107.94	1349670.73
Mercury	0.0002	mg/L	U	057571	3/9/91			481216.91	1349510.38
Mercury	0.0002	mg/L	UJ	056525	10/3/90			481137.29	1349541.06
Mercury	0.0002	mg/L	UNV	057529	3/9/91			481212.2	1349591.6
Methoxychlor	8.8	ug/L	U	000830	8/25/91			481139.24	1349502.78
Methoxychlor	8.8	ug/L	U	000831	8/25/91			481138.11	1349580.59
Methoxychlor	0.59	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Methoxychlor	0.5	ug/L	U	056503	10/3/90			481139.24	1349502.78
Methoxychlor	0.5	ug/L	U	056570	10/2/90			481138.11	1349580.59
Methoxychlor	0.5	ug/L	U	057571	3/9/91			481216.91	1349510.38
Methoxychlor	0.5	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Methoxychlor	0.5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Methoxychlor	0.5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Methoxychlor	0.5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Methoxychlor	0.5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Nitrobenzene	40	ug/L	U	000830	8/25/91			481139.24	1349502.78
Nitrobenzene	40	ug/L	U	000831	8/25/91			481138.11	1349580.59
Nitrobenzene	20	ug/L	U	057571	3/9/91			481216.91	1349510.38
Nitrobenzene	20	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Nitrobenzene	20	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Nitrobenzene	20	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Nitrobenzene	20	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Nitrobenzene	20	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Nitrobenzene	20	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Pentachlorophenol	200	ug/L	U	000830	8/25/91			481139.24	1349502.78
Pentachlorophenol	200	ug/L	U	000831	8/25/91			481138.11	1349580.59
Pentachlorophenol	100	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Pentachlorophenol	100	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Pentachlorophenol	100	ug/L	UJ	056614	9/26/90			481133.83	1349644.52

000000

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Pentachlorophenol	100	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Pentachlorophenol	100	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Pentachlorophenol	100	ug/L	UJ	057571	3/9/91			481216.91	1349510.38
Pentachlorophenol	100	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Pyridine	400	ug/L	U	000830	8/25/91			481139.24	1349502.78
Pyridine	400	ug/L	U	000831	8/25/91			481138.11	1349580.59
Pyridine	20	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Pyridine	20	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Pyridine	20	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Pyridine	20	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Pyridine	20	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Pyridine	20	ug/L	UJ	057571	3/9/91			481216.91	1349510.38
Pyridine	20	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Selenium	0.4	mg/L	U	056614	9/26/90			481133.83	1349644.52
Selenium	0.4	mg/L	U	057571	3/9/91			481216.91	1349510.38
Selenium	0.4	mg/L	UNV	057529	3/9/91			481212.2	1349591.6
Selenium	0.178	mg/L	-	056525	10/3/90			481137.29	1349541.06
Selenium	0.149	mg/L	U	056570	10/2/90			481138.11	1349580.59
Selenium	0.138	mg/L	U	056592	9/25/90			481135.55	1349611.44
Selenium	0.0848	mg/L	U	056503	10/3/90			481139.24	1349502.78
Selenium	0.0819	mg/L	-	056548	9/23/90			481110.16	1349642.79
Selenium	0.0803	mg/L	U	056680	9/25/90			481107.94	1349670.73
Selenium	0.066	mg/L	U	000830	8/25/91			481139.24	1349502.78
Selenium	0.066	mg/L	U	000831	8/25/91			481138.11	1349580.59
Silver	0.162	mg/L	NV	057529	3/9/91			481212.2	1349591.6
Silver	0.159	mg/L	-	057571	3/9/91			481216.91	1349510.38
Silver	0.0918	mg/L	J	056592	9/25/90			481135.55	1349611.44
Silver	0.073	mg/L	-	056525	10/3/90			481137.29	1349541.06
Silver	0.0608	mg/L	-	056614	9/26/90			481133.83	1349644.52
Silver	0.031	mg/L	J	056680	9/25/90			481107.94	1349670.73
Silver	0.02	mg/L	U	056503	10/3/90			481139.24	1349502.78
Silver	0.02	mg/L	U	056570	10/2/90			481138.11	1349580.59
Silver	0.02	mg/L	U	056548	9/23/90			481110.16	1349642.79

00004

2997

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Silver	0.003	mg/L	U	000830	8/25/91			481139.24	1349502.78
Silver	0.003	mg/L	U	000831	8/25/91			481138.11	1349580.59
Tetrachloroethene	50	ug/L	U	000830	8/25/91			481139.24	1349502.78
Tetrachloroethene	50	ug/L	U	000831	8/25/91			481138.11	1349580.59
Tetrachloroethene	5	ug/L	UJ	056503	10/3/90			481139.24	1349502.78
Tetrachloroethene	5	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
Tetrachloroethene	5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Tetrachloroethene	5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Tetrachloroethene	5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Tetrachloroethene	5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Tetrachloroethene	5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Tetrachloroethene	1	ug/L	J	057571	3/9/91			481216.91	1349510.38
Toxaphene	12	ug/L	U	000830	8/25/91			481139.24	1349502.78
Toxaphene	12	ug/L	U	000831	8/25/91			481138.11	1349580.59
Toxaphene	1.2	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Toxaphene	1	ug/L	U	056503	10/3/90			481139.24	1349502.78
Toxaphene	1	ug/L	U	056570	10/2/90			481138.11	1349580.59
Toxaphene	1	ug/L	U	057571	3/9/91			481216.91	1349510.38
Toxaphene	1	ug/L	UJ	056525	10/3/90			481137.29	1349541.06
Toxaphene	1	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Toxaphene	1	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Toxaphene	1	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Toxaphene	1	ug/L	UNV	057529	3/9/91			481212.2	1349591.6
Trichloroethene	50	ug/L	U	000830	8/25/91			481139.24	1349502.78
Trichloroethene	50	ug/L	U	000831	8/25/91			481138.11	1349580.59
Trichloroethene	5	ug/L	UJ	056503	10/3/90			481139.24	1349502.78
Trichloroethene	5	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
Trichloroethene	5	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Trichloroethene	5	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Trichloroethene	5	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Trichloroethene	5	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Trichloroethene	5	ug/L	UJ	057571	3/9/91			481216.91	1349510.38
Trichloroethene	5	ug/L	UNV	057529	3/9/91			481212.2	1349591.6

000092

**APPENDIX C
EXISTING DATA ON STOCKPILE BPW-005**

Parameter	Result	Units	Qual	Sample ID	Sample Date	Top Depth	Bottom Depth	Northing	Easting
Vinyl chloride	100	ug/L	U	000830	8/25/91			481139.24	1349502.78
Vinyl chloride	100	ug/L	U	000831	8/25/91			481138.11	1349580.59
Vinyl chloride	10	ug/L	U	057571	3/9/91			481216.91	1349510.38
Vinyl chloride	10	ug/L	UJ	056503	10/3/90			481139.24	1349502.78
Vinyl chloride	10	ug/L	UJ	056570	10/2/90			481138.11	1349580.59
Vinyl chloride	10	ug/L	UJ	056592	9/25/90			481135.55	1349611.44
Vinyl chloride	10	ug/L	UJ	056614	9/26/90			481133.83	1349644.52
Vinyl chloride	10	ug/L	UJ	056548	9/23/90			481110.16	1349642.79
Vinyl chloride	10	ug/L	UJ	056680	9/25/90			481107.94	1349670.73
Vinyl chloride	10	ug/L	UNV	057529	3/9/91			481212.2	1349591.6

000093

2997

APPENDIX D
PRIMARY/SECONDARY SOIL SAMPLES

TABLE D-1
HIS-008 PRIMARY RANDOM SAMPLE LOCATIONS

Sample ID	Northing	Easting	Estimated Boring Depth (feet)	Sample Depth Interval (feet)	TAL
HIS-008-1-R	481279	1350147	2.8	0.5-1.5	A
HIS-008-1-L	481279	1350147	2.8	0.5-1.5	C
HIS-008-1-S	481279	1350147	2.8	0.5-1.5	D
HIS-008-1-P	481279	1350147	2.8	0.5-1.5	E
HIS-008-1-TL	481279	1350147	2.8	0.5-1.5	F
HIS-008-1-TS	481279	1350147	2.8	0.5-1.5	G
HIS-008-1-TM	481279	1350147	2.8	0.5-1.5	H
HIS-008-2-R	481274	1350154	4.1	0-1.0	A
HIS-008-2-L	481274	1350154	4.1	0-1.0	C
HIS-008-2-S	481274	1350154	4.1	0-1.0	D
HIS-008-2-P	481274	1350154	4.1	0-1.0	E
HIS-008-2-TL	481274	1350154	4.1	0-1.0	F
HIS-008-2-TS	481274	1350154	4.1	0-1.0	G
HIS-008-2-TM	481274	1350154	4.1	0-1.0	H
HIS-008-3-R	481262	1350167	3.5	0.5-1.5	A
HIS-008-3-L	481262	1350167	3.5	0.5-1.5	C
HIS-008-3-S	481262	1350167	3.5	0.5-1.5	D
HIS-008-3-P	481262	1350167	3.5	0.5-1.5	E
HIS-008-3-TL	481262	1350167	3.5	0.5-1.5	F
HIS-008-3-TS	481262	1350167	3.5	0.5-1.5	G
HIS-008-3-TM	481262	1350167	3.5	0.5-1.5	H

**TABLE D-2
HIS-008 SECONDARY RANDOM SAMPLE LOCATIONS**

Sample ID	Northing	Easting	Estimated Boring Depth (feet)	Sample Depth Interval (feet)	TAL
HIS-008-1-R	481269	1350143	3.1	0.5-1.5	A
HIS-008-1-L	481269	1350143	3.1	0.5-1.5	C
HIS-008-1-S	481269	1350143	3.1	0.5-1.5	D
HIS-008-1-P	481269	1350143	3.1	0.5-1.5	E
HIS-008-1-TL	481269	1350143	3.1	0.5-1.5	F
HIS-008-1-TS	481269	1350143	3.1	0.5-1.5	G
HIS-008-1-TM	481269	1350143	3.1	0.5-1.5	H
HIS-008-2-R	481271	1350162	5.4	1.5-2.5	A
HIS-008-2-L	481271	1350162	5.4	1.5-2.5	C
HIS-008-2-S	481271	1350162	5.4	1.5-2.5	D
HIS-008-2-P	481271	1350162	5.4	1.5-2.5	E
HIS-008-2-TL	481271	1350162	5.4	1.5-2.5	F
HIS-008-2-TS	481271	1350162	5.4	1.5-2.5	G
HIS-008-2-TM	481271	1350162	5.4	1.5-2.5	H
HIS-008-3-R	481260	1350168	2.6	0.5-1.5	A
HIS-008-3-L	481260	1350168	2.6	0.5-1.5	C
HIS-008-3-S	481260	1350168	2.6	0.5-1.5	D
HIS-008-3-P	481260	1350168	2.6	0.5-1.5	E
HIS-008-3-TL	481260	1350168	2.6	0.5-1.5	F
HIS-008-3-TS	481260	1350168	2.6	0.5-1.5	G
HIS-008-3-TM	481260	1350168	2.6	0.5-1.5	H

TABLE D-3
A3A-006 PRIMARY RANDOM SAMPLE LOCATIONS

Sample ID	Northing	Easting	Estimated Boring Depth (feet)	Sample Depth Interval (feet)	TAL
A3A-006-1-R	482029	1349780	3.0	1.0-2.0	A
A3A-006-1-L	482029	1349780	3.0	1.0-2.0	C
A3A-006-1-S	482029	1349780	3.0	1.0-2.0	D
A3A-006-1-P	482029	1349780	3.0	1.0-2.0	E
A3A-006-1-TL	482029	1349780	3.0	1.0-2.0	F
A3A-006-1-TS	482029	1349780	3.0	1.0-2.0	G
A3A-006-1-TM	482029	1349780	3.0	1.0-2.0	H
A3A-006-2-R	482020	1349807	5.0	3.0-4.0	A
A3A-006-2-L	482020	1349807	5.0	3.0-4.0	C
A3A-006-2-S	482020	1349807	5.0	3.0-4.0	D
A3A-006-2-P	482020	1349807	5.0	3.0-4.0	E
A3A-006-2-TL	482020	1349807	5.0	3.0-4.0	F
A3A-006-2-TS	482020	1349807	5.0	3.0-4.0	G
A3A-006-2-TM	482020	1349807	5.0	3.0-4.0	H
A3A-006-3-R	482010	1349813	2.2	0-1.0	A
A3A-006-3-L	482010	1349813	2.2	0-1.0	C
A3A-006-3-S	482010	1349813	2.2	0-1.0	D
A3A-006-3-P	482010	1349813	2.2	0-1.0	E
A3A-006-3-TL	482010	1349813	2.2	0-1.0	F
A3A-006-3-TS	482010	1349813	2.2	0-1.0	G
A3A-006-3-TM	482010	1349813	2.2	0-1.0	H

**TABLE D-4
A3A-006 SECONDARY RANDOM SAMPLE LOCATIONS**

Sample ID	Northing	Easting	Estimated Boring Depth (feet)	Sample Depth Interval (feet)	TAL
A3A-006-1-R	482039	1349773	4.6	2.5-3.5	A
A3A-006-1-L	482039	1349773	4.6	2.5-3.5	C
A3A-006-1-S	482039	1349773	4.6	2.5-3.5	D
A3A-006-1-P	482039	1349773	4.6	2.5-3.5	E
A3A-006-1-TL	482039	1349773	4.6	2.5-3.5	F
A3A-006-1-TS	482039	1349773	4.6	2.5-3.5	G
A3A-006-1-TM	482039	1349773	4.6	2.5-3.5	H
A3A-006-2-R	482028	1349801	6.1	0-1.0	A
A3A-006-2-L	482028	1349801	6.1	0-1.0	C
A3A-006-2-S	482028	1349801	6.1	0-1.0	D
A3A-006-2-P	482028	1349801	6.1	0-1.0	E
A3A-006-2-TL	482028	1349801	6.1	0-1.0	F
A3A-006-2-TS	482028	1349801	6.1	0-1.0	G
A3A-006-2-TM	482028	1349801	6.1	0-1.0	H
A3A-006-3-R	482030	1349832	4.1	2.0-3.0	A
A3A-006-3-L	482030	1349832	4.1	2.0-3.0	C
A3A-006-3-S	482030	1349832	4.1	2.0-3.0	D
A3A-006-3-P	482030	1349832	4.1	2.0-3.0	E
A3A-006-3-TL	482030	1349832	4.1	2.0-3.0	F
A3A-006-3-TS	482030	1349832	4.1	2.0-3.0	G
A3A-006-3-TM	482030	1349832	4.1	2.0-3.0	H

TABLE D-5
BPW-005 PRIMARY RANDOM SAMPLE LOCATIONS

Sample ID	Northing	Easting	Estimated Boring Depth (feet)	Sample Depth Interval (feet)	TAL
BPW-005-1-R	481591	1349595	3.4	0.5-1.5	A
BPW-005-2-R	481587	1349621	6.9	3.5-4.5	A
BPW-005-3-R	481601	1349665	3.1	0-1.0	A
BPW-005-4-R	481569	1349660	5.7	2.5-3.5	A

TABLE D-6
BPW-005 SECONDARY RANDOM SAMPLE LOCATIONS

Sample ID	Northing	Easting	Estimated Boring Depth (feet)	Sample Depth Interval (feet)	TAL
BPW-005-1-R	481583	1349604	6.7	4.5-5.5	A
BPW-005-2-R	481589	1349627	3.4	0-1.0	A
BPW-005-3-R	481584	1349661	8.6	0-1.0	A
BPW-005-4-R	481564	1349667	5.7	3.5-4.5	A