

Proposed Plan for Operable Unit 5

Environmental Media

Fernald Environmental Management Project, Fernald, Ohio

Public Comment Period - May 1-May 31, 1995

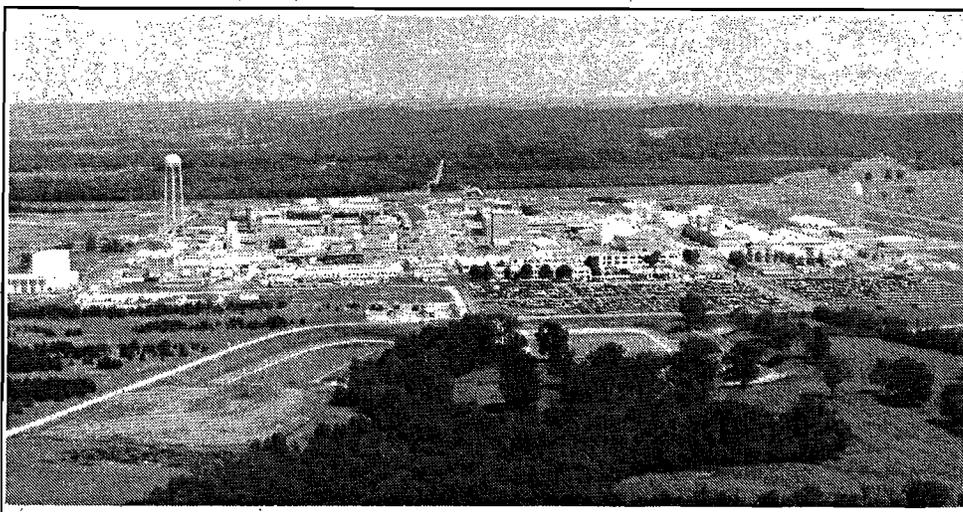


Photo of the Fernald Environmental Management Project Site

(Editor's Note: Technical and administrative terms are used throughout this Proposed Plan. When these terms are first used, they are printed in bold italics. Explanations of these terms, document references, and other helpful notes are provided in the margins.)

Inside This Plan

Community Acceptance	4
Site Background	4
Summary of the Remedial Investigation	6
Removal Actions	12
Summary of Site Risks	12
Remedial Action Objectives	16
Summary of Remedial Alternatives	18
Evaluation of Alternatives	29
Preferred Remedial Alternative	35
Site-Wide Integration of Remedies	41
Public Involvement Activities	45
Postage-Paid Comment Form	Back Page

Introduction

This *Proposed Plan* summarizes information on the range of remedial action alternatives evaluated for the radiologically and chemically contaminated environmental media that make up *Operable Unit 5* at the U.S. Department of Energy's (DOE's) Fernald Environmental Management Project (FEMP). The term environmental media includes groundwater, surface water, soil, sediment, flora and fauna both on and off the FEMP property. These evaluations were conducted due to the concern, on the part of DOE, involved regulatory agencies and the public, that site-related contamination in the environmental media could adversely impact human health and cause further degradation of environmental conditions. The DOE seeks public comment on the alternatives presented in this Proposed Plan, including the preferred alternative. Opportunities to comment include a public meeting (see side bar) and a prepaid comment form at the back of the document.

Public Meeting

May 23, 1995
 7 to 9 p.m.
 at
 The Plantation
 Harrison, OH

Proposed Plan - a document that summarizes DOE's preferred cleanup strategy, the rationale for the preference, and alternatives presented in the detailed analysis of the feasibility study. The Proposed Plan solicits public review and comment on all alternatives under consideration.

Operable Unit - a term used to describe a logical grouping of environmental media or waste management facilities at a cleanup site.

Operable Units 1-5 - the following is a summary of each of the FEMP operable units.

Operable Unit 1 - waste pit area including six waste pits, a Clearwell, and a burn pit.

Operable Unit 2 - other waste units including two lime sludge ponds, two flyash piles, a disposal area containing construction rubble, and a solid waste landfill.

Operable Unit 3 - former production area including plant buildings, scrap metal, equipment, and drummed waste inventories.

Operable Unit 4 - silos 1-4 (concrete waste storage silos) and support structures.

Operable Unit 5 - environmental media including groundwater in the aquifer, perched groundwater, surface water, soil, sediment, flora and fauna.

Record of Decision - a public record documenting the final determination of the selected alternative. Records of Decision are legally binding documents that are developed in consideration of public comments and fulfill CERCLA requirements. FEMP CERCLA decisions are signed by representatives of U.S. EPA Region 5 and the DOE.

Remedial Investigation - identifies the nature and extent of contamination at a site. Also provides an assessment of the potential risks associated with a site.

Feasibility Study - provides a full evaluation of cleanup alternatives based on information gathered during the remedial investigation.

Proposed plans are being issued for *Operable Units 1 through 5* at the FEMP; this is the fourth. Following consideration of public input on the proposed plans, *Records of Decision* (RODs), jointly signed by the DOE and the U.S. Environmental Protection Agency (EPA), are issued for each operable unit identifying the alternative selected for implementation.

Contaminated Environmental Media

The source of the contamination in environmental media is attributable to releases from past uranium production operations and waste management activities at the facility. The primary means by which the contaminants were released included air emissions, wastewater discharges, and leaks and spills during production operations. The termination of production operations in 1989 eliminated or reduced many of the primary sources of contaminant releases to the environment.

The primary focus of the Operable Unit 5 *Remedial Investigation/Feasibility Study* (RI/FS) was to: 1) establish the nature and extent of the existing contamination in environmental media at the site; 2) determine the potential for continued migration of these contaminants; and 3) identify viable remedial measures to protect human health and the environment.

Agency Involvement

The DOE's Fernald Area Office prepared this plan in accordance with public participation requirements identified under Section 117(a) of the Comprehensive Environmental Response, Compensation, and Liability Act (*CERCLA*), commonly called Superfund. As the owner of the FEMP, DOE is the lead agency conducting cleanup activities at the site. The DOE is performing the RI/FS at the FEMP under the terms of an *Amended Consent Agreement* with EPA. The Ohio Environmental Protection Agency (OEPA) is also participating in the remedy selection and cleanup process at the site.

This plan outlines the results of the Operable Unit 5 RI including assessment of potential risks to human health and the environment, summarizes the remedial action alternatives considered in the FS, and discusses the identification of a preferred alternative. The information summarized in this plan can be found in greater detail in the *Remedial Investigation Report for Operable Unit 5* and the *Feasibility Study Report for Operable Unit 5*. These documents and other supporting information are available in the *Administrative Record File*, which may be reviewed at the FEMP Public Environmental Information Center and the EPA Region 5 office, as listed on page 45.

Scope of the Operable Unit 5 Remedial Decision

The remedial decision for Operable Unit 5 will yield a remedy which provides a permanent cleanup solution for addressing contaminated media at the site. The expectations for the decision include:

- The establishment of final cleanup levels for soil, sediment, and groundwater
- A remedy which uses treatment to the extent practical to address the principal threats posed by the contaminated media
- The permanent disposition of removed contaminated materials or sludge generated through treatment in an appropriate on- or off-property disposal facility

- A remedy which applies institutional controls, as necessary, to complement engineering measures taken to address site contaminants
- A remedy which ensures the return of useable groundwater, including the Great Miami Aquifer, to full beneficial use within a reasonable time
- A remedy which ensures the short-term and long-term protection of the public and sensitive environmental receptors
- A remedy which is cost-effective and implementable and which accommodates the future application of new, more effective technologies which emerge during the conduct of remedial activities
- A remedy which accommodates the inherent uncertainties associated with the availability of future capacity at off-site licensed disposal facilities.

The cost of remedial actions, volumes of contaminated materials requiring action, and range of available remedial alternatives for Operable Unit 5 are sensitive factors in determining the final cleanup levels for the affected environmental media. These final cleanup levels (termed remediation levels) define the concentration of a given contaminant that would be permitted to remain in site soil, sediment and groundwater following the implementation of remedial actions. The final cleanup levels also consider factors such as technical limitations on attaining the cleanup level (for example, attaining levels below natural background or analytical detection limits), cross-media impacts, potential impacts to sensitive ecological receptors, and cost. While the Operable Unit 5 ROD will not establish future land use for the FEMP, the possible future uses of the property and the costs of remedial actions necessary to accommodate those uses must be taken into consideration when determining the final cleanup levels for the operable unit. Projected future land uses that envision more extensive and continued exposure to site contaminants remaining after remedial actions, such as the creation of a family farm on the existing government property, would require lower cleanup levels to ensure the long-term protection of such a future land user. Lower cleanup levels typically would require the removal, containment or treatment of larger quantities of contaminated site media, both on-and off-property, resulting in increased costs for a given remedial alternative.

Preferred Alternative

DOE's preferred alternative for addressing the radiological and chemical contamination in the environmental media involves: the excavation of contaminated soil and sediment that exceed *proposed final remediation levels* using conventional excavation equipment; placement of the excavated materials that meet waste acceptance criteria in an on-property above-grade disposal facility; and extraction and treatment of *Great Miami Aquifer* groundwater containing concentrations of contaminants above established or proposed *maximum contaminant levels (MCLs)*. Contaminated zones of *perched water* within the glacial overburden presenting an unacceptable threat to the underlying aquifer would be excavated concurrently with soil removal activities. Excavated soil and sediment exhibiting concentrations of contaminants which potentially jeopardize the long-term performance of the facility would be shipped off site for disposal at an approved facility. The FEMP would continue to examine emerging technologies, as part of the preferred remedy, to identify potential waste minimization opportunities and to minimize the potential vulnerabilities to completing remedial actions due to the uncertainties in the long-term availability of off-site disposal capacity.

This alternative is recommended because it is believed to be reliable over the long term, uses proven technologies, and offers the best balance of cost and technical considerations among the alternatives. This alternative has been determined to be protective of human health and the environment.

Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) - a federal law that provides a comprehensive framework to deal with the investigation and cleanup of hazardous substances released into the environment from a waste site.

Administrative Record File - documents including correspondence, public comments, RODs, and technical reports upon which the agencies base their remedial action selection.

Proposed Final Remediation Levels - contaminant-specific, concentration-based cleanup levels for environmental media proposed to be implemented as part of the preferred alternative. Cleanup levels are finalized in the issued ROD.

Great Miami Aquifer - a regionally extensive groundwater aquifer system providing potable drinking water to many communities throughout central and southwestern Ohio. The FEMP site is located over a 1050-acre portion of the almost 960,000-acre aquifer system. The Great Miami Aquifer is a designated sole-source aquifer under the federal Safe Drinking Water Act, signifying a protected status as a valued natural resource.

Maximum Contaminant Levels (MCLs) - concentration-based thresholds for individual chemical constituents in drinking water established by federal and state regulation to ensure the protection of public health. One goal of CERCLA is to restore affected aquifer systems to levels, such as the MCLs, which are protective of public health.

Perched Water - groundwater residing within the clay-rich soil located above the underlying Great Miami Aquifer (see Figure 2).

Fernald Citizens Task Force - chartered by DOE in 1993, these key stakeholders will recommend future land uses and final cleanup levels for the FEMP. The Task Force input will be instrumental in determining the path of future cleanup. We encourage you to attend Task Force meetings and offer your views on future uses of the site and final cleanup levels.

How You Can Participate

You are invited to:

- Read this Proposed Plan and review additional documents in the Administrative Record File
- Call the FEMP DOE office (see page 45) to ask questions, request information, or make arrangements for a briefing
- Attend the public meeting listed on page 1 and give verbal comments.
- Submit written comments (see postage-paid comment form on the back cover) by May 31.
- Contact State of Ohio or EPA Region E project managers (see page 45)

Responsiveness Summary - a part of the ROD that summarizes and provides responses to public comments received on the Proposed Plan during the public comment period.

Permeability - the capacity of soil to allow water to pass through it.

Community Acceptance

Community acceptance is one of the criteria which DOE and EPA are committed to evaluating during the process of selecting a remedy for Operable Unit 5. These federal agencies have several mechanisms available to them to gauge the degree of community acceptance, including open dialogue with citizens concerning the results of the investigation and encouraging citizens to participate by commenting on the remedial alternatives. This interaction with the community is critical to the CERCLA process and to making sound environmental decisions.


To foster community input into the decision process, the DOE chartered the *Fernald Citizens Task Force*. The Task Force, which is comprised of local government officials and residents, labor leaders, FEMP employees and community leaders, is focused on making recommendations to decision makers on preferred cleanup levels, waste disposition strategies and future land uses for the FEMP property. Throughout their development, the Operable Unit 5 FS and this Proposed Plan have attempted to consider the evolving deliberations of the Task Force. The preferred alternative identified in this Proposed Plan is consistent with the recommendations of the Task Force.

The public is encouraged to review and comment on all remedial alternatives considered for Operable Unit 5, not just the preferred alternative. All alternatives are explained in detail in the section entitled Summary of Alternatives (see page 18). Additional details on the remedial alternatives can be found in Sections 4 and 5 of the FS Report for Operable Unit 5. This report is available in the Administrative Record file.

The actual selection of the alternative to be implemented will be made only after comments received during the public comment period have been reviewed and analyzed. The DOE and EPA will consider all public comments on this Proposed Plan in preparing the ROD. Depending on comments received, the selected final remedy for Operable Unit 5 presented in the ROD could be different from the preferred alternative. All written and verbal comments received during the public comment period will be summarized and responded to in the *Responsiveness Summary* section of the ROD. The ROD for Operable Unit 5 is scheduled to be issued in the fall of 1995.

Site Background

The FEMP, formerly known as the Feed Materials Production Center, is a 1050-acre DOE facility located approximately 18 miles northwest of Cincinnati (see Figure 1). Fernald, Ohio is a small rural community located just south of the FEMP. The FEMP is a government-owned facility that operated from 1952 to 1989 providing in excess of 500 million pounds of high-purity uranium metal products in support of U.S. defense initiatives. The topography of the area includes gently rolling uplands with steep hillsides along major streams, such as the Great Miami River. Surface drainage on the FEMP is from east to west and south into Paddys Run, with the exception of the northeast corner which drains east toward the Great Miami River. Groundwater beneath the FEMP is found in two principal geologic units: the glacial overburden (ranging in thickness between zero and 50 feet) and the sand and gravel of the Great Miami Aquifer (see Figure 2). Groundwater occurring in the glacial overburden is considered "perched," in that it is contained within silty sand lenses residing within a low-permeability, clay-rich soil. The underlying Great Miami Aquifer is the principal drinking water supply for the region and is regulated as a sole-source aquifer under the Safe Drinking Water Act.

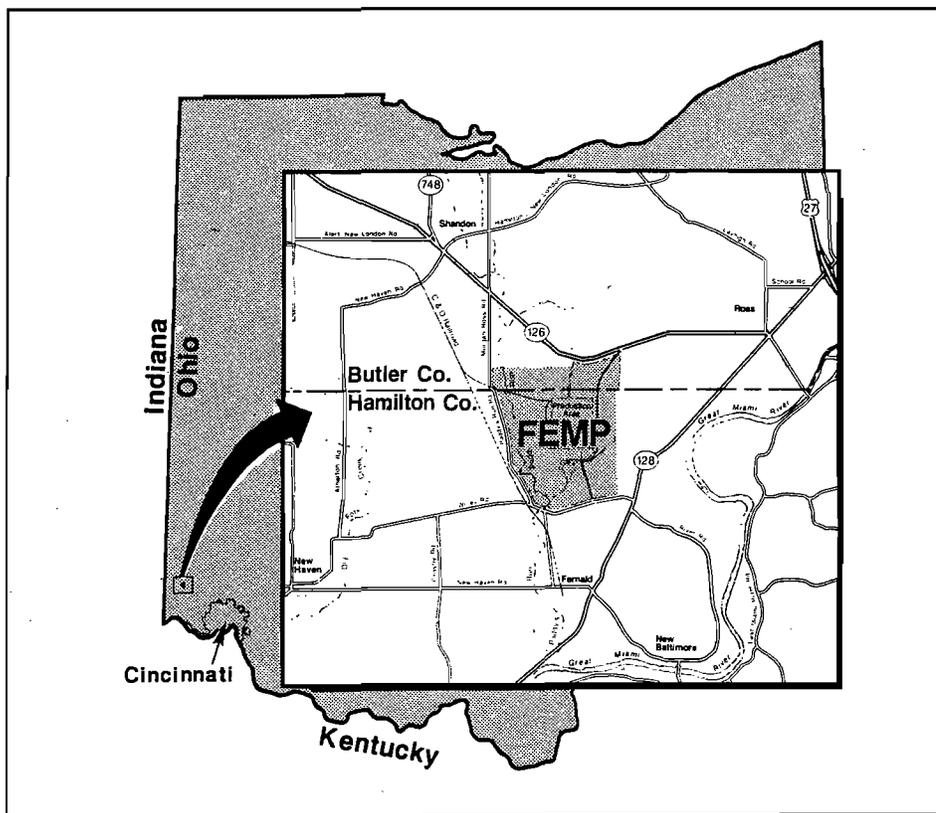

Additional Information

The Strategic Plan for the FEMP contains information on long range plans for the management and disposition of current waste inventories and anticipated future generation of waste materials.

The 1993 Environmental Report contains the results of the ongoing environmental monitoring program at the FEMP. The report documents the estimated impacts that the facility may have introduced to the air, water, and soil neighboring the FEMP for calendar year 1993.

Call one of the phone numbers listed on page 46 to request a copy of the plans or visit the FEMP Public Environmental Information Center to review the documents.

Figure 1: The FEMP is located in southwestern Ohio, approximately 18 miles northwest of downtown Cincinnati.

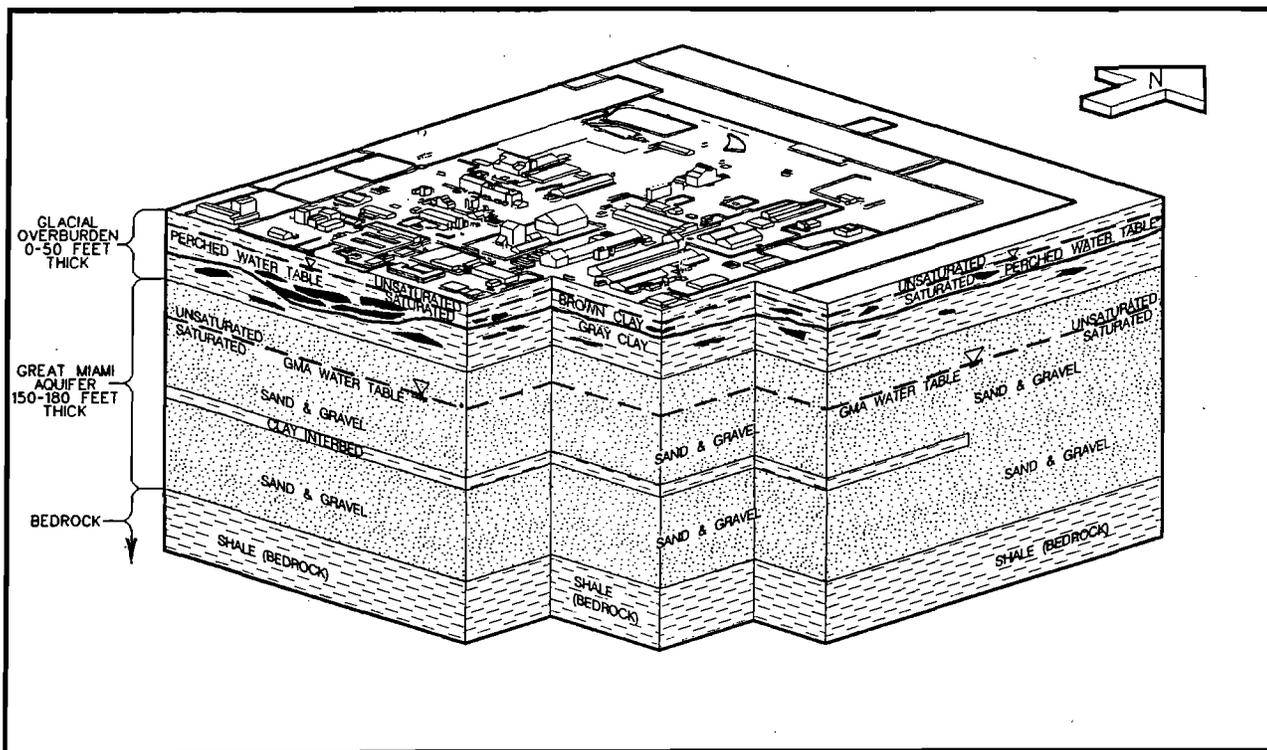


Figure 2: Conceptual Geologic Profile Beneath the FEMP

National Priorities List - a formal listing of the nation's highest priority hazardous waste sites, as established by CERCLA, that have been identified for investigation and possible remediation. Sites are ranked by the EPA based on their potential impacts to human health and the environment.

Baseline Risk Assessment - an assessment required to be conducted under CERCLA to evaluate potential risks to human health and the environment. This assessment estimates risks/hazards associated with existing and/or potential human and environmental exposures to contaminants.

Contaminants of Concern - contaminants detected at waste sites that present significant contributions to overall site risk. At the FEMP, these include:

- other radionuclides (besides uranium) including radium, thorium, and technetium
- organic chemicals including trichloroethene and dichloroethane (degreasing solvents)
- inorganic chemicals including arsenic, manganese and cadmium

Uranium - A naturally occurring radioactive element that was processed at the FEMP. For purposes of this Proposed Plan, uranium discussed is total uranium which includes all its isotopes (U-234, U-235/236, and U-238).

Natural Background - Many of the radiological and all of the inorganic contaminants present at the FEMP naturally exist in measurable concentrations in all environmental media. These parameters include uranium, thorium, and radium, as well as arsenic and cadmium. The background concentration of each constituent varies from point to point within a range for each media. The statistically based background values for total uranium in media at the FEMP site include:

- Groundwater and surface water - 1 microgram per liter ($\mu\text{g/L}$) or 1 part per billion (ppb)
- Sediment - 3 milligrams per kilogram (mg/kg) or 3 parts per million (ppm)
- Soil - 4 milligrams per kilogram (mg/kg) or 4 ppm

Due to confirmed contaminant releases to the environment, the FEMP was placed on the *National Priorities List* in November 1989. Under CERCLA, the risks posed by hazardous substances at National Priorities List sites must be evaluated and, if necessary, appropriate remediation methods must be implemented to reduce risks to acceptable levels.

The RI/FS process was initiated at the FEMP in 1986 under a Federal Facility Compliance Agreement between the EPA and the DOE. The work plan for the study, prepared by DOE in 1988, identified 39 site areas for investigation. To enhance implementation of the RI/FS, the 39 areas were grouped into five "operable units" by combining similar waste areas or related environmental concerns. The operable unit concept was incorporated into the April 1990 Consent Agreement between EPA and the DOE. The RI/FS and any required cleanup of specific operable units at the FEMP are guided by the Consent Agreement as amended in September 1991, and associated work plans. These documents provide procedures and schedules to ensure investigations are conducted in compliance with federal and state environmental laws.

Operable Units 1-4 at the FEMP are termed "source" operable units, as they include the former production area and associated waste management areas which were the initial points of contaminant release to the environment. Operable Unit 5 addresses environmental media at the site as discussed below. Each operable unit is being managed in accordance with the schedules set in the Amended Consent Agreement, with RODs for all operable units due to be completed by July 1996.

Operable Unit 5 Description

Operable Unit 5 encompasses all environmental media on and off the FEMP property impacted by contaminants released from the FEMP.

Sources of environmental media contamination from the FEMP can be described under two major categories: production operations and waste management practices. Production operations at the FEMP were limited to a fenced 136-acre tract of land known as the production area (being addressed under Operable Unit 3), located near the center of the site (Figure 3). Routine operations at the FEMP resulted in discharges to air from the process stacks and by-products which were handled in a variety of ways. Nonroutine discharges included spills and leaks. Before 1984, large quantities of solid and slurried wastes from the FEMP processes were stored or disposed of in concrete silos and in-ground pits located in the waste storage area (see Figure 3). Releases occurred from these waste management facilities as wind-induced dust or through surface water discharge. The waste storage areas are addressed under Operable Units 1, 2, and 4.

Summary of the Remedial Investigation

The RI for Operable Unit 5 included a number of tasks designed to identify the nature and extent of radiological and chemical contaminants in media on and within the immediate vicinity of the FEMP. These tasks included sampling of soil, sediment, surface water, perched water and groundwater. Additionally, studies were conducted on the local flora and fauna, which included the identification of threatened and endangered species. The data obtained during the RI were used to conduct a *baseline risk assessment* and to determine the need to pursue remedial alternatives. The RI identified over 90 *contaminants of concern* in the various environmental media and *uranium* as the predominant contaminant. For the purposes of this Proposed Plan, uranium is discussed as total uranium rather than its individual isotopes and comparisons of contaminant concentrations are stated in relationship to *natural background* (where applicable). The

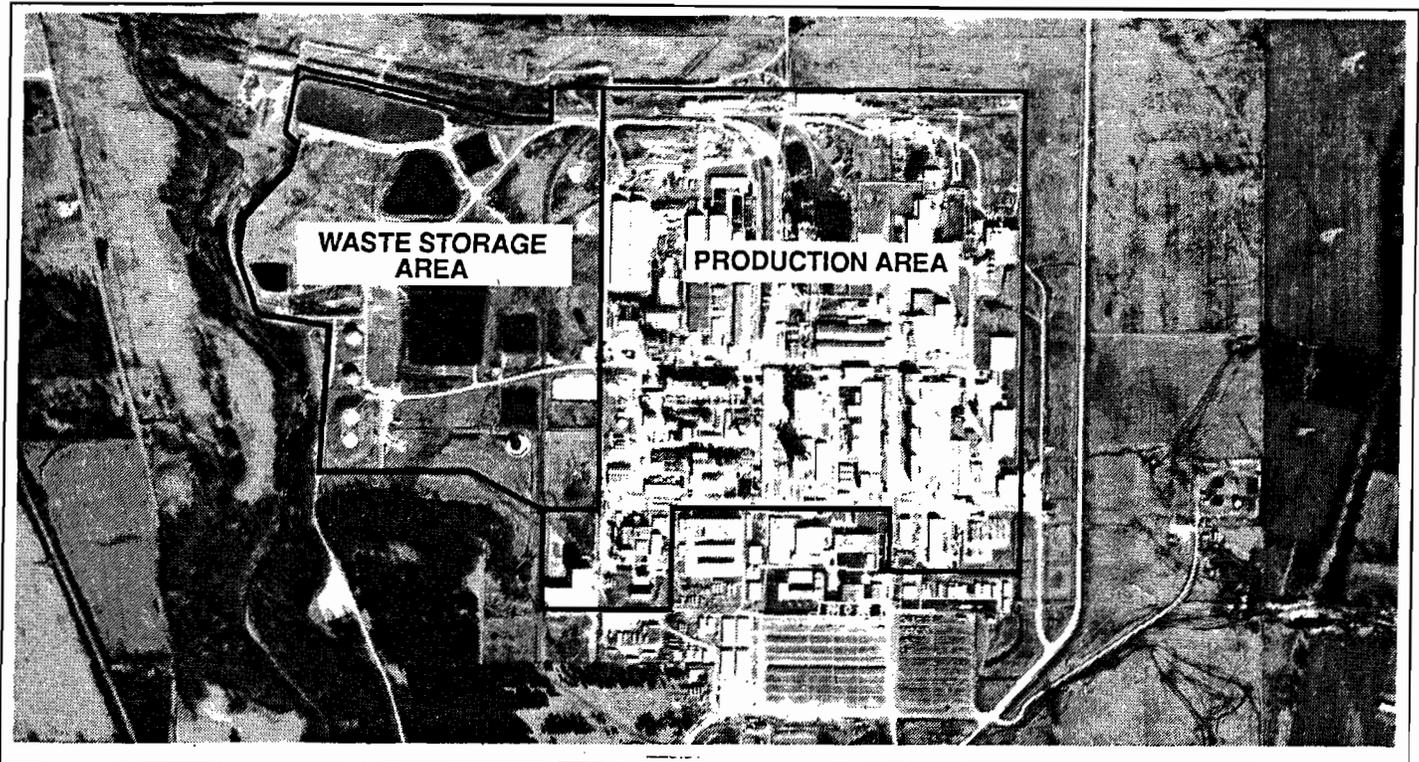


Figure 3: Aerial photograph showing the Production Area and the Waste Storage Area at the FEMP Site.

Proposed Plan contains only a brief summary of the findings of the RI; the reader is directed to the Operable Unit 5 RI Report for additional information on specific contaminant concentrations.

Sampling conducted for the RI has documented that radiological and chemical contaminants from source areas have migrated to the surrounding media, both on and off the FEMP property, as discussed below. Addressing these contaminated media in a manner which ensures the long-term protection of human health and the environment is the objective of the Operable Unit 5 remedy.

Contamination In Soil

Contamination of surface and subsurface soils occurs within, as well as outside, the FEMP property boundaries. The highest concentrations of uranium in surface soil were found in the former production area at the location of the former scrap metal pile area (greater than 8000 *parts per million [ppm]*). Contamination in subsurface soil appears limited to the FEMP property. Levels of uranium, up to a hundred times background levels, were found within the FEMP property boundary in soil at depths as great as 20 feet. Some of the highest subsurface contaminant levels (greater than 400 ppm) were found near the former processing facilities where acidic uranium solutions were handled in large quantities.

Concentrations of approximately 20 ppm of uranium (approximately five times background) were identified in surface soil samples collected off-property immediately adjacent to the eastern and northeastern boundary of the FEMP. Uranium was detected at above background concentrations, but generally less than two times background levels, in a widespread area off the FEMP property; up to 11 square miles of surface

parts per million (ppm) - a ratio of the mass of a contaminant to the total mass of contaminant and medium (usually soil or water). Example: 1 ppm uranium can mean 1 gram of uranium in 1 million grams of water. Parts per million of contaminants in water can also be expressed (numerically equivalent) as milligrams per liter.

parts per billion (ppb) - a ratio as above. Parts per billion of contaminants in water can also be expressed (numerically equivalent) as micrograms per liter ($\mu\text{g/L}$).

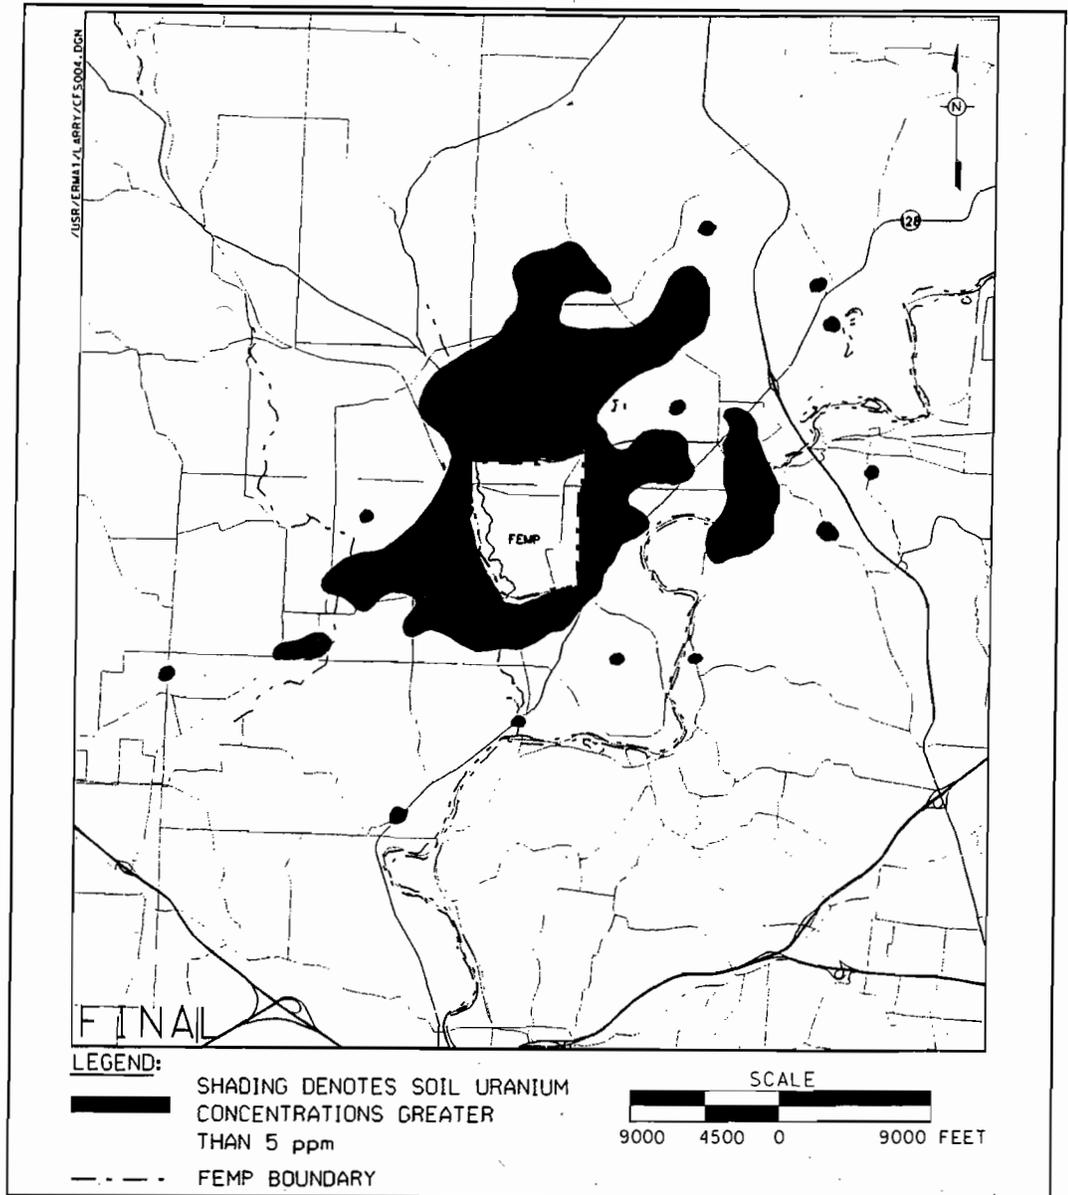


Figure 4: Estimate of Off-Property Surface Soil Potentially Impacted by FEMP Historical Operations

soil are projected to have been impacted at these low concentrations. The source of these low concentrations is emissions of dust particles to the atmosphere from plant stacks over the FEMP's 38-year production history.

Figure 4 depicts the area estimated to have been impacted with above-background concentrations of uranium in surface soil due to FEMP operations. It should be noted that there is significant uncertainty associated with the measured analytical results for the range of low concentrations of uranium (5 to 7 ppm) typically detected in the affected area. It becomes increasingly difficult to differentiate the presence of site-introduced contaminants as the measured values approach the range of natural background for a constituent. In the event the selected remedy contemplates removal of soil at this uranium concentration range (5 to 7 ppm), significant additional off-property sampling would be required to establish the definitive limits of the impacted areas.

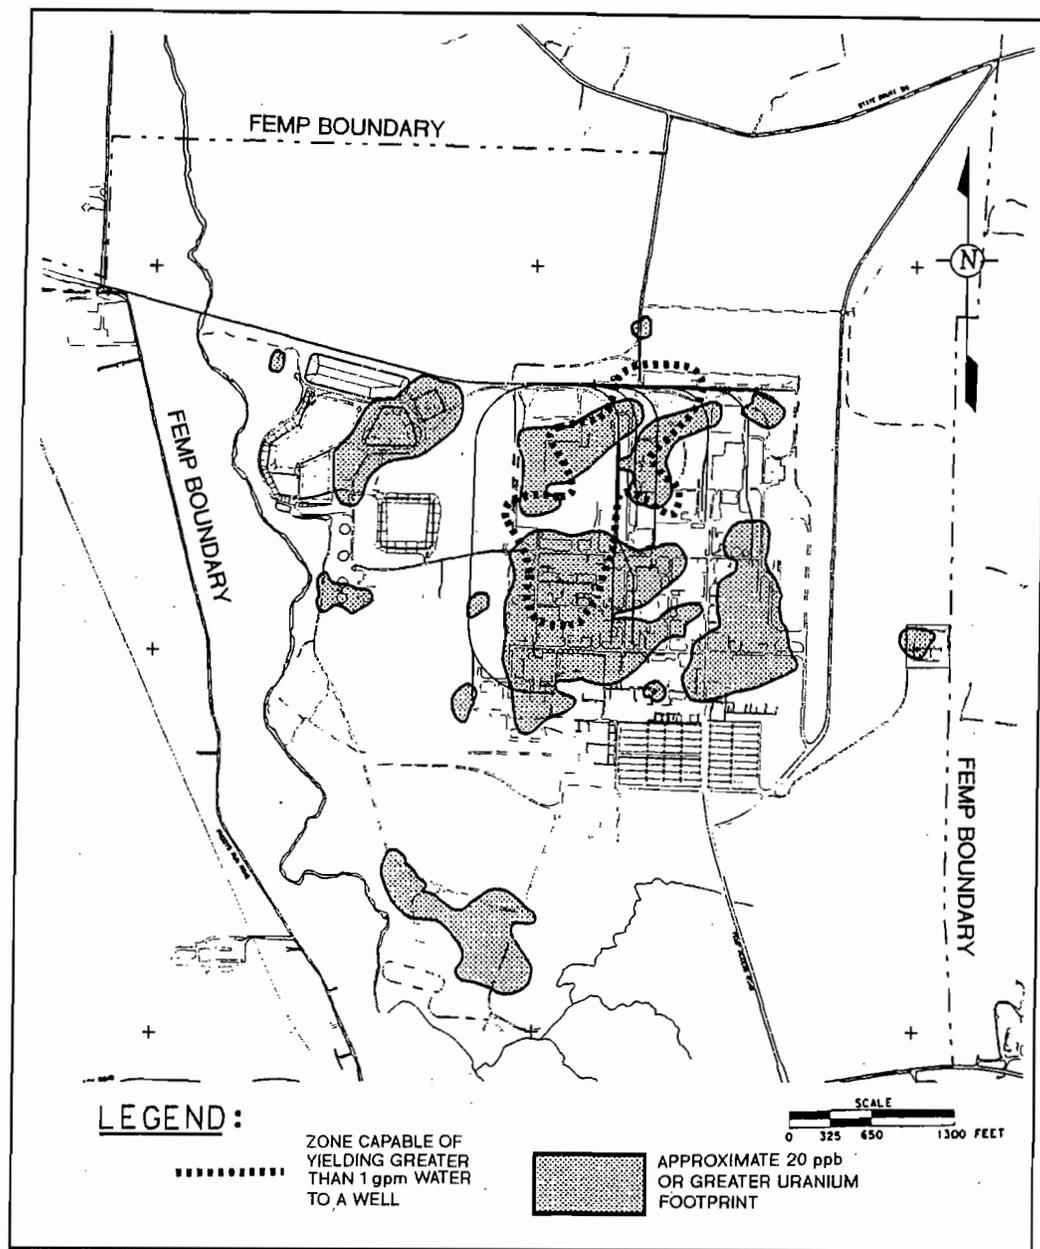


Figure 5: Impacted Areas of the Perched Groundwater System

Radium, thorium, fission and uranium activation products and inorganic and organic contaminants were also observed in surface and subsurface soils on the FEMP property. The areas affected by these contaminants are localized, with the highest concentrations typically found in association with areas exhibiting the highest uranium concentrations.

Contamination In Perched Groundwater

Extensive sampling of perched groundwater on the FEMP property identified the presence of site-related contaminants across much of the former production area, adjacent to the storage pits and silos, and in several other locations (see Figure 5). Concentrations of contaminants (radionuclides, inorganics and organics) are greatest underlying several of the former production buildings. These contaminant concentrations diminish to natural background levels near the perimeter of the FEMP property.

Radium - a naturally occurring radioactive metal which was present in uranium ore and ore concentrate feed streams to the production process. Radium was removed during processing and is present in the FEMP waste streams.

Thorium - a naturally occurring radioactive metal. Thorium metal was a relatively limited product stream at the FEMP. Significant quantities of relatively pure thorium compounds remain in inventory at the site. Additionally, thorium was introduced to the FEMP production process in uranium ore and ore concentrate feed streams.

Fission and uranium activation products - radioactive elements produced as a result of a nuclear reaction. These radioactive elements were present as trace impurities in uranium recycle feed streams received at the FEMP from other DOE facilities.

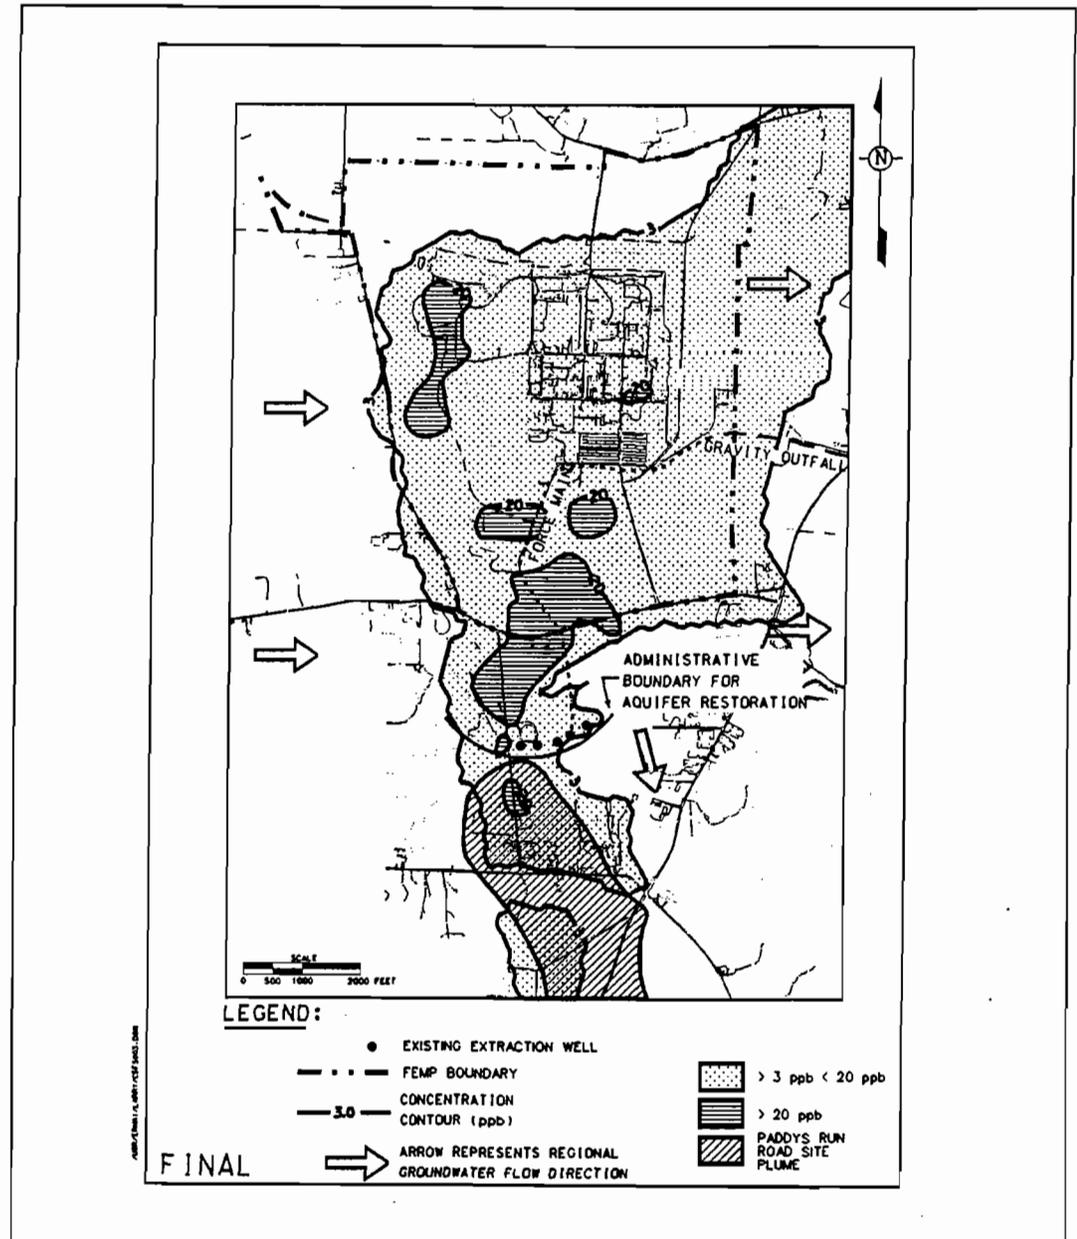


Figure 6: Impacted Areas of the Great Miami Aquifer

Contamination In Great Miami Aquifer Groundwater

Uranium, the principal site-related contaminant in the Great Miami Aquifer, is primarily found in the uppermost portion of the aquifer. Figure 6 depicts the areas of the Great Miami Aquifer which have above background (1 ppb) concentrations of uranium and appear to have been impacted by FEMP operations. Significant levels of contamination exist in several areas, including:

- A localized area beneath the former production area (up to 50 ppb of uranium)
- Beneath the waste storage area (up to 70 ppb of uranium)
- Along the length of Paddy's Run from the waste storage area to approximately 1 mile south of the FEMP property (up to 350 ppb of uranium)
- Beneath a solid waste disposal area, termed the South Field, located on the southern portion of the FEMP property (up to 2100 ppb of uranium)

Above-background concentrations of uranium also exist in the groundwater beneath the west bank of the Great Miami River, south of the confluence with Paddys Run. Concentrations of uranium in this area are typically less than 10 ppb.

Several other site-related contaminants (radionuclides, inorganics and organics) are also present in the aquifer, occurring as localized pockets within the plume of uranium contamination.

Contamination In Surface Water

The FEMP's primary drainageways are the storm sewer outfall ditch and Paddys Run. Because the composition and spatial boundaries of surface water rapidly change, the concentrations discussed here reflect the most recent 1993 sampling results. Surface water samples collected from the storm sewer outfall ditch indicated elevated concentrations of uranium (up to 64 ppb). Improved storm water management practices implemented at the FEMP since these samples were collected have significantly reduced uranium discharges to the storm sewer outfall ditch.

Surface water samples collected from both the on- and off-property portions of Paddys Run (south of the FEMP) exhibited above-background concentrations for total uranium and total thorium. Samples collected from the Great Miami River immediately downstream from the FEMP wastewater discharge outfall line indicated concentrations of uranium ranging up to 2.8 ppb (background is 1 ppb). Concentrations of uranium in the Great Miami River were found to diminish downstream of the outfall line.

Contamination In Sediment

Sediment samples were collected from the storm sewer outfall ditch, Paddys Run and the Great Miami River. Because the composition and spatial boundaries of sediment change rapidly, the concentrations discussed here reflect the most recent 1993 sampling results. In sediment samples collected from the storm sewer outfall ditch, total uranium was the most frequently detected radionuclide with concentrations slightly above background. Inorganic contaminants were also detected at above-background concentrations.

Radium-226 and total uranium were detected in sediment from the on-property portion of Paddys Run at concentrations up to 1.4 pCi/g and 22.8 ppm, respectively (background for radium-226 is 0.5 pCi/g). *Volatile organics*, *semivolatile organics* and inorganics were also detected in select samples of on-property sediment with the concentration of organics ranging up to 350 ppm. Off-property sediment sampling detected only uranium (up to 11 ppm) and zinc (50 ppm; background is 13.5 ppm) concentrations exceeding background.

Sediment samples from the Great Miami River indicated concentrations of total uranium, radium-226, and total thorium to be slightly above background.

Impacts To Biological Resources

Radiochemical analysis was performed on samples of vegetation, benthic macroinvertebrates, fish and small mammals collected from locations on and off the FEMP property. In general, uranium was detected at very low concentrations in all sampling groups.

Volatile Organics - a group of organic compounds that have a tendency to vaporize readily. Examples include trichlorethylene, dichloroethane and benzene.

Semivolatile Organics - a group of organic compounds which do not vaporize readily. Examples include phenol and naphthalene.

Removal Actions

Concurrent with the ongoing RI field investigations, a number of *removal actions* were implemented to minimize the potential for impacts to human health associated with existing environmental conditions at the FEMP. These removal actions included the collection and treatment of contaminated surface water runoff; efforts to minimize the migration of contaminated perched water to the Great Miami Aquifer; and measures to mitigate the further migration of contamination in groundwater. Upon initiation of the final remedial action these activities will be discontinued as separate removal actions, and incorporated into the final remedial action as needed.

Summary of Site Risks

As the final step of the remedial investigation, a baseline risk assessment was conducted to evaluate current and future potential risks to human and ecological receptors associated with contaminants present at the site. Using *conservative* assumptions, the baseline risk assessment evaluated risks posed by the existing conditions as if no additional cleanup actions were performed at the site. Risks were evaluated for the site as it presently exists and for simulated conditions up to 1000 years into the future.

Consistent with EPA policies, the results of the baseline risk assessment were compared to risk-based standards to determine if cleanup actions were warranted. The results demonstrated that the existing concentrations of contaminants in the environmental media pose risks to human and ecological receptors at a level sufficient to trigger the need for remedial actions.

Human Health Evaluation

Within the baseline risk assessment, the maximum potential exposure that a human could receive from the existing contaminated environmental media was evaluated for both current and future land use scenarios. The baseline risk assessment applied these potential land uses to bracket the range of risks associated with the FEMP in the event no additional cleanup actions were undertaken at the FEMP. These scenarios are summarized below.

Exposure Scenarios

The major assumptions employed to support the assessment of risk to receptors for the two representative land use scenarios include the following:

Current Land Use with Access Controls - For this scenario, the FEMP is assumed to remain under federal ownership with current access restrictions maintained. No remedial actions are assumed to take place, and site contamination is assumed to spread through contact with the wind, rain and groundwater. No members of the public are assumed to have established residences on the FEMP property. Human receptors projected to be hypothetically exposed under this scenario include a trespassing youth, a site worker, a visitor, and the members of an off-property farm family.

Future Land Use Without Access Controls - For this scenario, federal ownership is assumed to be discontinued at the FEMP and a family farm is assumed to occupy the facility. Human receptors assumed to be hypothetically exposed under this scenario include the members of farm families located both on and off the existing FEMP property.

Removal Actions - cleanup actions taken to address a near-term environmental or public health concern due to the release or significant potential for release of hazardous substances. Removal actions are implemented at waste sites to address more immediate concerns while the RI/FS process is underway.

Conservative - overly cautious, careful, assumes highly protective conditions.

The following types of human exposure were evaluated in the baseline risk assessment:

- Inhalation of organic vapors and resuspended soil
- Ingestion of contaminated groundwater
- Direct radiation
- Incidental ingestion of contaminated soil
- Uptake into crops, meat and milk and subsequent ingestion
- Dermal contact with contaminated soil, surface water and groundwater.

Carcinogenic Risk

Carcinogenic risk describes the potential for a contaminant to induce human cancer and is expressed as a product of a receptor's total expected lifetime exposure to a particular contaminant and a *slope factor* for the contaminant. The calculated product, referred to as an incremental lifetime cancer risk (ILCR), indicates the potential increase in cancer occurrences as a result of human exposure to the carcinogenic contaminant. As described in the *National Contingency Plan*, contaminants present in sufficient concentrations to create an excess lifetime cancer risk within or less than the range of 1 chance in 10,000 (referred to as 10^{-4}) to a 1 chance in 1,000,000 (referred to as 10^{-6}) are considered acceptable to the EPA. The goal of cleanup at a waste site being addressed under CERCLA is to reduce carcinogenic risk to within this ILCR range.

As shown in Table 1, carcinogenic risks were projected to exceed the acceptable risk range for all receptors considered under the current land use with access controls scenario, with the exception of the trespassing youth. Under this scenario, up to one additional residential receptor out of 100 are potentially at risk of developing cancer over a lifetime. This excess cancer risk is primarily related to ingestion of groundwater contaminated with uranium and other hazardous constituents and is estimated for a receptor who, over the individual's entire lifetime, consumes groundwater that exhibits the highest projected concentrations expected to occur in the aquifer within a period of 1000 years into the future. Similarly, carcinogenic risks are also projected to exceed the acceptable risk range for all receptors considered under the future land use without access controls scenario except the off-property child.

As identified by the baseline risk assessment, the potential risks associated with the site's contaminated environmental media increase with the concentrations of contaminants in the aquifer. Therefore, contamination present in the soil and sediment at the site, if not addressed by the preferred alternative or one of the other alternatives, would continue to migrate to the Great Miami Aquifer. If no actions were taken, the continued migration of site contaminants would result in further deterioration of existing environmental conditions, potentially increasing risks to human health over the long term.

Noncarcinogenic Health Effects

Many contaminants, such as manganese and zinc, commonly found at waste sites are considered to present potential noncarcinogenic health risks. Examples of noncarcinogenic health effects include kidney damage and eye irritation. Additionally, several contaminants, such as uranium, have been determined to present both noncarcinogenic and carcinogenic health risks.

Slope Factor - a conservatively estimated value of an individual's probability of developing cancer as a result of a lifetime exposure to a particular level of a potential carcinogen.

National Contingency Plan - federal regulations implementing response actions under CERCLA, including the procedures for performing the RI/FS process and conducting removal and remedial actions to address the releases of hazardous substances.

TABLE 1
SUMMARY OF BASELINE RISK ASSESSMENT RESULTS

Receptor	Exposure Duration	Range of Carcinogenic Risk ^a	Range of Noncarcinogenic Risk ^b (Hazard Index)	Primary Contributing Media
Current Land Use With Access Controls				
Site Worker (Groundskeeper)	25 years	9.9×10^{-6} to 1.4×10^{-3}	<1 to 5.4	Soil
Trespassing Youth	12 years	7.7×10^{-6} to 6.5×10^{-5}	<1 to 1.8	Soil
Off-Property Farmer	70 years (lifetime)	6.6×10^{-4} to 1.2×10^{-2}	>2.3 to 50	Groundwater/Soil
Off-Property Child	6 years	7.3×10^{-5} to 3.9×10^{-3}	>14 to 260	Groundwater/Soil
Future Land Use Without Access Controls				
Off-Property Farmer	70 years (lifetime)	1.7×10^{-5} to 2.3×10^{-3}	<1 to 37	Groundwater
Off-Property Child	6 years	6.5×10^{-7} to 2.1×10^{-4}	<1 to 150	Groundwater
On-Property Farmer	70 years (lifetime)	9.1×10^{-3} to 5.3×10^{-2}	23 to 1500	Soil/Groundwater
On-Property Child	6 years	6.6×10^{-4} to 5.3×10^{-3}	110 to 840	Soil/Groundwater

^a The site was divided into several on- and off-property areas for risk analysis; these ranges represent the lower and upper bounds of risk to each receptor. The NCP defines an acceptable level of carcinogenic risk as less than 1 additional incidence of cancer in 10,000 to 1,000,000 individuals (10^{-4} to 10^{-6}).

^b A hazard index (the ratio of the level of exposure to an acceptable level) greater than 1 indicates that there may be concern for noncarcinogenic effects. Hazard indices listed are cumulative across all exposure pathways.

Hazard Index - an index used as a measure of the potential for site contaminants to present unacceptable noncarcinogenic toxic effects. When the hazard index exceeds 1, there may be concern for potential noncarcinogenic effects.

Potential noncarcinogenic health effects for a waste site are assessed in terms of a *hazard index* for each contaminant of concern. The calculated hazard index indicates the potential for the most sensitive individuals, such as children, to be adversely affected. Hazard indices are compared to a threshold value of 1, established by EPA as the level above which there is the potential of noncarcinogenic effects on exposed individuals. Estimates of the noncarcinogenic effects to the hypothetically exposed human receptors for the two land use scenarios evaluated for the baseline risk assessment are listed in Table 1. The hazard indices were estimated for a range of locations on and off FEMP property.

For the current land use with access controls scenario, the hazard index of 5.4 for the site worker is related to projected incidental ingestion and dermal contact with highly contaminated soil in the former production area over a 25-year period. The hazard index of 260 to the off-property child is associated with the projected incidental ingestion of soil and the consumption of untreated groundwater for a period of 6 years

at the maximum concentrations predicted to occur in the aquifer off the FEMP property within the next 1000 years. This estimate is based on conservative assumptions associated with exposure duration and the modeling used to predict the concentrations of the contaminants in the soil and groundwater at the closest point of potential exposure. For the future land use without access controls scenario, a hazard index of up to 840 was calculated for the hypothetical on-property resident child. The primary exposure routes for this hazard index are attributable to incidental ingestion of contaminated soil and the consumption of untreated groundwater.

Evaluation of Risk to Ecological Receptors

A Site-Wide Ecological Risk Assessment was conducted to determine if the radiological and chemical contaminants present at the site represent a current or future risk to ecological species (i.e., flora and fauna) inhabiting the FEMP site or nearby off-property areas, including the Great Miami River. This assessment concluded that the concentration of select inorganic, organic and radiological contaminants present at the site in soil, surface water and sediment could present unacceptable risks to plants and animals. The greatest calculated risk to terrestrial and aquatic receptors (e.g., trees, animals, and fish) was determined to be attributable to elevated concentrations of uranium in the environmental media. The primary source of this risk was projected to be associated with the toxicity of uranium as a heavy metal, as opposed to its radiological properties.

Fate and Transport Modeling

To aid in evaluating potential risks, *fate and transport modeling* was used to predict the migration of site contaminants through the environment, assuming no additional cleanup actions are taken. The models used data obtained during the remedial investigation, such as contaminant concentrations, and the physical characteristics of the local geology, surface water hydrology and groundwater to predict the movement of the contaminants through the environment. The modeling was used to predict the potential deterioration of environmental conditions in the vicinity of the FEMP over a period of 1000 years.

The modeling identifies the projected future concentrations of the various contaminants to which the receptors would be exposed through inhalation, ingestion, dermal contact and direct radiation. The results of the modeling conducted to support Operable Unit 5 indicate that the amount of contaminants being released from the soil and sediment at the site to the regional aquifer will continue to increase throughout the 1000-year period. The maximum concentration of total uranium projected to occur within the aquifer approximately 1000 years in the future could exceed 9000 ppb in the event no additional remedial measures were implemented. This concentration greatly exceeds the proposed federal drinking water standard for uranium of 20 ppb. The modeling results support the baseline risk assessment conclusions that remedial actions are necessary at the site.

Fate and Transport Modeling - computer simulations of the natural environment, performed to estimate the transport of a contaminant through environmental media in order to provide input to the baseline risk assessment.

Remedial Action Objectives

As part of the RI/FS process, *remedial action objectives* were developed in accordance with the National Contingency Plan and EPA guidance. The intent of the remedial action objectives is to set goals to ensure the protection of human health and the environment. The goals are designed specifically to mitigate the potential adverse effects of site contaminants present in environmental media. From the remedial action objectives, preliminary chemical-specific *remediation levels*, which define acceptable levels of risks, are developed. For environmental media, remediation levels were developed for a range of potential residual risk levels (i.e., 10^{-6} and 10^{-5}) and a range of potential exposed receptors (i.e., resident farmer to recreational user). As previously discussed, a level of 10^{-6} represents the concentration of contaminants in media which would yield a calculated increase in the chance of acquiring a cancer in a 70-year lifetime of 1 in 1,000,000. This incremental chance would be in addition to the 1 in 4 chance of acquiring cancer which currently exists in the U.S. The remediation levels were developed to ensure that remedial actions reduce the projected risk to humans (presented in Table 1) to protective levels consistent with the anticipated future land use of the FEMP. These levels must also be protective of ecological receptors residing in the area.

Remedial Action Objectives - goals set in accordance with EPA guidance for protection of human health and environmental receptors from potential adverse effects of contaminants in any media. Usually include targeted cleanup goals.

Remediation Levels - contaminant-specific, concentration-based cleanup levels for environmental media. Remediation levels, which are preliminary throughout the RI/FS process, are finalized in the issued ROD.

Land Use Objectives - the planning-level projected future land use of the FEMP, adopted for purposes of developing and evaluating alternatives for the FS.

The remedial action objectives for Operable Unit 5 include (1) eliminating, or reducing to acceptable levels, the potential for human or ecological receptors to come in contact with contaminated environmental media, and (2) prevention of off-property migration of contaminants in excess of the chemical-specific remediation levels. Chemical-specific preliminary remediation levels were established for each category of media (soil, sediment, perched groundwater, and the Great Miami Aquifer) that have been affected by site contamination.

In addition to meeting the remedial action objectives, all of the alternatives considered in the FS were designed to achieve target *land use objectives* upon completion of the cleanup. A range of potential future land uses was used as the foundation for the identification, initial screening, and detailed evaluation of viable remedial action alternatives. The same potential future uses also provide the framework for identifying risk-based exposure scenarios and the hypothetical reasonable maximally exposed (RME) individuals for which land use-specific remediation levels are established.

The range of land use objectives was strategically defined to appropriately bracket the extensive combinations of future land uses potentially viable for the property. The land use objectives were developed to take into consideration the progressive deliberations and resolutions of the Fernald Citizens Task Force. The prevailing land use of the region, residential farming, was used as the point of departure for establishing potential future land uses. From this point of departure, the following future land use objectives for the FEMP property were formulated:

- **Land Use Objective 1** examines the viability of returning the entire on-property area to full unrestricted use following cleanup. This objective considers the potential for establishing a hypothetical family farm on any portion of the existing FEMP property. For this, and all other land use objectives, affected off-property areas were examined only in context of the existing land use in the region, residential farming.

- *Land Use Objective 2* provides for the establishment of an on-property, consolidated management area for contaminated soil, with unrestricted use of all remaining areas of the property. This land use objective considers the potential for establishing a hypothetical family farm, following cleanup, on any portion of the FEMP property outside the area where the contaminated materials are consolidated.
- *Land Use Objective 3* also provides for the consolidation of contaminated soil in a central area, but restricts the potential uses of the remaining areas of the property through the application of institutional controls. This objective considers the potential for establishing recreational, commercial/industrial, or undeveloped open space (i.e., green space) on any portion of the FEMP property outside the area where the contaminated materials are consolidated.
- *Land Use Objective 4* provides for minimum consolidation of contaminated soil with access and future use of the FEMP property restricted. This land use objective contemplates the FEMP property being maintained as a waste management area.

By using the land use objectives approach to formulate remedial action alternatives, decision-makers are provided with a comprehensive but manageable array of alternatives. From this array, decision-makers are provided with the required information from which to evaluate technical site constraints, required administrative controls, and the overall cost implications of moving from totally restrictive to progressively less restricted land use possibilities.

As previously discussed, the Operable Unit 5 remedy does not result in a specific recommended land use for the FEMP property. The Operable Unit 5 remedy will establish final cleanup levels for the site for each media, coupled with the selection of a final disposal strategy for the materials exhibiting contaminant concentrations above those cleanup levels. The final cleanup levels for the soil and other media would establish the permissible concentration of contaminants which could remain at the site following the completion of remedial actions. The remaining concentrations of these contaminants would present a potential for exposure and risk to future users of the FEMP. The degree of exposure and risk associated with these remaining contaminant concentrations would be linked directly to the type and duration of future use of the facility. Future land uses contemplating more direct contact for longer time intervals (e.g., residential farming of the FEMP) would be expected to yield a higher calculated exposure and risk than would future uses which involve less opportunities for long-term exposure (e.g., recreational or industrial use of the FEMP). The Fernald Citizens Task Force is focused on making recommendations to the DOE regarding preferred future uses for the FEMP property. Draft recommendations were issued during the winter of 1995 for public review; final recommendations are expected in July.

CERCLA does not provide for one set of cleanup criteria for universal application to waste sites, but requires that sites attain, or seek a waiver to, federal and state environmental laws and regulations (i.e., *applicable or relevant and appropriate requirements [ARARs]*), which are location-, chemical-, and action-specific to the individual remediation site. Section 121 (d)(1) of CERCLA requires that on-site remedial actions attain the level of protectiveness required by an ARAR, but does not require compliance with procedural or administrative requirements. Off-site remedial actions must comply with the administrative as well as substantive requirements of laws and regulations. Therefore, in addition to meeting the risk-based remediation levels established for each land use objective, all the viable alternatives must satisfy ARARs specified in federal and state environmental laws

Applicable or Relevant and Appropriate Requirements (ARARs)- "applicable" requirements mean those standards, criteria, or limitations promulgated under federal or state law that are required specific to a substance, pollutant, contaminant, action, location, or other circumstance at a CERCLA site. "Relevant and appropriate" requirements mean those standards, requirements, or limitations that address problems or situations sufficiently similar to those encountered at the CERCLA site such that their use is well suited to that particular site.

and regulations. Examples of the primary ARARs for the Operable Unit 5 alternative include, but are not limited to:

- State of Ohio siting criteria for solid waste disposal facilities
- Resource Conservation and Recovery Act (RCRA) requirements for treatment of contaminated media and the design of engineered containment facilities
- Safe Drinking Water Act maximum contaminant levels (MCLs) for public water supplies
- National Pollutant Discharge Elimination System requirements for wastewater treatment and discharge
- State of Ohio rules for control of particulate emissions and fugitive dust
- Uranium Mill Tailings Radiation Control Act regulations regarding the management of tailings at inactive uranium processing facilities.

Process option - Various chemical or mechanical methods that could be used to achieve remedial action objectives. The selection of the best option for treating or removing contamination from a material is dependent on the balance of advantages and difficulties inherent in each process. Factors that must be balanced include energy consumption, through-put rate, efficiency, material preparation before processing, form of the material after processing, reliability, the need for reagents or additives, the generation of byproducts or new waste streams, and many other chemical and mechanical variables.

Off-Site Licensed Disposal Facility - a representative commercial disposal facility permitted to accept low-level radiological and/or mixed (radiological and hazardous) waste has been used as part of the basis for evaluating alternatives in the Operable Unit 5 FS. The representative facility is located near Clive, Utah. Based on a number of factors, including the duration of FEMP remedial actions and the future capacity and regulatory compliance status of the representative facility, alternative facilities may be required in the future.

These primary ARARs focus on the control of solid and hazardous wastes, the maximum permissible contaminant concentrations in surface and groundwater, and the regulation of air emissions that may result from the remediation activities for Operable Unit 5. The ARARs also govern the handling of residual materials that may be generated during treatment processes.

Summary of Remedial Alternatives

There were many remedial technologies and *process options* initially considered for the cleanup of each of the affected media present at the FEMP. Arraying these process options together produced in excess of 2000 potential alternatives which could be applied at the site. Using the four land use objectives as a guide, 10 viable remedial alternatives were identified from the long list of available alternatives for further consideration in the initial screening step of the FS. The alternatives were first compared against one another to identify and distinguish meaningful differences among the various alternatives, and then evaluated with respect to their effectiveness, implementability and cost. Only the alternatives judged as best or most promising on the basis of these evaluation factors were retained for further consideration and analysis. The screening process resulted in the selection of seven remedial alternatives which were sufficiently distinct, yet potentially implementable and effective.

This Proposed Plan only discusses the seven alternatives that met the initial screening criteria. In order to adequately compare the final alternatives and select an appropriate remedy for a site, CERCLA requires that a no-action alternative be developed and used as a baseline against which other alternatives are evaluated. Each of the seven alternatives, along with the no-action alternative, is listed below with its associated land use objective category.

No-Action Alternative - Under this alternative, no remedial actions would be taken for Operable Unit 5 contaminated media. This alternative was retained to provide a baseline for comparison in accordance with regulatory requirements.

Land Use Objective 1: Full Unrestricted Use

Alternative 1 - Excavation and Off-Site Shipment - Under this alternative, soil and sediment with contamination exceeding remediation levels would be excavated and shipped to an *off-site licensed disposal facility*. Shipping is assumed to take place in covered gondola rail cars. Excavated areas would be regraded with existing site soil so as to reach

a predetermined final surface grade. The use of clean, imported fill would be required, but kept to a minimum. Contaminated perched groundwater zones, deemed to represent unacceptable risks to potential human receptors (i.e., yielding greater than 1 gpm to a well; see Figure 5) or the underlying Great Miami Aquifer, would also be excavated and disposed of at an off-site disposal facility. Although domestic wells installed in the area of the FEMP over the last 30 years draw water from the underlying regional aquifer, the EPA, the OEPA, and the DOE collectively agreed that a yield of 1 gpm would be considered reasonable to sustain a household.

Within this alternative, two differing remediation levels were examined. The first case had as an objective the protection of the projected future receptors (in this case a hypothetical on- and off-property farmer) at an ILCR of 10^{-6} . The second case was designed to provide protection to these same receptors at a 10^{-5} level.

To achieve these goals, remediation levels for soil had to be adjusted (i.e., lowered) in select areas to take into consideration the potential for continued leaching of contaminants into the aquifer at concentrations which potentially exceeded groundwater cleanup levels. These adjustments were contaminant specific and took into consideration the geologic conditions of the site and the *solubility* of the contaminant.

Coupled with the target risk levels for soil were equivalent goals for the cleanup of existing contamination in the Great Miami Aquifer. Two groundwater restoration cases for uranium were examined: reduce contamination levels to 3 ppb (i.e., 10^{-6} ILCR) or to 20 ppb; the 20 ppb level for uranium represents the proposed federal drinking water standard and is slightly lower than a 10^{-5} ILCR for exposure through groundwater pathways. For both cases a series of groundwater extraction wells would be installed to flush the contaminants from the aquifer and attain the desired cleanup levels.

As indicated in Figure 6, an administrative boundary was established at the northern limit of the *Paddys Run Road Site*. This corresponds to the southern extent of the groundwater capture zone created by the South Plume Removal Action wells, which began operation in 1993. The *South Plume Removal Action* was initiated before selection of the final remedy to prevent the additional migration of contaminants off site. DOE's role and involvement in OEPA's ongoing assessment and/or cleanup of the Paddys Run Road Site plume, if any, would be defined separately as part of the Paddys Run Road Site response obligations and in accordance with the Paddys Run Road Site project schedule. Monitoring would continue south of the administrative boundary until such time as the need for action is established and implemented.

Figure 7 provides a graphic representation of the expected reduction of uranium concentrations in the Great Miami Aquifer due to operation of the groundwater extraction systems. Modeling performed for the FS was used to estimate the groundwater pumping rates required from the recovery wells installed to restore the aquifer system to the target cleanup levels. This modeling effort yielded an estimated maximum pumping rate of 7500 gallons per minute (gpm) for the 10^{-6} ILCR target recovery system and a maximum rate of 4000 gpm for the system pursuing cleanup to the drinking water standards (i.e., MCLs). The pumping rate for these systems would

Solubility - the tendency of a contaminant present in soil to dissolve into surface water or groundwater.

Paddys Run Road Site - a State of Ohio-led CERCLA cleanup site located south of the FEMP along Paddys Run Road. The site, which is currently finalizing its remedial investigation results, involves volatile and semivolatile compounds and inorganic constituents (including arsenic) in the Great Miami Aquifer.

South Plume Removal Action - Undertaken in 1993 to prevent a plume of contamination within the Great Miami Aquifer from migrating farther off FEMP property to the south. The objectives are plume control and protection of public health by limiting use of groundwater contaminated with uranium.

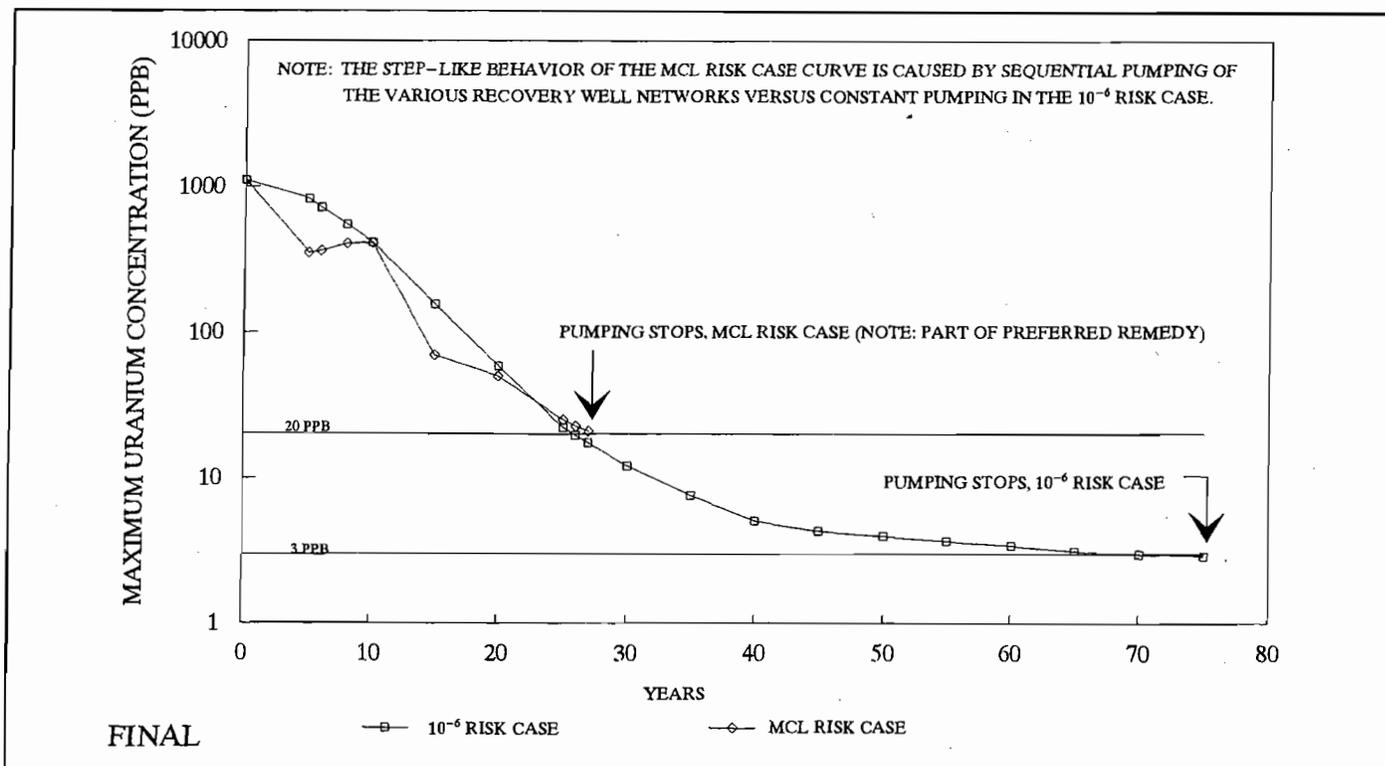


Figure 7: Reduction of Maximum Uranium Concentration in the Great Miami Aquifer with Pumping

be expected to vary during the period of aquifer restoration with gradual cessation of pumping once the attainment of cleanup goals could be certified. The modeling further estimated the time to restore the aquifer for the 10^{-6} ILCR-based recovery system to be about 75 years, while the MCL-based system was estimated to require about 27 years of pumping to attain cleanup objectives. More detailed modeling would be conducted following remedy selection to refine these flow rates and restoration time frames in support of the remedial design process.

Groundwater restoration systems, similar to the recovery well network contemplated at the FEMP, have been applied by industry over the last 10 to 15 years under Superfund and other environmental cleanup programs. In general, the industry experience has highlighted the inherent difficulties in successfully applying the technology to fully restore an aquifer in a reasonable time frame. This industry experience has identified the importance of treating groundwater restoration as an iterative process requiring continued process evaluation, monitoring, and (if needed) modifications to optimize system performance. Consistent with industry experience, the FEMP would continue to evaluate the performance of the recovery well system and explore opportunities for applying design changes or new technologies to enhance the aquifer restoration process. As part of the selected remedy DOE has committed to EPA to investigate and apply, if appropriate, innovative technologies such as reinjection, which would involve the injection of noncontaminated water into the aquifer at select locations to increase the flushing effect, potentially enhancing contaminant removal from the groundwater system.

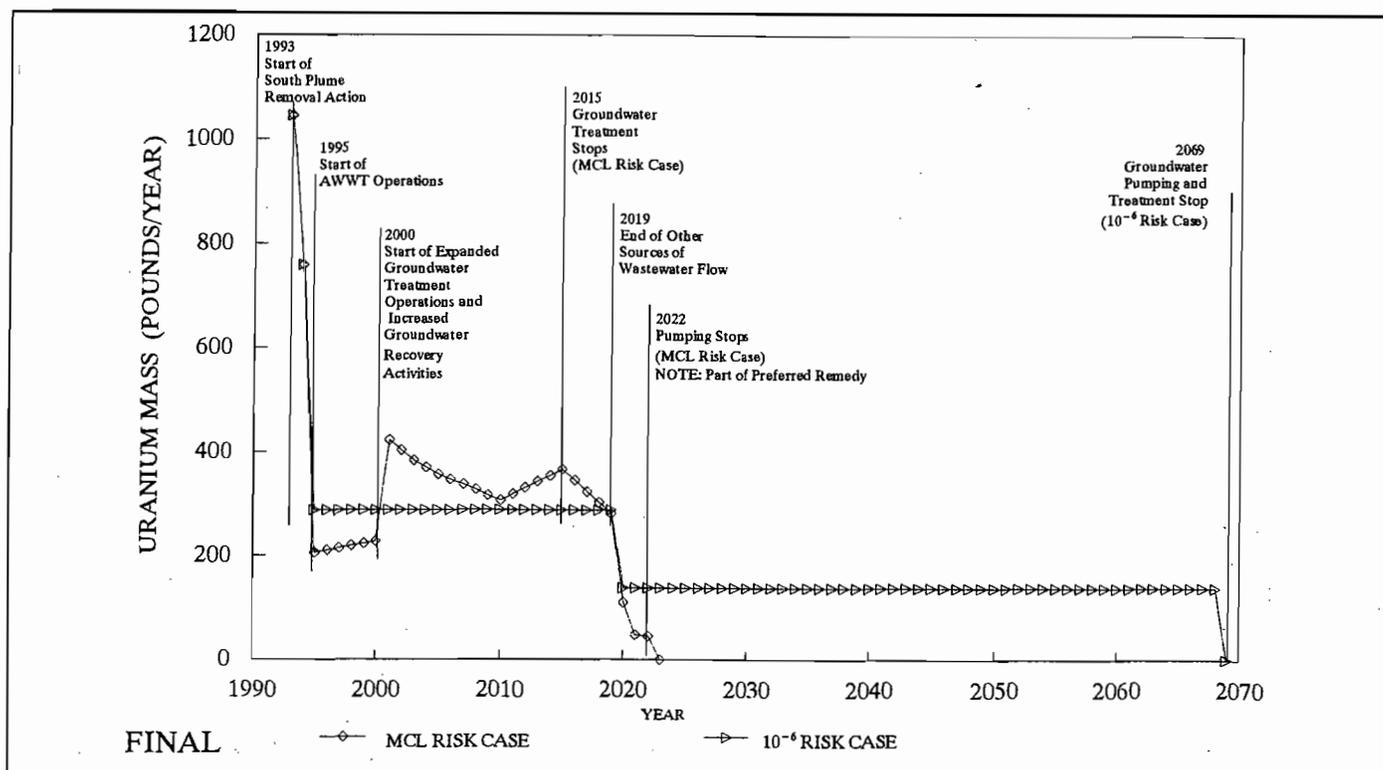


Figure 8: Estimated Uranium Discharge to the Great Miami River

During the period of active aquifer restoration, an alternative water supply would be provided to all groundwater users in the areas exhibiting concentrations above the remediation levels. The DOE has provided funding to the Hamilton County Department of Public Works to help support the installation of a public water supply to the surrounding area. The system is expected to be operational in the fall of 1995.

An expansion of the FEMP's *advanced wastewater treatment (AWWT)* facility would treat extracted groundwater. The expansion would be designed to address all major contaminants in the recovered groundwater. For uranium, the primary contaminant, the projected treatment would reduce the concentration to below 20 ppb before discharge to the Great Miami River.

The specific treatment configuration, size and capacity of the expanded facility would be finalized during the remedial design process when it is anticipated that the AWWT facility would be able to accommodate the required flows. An important focus of the design process would be to establish the final capacity of the AWWT facility considering the previously discussed uncertainties in the effectiveness and time frame of the aquifer restoration process.

Contaminated storm water runoff is currently being collected in retention basins from the surface of the former production area and from the Operable Unit 1 and 4 areas. Collection of this water will continue until those areas are remediated. The collected storm water would be treated before discharge to the Great Miami River. Figure 8 graphically presents the total mass of uranium from all site-related sources that is estimated to be discharged to the river following treatment for both groundwater recovery cases examined.

Advanced Wastewater Treatment Facility - an 1100-gpm ion exchange wastewater treatment plant that began operating in January 1995.

A summary of the uranium cleanup goals, volumes of soil requiring action, and the estimated cost of Alternative 1 is provided below.

SUMMARY OF ALTERNATIVE 1 - EXCAVATION AND OFF-SITE SHIPMENT

	Risk Range	
On-Property Receptor	Resident Farmer	Resident Farmer
On-Property Risk Level	10 ⁻⁶	10 ⁻⁵
On-Property Uranium Cleanup Level (ppm)	5	15
Off-Property Receptor	Resident Farmer	Resident Farmer
Off-Property Risk Level	10 ⁻⁶	10 ⁻⁵
Off-Property Uranium Cleanup Level (ppm)	5	15
Volume Requiring Excavation		
- On-Property (cubic yards) ^a	4,450,000	2,340,000
- Off-Property (cubic yards)	5,200,000	400,000
- Total (cubic yards) ^b	9,650,000	2,740,000
Off-Site Disposal		
- Volume (cubic yards) ^c	9,350,000	2,400,000
- Rail Cars	165,000	42,240
On-Site Disposal (cubic yards)	0	0
<i>Present Worth Cost</i> ^d	\$4330M	\$1240M
<i>Total Project Cost</i> ^d	\$13870M	\$3020M

Present Worth Cost - the amount of money that if invested in the bank at the beginning of remediation and disbursed as needed, would be sufficient to cover all costs associated with remedial actions.

Total Project Cost - the total amount of money required to cover remedial activities. Assumes that money is acquired on an annual basis with an inflation rate of 3.7 percent per year.

^a Includes 175,000 cubic yards of gravel from production area.

^b Includes volume of clean soil (to be used as backfill) excavated to reach contaminated soil at depth.

^c Volume does not include excavation of soil below cleanup level to gain access to deeper contamination.

^d All costs (M = million) are estimated and include the recovery/collection and treatment of site surface water, wastewater, and groundwater.

Land Use Objective 2: Establishment of a Consolidated Waste Management Area with Unrestricted Use of the Remaining Areas of the Property

Alternative 2A - Engineered Disposal Facility - Under this alternative, contaminated soil exceeding remediation levels would be excavated and placed in an engineered above-grade disposal facility. The facility would be situated on an area displaying the best available geologic conditions. An investigation of the property is presently underway to establish the most suitable location for such a facility in the event it is deemed appropriate.

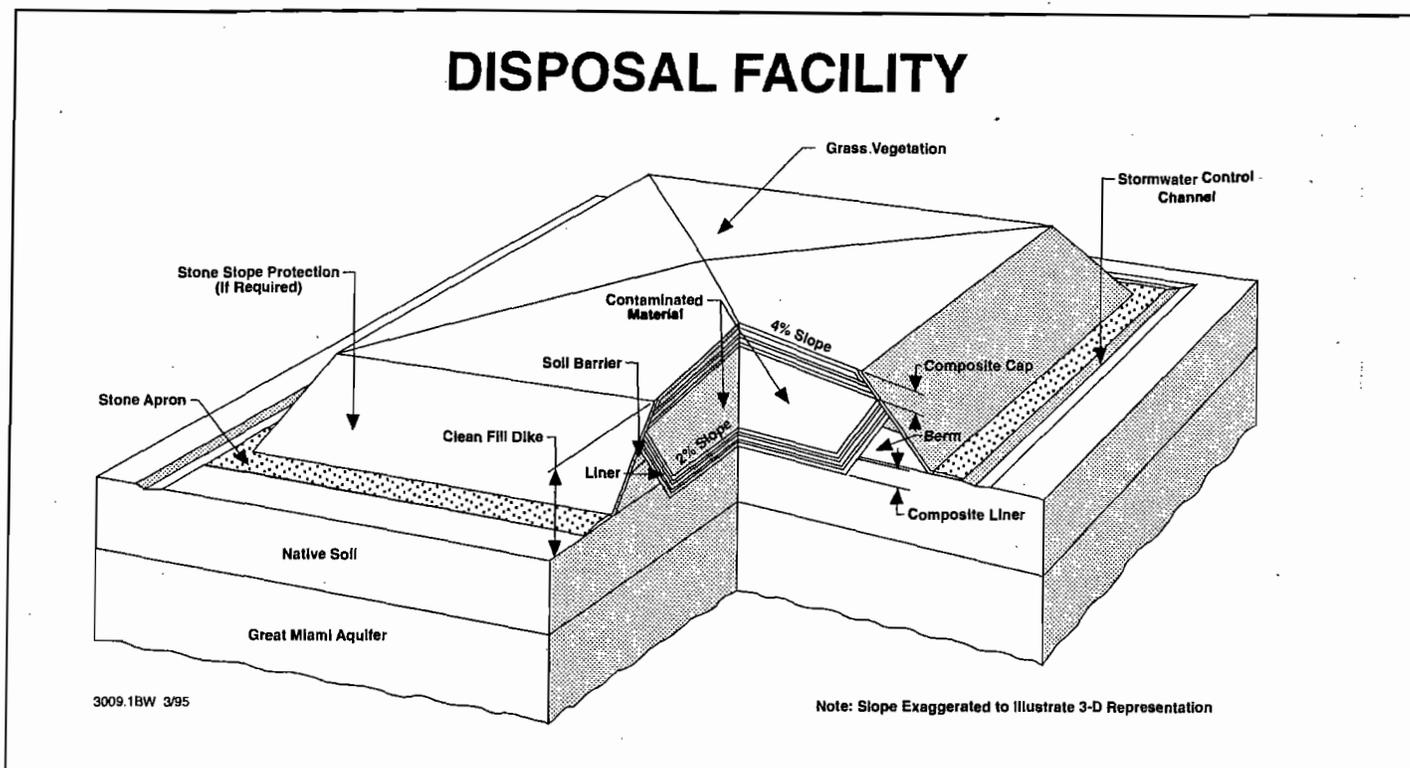


Figure 9: Conceptual Drawing of an Engineered Disposal Facility

The design of the disposal facility would include a multilayered lining and capping system. A conceptual cross section of an engineered disposal facility is presented in Figure 9. Contaminated soil not meeting the *waste acceptance criteria* for the disposal facility would be shipped to an off-site disposal facility, unless a more economical technology emerged which was deemed more prudent to apply to this soil to attain the acceptance criteria. As in Alternative 1, two different remediation levels were considered; target ILCR levels of 10^{-6} and 10^{-5} for the hypothetical on-property farmer.

The footprint of the disposal facility would be fenced and would remain under the continued ownership of the federal government, with restrictions placed in the property deed and permanent markers installed to reduce the potential for human intrusion into the disposal facility. Additionally, a long-term environmental monitoring program would be implemented with performance reviews of the disposal facility conducted by EPA at least once every five years.

The contaminated perched water excavation and Great Miami Aquifer recovery and treatment components of the alternative are the same as those associated with Alternative 1.

Waste Acceptance Criteria - the maximum concentration of a given contaminant that can be permanently disposed of on property while ensuring the long-term protection of the groundwater aquifer. The waste acceptance criteria take into consideration the design of the remedial action, the underlying geologic conditions, and the mass and solubility of the contaminant. The preliminary waste acceptance criteria for the on-property disposal facility option for total uranium in soil to ensure the protection of the aquifer to proposed drinking water standards is 1030 ppm.

A summary of the uranium cleanup goals, volumes of soil requiring action, and the estimated costs of Alternative 2A is provided below.

SUMMARY OF ALTERNATIVE 2A - ENGINEERED DISPOSAL FACILITY

Risk Range		
On-Property Receptor	Resident Farmer	Resident Farmer
On-Property Risk Level	10 ⁻⁶	10 ⁻⁵
On-Property Uranium Cleanup Level (ppm)	5	15
Off-Property Receptor	Resident Farmer	Resident Farmer
Off-Property Risk Level	10 ⁻⁶	10 ⁻⁵
Off-Property Uranium Cleanup Level (ppm)	5	15
Volume Requiring Excavation		
- On-Property (cubic yards) ^a	4,450,000	2,340,000
- Off-Property (cubic yards)	5,200,000	400,000
- Total (cubic yards) ^b	9,650,000	2,740,000
Off-Site Disposal		
- Volume (cubic yards)	50,000	25,000
- Rail Cars ^c	880	440
On-Site Disposal Facility (cubic yards) ^d	9,300,000	2,375,000
Present Worth Cost ^e	\$2290M	\$720M
Total Project Cost ^e	\$12030M	\$2580M

- ^a Includes 175,000 cubic yards of gravel from production area.
- ^b Includes volume of clean soil (to be used as backfill) excavated to reach contaminated soil at depth.
- ^c For off-site disposal volumes of 50,000 yd³ or less, shipment may be made by truck rather than rail.
- ^d Volume does not include excavation of soil below cleanup level to gain access to deeper contamination.
- ^e All costs (M = million) are estimated and include the recovery/collection and treatment of site surface water, wastewater, and groundwater.

Alternative 2C--Consolidation With Off-Site Shipment - Under this alternative, contaminated soil exceeding remediation levels would be excavated and, depending on contaminant concentration levels, dispositioned either in an on-property earthen-covered consolidation area or at an off-site licensed disposal facility. Two risk and cleanup levels, consistent with Alternative 2A, were evaluated for this alternative.

The waste acceptance criteria for the consolidation area would be established to ensure the protection of neighboring populations and the underlying aquifer. For the 10⁻⁶ risk case, all excavated soil above background levels would require disposition at an off-site licensed disposal facility in order to meet the 3 ppb aquifer protection level. For the MCL case, excavated soil exhibiting low concentrations of contaminants (i.e., less than the 45 ppm of insoluble uranium waste acceptance criteria) would be consolidated under an earthen cover. The earthen cover would include at least 12 inches of clean fill and a vegetative cover. The area of consolidation would be maintained under the continued ownership of the federal government, with restrictions placed in the property deed and permanent markers installed to reduce the potential for human intrusion into the consolidation area.

The perched groundwater and Great Miami Aquifer remedial strategies would be consistent with those described for Alternative 1.

A summary of the uranium cleanup goals, volumes of soil requiring action, and the estimated costs of Alternative 2C is provided below.

SUMMARY OF ALTERNATIVE 2C - CONSOLIDATION WITH OFF-SITE SHIPMENT

Risk Range		
On-Property Receptor	Resident Farmer	Resident Farmer
On-Property Risk Level	10 ⁻⁶	10 ⁻⁵
On-Property Uranium Cleanup Level (ppm)	5	15
Off-Property Receptor	Resident Farmer	Resident Farmer
Off-Property Risk Level	10 ⁻⁶	10 ⁻⁵
Off-Property Uranium Cleanup Level (ppm)	5	15
Volume Requiring Excavation		
- On-Property (cubic yards) ^a	4,450,000	2,340,000
- Off-Property (cubic yards)	5,200,000	400,000
Total (cubic yards) ^b	9,650,000	2,740,000
Off-Site Disposal		
- Volume (cubic yards)	9,350,000	1,160,000
- Rail Cars	165,000	20,400
On-Site Disposal (cubic yards) ^c	0	1,240,000
Present Worth Cost ^d	\$4330M	\$910M
Total Project Cost ^d	\$13870M	\$2780M

^a Includes 175,000 cubic yards of gravel from production area.

^b Includes volume of clean soil (to be used as backfill) excavated to reach contaminated soil at depth.

^c Volume does not include excavation of soil below cleanup level to gain access to deeper contamination.

^d All costs (M = million) are estimated and include the recovery/collection and treatment of site surface water, wastewater, and groundwater.

Land Use Objective 3: Establishment of a Consolidated Waste Management Area with Restricted Use of the Remaining Areas of the Property

Alternative 3A--Engineered Disposal Facility - Under this alternative, contaminated soil exceeding remediation levels would be excavated and placed in an engineered disposal facility. The remedial strategy for soil, perched water and the Great Miami Aquifer is consistent with Alternative 2A. Perched water zones exhibiting concentrations of contaminants which threaten the water quality of the underlying aquifer to a level above the proposed or existing MCLs would also be excavated. This alternative considered five different cases of restricted land use with corresponding remediation levels for on- and off-property soil. For all five cases evaluated, the remediation level of the Great Miami Aquifer was set at the existing and proposed federal drinking water standards (i.e., 20 ppb for uranium).

The disposal facility area would remain fenced and under the continued ownership of the federal government, with restrictions placed in the deed and permanent markers installed to reduce the potential for human intrusion into the disposal facility. The remaining areas of the site would have institutional controls applied to ensure the adopted land use strategy is maintained. An environmental monitoring program would continue with reviews of the site performed by EPA at least once every five years. The shading on the following summary table represents the preferred alternative for Operable Unit 5 - Alternative 3A with a total uranium remediation level for on-property soil of 80 ppm.

A summary of the uranium cleanup goals, volumes of soil requiring action, and the estimated costs of Alternative 3A is provided below.

SUMMARY OF ALTERNATIVE 3A - ENGINEERED DISPOSAL FACILITY

ALARA - as low as reasonably achievable. A DOE policy to reduce exposures and the risk associated with residual contamination to levels that are "as low as reasonably achievable" considering technical, economic, social, practical and public policy factors, as appropriate.

	Risk Range				
	Industrial User	Developed Park User	Undeveloped Park User	Undeveloped Park User	Undeveloped Park User
On-Property Receptor					
On-Property Risk Level	10 ⁻⁶	10 ⁻⁶	10 ⁻⁶	10 ⁻⁶	10 ⁻⁶
On-Property Uranium Cleanup Level (ppm)	15	40 ^a	80 ^a	80 ^a	80 ^a ppm with an ALARA goal of 50 ppm
Off-Property Receptor	Resident Farmer	Resident Farmer	Resident Farmer	Resident Farmer	Resident Farmer
Off-Property Risk Level	10 ⁻⁵	10 ⁻⁵	10 ⁻⁵	HI=1 3.5 x 10 ⁻⁵	HI=1 3.5 x 10 ⁻⁵
Off-Property Uranium Cleanup Level (ppm)	15	15	15	50	50
Volume Requiring Excavation					
- On-Property (cubic yards) ^b	1,990,000	1,800,000	1,790,000	1,789,000	1,799,000
- Off-Property (cubic yards)	400,000	400,000	400,000	1000	1000
- Total (cubic yards) ^c	2,390,000	2,200,000	2,190,000	1,790,000	1,800,000
Off-Site Disposal					
- Volume (cubic yards)	25,000	25,000	25,000	25,000	25,000
- Rail Cars ^d	440	440	440	440	440
On-Site Disposal ^e (cubic yards)	2,340,000	1,750,000	1,750,000	1,750,000	1,750,000
Present Worth Costs ^f	\$690M	\$630M	\$610M	\$580M	\$580M
Total Project Cost ^f	\$2510M	\$2220M	\$2180M	\$2110M	\$2110M

^a Cleanup level of 20 ppm for uranium may be required in the production area to protect the aquifer.
^b Includes 175,000 cubic yards of gravel from production area.
^c Includes volume of clean soil (to be used as backfill) excavated to reach contaminated soil at depth.
^d For off-site disposal volumes of 50,000 yd³ or less, shipment may be made by truck rather than rail.
^e Volume does not include excavation of soil below cleanup level to gain access to deeper contamination.
^f All costs (M = million) are estimated and include the recovery/collection and treatment of site surface water, wastewater, and groundwater.

Alternative 3C - Consolidation With Off-Site Shipment - Under this alternative, contaminated soil exceeding remediation levels would be excavated, with the contaminated soil exhibiting levels greater than the consolidation area waste acceptance criteria shipped by rail to a licensed off-site disposal facility. The remedial strategy for soil, perched groundwater, and the Great Miami Aquifer is consistent with Alternative 2C. The remediation levels considered for this alternative are consistent with those used for Alternative 3A. A summary of the cleanup levels, soil volumes requiring action, and the estimated costs of Alternative 3C is provided below.

SUMMARY OF ALTERNATIVE 3C - CONSOLIDATION WITH OFF-SITE SHIPMENT

	Risk Range				
	Industrial User	Developed Park User	Undeveloped Park User	Undeveloped Park User	Undeveloped Park User
On-Property Receptor	Industrial User	Developed Park User	Undeveloped Park User	Undeveloped Park User	Undeveloped Park User
On-Property Risk Level	10 ⁻⁶	10 ⁻⁶	10 ⁻⁶	10 ⁻⁶	10 ⁻⁶
On-Property Uranium Cleanup Level (ppm)	15	40 ^a	80 ^a	80 ^a	80 ^a ppm with an ALARA goal of 50 ppm
Off-Property Receptor	Resident Farmer	Resident Farmer	Resident Farmer	Resident Farmer	Resident Farmer
Off-Property Risk Level	10 ⁻⁵	10 ⁻⁵	10 ⁻⁵	HI=1 3.5 x 10 ⁻⁵	HI=1 3.5 x 10 ⁻⁵
Off-Property Uranium Cleanup Level (ppm)	15	15	15	50	50
Volume Requiring Excavation					
- On-Property (cubic yards) ^b	1,990,000	1,800,000	1,790,000	1,789,000	1,799,000
- Off-Property (cubic yards)	400,000	400,000	400,000	1000	1000
- Total (cubic yards) ^c	2,390,000	2,200,000	2,190,000	1,790,000	1,800,000
Off-Site Disposal					
- Volume (cubic yards)	1,150,000	1,130,000	1,120,000	1,120,000	1,120,000
- Rail Cars	20,200	19,900	19,700	19,700	19,700
On-Site Disposal^d (cubic yards)	1,220,000	652,000	652,000	652,000	652,000
Present Worth Cost^e	\$880M	\$820M	\$800M	\$770M	\$770M
Total Project Cost^e	\$2690M	\$2290M	\$2240M	\$2170M	\$2170M

^a Cleanup level of 20 ppm for uranium may be required in the production area to protect the aquifer.

^b Includes 175,000 cubic yards of gravel from production area.

^c Includes volume of clean soil (to be used as backfill) excavated to reach contaminated soil at depth.

^d Volume does not include excavation of soil below cleanup level to gain access to deeper contamination.

^e All costs (M = million) are estimated and include the recovery/collection and treatment of site surface water, wastewater, and groundwater.

Land Use Objective 4: Restricted Use of the Entire On-Property Area

Alternative 4A - Engineered Disposal Facility - Under this alternative, contaminated soil exceeding remediation levels would be excavated and placed into an engineered disposal facility. This alternative is similar to Alternatives 2A and 3A, except that the remediation level and minimum soil consolidation contemplates restricted access to the entire FEMP property. A summary of the cleanup levels, soil volumes requiring action, and the estimated costs of Alternative 4A is provided below.

SUMMARY OF ALTERNATIVE 4A - ENGINEERED DISPOSAL FACILITY

	Risk Range	
On-Property Receptor	Trespasser	Trespasser
On-Property Risk Level	10 ⁻⁶	10 ⁻⁶
On-Property Uranium Cleanup Level (ppm) ^a	100	100
Off-Property Receptor	Resident Farmer	Resident Farmer
Off-Property Risk Level	10 ⁻⁵	HI=1
Off-Property Uranium Cleanup Level (ppm)	15	50
Volume Requiring Excavation		
- On-Property (cubic yards) ^b	1,790,000	1,789,000
- Off-Property (cubic yards)	400,000	1000
- Total (cubic yards) ^c	2,190,000	1,790,000
Off-Site Disposal		
- Volume (cubic yards)	25,000	25,000
- Rail Cars ^d	440	440
On-Site Disposal ^e	1,750,000	1,750,000
Present Worth Cost ^f	\$610M	\$580M
Total Project Cost ^f	\$2180M	\$2110M

- ^a Cleanup level of 20 ppm for uranium may be required in the production area to protect the aquifer.
- ^b Includes 175,000 cubic yards of gravel from production area.
- ^c Includes volume of clean soil (to be used as backfill) excavated to reach contaminated soil at depth.
- ^d For off-site disposal volumes of 50,000 yd³ or less, shipment may be made by truck rather than rail.
- ^e Volume does not include excavation of soil below cleanup level to gain access to deeper contamination.
- ^f All costs (M = million) are estimated and include the recovery/collection and treatment of site surface water, wastewater, and groundwater.

Alternative 4C - Consolidation With Off-Site Shipment - Under this alternative, contaminated soil exceeding remediation levels would be excavated, and dispositioned either on property in an earthen-covered consolidation area or off site at a licensed disposal facility. This alternative is similar to Alternatives 2C and 3C, except that the remediation levels contemplate restricted access to the entire FEMP.

A summary of the cleanup levels, soil volumes requiring action, and the estimated costs of Alternative 4C is provided below.

SUMMARY OF ALTERNATIVE 4C - CONSOLIDATION WITH OFF-SITE SHIPMENT

	Risk Range	
	Trespasser	Trespasser
On-Property Receptor	Trespasser	Trespasser
On-Property Risk Level	10 ⁻⁶	10 ⁻⁶
On-Property Uranium Cleanup Level (ppm) ^a	100	100
Off-Property Receptor	Resident Farmer	Resident Farmer
Off-Property Risk Level	10 ⁻⁵	HI = 1
Off-Property Uranium Cleanup Level (ppm)	15	50
Volume Requiring Excavation		
- On-Property (cubic yards) ^b	1,790,000	1,789,000
- Off-Property (cubic yards)	400,000	1000
- Total (cubic yards) ^c	2,190,000	1,790,000
Off-Site Disposal		
- Volume (cubic yards)	1,120,000	1,120,000
- Rail Cars	19,700	19,700
On-Site Disposal ^d	652,000	652,000
Present Worth Cost ^e	\$800M	\$780M
Total Project Cost ^e	\$2240M	\$2170M

- ^a Cleanup level of 20 ppm for uranium may be required in the production area to protect the aquifer.
- ^b Includes 175,000 cubic yards of gravel from production area.
- ^c Includes volume of clean soil (to be used as backfill) excavated to reach contaminated soil at depth.
- ^d Volume does not include excavation of soil below cleanup level to gain access to deeper contamination.
- ^e All costs (M = million) are estimated and include the recovery/collection and treatment of site surface water, wastewater, and groundwater.

Evaluation of Alternatives

The seven alternatives were subjected to a detailed comparative evaluation process to identify the advantages and disadvantages of each alternative relative to one another. The detailed evaluation was conducted employing the criteria defined within the National Contingency Plan as the framework for identifying technical and administrative differences among the alternatives. Brief definitions and the categorization of the criteria are provided in the side bars.

REMEDIAL ACTION EVALUATION CRITERIA

Threshold Criteria:

- Overall Protection of Public Health and the Environment

This criterion addresses the way in which a potential remedy would reduce, eliminate, or control the risks posed by the site to human health and the environment. The methods used to achieve an adequate level of protection may be through engineering controls, treatment techniques, or other controls such as restrictions on the future use of the site. Total elimination of risk is often impossible to achieve. However, a remedy must minimize risk to ensure that human health and the environment would be protected to the extent possible.

- Compliance with ARARs

Compliance with ARARs, or "applicable or relevant and appropriate laws and regulations," ensures that a selected remedy will meet all related federal, state, and local requirements. The requirements may specify maximum concentrations of chemicals that can remain at a site; design or performance requirements for treatment technologies; and restrictions that may limit potential remedial activities at a site because of its location.

Compliance with an ARAR during a remedial action may be waived if compliance with the requirement will result in greater risk to human health and the environment than other alternatives; compliance with the ARAR is technically impractical from an engineering perspective; or the alternative will attain an equivalent level of protection to that required under the ARAR.

REMEDIAL ACTION EVALUATION CRITERIA

Balancing Criteria:

• Long-Term Effectiveness or Permanence

This criterion addresses the ability of a potential remedy to reliably protect human health and the environment over time, after the remedial goals have been accomplished.

• Reduction of Toxicity, Mobility, or Volume of Contaminants

This criterion assesses how effectively a proposed remedy will address the contamination problem. Factors considered include the nature of the treatment process, the amount of hazardous materials that will be destroyed by the treatment process, how effectively the process reduces the toxicity, mobility, or volume of waste, and the type and quantity of contamination that will remain after treatment.

• Short-Term Effectiveness

Technologies often require several years for implementation. This criterion evaluates a potential remedy for the length of time required for implementation and the potential impact on human health and the environment during the remediation.

• Implementability

Implementability addresses the ease with which a potential remedy can be put in place. Factors such as availability of materials and services are considered.

• Cost

Costs (including capital costs required for design and construction, and projected long-term maintenance costs) are considered and evaluated against the results of implementing the remedy.

The first two cleanup evaluation criteria, overall protection of human health and the environment and compliance with applicable or relevant and appropriate requirements, are considered threshold criteria that must be attained by the selected remedial action. The next five criteria on the list include short-term effectiveness; long-term effectiveness and permanence; reduction of toxicity, mobility, or volume through treatment; implementability; and cost. All five of these criteria are balanced to achieve the best overall solution. The last two cleanup evaluation criteria, state acceptance and community acceptance, are evaluated following receipt of comments on the Proposed Plan and incorporated as appropriate before making a final remedy selection in the ROD.

Overall Protection of Human Health and the Environment

All of the action alternatives would provide permanent solutions and adequately protect human health and the environment. The no-action alternative would allow for continued migration of site contaminants and would not provide for the protection of human health and the environment. Alternative 1 ranks the highest in terms of the degree of protectiveness, as measured by reduced uncertainty and long-term effectiveness. Alternative 1 involves the removal of contaminated soil and sediment from the FEMP to a permitted off-site disposal facility. This alternative provides a high level of certainty for continued long-term protectiveness and requires no provisions for perpetual institutional controls or 5-year CERCLA reviews. Future uncertainties on the availability of off-site disposal capacity could affect the implementability of this alternative, potentially causing delays in the attainment of the remedial objectives.

Alternatives that include the on-property disposal facility provide the highest level of protectiveness. For alternatives relying on an engineered disposal facility, conservative design assumptions and the adoption of concentration-based waste acceptance criteria would supplement existing site geology to ensure the long-term performance of the disposal system. Modeling runs completed for the FS on the performance of the on-property disposal facility demonstrate with reasonable certainty (>80%) that concentrations of contaminants in the aquifer underlying the facility would not exceed existing and proposed federal drinking water standards for 1000 years.

Alternatives relying on on-property disposal would typically present the lowest overall short-term risk to remediation workers and off-property residents. Short-term risks are those occurring during implementation of the remedial action and include mechanical hazards, transportation related injuries/fatalities, and impacts due to releases (i.e., fugitive dust, etc.) during construction activities. For the on-property disposal alternatives, short-term risks are directly related to the quantity of material excavated (i.e., the remediation levels) and placed in the facility. The larger the quantity excavated, the higher the associated short-term risks.

Alternatives employing the on-property disposal facility would adequately protect flora and fauna, including aquatic life in Paddys Run and the Great Miami Aquifer. For select remediation levels (i.e., 10^{-6} ILCR to the resident farmer), significant acreage of forested wetlands and forested areas both on and off the FEMP property would be excavated. For alternatives not contemplating a residential farming land use at the FEMP, no areas of forested wetlands on or off the FEMP property would be disturbed.

Compliance With Applicable or Relevant and Appropriate Requirements

Alternative 1 would comply with ARARs. All other action alternatives that include an on-property disposal facility or consolidation area would comply with ARARs if a CERCLA waiver is granted by EPA for the State of Ohio solid waste disposal facility siting requirements. In general, to be granted the waiver, the FEMP would need to adopt an engineering design for the facility which would, when coupled with existing site geologic conditions, attain a standard of performance equivalent to that required under the State of Ohio siting requirements. Input received from representatives of OEPA indicates that the consolidation area with earthen cover, contemplated under Alternatives 2C, 3C and 4C, would probably not fulfill waiver requirements.

Each of the alternatives (except the no-action alternative) includes an aggressive aquifer pump and treat component aimed at restoring the Great Miami Aquifer to its full beneficial use within a reasonable time frame. This groundwater recovery component would reduce the existing concentration of uranium to below proposed drinking water standards at all points within the aquifer in about 27 years and these alternatives would be in compliance with ARARs.

Each of the alternatives relying on on-property disposal (i.e., capping systems or disposal facilities) would employ design considerations found in the federal Uranium Mill Tailing Remediation Act standards and RCRA to ensure the long-term performance of the disposal system. These standards would require the use of multilayered capping and lining systems, the development of contaminant-specific waste acceptance criteria, and use of a design which ensures protectiveness for 200 to 1000 years. Long-term monitoring would be provided for all alternatives involving on-property disposal, as required to demonstrate the continued performance of the disposal system.

Long-Term Effectiveness and Permanence

Long-term effectiveness is evaluated through two criteria: the magnitude of the residual risk remaining at the site after the cleanup and the adequacy and reliability of any required engineering or institutional controls. Remedial alternatives employing off-site disposal as the principal means of addressing contaminated soil and sediment would require the least amount of contaminated materials to remain at the site. Alternative 1 would include the removal of all contaminated material from the site with no long-term requirements for continued institutional controls, surveillance, or maintenance activities at the facility.

Each of the alternatives would ensure the attainment of the remediation levels through the implementation of a verification sampling program before remediation and the completion of a certification sampling program following completion of remediation activities. All alternatives would employ excavation to remove perched groundwater zones presenting unacceptable risks to future receptors or the underlying aquifer. Each alternative also employs pump and treat technologies to attain health-protective levels in the Great Miami Aquifer.

REMEDIAL ACTION EVALUATION CRITERIA

Modifying Criteria:

* State Acceptance

The state has an opportunity to review the FS and Proposed Plan and offer comments. A state may agree with, oppose, or have no comment on the preferred alternative.

* Community Acceptance

During the public comment period, interested persons or organizations may comment on the alternatives. These comments are considered by DOE and EPA in making the final selection. The comments are addressed in a document called a Responsiveness Summary which is part of the ROD for the site.

Each of the alternatives employing an on-property disposal facility or central consolidation area relies on engineering measures and institutional controls to ensure the long-term performance of the remedy and maintain the protection of human health and the environment over time. The highest level of certainty is associated with the consolidation area with engineering controls and the off-site shipment and disposal of the more heavily contaminated soil. The remaining material would exhibit low concentrations of contaminants which present lower overall risks to potential intruders in the event the planned institutional controls were to fail in the future.

Long-term environmental impacts associated with the construction of the on-property disposal facility or consolidation area would include the permanent commitment of up to 301 acres of land, of which 57 acres are woodlands and pine plantation habitat. Between 9 and 36 acres of wetlands could be lost depending on the cleanup level selected. Mitigation for wetlands impacts will be determined using Section 404(b)(1) guideline of the Clean Water Act, in consultation with the Corps of Engineers, EPA and OEPA. The 100- and 500-year floodplains of Paddys Run and the Great Miami River would not be permanently altered as a result of backfilling and regrading activities. No significant long-term impacts are expected for water quality and hydrology, air quality, socioeconomics, or cultural resources.

Reduction of Toxicity, Mobility, or Volume Through Treatment

All of the alternatives rely upon treatment to address contaminated storm water and recovered groundwater before discharge to the Great Miami River. In general, two other treatment options were considered for application to Operable Unit 5 contaminated media. The first was soil washing, which involves the use of physical and chemical processes to reduce contaminant levels in soil. The second was the use of cement stabilization to address site soil, which involves mixing the soil with cement to generate a solid monolithic product. Soil washing is a promising technology for addressing contaminated soil; however, the technology is limited in its application at the FEMP due to site-related constraints (i.e., the presence of the sole-source aquifer beneath all potential treated soil backfill areas). With further development, soil washing could have application as a support technology at the FEMP when used in conjunction with a disposal technology, such as the on-property disposal facility, to address the soil not meeting the waste acceptance criteria for the engineered disposal facility. Cement stabilization was not adopted as a major component of any of the alternatives because of the significant cost of applying the technology and the increased volume due to the addition of cement additives.

It should be recognized that each of the proposed alternatives will require from 20 to 22 years to complete soil cleanup activities and potentially 27 years to complete groundwater restoration. Additionally, for those alternatives relying on off-site disposal capacity, there is significant uncertainty in the continued availability of this capacity over the 22-year soil cleanup. During this time the FEMP will continue to evaluate emerging technologies, such as physical separation techniques, to potentially apply to the selected remedy to promote cost effectiveness, waste minimization and to reduce potential vulnerabilities to completing the remedial action due to unavailability of off-site disposal capacity.

Short-Term Effectiveness

The evaluation of the alternatives under this criterion addresses effects during the construction and implementation phase of remedial actions. Short-term effectiveness evaluates the potential impacts to workers, the public and the environment associated with implementing a remedial alternative. Critical considerations in the assessment of the Operable Unit 5 alternatives are: the projected amount of work hours to accomplish a given alternative, the quantity of soil to be excavated, the estimated fugitive dust generated by material movements, and the haul time to the off-site disposal facility.

By definition, the no-action alternative presents the least short-term impacts. All the action alternatives involve remedial activities such as earthmoving, construction and operation of treatment facilities, and material transport. All action alternatives would create an impact and pose some risk to the environment, workers and the public. These impacts can be effectively controlled through the application of mitigative measures such as dust suppression techniques and rigorous worker health and safety programs.

In general, those alternatives relying upon off-site disposal as the principal means for material disposition present the highest overall short-term risk. The most significant element of short-term risk for these alternatives is due to the projected injuries and fatalities estimated to result as a consequence of transporting such large quantities of material.

Alternatives employing on-site disposal in an engineered facility would present the lowest overall short-term risks. The most significant element of short-term risk associated with this set of remedial alternatives is attributable to projected worker injuries related to mechanical hazards. Such injuries would be minimized at DOE facilities, such as the FEMP, through the adoption of strict health and safety program requirements during the implementation of remedial actions.

As part of the short-term risk assessment, estimates were completed for each alternative of the projected risks to individuals neighboring the FEMP due to the conduct of remedial activities. These risks were estimated on the basis of modeling projections of the potential releases of dust during excavation, soil transport, and disposal activity. For alternatives considered in the FS, the highest calculated risk to the maximally exposed individual over the 22-year soil cleanup process would not be expected to exceed a 10^{-6} ILCR.

Short-term impacts associated with the action alternatives would include temporary on-property disruption of up to approximately 42 acres of land from construction of support facilities and up to 930 acres from soil excavation, resulting in the temporary loss of habitat. Off-property soil excavation would temporarily disturb up to 6446 acres of land (assuming cleanup at the 10^{-6} level). Appropriate engineering controls would minimize fugitive dust emissions during excavation activities.

Implementability

This evaluation criterion addresses the technical and administrative feasibility of implementing the remedial alternatives. Alternatives involving the on-property disposal of contaminated soil and sediment are considered readily implementable through the use of existing technologies and construction methods.

The availability of off-site disposal capacity over the duration of the remedial actions presents considerable uncertainty. Discussions with personnel associated with a representative off-site disposal facility indicate that the disposal site could be expanded to accommodate a greater volume of low-level radioactive or mixed wastes. The availability of this expanded capacity or alternate capacity at some future (yet to be constructed) site is unclear and is compounded by the up to 22-year duration of remedial actions to address contaminated soil and sediment. For these reasons, alternatives relying on off-site disposal are considered less implementable than the on-site alternatives, and may mean delays to accommodate administrative or capacity issues.

The aquifer restoration component of the alternatives are considered implementable through reliance on available groundwater extraction and treatment technologies. There is considerable uncertainty in the amount of time required to attain remediation levels for uranium and several other contaminants. This uncertainty is due to the limited ability to predict the rate at which the silt, sand and gravel making up the aquifer system will release contaminants to the groundwater for extraction. The FEMP will continue to investigate other technologies, such as reinjection, to enhance contaminant recovery and reduce the time needed to restore the aquifer. Reinjection would potentially involve the pumping of treated groundwater back into the aquifer to increase the rate of flow and create a flushing effect in order to speed contaminant removal.

Cost

Cost estimates are used in the FS process to provide a basis for comparison among alternatives. Estimates for FSs are typically provided to an accuracy range of +50 percent (real cost would be 50 percent higher than the estimate) to -30 percent (real cost would be 30 percent lower than the estimate) because of the uncertainties in the available information used to develop them. To provide a fair basis of comparison for alternatives, cost estimates for alternatives are presented in present worth costs. Present worth costs reflect the quantity of money which would need to be placed in a bank today at a set interest rate, termed the discount rate, to pay for the remedial action over the life of the project.

The tables previously presented summarizing each of the remedial alternatives provided the present worth costs of each of the alternatives considered for Operable Unit 5. As identified in these summary tables, the cost estimates for each alternative reflect the costs to attain differing levels of protection against residual ILCR attributable to the site following the implementation of the alternative. As the incremental risk levels become progressively more stringent, there is a corresponding increase in the contaminated soil volume that requires attention.

In general, for alternatives pursuing restoration to a 10^{-6} ILCR to the resident farmer (Alternatives 1, 2A and 2C), in excess of 80 percent of the projected cost for these alternatives is associated with addressing the cleanup of contaminated soil and the remaining 20 percent is attributed to the recovery and treatment of contaminated groundwater. For all other alternatives, approximately 60 to 75 percent of the projected costs is associated with soil cleanup and the remaining 25 to 40 percent is attributed to groundwater recovery and treatment. For the groundwater recovery and treatment cost component, in excess of 80 percent of the projected costs is attributed to the operation, maintenance and final dismantlement of the AWWT facility.

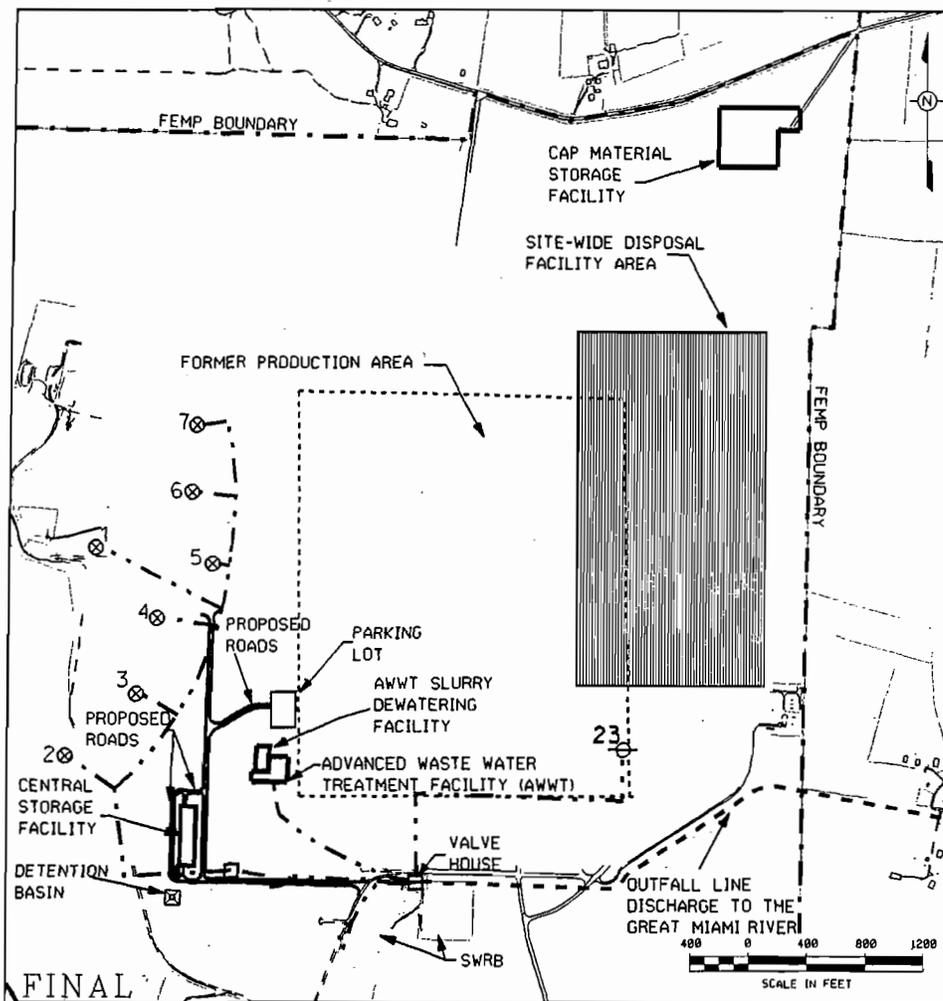


Figure 10: Site Plan of Preferred Remedy

Preferred Remedial Alternative

The preferred remedial action for Operable Unit 5 is Alternative 3A, Full Excavation of Contaminated Soil; Placement in an On-Property Disposal Facility; and Extraction and Treatment of Great Miami Aquifer Groundwater.

Alternative 3A is recommended because it provides a remedy which is reliable over the long term, offers the lowest overall short-term risks, is less costly when compared to other alternatives, and employs proven technologies which are implementable. The alternative would comply with ARARs following issuance of the required waivers to State of Ohio solid waste disposal facility siting requirements. Alternative 3A involves excavation and consolidation of contaminated soil and sediment within an on-site, above-grade disposal facility. Excavated soil or sediment not meeting the waste acceptance criteria of the facility would be shipped to an off-site licensed disposal facility. Alternative 3A also includes extraction and treatment of contaminated groundwater and the collection and treatment of contaminated storm water runoff. The FEMP would continue to assess emerging technologies for their viability as support options to the selected remedy in the event they were deemed cost effective and equally or more protective. Figure 10 presents a conceptual site plan of the facilities required to support the preferred alternative, including the needs of other operable units.

Highlights of Alternative 3A

- The most significantly contaminated soil and sediment would be removed and confined in an engineered disposal facility or shipped off site; contaminated perched groundwater would be removed and treated.
- The on-property engineered disposal facility would use proven reliable designs and materials.
- Contaminants remaining in on-property soil and sediment after the implementation of Alternative 3A would not result in unacceptable risks to human health and the environment and would allow industrial, developed, and undeveloped park land uses.
- Uranium levels in the Great Miami Aquifer would be reduced to below proposed MCLs for drinking water; and the planned Hamilton County public water supply would provide alternate water to residences impacted by the South Plume during the period of aquifer restoration.
- Alternative 3A would include monitoring to confirm the long-term effectiveness of the remedial action.

Specifically, Alternative 3A would be designed to meet the following remedial action objectives:

- Protect the Great Miami Aquifer at concentrations not to exceed proposed or existing MCLs for site-related contaminants.
- Consolidate contaminated materials to maximize the acreage of the existing FEMP property which can be returned to a more beneficial use for the surrounding community.
- Return the Great Miami Aquifer to its full beneficial use in a reasonable time frame (approximately 27 years).
- Minimize short-term risks to human and ecological receptors during the implementation of remedial actions.
- Avoid disruption of the 26-acre forested wetland on the northwest portion of the FEMP.
- Attain a residual risk level in the range of 10^{-5} ILCR to the hypothetical RME off-property farmer.
- Attain a residual risk level in the range of 10^{-6} ILCR and a hazard index of 1 for recreational users of the FEMP property.
- Attain a residual risk level in the range of 10^{-6} ILCR for a hypothetical trespasser in the fenced area of the on-property disposal facility.
- Ensure the long-term reliability of the completed remedy for up to 1000 years.

It should be noted that it is not the intent of the Operable Unit 5 RI/FS decision process to select a future land use for the site. The off-property farmer, on-property recreational user, and hypothetical trespasser were selected as example receptors to facilitate explanation of the alternatives and residual risk. Other land uses could occur depending on the level of risk deemed acceptable.

Soil and Sediment

Soil and sediment exceeding proposed final remediation levels (Table 2) would be excavated and placed in an engineered, above-grade disposal facility located on FEMP property. Contaminated perched water zones, which represent an unacceptable risk to the underlying Great Miami Aquifer, would also be excavated and placed in the disposal facility. Any contaminated water generated during these excavation operations would be directed to the AWWT facility. A disposal facility with the dimensions of approximately 1610 feet x 1610 feet x 37 feet tall (about 60 acres) would accommodate Operable Unit 5 material. Land within the disposal facility area would be fenced and maintained under the continued ownership of the federal government. Maintenance would include the sampling of a monitoring well network to assess the performance of the disposal facility. Areas outside the disposal facility area could, if deemed appropriate by the federal government, be made available for alternative land uses.

The proposed final remediation levels for soil presented in Table 2 represent the 1×10^{-6} ILCR or MCL levels to the undeveloped park users for individual constituents. For less leachable forms of uranium in on-property soil, the listed remediation level would be 80 ppm. The preferred remedy would adopt the DOE's ALARA concept by applying available hand-held radiological instruments to help guide excavation and identify any isolated locations of higher contamination. To this end, the preferred remedy would establish an ALARA goal of 50 ppm of total uranium in on-property soil. The FEMP would apply available (hand-held) detection technology in an attempt to lower overall radiological contamination levels residing on and off the FEMP property. Applying ALARA in this manner is considered appropriate based upon the cost effectiveness of the approach and the estimated small (< 1 percent) overall increases in expected volumes of excavated soil.

TABLE 2
PROPOSED FINAL REMEDIATION LEVELS

Contaminant	On-property Soil (ppm)	Off-property Soil (ppm)	Sediment (ppm)	Surface Water ^a (ppb)	Great Miami Aquifer (ppb)
Uranium - nonleachable	80 ^b	50	210	530	20
Uranium - leachable	20	NA	NA	NA	NA
1,2-dichloroethane	0.16	0.13	NA	NA	5.0
Trichloroethene	25	1.5	NA	NA	5.0
Antimony	96	0.61	NA	200	6.0
Arsenic	12	9.6	94	50	50
Beryllium	1.5	0.62	33	1	4.0
Cadmium	82	0.91	71	10	14
Manganese	4600	1400	410	1500	900
Mercury	7.5	0.3	NA	0.2	2.0
Silver	29,000	1.0	NA	5	50
Radium-226	1.7 ^c	1.5 ^c	2.9 ^c	38 ^d	20 ^d
Strontium-90	14 ^c	0.6 ^c	7100 ^c	41 ^d	8.0 ^d
Technetium-99	30 ^c	1.0 ^c	200,000 ^c	150 ^d	940 ^d
Thorium-232	1.5 ^c	1.4 ^c	1.6 ^c	270 ^d	1.2 ^d
Thorium-230	280 ^c	80 ^c	18,000 ^c	3500 ^d	15 ^d

^a Paddys Run and Great Miami River. Applies to Great Miami River locations beyond the mixing zone for the FEMP's outfall line as defined by State of Ohio water quality regulations.

^b ALARA goal of 50 ppm uranium would be applied

^c pCi/g

^d pCi/L

NA - Not applicable (i.e., not of concern) for this media

Picocuries per liter (pCi/L)

Picocuries per gram (pCi/g) -

Concentration terms expressing

the total activity of a radioactive

constituent present within a

given mass/volume (i.e., liter or

gram) of a medium (i.e., water or

soil). A picocurie is equivalent to

the radioactivity present in one

trillionth of one gram of pure


radium.

A total uranium remediation level of 50 ppm would be established for soil off the FEMP property. Based upon available site characterization data less than 1000 cubic yards of soil off the FEMP property would require excavation to attain the remediation levels associated with the preferred alternative. These excavations are envisioned to include soil adjacent to the FEMP sewage treatment plant, soil underlying the retired FEMP outfall line to the Great Miami River, and soil and concrete located adjacent to the retired FEMP outfall discharge at the bank of the Great Miami River.

Operable Unit 5 is the fourth of the five FEMP operable units to proceed through the remedy selection process. The three FEMP operable units (i.e., 1, 2 and 4) preceding Operable Unit 5 similarly established soil remediation levels in their RODs for the constituents of concern occurring within the respective boundaries of these source operable units. The final remediation levels in these RODs were derived on the basis of operable unit-specific information regarding the physical, chemical, radiological and geochemical characteristics of the contaminants and the environmental setting in which they reside. Where the final soil remediation level for a specific constituent established through the Operable Unit 5 remedy decision process is more restrictive (i.e., lower) than that defined in an individual ROD for Operable Units 1, 2, or 4, the final Operable Unit 5 remediation level will serve as the soil cleanup criteria within the boundary of the source operable unit.

Initially, the soil and sediment having contamination levels that exceed the waste acceptance criteria of the on-property disposal facility would be shipped to an off-site commercial disposal facility. Emergent technologies would, however, be retained as an option for

TABLE 3 PROJECTED QUANTITY OF EXCAVATED SOIL FOR THE PREFERRED ALTERNATIVE	
Soil	Cubic Yards
Excavated on property	1,799,000
Excavated off property	1,000
Total	1,800,000
Shipped off site	25,000
Excavated clean soil	25,000
Placed in facility	1,750,000

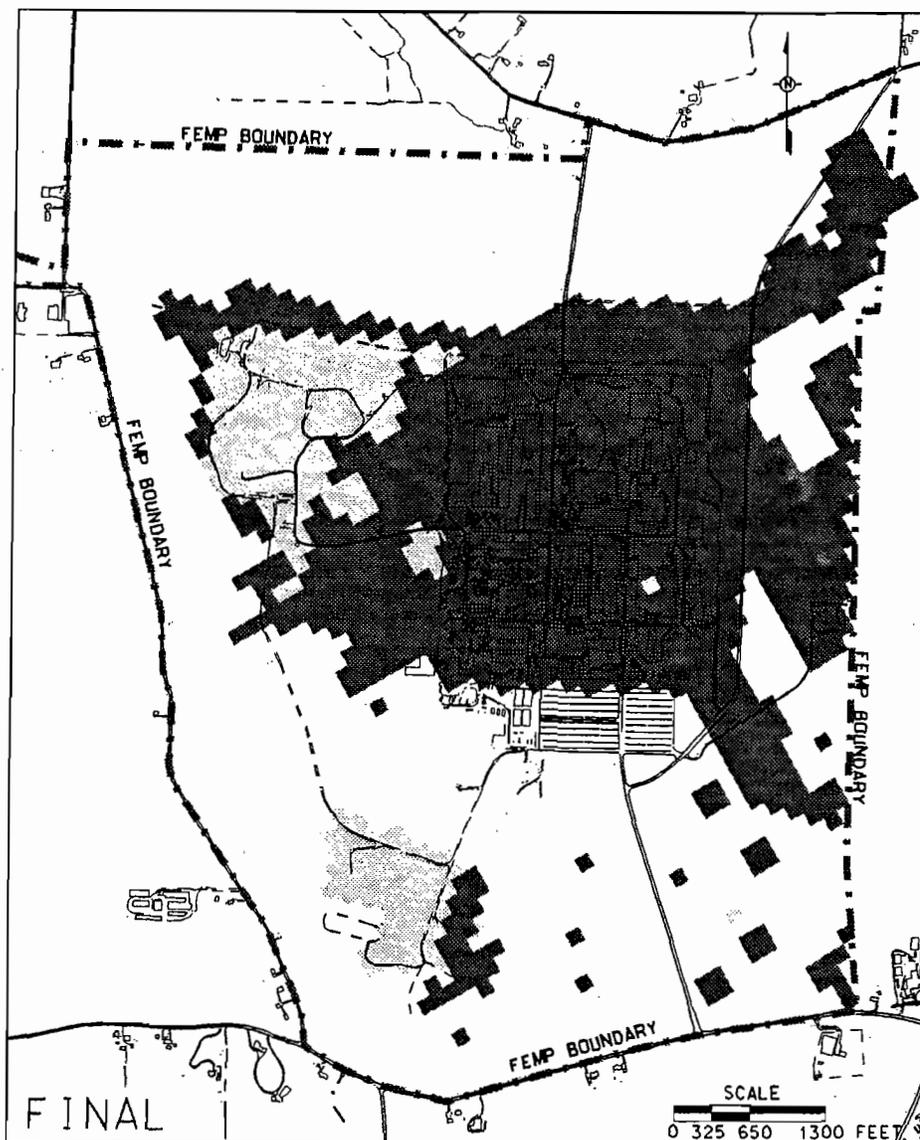

LEGEND:

- OU 5 EXCAVATION
- OTHER OU's EXCAVATION

Figure 11: Excavation Footprint for Preferred Alternative

treating and dispositioning this soil in the future. Retaining emergent technologies is appropriate due to the uncertainty of the long-term availability of off-site disposal capacity. Examples of emergent technologies include soil washing and vitrification. When a method is found that would allow additional soil to cost effectively meet the waste acceptance criteria for the on-property disposal facility, the DOE would present that technology to EPA and request approval for its use at the FEMP. At the request of EPA, DOE has committed to performing a number of treatability studies examining the viability of applying several emerging technologies (e.g., phosphate soil amendment, soil compaction, etc.). These studies will be conducted during the remedial design phase.

The area of on- and off-property excavation (i.e., footprint) required to attain the proposed final remediation levels is presented in Figure 11. Table 3 presents the projected quantity of excavated soil/sediment that meets the waste acceptance criteria for the on-property disposal facility and the quantity of soil requiring off-site disposal. The volume projections

presented in Table 3 are based on an engineering evaluation of available data. Final excavation footprints and volumes would be established through completion of a preexcavation verification survey. Waste acceptance criteria for the on-property disposal facility would be finalized during remedial design but would be no greater than 1030 ppm total uranium.

Following excavation, soil samples would be collected from all affected areas and analyzed to certify that cleanup objectives were attained. Excavated areas would be regraded and backfilled, as needed, with borrow material and topsoil to ensure positive drainage. A vegetative cover would be reestablished on the backfilled areas.

The sequence of excavation and backfill activities would depend on gaining access to contaminated soil underlying existing facilities in the former production area and the other source operable units (Operable Units 1 through 4). On the basis of available funding projections, the estimated period for attainment of remedial action objectives for soil/sediment, including construction of the on-property disposal facility, is 22 years.

Potential environmental impacts have been factored into the evaluation of alternatives for the Operable Unit 5 remedial action consistent with the values of the National Environmental Policy Act. The preferred alternative would avoid impacts to the 26 acres of forested wetlands in the northwestern part of the site and the riparian corridor along the northern portion of Paddys Run. Approximately 354 acres within the FEMP property boundary and approximately 2 acres off-property would be disturbed during soil excavation activities. However, these areas would be regraded and revegetated to approximate prerediation conditions. In the long term, 137 acres would be committed to on-site disposal, and will include 50 acres of pine plantation, 7.5 acres of early to mid-successional woodlands and 9.0 acres of wetlands. The remainder of the acreage would include previously disturbed areas (e.g., process area) and managed fields.

Groundwater

Areas of the Great Miami Aquifer exhibiting concentrations of contaminants exceeding existing or proposed federal primary drinking water standards (for contaminants which do not have a drinking water standard, a concentration equivalent to an ILCR of 10^{-5} to a residential farming groundwater user would be used) would be subjected to groundwater extraction through the use of recovery wells. For purposes of alternative evaluation, the southern boundary of the area of aquifer restoration would be established at the northern limit of the Paddys Run Road Site contaminant plume. This corresponds to the southern extent of groundwater capture created by the South Plume Removal Action wells (see Figure 6).

Groundwater recovery would continue in the affected locations of the aquifer until the existing and proposed primary drinking water standards (or 10^{-5} ILCR for contaminants without drinking water standards) are attained. On the basis of available modeling data, the uranium concentration in all areas of the aquifer would be expected to attain the proposed drinking water standard (20 ppb) within 27 years at a maximum pumping rate of 4000 gpm. Figure 7 shows the expected reduction of uranium concentrations in the aquifer with time as a result of pumping of the required recovery wells.

It should be recognized that the process of flushing the aquifer of contaminants is chiefly controlled by the chemical interaction between the contaminant and the sand and gravel composing the aquifer system. This process of chemical interaction within the aquifer is complex and leads to significant uncertainty in the ability to adequately model the effects of groundwater recovery operations. Recognizing this uncertainty, the FEMP would, as

part of the preferred alternative, continue to evaluate alternatives or emerging technologies to enhance contaminant recovery from the aquifer. These technologies could include the possible reinjection of treated groundwater back into the aquifer to speed the flushing process. If the need to apply reinjection or other enhancement technologies is deemed appropriate, approval by EPA and OEPA would be obtained before implementation.

Portions of the recovered groundwater exhibiting the highest concentrations of uranium would be treated through an expansion of the existing on-property AWWT facility. The expansion to the plant would apply best demonstrated available technologies to the treatment of the recovered groundwater. The expansion would entail the addition of water treatment capacity using available space within the existing AWWT facility (Building 51 at the FEMP). Contaminated groundwater would be treated to the design capacity of the AWWT facility, and more highly contaminated water would be preferentially treated before treatment would be expended on less contaminated water.

The remaining portions of the recovered groundwater exhibiting uranium concentrations less than the proposed MCL under the Safe Drinking Water Act would be directly discharged without treatment. The uranium concentration in the effluent discharged to the Great Miami River (treated and nontreated groundwater, treated surface water and wastewater) would not exceed 20 ppb. The maximum discharge of uranium to the river from the FEMP would not exceed 600 pounds per year. Figure 8 shows the estimated discharges of uranium to the Great Miami River as a result of implementing the preferred alternative.

A public water supply, partially funded by DOE, is currently being installed in the area surrounding the FEMP. This public water is envisioned to be available during the period of aquifer restoration as an alternate source of drinking water for the off-property areas impacted at levels greater than the proposed MCL for uranium.

Storm Water and Wastewater

Contaminated storm water runoff is currently collected from the surfaces of the former production area and the Operable Units 1 and 4 areas. Storm water runoff control will continue throughout the site remediation time period. Storm water would continue to be directed to the existing storm water retention basin. Following attainment of remedial objectives associated with the source operable units and soil, the retention basin would be removed.

Storm water, along with wastewater generated during remediation, would be treated in the AWWT facility. Sedimentation sludges, regenerate sludges, spent ion exchange resins, carbon filter media, and other miscellaneous waste streams (residues) generated by the operation of the groundwater, storm water and wastewater treatment facilities would be dewatered at the AWWT facility and characterized before disposal. The residues would be disposed of in the on-site facility during the period of active soil remediation and sent to a licensed off-property disposal facility thereafter.

Decontamination and Demolition

Following attainment of remedial action objectives, support facilities (including the planned wastewater treatment facilities, interim staging facilities, miscellaneous roadways, pipelines, etc.) would be decontaminated and demolished. Construction materials would be recycled to the extent practical. Contaminated rubble generated following closure of the on-property disposal facility (e.g., demolition of the AWWT facility) would be dispositioned off site at a licensed disposal facility. The pumps and transmission lines associated with the recovery wells would be removed and dispositioned off site. Recovery and monitoring well casings and borings would be abandoned in accordance with State of Ohio requirements.

Site-Wide Integration of Remedies

Of the five operable units at the FEMP, Operable Unit 5 is chronologically the fourth to issue a Proposed Plan for comment. The final operable unit, Operable Unit 3, is expected to issue a Proposed Plan in 1996. Each of the operable unit FS reports has provided a progressive evaluation of the projected FEMP site-wide remedy, using the best information available at the time, to predict postremediation site conditions. This projected site-wide remedy incorporates the selected (identified in a ROD), preferred (identified in a Proposed Plan), or leading alternative for each operable unit, as appropriate. The intent of the analysis is to progressively monitor the interfaces among the operable units to ensure that the final adopted site-wide remedy is well thought out, cost effective, and ensures the long-term protection of human health and the environment.

The Operable Unit 5 FS completed such an evaluation employing the preferred Operable Unit 5 alternative in conjunction with the selected or projected remedies listed in Table 4 for the other four operable units. These listed remedies for Operable Units 3 and 5 should not be regarded as a preselection by DOE or EPA of an alternative; they were adopted for the purpose of completing the assessment of the projected postremediation site conditions.

**TABLE 4
REMEDIES ADOPTED TO COMPLETE SITE-WIDE ANALYSIS**

Operable Unit	Key Components
1-Waste Pits	Excavation of pit contents, caps, berms, and lining system Excavation of heavily contaminated soil underlying pits Drying of excavated soil and waste, as required Shipment of excavated material by rail to off-site disposal facility
2-Other Waste Units	Excavation of waste materials and adjacent contaminated soil Shipment to off-site disposal facility of material not meeting Acceptance Criteria of on-property disposal facility Placement of excavated material meeting acceptance criteria in central on-property above-grade disposal facility
3-Production Facilities and Inventories	Off-site shipment of remaining waste and production inventories (including thorium) and decontamination residues Decontamination and demolition of all structures and facilities Recycling/reuse of generated debris and equipment to maximum extent practical Off-site disposal of rubble and debris not meeting acceptance criteria of on-property facility Disposal of rubble and debris meeting acceptance criteria in a central disposal facility
4-Silos 1-4	Removal and vitrification of waste inventories Off-site disposal of vitrified waste Excavation of contaminated soil and placement of soil attaining the acceptance criteria in a central on-property disposal facility Decontamination and demolition of silo structures and support facilities Placement of rubble and debris in central disposal facility
5-Environmental Media	See preferred alternative section - Pages 3 and 35
Elements Common To All Operable Units	Long-term environmental monitoring program for FEMP Continued maintenance and surveillance of disposal facility Performance of reviews of site conditions by EPA every 5 years Continued federal ownership of disposal facility area Restrictions placed in FEMP property deed pertaining to future uses of the site

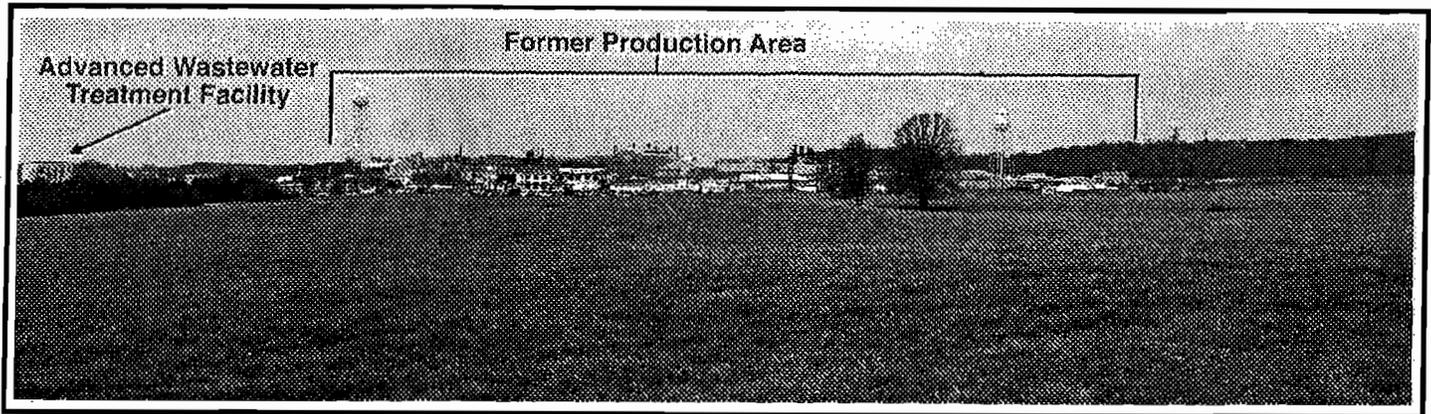


Figure 12a: Photograph of the current FEMP skyline looking north from Willey Road



Figure 12b: Artist's rendition of the FEMP skyline following completion of the adopted site-wide remedy.

TABLE 5 PROJECTED VOLUMES FOR REMEDY ADOPTED TO COMPLETE SITE-WIDE ANALYSIS	
Contaminated Materials	Cubic Yards
Off-Property Disposal	736,000
On-Property Disposal	2,425,960

Table 5 presents an estimate of the volume of material requiring on- or off-site disposal for the adopted site-wide remedy. In general, the site-wide remedy applies a balanced approach to site restoration. Material with higher uranium contamination, deemed to represent the principal threat at the site, would be treated (if required) and shipped off site for disposal. Material exhibiting lower contaminant concentrations distributed over a larger volume, termed a secondary threat, would be permanently disposed of on the FEMP property in one central engineered disposal facility. The adopted alternatives and their projected soil and waste volumes may be subject to change as the remedy selection process is finalized in the RODs for each of the individual operable units.

The proposed site-wide engineered disposal facility is estimated to be 2400 feet x 1300 feet x 62 feet high (about 71 acres). The size of the facility is based upon the consolidation of approximately 600,000 cubic yards of contaminated soil and construction debris from Operable Units 1 through 4 in addition to the 1.8 million cubic yards of soil contributed from Operable Unit 5. A projection of the estimated footprint of the engineered disposal facility accommodating the site-wide remedy is shown in Figure 10. A before and after depiction of the FEMP skyline is shown in Figure 12a/12b. The duration of the remedial

action is anticipated to take 22 years to address the source areas (i.e., pits, silos, landfill) and contaminated soil and sediment and approximately 27 years to restore the aquifer.

The analysis of the adopted site-wide remedy performed for the FS included a risk analysis of the postremedial site conditions. The purpose of this risk analysis was to determine whether the site-wide remedy could ensure the long-term protection of human health consistent with the adopted land use objective. The adopted land use objective was that of attaining a cleanup that provides for the protection of hypothetical on-property industrial and/or recreational users and an off-property farmer. This risk analysis examined the long-term performance of the on-property disposal facility and the potential risks to future human receptors due to residual concentrations of contaminants remaining at the site in soil and groundwater following the certified completion of remedial actions at all five operable units.

The results of the risk analysis indicate that the adopted site-wide remedy, including the use of the proposed final remediation levels listed in Table 2, would result in a 90.7 percent reduction in carcinogenic risk to the undeveloped-park user of the FEMP property (Figure 13). Of the ILCR/carcinogenic risk projected to remain following remedy implementation, 80 percent is due to the presence of naturally occurring background constituents. Similarly, the risk analysis projects a 96.5 percent reduction in noncarcinogenic health effects (i.e., HI) for the future undeveloped-park user following implementation of the site-wide remedy. Naturally occurring background constituents will account for approximately 69 percent of this residual noncarcinogenic risk to the future undeveloped-park user of the FEMP property.

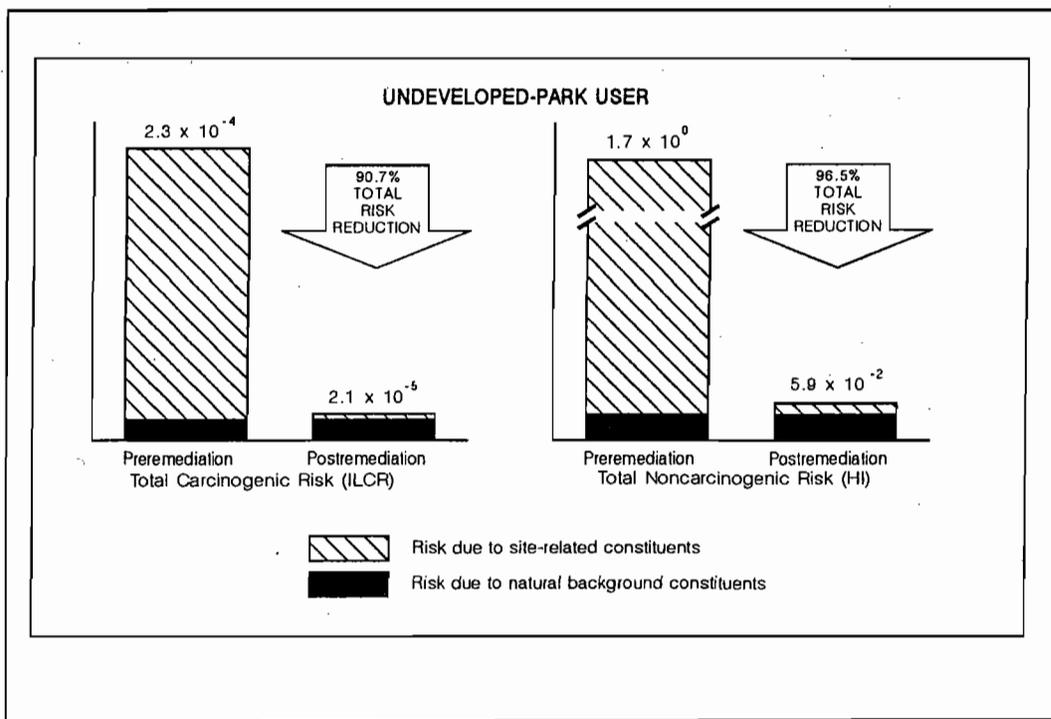


Figure 13: Projected Risk Reduction Between Preremedial and Postremedial Conditions

In completing the Operable Unit 5 FS and those for the other FEMP operable units, DOE has acknowledged that uncertainties exist which may impact the course of remedial action once field work is underway. Uncertainties can be managed by emphasizing conservatism for any assumptions made and by planning for additional data evaluation and assessment as the remedial actions are implemented. By acknowledging the existence of uncertainties, bounding assumptions on the conservative side, and planning for an iterative approach to implementation of the remedial actions, DOE and FEMP stakeholders can move forward with the decision-making process.

The overall conclusions of the evaluation completed in the Operable Unit 5 FS for the adopted site-wide remedy was that the Operable Unit 5 preferred remedy, in conjunction with the selected or leading alternatives for the other four operable units, would provide for the protection of human health and the environment over the long term (i.e., up to or beyond 1000 years). The evaluation further concluded that the adopted site-wide remedy would attain the adopted land use objective (i.e., restricted use of the FEMP for industrial and recreational purposes) and provide for the long-term protection of water quality in the Great Miami Aquifer.

Public Involvement Activities

The community is encouraged to read and provide comments on the Operable Unit 5 FS Report and this Proposed Plan. The FS describes the remedial action alternatives which were considered for the FEMP and describes the merits and shortcomings of each. This Proposed Plan puts forth a preferred remedial action alternative for Operable Unit 5 based upon the content and conclusions of the FS.

A final remedy selection will be made only after hearing and considering community comments and concerns. Based upon those comments, the preferred alternative may be modified, another alternative presented in this Proposed Plan selected, or a new alternative selected based on information gathered from the community before and during the comment period.

Once again, the public is encouraged to review and comment on the Operable Unit 5 FS and this Proposed Plan. These and other supporting documents are available from the Administrative Record, located at the Public Environmental Information Center and at EPA offices in Chicago, Illinois. Addresses for these Administrative Record locations are provided below.

Your comments may either be presented publicly at a community meeting or submitted by mail to:



The OHIO ENVIRONMENTAL PROTECTION AGENCY is participating in the RI/FS and remedial action processes of the FEMP. For additional information concerning the state's role in the cleanup process at the FEMP or regarding the specifics of this Proposed Plan contact:

Tom Schneider
Fernald Project Manager
Ohio Environmental
Protection Agency
401 E. Fifth Street
Dayton, Ohio 45402-2911
(513) 285-6466

Mr. Gary Stegner

U.S. Department of Energy
Fernald Area Office
P.O. Box 398705
Cincinnati, OH 45239-8705

513-648-3131

Mr. Jim Saric

U.S. EPA, 5HRE 8J
77 W. Jackson Blvd.
Chicago, IL 60604

312-886-0992

The date, time and location of the public meeting and dates for the comment period have been announced in the local media and are posted at the Administrative Record locations; addresses and hours are as follows:

Public Environmental Information Center

10845 Hamilton-Cleves Highway
Harrison, OH 45030

513-738-0164

Monday and Thursday, 9 a.m. to 7 p.m.
Tuesday, Wednesday and Friday,
9 a.m. to 4:30 p.m.
Saturday, 9 a.m. to 1 p.m.

U.S. EPA Region V

77 W. Jackson Blvd.
Chicago, IL 60604


312-886-0992

Monday-Friday, 8 a.m. to 5 p.m.



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST-CLASS MAIL PERMIT NO. 19409 CINCINNATI OH
POSTAGE WILL BE PAID BY THE ADDRESSEE



GARY STEGNER
PUBLIC INFORMATION
FERNALD AREA OFFICE
US DEPARTMENT OF ENERGY
PO BOX 538705
CINCINNATI OH 45253-9985



-----Fold Here-----

Tape

Tape

-----Fold Here-----

For More Information

Additional information or related cleanup documents are available to the public at the following location:

Public Environmental Information Center
JAMTEK Building
10845 Hamilton-Cleves Highway
Harrison, OH 45030
513-738-0164 or 0165