

7234

UNCONTROLLED IF PRINTED

LMS/FER/S03496-4.0  
Revision 4.0 Final

Fernald Preserve, Fernald, Ohio

**Comprehensive Legacy  
Management and  
Institutional Controls Plan**

**Volumes I and II**

**April 2010**



U.S. DEPARTMENT OF  
**ENERGY**

Legacy  
Management

***UNCONTROLLED IF PRINTED***

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**LMS/FER/S03496-4.0**

**Comprehensive  
Legacy Management and  
Institutional Controls Plan**

**Volumes I and II**

**Fernald Preserve  
Fernald, Ohio**

**April 2010**

**Revision 4  
Final**


**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**  
**Legacy Management and Institutional Controls Plan**  
**Document History**

Version No./Revision No.	Date	Description of Revision
4.0	04/26/2010	Please refer to the "Significant Changes Summary" on the following pages for details of the changes incorporated in this revision.
3.1	05/29/2009	Based on one comment received from the Ohio Environmental Protection Agency (OEPA) and the recent issuance of the renewed National Pollution Discharge Elimination System Permit (NPDES), it has become necessary to issue revisions to Sections 4.0 and 5.0 of Attachment D (Integrated Environmental Monitoring Plan) of the 2009 LMICP.  Section 4.0 was revised to incorporate the changes to the Fernald Preserve's NPDES Permit. A new NPDES Permit was issued by OEPA and became effective on April 1, 2009.  Section 5.0 was revised to reincorporate the requirements of National Emissions Standards for Hazardous Air Pollutants (NESHAP), 40 CFR 61 Subpart H, that had been removed from the 2009 LMICP.
3.0	01/19/2009	This document was previously issued under U.S. Department of Energy (DOE) Technical Assistance Contract DE-AC01-02GJ79491 as document number <b>DOE-LM/1526-2008</b> .  As the initial issue under DOE Legacy Management Support (LMS) contract DE-AM01-07LM00060, it has been renumbered as <b>LMS/FER/S03496-3.0</b> .  Please refer to the "Significant Changes Summary" on the following pages for details of the changes incorporated in this revision.

Approved:

  
 \_\_\_\_\_  
 Jane Powell  
 Fernald Preserve Manager  
 U.S. Department of Energy  
 Office of Legacy Management

4/26/10  
 Date

  
 \_\_\_\_\_  
 Frank Johnston  
 Fernald Preserve Site Manager  
 S.M. Stoller Corporation

4/26/2010  
 Date

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**2010 Comprehensive Legacy Management and Institutional Controls Plan, Revision 4  
Changes Summary**

<b>Section</b>	<b>Description of Modification</b>	<b>Driver/Technical Information</b>
<b>Volume I</b>		
<b>Section 1</b>	No significant changes.	NA
<b>Section 2</b>	Updated Section 2.4.2 to reflect the new status of the natural resource damage settlement.	2008 Consent Decree Resolving Ohio's Natural Resource Damage Claim against DOE
<b>Section 3</b>	Updated Section 3.2 to reflect the new status of the natural resource damage settlement.	2008 Consent Decree Resolving Ohio's Natural Resource Damage Claim against DOE
<b>Section 4</b>	No significant changes.	NA
<b>Section 5</b>	Removed redundant text from Section 5.0. Moved some text from Section 5.0 to Section 5.4.	NA
<b>Section 6</b>	No significant changes.	NA
<b>Appendix A</b>	No significant changes.	NA
<b>Volume II</b>		
<b>Section 1</b>	The status of the disposal of the Silo 1 and 2 waste will be updated prior to the final issuance of the LMICP in January 2010. Commencement of permanent disposal of the Silo 1 and 2 waste at the Waste Control Specialists facility in Andrews, Texas will occur in October 2009.	NA
<b>Section 2</b>	No significant changes.	NA
<b>Section 3</b>	Updated Table 3.2 to change OSDF walkdowns from April and October to "Spring and Fall."	This change reflects realistic timing in the field.
<b>Section 4</b>	Updated Section 4.2 to align the section with the updated procedure for handling suspected contaminated soil, material, or debris.	<i>Fernald Preserve Procedure for Suspect Material or Debris Discoveries (DOE 2009)</i>
<b>Section 5</b>	Updated Section 5.1 to clarify the availability of environmental data, site inspection reports, and OSDF inspection reports on the Web. Updated Section 5.2.3 to reflect the renewed ability for users to perform an online search of the CERCLA Administrative Record.	NA
<b>Appendix A</b>	No significant changes.	NA
<b>Appendix B</b>	No significant changes.	NA
<b>Appendix C</b>	No significant changes.	NA
<b>Appendix D</b>	Updated Trail Inspection Form to include Hickory Trail and Sycamore Trail.	Hickory Trail and Sycamore Trail were added to the trail system in fall 2009.

**UNCONTROLLED IF PRINTED**

<b>Section</b>	<b>Description of Modification</b>	<b>Driver/Technical Information</b>
<b>Attachment A – OMMP</b>		
<b>Section 1</b>	No significant changes.	NA
<b>Section 2</b>	No significant changes.	NA
<b>Section 3</b>	Removed Figure 3-8, which shows the NPDES, FFCA, and IEMP treated effluent and surface water sampling locations, and the reference to the figure from the text.	The reader is referred to the IEMP, Section 4, which contains an identical figure.
<b>Section 4</b>	No significant changes.	NA
<b>Section 5</b>	No significant changes.	NA
<b>Section 6</b>	No significant changes.	NA
<b>Section 7</b>	No significant changes.	NA
<b>Attachment B – PCCIP</b>		
<b>Section 1</b>	No significant changes.	NA
<b>Section 2</b>	No significant changes.	NA
<b>Section 3</b>	Updated Section 3.5 to clarify the photo-documentation process.	NA
<b>Section 4</b>	Updated Section 4.5 and removed Table 4-3 (Notice in Deed or Other Transfer Instrument).	The requirements for Fernald Preserve deed restrictions are identified in Appendix B of Volume II and in the second paragraph of Section 4.5.
<b>Section 5</b>	No significant changes.	NA
<b>Section 6</b>	Updated Section 6.2.3 to clarify the OSDF inspection process.	NA
<b>Section 7</b>	No significant changes.	NA
<b>Section 8</b>	Updated Tables 8-2 and 8-3 to clarify inspection frequency.	NA
<b>Section 9</b>	No significant changes.	NA
<b>Section 10</b>	No significant changes.	NA
<b>Section 11</b>	No significant changes.	NA

**UNCONTROLLED IF PRINTED**

<b>Section</b>	<b>Description of Modification</b>	<b>Driver/Technical Information</b>
<b>Attachment C – GWLMP</b>		
<b>Section 1</b>	Revisions made to Table 1-1 to reflect OEPA approved parameter lists and sampling schedules.	NA
<b>Section 2</b>	No significant changes.	NA
<b>Section 3</b>	Revisions made to Sections 3.2.1.3 and 3.2.2 to reflect OEPA approved parameter lists and sampling schedules.	NA
<b>Section 4</b>	Revisions made to Section 4.4.2.2 to reflect OEPA approved parameter lists and sampling schedules.	NA
<b>Section 5</b>	No significant changes.	NA
<b>Section 6</b>	Revisions made to Section 6.1 provide additional detail on the type of water quality evaluations that will be conducted.	NA
<b>Appendix A</b>	No significant changes.	NA
<b>Appendix B</b>	Revisions made to Section 2.1 and Tables 2-1, 2-2 to reflect OEPA approved parameter lists and sampling schedules.	NA
<b>Appendix C</b>	No significant changes.	NA
<b>Appendix D</b>	No significant changes.	NA
<b>Appendix E</b>	Revisions made to Section 4 to reflect OEPA approved parameter lists and sampling schedules.	NA
<b>Attachment D – IEMP</b>		
<b>Section 1</b>	No significant changes.	NA
<b>Section 2</b>	No significant changes.	NA
<b>Section 3</b>	Well 2098 was an important control point in the northeast corner of water level map. A new landowner denied DOE access to well 2098. Well 81 will now serve as the control point in the northeast.	NA

**UNCONTROLLED IF PRINTED**

Section	Description of Modification	Driver/Technical Information
<b>Attachment D – IEMP continued</b>		
Section 4	<p>Removed location STRM 4004 from the list of monitored surface water locations.</p> <p>Location G4 has been replaced by location G10. Location G10 is on the eastern side of the Great Miami River on a gravel bar downstream of the outfall line. Figure 4-4 has been revised removing location G4 and replacing it with location G10.</p>	<p>STRM 4004A, which was established as an alternate location for STRM 4004, has a more reliable source of surface water while STRM 4004 is frequently dry. STRM 4004 is no longer a NPDES regulated surface water location.</p> <p>Location G4 cannot be accessed safely.</p>
Section 5	<p>This section was completely rewritten and therefore does not contain any tracked changes. Beginning with 2010, the air particulate monitoring requirement at the Fernald Preserve has been removed from Section 5. The final NESHAP Report will be issued in June 2010 (i.e. 2009 NESHAP Report).</p>	<p>Based on previous OEPA comments, DOE revisited the air particulate monitoring issue with USEPA Region 5. USEPA Office of Air and Radiation determined that 3 years of air monitoring after closure was appropriate and therefore approved DOE's position that air monitoring would cease at the end of 2009.</p>
Section 6	<p>Sediment monitoring has been changed from an annual requirement to once every five years.</p>	<p>OEPA suggested and DOE agrees that sediment monitoring can be conducted once every five years.</p>
Appendix A	<p>Updated text in Sections 1.0, 2.4, 2.6, 4.2, and 4.4 to reflect the new status of the natural resource damage settlement.</p> <p>Updated Figure A-1 to show the Hickory and Sycamore Trails.</p> <p>Updated Section 4.1.2 to clarify Indiana brown bat monitoring requirements.</p>	<p>2008 Consent Decree Resolving Ohio's Natural Resource Damage Claim against DOE</p> <p>Hickory Trail and Sycamore Trail were added to the trail system in fall 2009.</p> <p>NA</p>

**UNCONTROLLED IF PRINTED**

<b>Attachment E – Community Involvement Plan</b>		
<b>Section 1</b>	No significant changes.	NA
<b>Section 2</b>	No significant changes.	NA
<b>Section 3</b>	No significant changes.	NA
<b>Section 4</b>	No significant changes.	NA
<b>Section 5</b>	No significant changes.	NA
<b>Appendix A</b>	No significant changes.	NA

***UNCONTROLLED IF PRINTED***

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Volume I**

**Legacy Management Plan**

**April 2010**

**U.S. Department of Energy**

**Revision 4  
Final**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Emergency Contact**

**Grand Junction 24-hour  
Monitored Security Telephone Number**

**877-695-5322**

***UNCONTROLLED IF PRINTED***

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Contents**

Acronyms and Abbreviations ..... iii

Executive Summary ..... v

1.0 Introduction..... 1-1

    1.1 Purpose and Organization of the LMICP..... 1-1

    1.2 Purpose of Legacy Management..... 1-3

    1.3 Approach to Legacy Management at the Fernald Preserve ..... 1-6

        1.3.1 Inspections According to IC Plan Requirements ..... 1-6

        1.3.2 Increase Monitoring as Needed ..... 1-6

        1.3.3 DOE Management of the Legacy Management Program ..... 1-6

2.0 Site Background..... 2-1

    2.1 Site Description..... 2-1

        2.1.1 Fernald Preserve Description ..... 2-1

        2.1.2 Fernald Preserve and Surrounding Area ..... 2-1

    2.2 Site History ..... 2-1

        2.2.1 Feed Materials Production Center ..... 2-1

        2.2.2 Change in Site Mission from Production to Remediation ..... 2-3

        2.2.3 Current Conditions ..... 2-3

    2.3 Remediation Process ..... 2-3

        2.3.1 Summary of Remediation Efforts ..... 2-3

        2.3.2 Completion of Site Remediation ..... 2-5

    2.4 Site Conditions at Closure ..... 2-5

        2.4.1 OSDF ..... 2-5

        2.4.2 Restored Areas ..... 2-6

        2.4.3 Groundwater ..... 2-9

        2.4.4 Uncertified Areas ..... 2-9

        2.4.5 Existing Infrastructure and Facilities ..... 2-11

3.0 Scope of Legacy Management at the Fernald Preserve ..... 3-1

    3.1 Legacy Management of the OSDF ..... 3-2

    3.2 Surveillance and Maintenance of Restored Areas ..... 3-3

4.0 Oversight of Legacy Management at the Fernald Preserve ..... 4-1

    4.1 Office of Legacy Management Responsibilities..... 4-1

    4.2 Role of the Site Contractor and Use of Subcontracts ..... 4-1

    4.3 Role of Regulators ..... 4-2

    4.4 CERCLA 5-Year Reviews ..... 4-2

    4.5 Reporting Requirements ..... 4-2

5.0 Records Management..... 5-1

    5.1 Types of Data Required for Legacy Management..... 5-1

    5.2 Legacy Management Records Custodian..... 5-1

    5.3 Records Storage Location ..... 5-1

    5.4 Public Access Requirements..... 5-1

6.0 Funding ..... 6-1

7.0 References..... 7-1

**UNCONTROLLED IF PRINTED**

**Figures**

Figure 2-1. Fernald and Vicinity ..... 2-2  
Figure 2-2. Fernald Land Use ..... 2-7  
Figure 2-3. Uncertified Areas and Subgrade Utility Corridors ..... 2-10

**Table**

Table 5-1. Types of Data Needed to Support Legacy Management Activities..... 5-3

## Acronyms and Abbreviations

AEC	U.S. Atomic Energy Commission
AR	Administrative Record
CAWWT	converted advanced wastewater treatment facility
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
DOE	U.S. Department of Energy
LM	U.S. Department of Energy Office of Legacy Management
EMS	Environmental Management System
EPA	U.S. Environmental Protection Agency
ft	feet/foot
FFCA	Federal Facilities Compliance Agreement
FMPC	Feed Materials Production Center
FRL	final remediation level
IC Plan	Institutional Controls Plan
LCS	leachate collection system
LDS	leak detection system
LMICP	<i>Comprehensive Legacy Management and Institutional Controls Plan</i>
LMS	Legacy Management Support
NRRP	<i>Natural Resources Restoration Plan</i>
OEPA	Ohio Environmental Protection Agency
OMMP	Operations and Maintenance Master Plan
OSDF	on-site disposal facility
PCCIP	Post-Closure Care and Inspection Plan
PDF	portable document file
ppb	parts per billion
RCRA	Resource Conservation and Recovery Act
RI/FS	remedial investigation/feasibility study
ROD	record of decision
SEP	Sitewide Excavation Plan
UF <sub>4</sub>	uranium tetrafluoride
UNH	uranyl nitrate hexahydrate
UO <sub>3</sub>	uranium trioxide
WAC	waste acceptance criteria

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## **Executive Summary**

This *Comprehensive Legacy Management and Institutional Controls Plan* (LMICP) was developed to document the planning process and the requirements for the long-term care, or legacy management, of the Fernald Preserve. The LMICP is a two-volume document with supporting documents included as attachments to Volume II. Volume I provides the planning details for the management of the Fernald Preserve that go beyond those identified as institutional controls in Volume II. Primarily, Volume II is a requirement of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA), providing institutional controls that will ensure that cleanup remedies implemented at the Fernald Preserve will protect human health and the environment. The format and content of Volume II follows U.S. Environmental Protection Agency (EPA) requirements for institutional controls. Volume II is enforceable under CERCLA authority.

Volume I is the Legacy Management Plan. This plan is not a required document under the CERCLA process, and it is not a legally enforceable document. It provides the U.S. Department of Energy (DOE) Office of Legacy Management (LM) with a plan for managing the Fernald Preserve and fulfilling DOE's commitment to maintain the Fernald Preserve following closure. The plan discusses how DOE, specifically LM, will approach the legacy management of the Fernald Preserve. It describes the surveillance and maintenance of the entire site, including the on-site disposal facility (OSDF). It explains how the public will continue to participate in the future of the Fernald Preserve. Also included in the Legacy Management Plan is a discussion of records and information management. The plan concludes with a discussion on funding for legacy management of the site.

Volume II is the Institutional Controls Plan (IC Plan). The IC Plan is required under the CERCLA remediation process when a physical remedy does not allow for full, unrestricted use or when hazardous materials are left on site. The plan is a legally enforceable CERCLA document and is part of the remedy for the site (an EPA requirement). The plan outlines the institutional controls that are established for and enforced across the entire site, including the OSDF, to ensure that human health and the environment continue to be protected following the completion of the remedy. The IC Plan has five attachments that lend support to and provide details regarding the established institutional controls. The attachments provide further information on the continuing groundwater remediation (pump-and-treat) system (Attachment A); the OSDF cap and cover system (Attachment B); the leak detection and leachate management systems for the OSDF (Attachment C); the environmental monitoring that will continue following closure (Attachment D), and the Community Involvement Plan (Attachment E), a CERCLA-required document developed by DOE. The Community Involvement Plan explains in detail how DOE will ensure that the public has appropriate opportunities for involvement in post-closure activities.

The LMICP was first approved in August 2006. It is anticipated that the LMICP revisions will be finalized by January each year to correspond with calendar-year monitoring and reporting. EPA and Ohio Environmental Protection Agency comments will be addressed between October and January.

**UNCONTROLLED IF PRINTED**

The future LMICP schedule will be as follows:

- Each June, the annual Site Environmental Report will be submitted. It will make recommendations based on the previous year's monitoring information.
- Each September, an annual review of the LMICP will be submitted. It will identify updates as necessary.
- Each January, the LMICP will be finalized to correspond with the monitoring and reporting schedule.

Pertinent information associated with the CERCLA 5-year reviews will be included in the LMICP revisions as needed.

## **1.0 Introduction**

Legacy management is required at the Fernald Preserve to ensure that the remedial actions implemented at the site continue to be effective and protective of human health and the environment following site closure. This *Comprehensive Legacy Management and Institutional Controls Plan* (LMICP) outlines the U.S. Department of Energy's (DOE's) approach to, and documents the requirements for, the long-term care of the Fernald Preserve. The LMICP serves the same function as the Long-Term Surveillance and Maintenance Plan used at other DOE sites. It is DOE's intent to continue to review and refine the LMICP, with the involvement of the local community and the regulators, to ensure that legacy management activities meet stakeholder and regulatory requirements. All revisions will be subject to regulatory agency review and will be made available to the community. Revisions can always be made as needed if the results of the site inspections, the on-site disposal facility (OSDF) inspections, or monitoring require them. The term "legacy management" is used throughout this LMICP and is intended to encompass all activities defined as such in DOE policy and guidance. Legacy management activities were formerly referred to as "stewardship" activities, a term that this LMICP uses interchangeably.

The DOE Office of Legacy Management (LM) is responsible for ensuring that DOE's post-closure responsibilities are met and for providing DOE programs for long-term surveillance and maintenance, records management, workforce restructuring and benefits continuity, property management, land-use planning, and community assistance. Additional information regarding LM can be found at <http://www.lm.doe.gov>.

DOE policy and guidance clearly identify protectiveness of the remedies carried out at the Fernald Preserve (e.g., groundwater, OSDF, institutional controls) as the top priority for legacy management. Specifically, the OSDF requires regular monitoring and maintenance to ensure its integrity and performance. The restored areas of the site also require monitoring to ensure that applicable laws and regulations are followed. DOE policy and funding priorities regarding legacy management emphasize supporting the remedies as described in the Fernald Preserve's records of decision (RODs).

### **1.1 Purpose and Organization of the LMICP**

The LMICP provides an overview of the defined end-state maintenance and monitoring requirements as well as the contingencies that are in place to address any changes made to the end state.

The LMICP has been developed as a two-volume set. Volume I is the Legacy Management Plan, which outlines DOE's approach to legacy management, including such issues as community involvement, records management, and funding. Volume II, the Institutional Controls Plan (IC Plan), outlines the specific surveillance and maintenance requirements for the Fernald Preserve.

Five support plans are included in the LMICP as attachments:

- Attachment A—Operations and Maintenance Master Plan for Aquifer Restoration and Wastewater Treatment (OMMP)
- Attachment B—Post-Closure Care and Inspection Plan (PCCIP)

## **UNCONTROLLED IF PRINTED**

- Attachment C—Groundwater/Leak Detection and Leachate Monitoring Plan
- Attachment D—Integrated Environmental Monitoring Plan
- Attachment E—Community Involvement Plan

These support plans outline the operational requirements associated with the ongoing groundwater remedy (Attachment A); the surveillance and maintenance requirements for the OSDF (Attachment B); surveillance and maintenance for the leachate and groundwater associated with the OSDF (Attachment C); the environmental monitoring requirements necessary to ensure the completion and effectiveness of the remedies (Attachment D); and the methods DOE will use to maintain communication with the public and involve the public in legacy management activities at the Fernald Preserve (Attachment E).

DOE is required to conduct legacy management activities at facilities that have completed site remediation (refer to Section 1.2). The Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) (Title 42 *United States Code* Section 9601 et seq.) requires that institutional controls be part of selected remedies where land-use restrictions are placed on the property. The Fernald Preserve remedies include use restriction, waste disposal (the OSDF), and continuing groundwater extraction and treatment. DOE has followed U.S. Environmental Protection Agency (EPA) guidance on institutional controls (refer to Section 1.2). Existing laws, regulations, policies, and directives provide broad requirements for DOE to conduct legacy management activities. These activities include monitoring, reporting, record keeping, and long-term surveillance and maintenance for various facilities and media, including engineered waste disposal units, surface water, and groundwater.

The PCCIP (Attachment B) includes detailed information about the OSDF, and the OMMP (Attachment A) includes detailed information about the monitoring and maintenance of the converted advanced wastewater treatment facility (CAWWT), groundwater restoration systems, and the active outfall line. Legacy management activities covered in the PCCIP and OMMP also include ensuring that restrictions on access to and use of the Fernald Preserve are enforced (for example, through records management and education). Surveillance and maintenance in restored areas will focus on protecting natural and cultural resources in accordance with applicable laws and regulations. Legacy management activities related to public involvement include maintaining communication with the public and providing the public with information about the site's former production activities, its historical remediation, continuing groundwater remediation, land-use restrictions, and the future of the Fernald Preserve. Displays and programs at the Visitors Center and outreach programs at local schools and organizations will help LM meet this objective.

This Legacy Management Plan describes planned legacy management activities at the Fernald Preserve as well as issues related to stewardship and is organized into the following sections:

**Section 1.0 (Introduction)**—Provides an introduction to this plan and discusses the purpose and necessity of legacy management at DOE facilities.

**Section 2.0 (Site Background)**—Provides the history of the Fernald Preserve, beginning with the site's construction in the 1950s, and presents a discussion of production activities, remediation, and site conditions at the time of closure.

## UNCONTROLLED IF PRINTED

**Section 3.0 (Scope of Legacy Management at the Fernald Preserve)**—Discusses the scope of legacy management at the Fernald Preserve, including the management of site property, legacy management of the OSDF, and surveillance and maintenance of restored areas.

**Section 4.0 (Oversight of Legacy Management at the Fernald Preserve)**—Describes the breakdown of responsibilities for legacy management activities at the Fernald Preserve, including LM, contractors, regulators, the CERCLA 5-year review, and reporting requirements.

**Section 5.0 (Records Management)**—Describes the importance of records management and preservation and how they apply to legacy management. This section also describes various avenues for records management during legacy management.

**Section 6.0 (Funding)**—Discusses the funding needed to implement and sustain a legacy management program at the Fernald Preserve.

The LMICP will be finalized by January each year to correspond with calendar-year monitoring and reporting. Comments from EPA, Ohio EPA (OEPA), and the community will be addressed between October and January.

The future LMICP schedule will be as follows:

- Each June, the annual Site Environmental Report will be submitted and will include recommendations based on the previous year's monitoring information.
- Each September, an annual review of the LMICP will take place, and updates will be identified as necessary.
- Each January, the revised LMICP will be submitted to correspond with the monitoring and reporting schedule.

Pertinent information associated with the CERCLA 5-year reviews will be included in the LMICP revisions as needed.

### 1.2 Purpose of Legacy Management

In recent years, DOE has increased its focus on the need for legacy management following completion of remediation. DOE orders and policies that provide the framework for legacy management include the documents listed below. The term “stewardship” is used in the following descriptions. When these documents were prepared, the term “stewardship” was used instead of “legacy management.” Both terms are used in this Legacy Management Plan and refer to the same process.

- DOE Order 144.1, *Department of Energy American Indian Tribal Government Interactions and Policy*, requires DOE sites to consult with potentially affected tribes concerning the effects of proposed DOE actions (including real property transfers), and to avoid unnecessary interference with traditional religious practices.
- DOE Order 200.1A, *Information Management Program*, provides a framework for managing information, information resources, and information technology investment.
- DOE Order 430.1B, *Real Property Asset Management*, identifies the requirements and establishes reporting mechanisms and responsibilities for real property asset management.

## UNCONTROLLED IF PRINTED

- DOE Order 435.1, *Radioactive Waste Management*, requires DOE radioactive waste management activities to be systematically planned, documented, executed, and evaluated in a manner that protects workers and the public as well as the environment.
- DOE Order 450.1A, *Environmental Protection Program*, requires the implementation of sound stewardship practices that are protective of the air, the land, water, and other natural and cultural resources affected by DOE operations.
- DOE Order 5400.5, *Radiation Protection of the Public and the Environment*, establishes acceptable levels for the release of property on which any radioactive substances or residual radioactive material was present.
- DOE Policy 454.1, *Use of Institutional Controls*, establishes a consistent framework for the use of institutional controls throughout the DOE complex.
- The Secretary of Energy's Land and Facility Use Policy (DOE 1994) and DOE Policy 430.1, *Land and Facility Use Planning Policy*, state that DOE sites must consider how best to use DOE land and facilities to support critical missions and to stimulate the economy while preserving natural resources, diverse ecosystems, and cultural resources.
- Executive Order 13423, *Strengthening Federal Environmental, Energy, and Transportation Management*, establishes goals in the areas of energy efficiency, acquisition, renewable energy, toxics reduction, recycling, sustainable buildings, electronics stewardship, fleets, and water conservation.

Below are other documents and reports that address legacy management issues across the DOE complex and help to better define the activities that may be required for legacy management purposes.

- *From Cleanup to Stewardship* (DOE 1999a) addresses the nature of long-term stewardship at DOE sites, anticipated long-term stewardship at DOE sites, and planning for long-term stewardship.
- *The Long-Term Control of Property: Overview of Requirements in Orders DOE 5400.1 and DOE 5400.5* (DOE 1999b) summarizes DOE requirements for radiation protection of the public and environment, with the intent of assisting DOE elements in planning and implementing programs for the long-term control (or stewardship) of property.
- *Institutional Controls in RCRA and CERCLA Response Actions at Department of Energy Facilities* (DOE 2000a) provides DOE environmental restoration project managers with the information on institutional controls that they need to make environmental restoration remedy decisions under the Resource Conservation and Recovery Act (RCRA) and CERCLA.
- *Memorandum: Long-Term Stewardship Guiding Principles* (DOE 2000b) identifies broad concepts pertaining to stewardship and elements that Ohio stakeholders identified as critical to the success of stewardship planning.
- *A Report to Congress on Long-Term Stewardship* (DOE 2001a), required by the fiscal year 2000 National Defense Authorization Act, represents the most comprehensive compilation of DOE's expected long-term stewardship obligations to date, and it provides summary information for site-specific, long-term stewardship scopes, costs, and schedules. The report provides a snapshot of DOE's current understanding of stewardship activities and highlights areas where significant uncertainties still remain.

## UNCONTROLLED IF PRINTED

- *Long-Term Stewardship Study* (DOE 2001c) describes and analyzes several significant national or crosscutting issues associated with long-term stewardship and, where possible, options for addressing these issues. The principal purposes are to promote the exchange of information and to provide information on the decision-making processes at the national level and at individual sites.
- *Institutional Controls: A Site Manager's Guide to Identifying, Evaluating and Selecting Institutional Controls at Superfund and RCRA Corrective Action Cleanups* (EPA 2000) provides an overview of the types of institutional controls that are commonly available, including their relative strengths and weaknesses. It also provides a discussion of the key factors to consider when evaluating and selecting institutional controls in CERCLA and RCRA corrective-action cleanups.
- *Managing Data for Long-Term Stewardship* (ICF 1998) represents a preliminary assessment of how successfully information about the hazards that remain at DOE sites will be preserved and made accessible for the duration of long-term stewardship.

DOE defines stewardship as “all activities required to protect human health and the environment from hazards remaining after remediation is completed” (DOE 1999a). Three categories, or levels, of stewardship are recognized: “active,” “passive,” and “no stewardship required.” Active stewardship is defined as “the direct performance of continuous or periodic custodial activities such as controlling access to the site; preventing releases from a site; performing maintenance operations; or monitoring performance parameters.” Passive stewardship is defined as “the long-term responsibility to convey information warning about the hazards at a site or limiting access to, or use of, a site through physical or legal mechanisms.” No stewardship is required “where cleanup has been completed to levels that will allow for unrestricted or residential future use” (DOE 1999a). The Fernald Preserve will have a combination of active and passive measures during the legacy management of the site. This plan describes both active and passive measures, ranging from regular monitoring and maintenance to land use restrictions and postings.

The implementation of the LM Environmental Management System (EMS) ensures that sound stewardship practices protective of the air, land, water, and other natural and cultural resources potentially affected by operations are employed throughout the project. EMS is a systematic process for reducing the environmental impacts that result from LM and contractor work activities, products, and services and for directing work to occur in a manner that protects workers, the public, and the environment. The process adheres to Plan-Do-Check-Act principles, mandates environmental compliance, and integrates green initiatives into all phases of work, including scoping, planning, construction, subcontracts, and operations. Proposed site maintenance activities will be assessed for opportunities to improve environmental performance and sustainable environmental practices. Some areas for consideration include reusing and recycling products or wastes, using environmentally preferable products (i.e., products with recycled content, such as office furniture, concrete, asphalt; products with reduced toxicity; and energy-efficient products), using alternative fuels, using renewable energy, and making environmental habitat improvements.

The fundamental components of the long-term care of the Fernald Preserve include input from the regulators and the public, and public access to site information. Public involvement and access to information during legacy management are emphasized in all DOE policy and guidance, and this Legacy Management Plan is intended to clearly outline DOE's commitment to those aspects of legacy management.

### **1.3 Approach to Legacy Management at the Fernald Preserve**

At the Fernald Preserve, completing remediation to levels acceptable for unrestricted use was not feasible. As a result, legacy management is necessary to ensure that all remedial efforts continue to be effective and protective of human health and the environment. The OSDF was constructed to contain waste materials that will remain on the Fernald Preserve. This facility must be monitored and maintained to ensure its integrity and the public's safety.

#### **1.3.1 Inspections According to IC Plan Requirements**

Site inspections include inspections of the OSDF cap, the leachate collection system (LCS) and the leak detection system (LDS), the CAWWT, extraction wells and associated piping, the active outfall line, and restored areas of the site. Inspections can be scheduled or unscheduled as needed. These inspections are further defined in the IC Plan.

#### **1.3.2 Increase Monitoring as Needed**

LM has the option of increasing monitoring at any time, as needed. However, any proposed decrease in the frequency of monitoring activities included in the IC Plan will require EPA approval.

#### **1.3.3 DOE Management of the Legacy Management Program**

The LM mission includes (1) providing sustained human and environmental protection through the mitigation of residual risks and (2) protecting natural and cultural resources at DOE facilities. LM provides overall departmental policy, direction, and program guidance on matters affecting legacy management.

## 2.0 Site Background

### 2.1 Site Description

#### 2.1.1 Fernald Preserve Description

The Fernald Preserve is on a 1,050-acre tract of land, approximately 18 miles northwest of Cincinnati, Ohio, and near the unincorporated communities of Ross, Fernald, Shandon, New Haven, and New Baltimore (Figure 2-1). The former production area occupies approximately 136 acres in the center of the site. The former waste pit area and the former silos area were located adjacent to the western edge of the production area. Paddys Run, an intermittent stream, flows from north to south along the Fernald Preserve's western boundary and empties into the Great Miami River approximately 1.5 miles south of the site. The Fernald Preserve lies on a terrace that slopes gently between vegetated bedrock outcrops to the north, southeast, and southwest. Soil beneath the site is glacial overburden, consisting primarily of clay and silt with minor amounts of sand and gravel, that overlies the Great Miami Aquifer. Paddys Run and the Storm Sewer Outfall Ditch, which empties into Paddys Run, have eroded the glacial overburden, exposing the sand and gravel that make up the Great Miami Aquifer.

#### 2.1.2 Fernald Preserve and Surrounding Area


In the vicinity of the Fernald Preserve are the communities of Shandon (northwest), Ross (northeast), New Baltimore (southeast), Fernald (south), and New Haven (southwest) (Figure 2-1). Land use in the area consists primarily of residential use, farming, and gravel excavation operations. Some land in the vicinity of the Fernald Preserve is dedicated to housing development, light industry, and parkland. The Great Miami River is located to the east, and, like Paddys Run and the Storm Sewer Outfall Ditch, it has eroded significant portions of the glacial overburden, exposing the sand and gravel of the Great Miami Aquifer.

### 2.2 Site History

#### 2.2.1 Feed Materials Production Center

The Feed Materials Production Center (FMPC) was the original name given to what is now the Fernald Preserve. The U.S. Atomic Energy Commission (AEC) constructed the FMPC in the early 1950s for the purpose of producing high-purity uranium metal from ores and process residues for use at other government facilities involved in the production of nuclear weapons for the nation's defense.

A variety of materials were used throughout the production process, including ore concentrates and recycle materials that were dissolved in nitric acid to produce a uranyl nitrate hexahydrate (UNH) feed solution. The UNH was then concentrated and thermally denitrated to uranium trioxide (UO<sub>3</sub>), or orange oxide. The orange oxide was either shipped to the gaseous diffusion plant in Paducah, Kentucky, or was converted to uranium tetrafluoride (UF<sub>4</sub>), also known as green salt. The green salt was blended with magnesium-metal granules and placed in a closed reduction pot to produce a mass of uranium metal called a derby. Some derbies were shipped to other facilities, but the remainder were melted and poured into preheated graphite molds to form ingots.

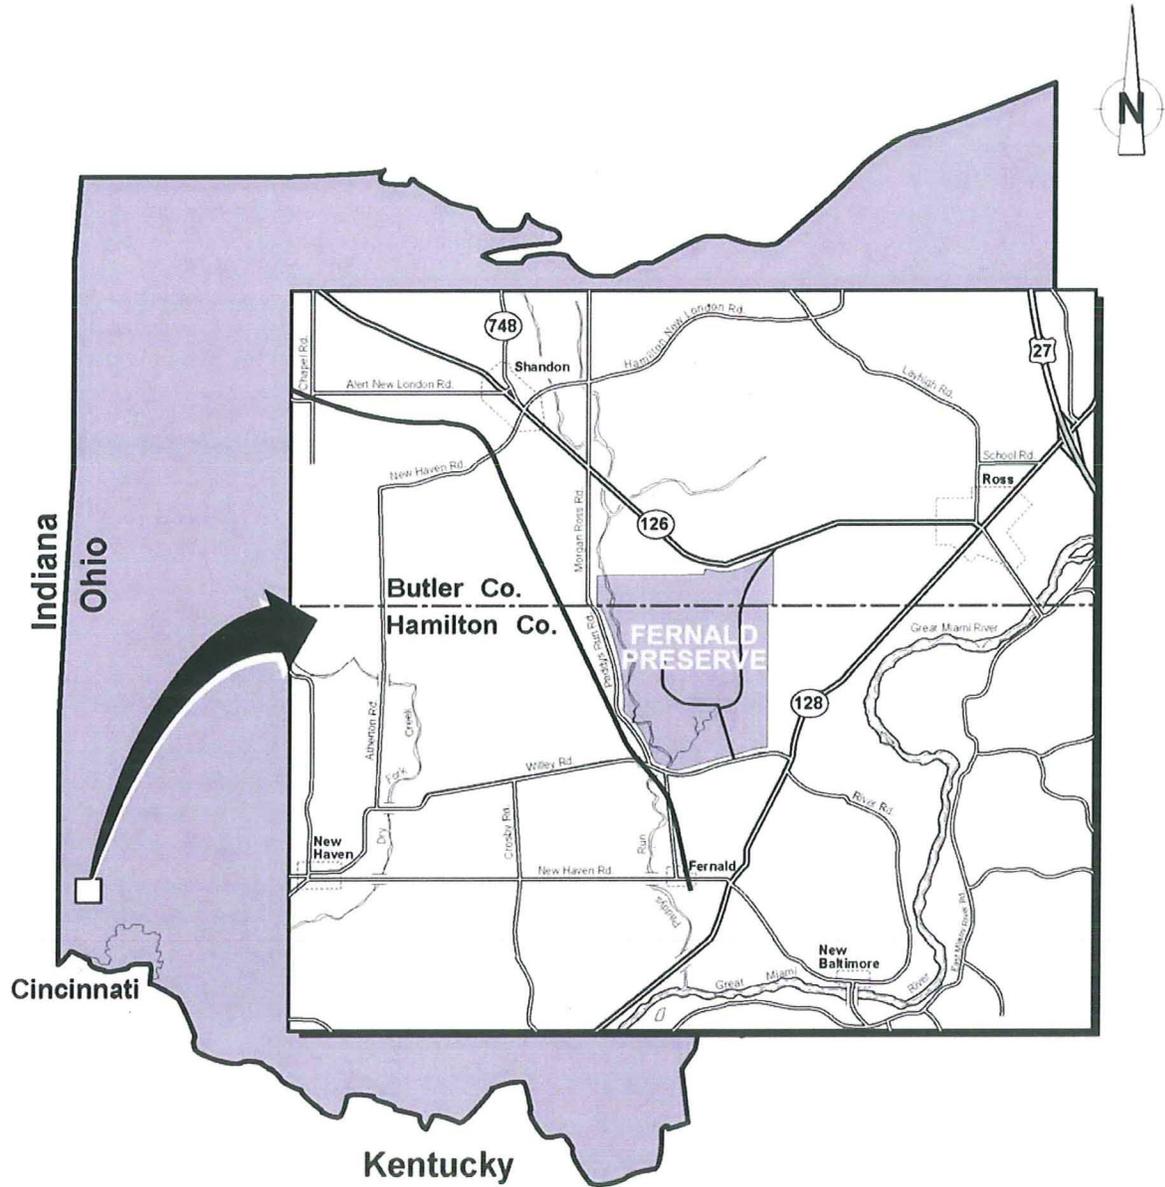

The Fernald site covers about 1,050 acres (425 hectares).

Figure 2-1. Fernald and Vicinity

## UNCONTROLLED IF PRINTED

Some ingots were rolled or extruded to form billets. Small amounts of thorium were also produced at the site from 1954 to 1975. The site then served as a thorium repository for DOE. Two reports that explain in greater detail the role of the Fernald Preserve within the DOE complex and the processes that took place at the Fernald Preserve are *Historical Documentation of the Fernald Site and Its Role within the U.S. Department of Energy Weapons Complex* (DOE 1998b), and *Historical Documentation of Facilities and Structures at the Fernald Site* (DOE 1998a).

High-purity uranium metal was produced at the site from 1952 through 1989. During that time, more than 500 million pounds of uranium metal products were shipped from Fernald to other sites. During these production operations, uranium was released into the environment, resulting in the contamination of soil, surface water, sediment, and groundwater on and around the site.

### 2.2.2 Change in Site Mission from Production to Remediation

In July 1986, DOE and EPA signed a Federal Facilities Compliance Agreement (FFCA), addressing impacts to the environment that were associated with the site. DOE agreed to conduct the FFCA investigation as a remedial investigation/feasibility study (RI/FS) in accordance with CERCLA guidelines. In 1989, production ceased at the FMPC due to a decrease in the demand for the feed materials and an increase in environmental restoration efforts. The site was subsequently included on the EPA National Priorities List. In 1991, the site was renamed the Fernald Environmental Management Project, and it was officially closed as a production facility. DOE's management of the site switched from the Defense Programs division to the Environmental Restoration and Waste Management division. The National Lead Company of Ohio operated the site during most of the production years under contracts with AEC and DOE. The Westinghouse Environmental Management Company became the site's prime contractor in 1986. In 1992, after the conversion of the site's mission to environmental cleanup, DOE awarded an Environmental Restoration Management Contract to the Fernald Environmental Restoration Management Corporation, which later became known as Fluor Fernald Inc. DOE awarded a new contract to Fluor Fernald Inc. in November 2000 to complete the facility's remediation. In 2003, DOE changed the site name to the Fernald Closure Project. The sitewide remediation effort was conducted pursuant to CERCLA. Waste management was conducted according to RCRA.

### 2.2.3 Current Conditions

The Declaration of Physical Completion occurred on October 29, 2006. All contaminated soils have been excavated and certified to meet final remediation levels (with the exception of certain areas associated with utility corridors and groundwater infrastructure discussed in Section 2.4.4); the OSDF is complete; all required groundwater infrastructure is installed, operational, and secured; and restoration activities have been completed within all excavated areas, including achieving final grade and completing the necessary plantings.

## 2.3 Remediation Process

### 2.3.1 Summary of Remediation Efforts

CERCLA is the primary driver for the environmental remediation of the Fernald Preserve. The site was divided into five operable units (OUs) as follows:

- OU1—Waste Pits Area
- OU2—Other Waste Units

## UNCONTROLLED IF PRINTED

- OU3—Production Area
- OU4—Silos 1 through 4
- OU5—Environmental Media

An RI/FS was conducted for each of the five OUs listed above. Based on the results of the RI/FS, RODs outlining the selected remedy for each OU were issued. A summary of the remedies follows.

The remedy for OU1 included removing all material from the waste pits, stabilizing the material by drying it, and shipping it off site for disposal. This process was completed in summer 2005.

The remedy for OU2 included removing material from the various units, disposing of material that met the on-site waste acceptance criteria (WAC) in the OSDF, and shipping all other material off site for disposal. DOE and regulators, in consultation with the local community, developed the WAC to strictly control the type of waste disposed of on site.

The OU3 remedy included decontaminating and decommissioning all contaminated structures and buildings, recycling waste materials if possible, disposing of material that met the on-site WAC in the OSDF, and shipping all other material off site for disposal.

The OU4 remedy included removing and treating all material from the silos, dismantling the silos, and shipping the waste materials and silo debris off site for disposal.

OU5 includes all environmental media, such as soil, sediment, surface water, groundwater, and vegetation. *The Site-wide Excavation Plan (SEP)* (DOE 1998c) describes the remediation of soils. First, material exceeding the WAC for the OSDF was disposed of by one of the following methods: (1) transporting material to an off-site disposal facility for treatment and disposal, (2) treating material on site and transporting it to an off-site disposal facility, or (3) treating material on site and disposing of it in the OSDF. Details and exceptions for the methods listed above are outlined in the SEP.

Soils and sediments with contaminants in concentrations that exceeded final remediation levels (FRLs), which are defined in the SEP but were below the OSDF WAC, were excavated and placed in the OSDF. Soil certification processes were performed to ensure that excavation has removed all impacted material, as outlined in the SEP. Several subgrade utility corridors that are being used to support the continuing groundwater remediation were not certified at closure, but they will be certified following the completion of remediation and discontinuation of their use (see Section 2.4.4).

The OU5 ROD (DOE 1996) describes the approved remediation method of pump-and-treat for groundwater. The OU5 ROD also committed to continual evaluation of remediation technologies to allow for the improvement of the remedy with new technologies. As a result, an enhanced groundwater remedy, which could reduce groundwater remediation by 10 years, was suggested and subsequently approved. The enhanced remedy includes additional extraction wells.

The primary constituent of concern for groundwater is uranium. Other constituents have been identified and will be removed during remediation of the uranium. The OU5 ROD provides a complete list of all of the constituents identified in groundwater. The FRL for uranium in

## UNCONTROLLED IF PRINTED

groundwater is 30 parts per billion (ppb). In the original ROD, the FRL for uranium in groundwater was 20 ppb. After EPA changed the drinking water standard, and after EPA and OEPA approved of the *Explanation of Significant Differences for Operable Unit 5* (DOE 2001b), the FRL was raised to 30 ppb. DOE and regulators based the target cleanup levels for groundwater on the use of the aquifer as a potable water supply and incorporated Safe Drinking Water Act standards for all constituents for which these standards were available.

Ecological restoration followed remediation and was the final step in completing the site's cleanup. The goal for ecological restoration of the Fernald Preserve was to enhance, restore, and construct (as feasible, given post-excavation landforms and soils) the early stages of vegetation communities native to presettlement southwestern Ohio.

Figure 2–2 illustrates the ecological restoration of the Fernald Preserve. The restoration involved four major components:

- Expanding and enhancing the riparian corridor along Paddys Run.
- Expanding and enhancing the wooded areas in the northern portion of the Fernald Preserve.
- Restoring a contiguous prairie in the central and eastern portions of the Fernald Preserve (including the OSDF).
- Creating open water areas and wetlands throughout the site as topography and hydrology allow.

### 2.3.2 Completion of Site Remediation

In January 2003, the site's name was changed to the Fernald Closure Project. DOE's closure contract with Fluor Fernald Inc. outlined the scope of remediation activities required for closure. The process of legacy management or long-term stewardship began immediately following DOE's Determination of Reasonableness, or acceptance, of Fluor Fernald Inc.'s Declaration of Physical Completion (the point commonly referred to as "closure"). The Declaration of Physical Completion occurred on the day that remediation of the site (with the exception of groundwater) as outlined in Fluor Fernald Inc.'s Comprehensive Exit Transition Plan was completed. LM assumed legacy management responsibilities for the site on that date.

## 2.4 Site Conditions at Closure

Sections 2.4.1 through 2.4.5 provide an overview of conditions of the OSDF, restored areas, groundwater remediation, uncertified areas, and existing infrastructure and facilities.

### 2.4.1 OSDF

A pre-design investigation determined that the most suitable location for the OSDF was on the eastern side of the Fernald Preserve (Figure 2–2). Details of the investigation are in the *Pre-design Investigation and Site Selection Report for the On-site Disposal Facility* (DOE 1995b). This location was considered the best because of the thickness of the gray clay layer that overlies the Great Miami Aquifer.

Construction of the OSDF began with Cell 1 in December 1997, and ended with the completion of the permanent cap for Cell 8 in late 2006. The OSDF consists of eight individual cells covered by a

continuous permanent cap. The final dimensions are approximately 950 feet (ft) east to west and 3,600 ft north to south, with a maximum height of 65 ft. The footprint of the actual disposal facility is approximately 75 acres. A buffer area and perimeter fence surrounds the disposal facility. The OSDF, including the buffer, covers approximately 120 acres. Institutional controls are described in greater detail in Volume II of this plan (the IC Plan), and additional details are included in the PCCIP (Attachment B), OU2 ROD (DOE 1995a), and OU5 ROD (DOE 1996). Approximately 2.96 million cubic yards of impacted materials were placed in the facility. The PCCIP (Attachment B) provides a summary of the materials permitted to be placed in the OSDF. The design approach for the OSDF is described in both the OU2 ROD (DOE 1995a) and the *Final Design Calculation Package; On-site Disposal Facility* (GeoSyntec 1997). The design includes a liner system, impacted-materials placement, a final cover system, a leachate management system, a surface water management system, and other ancillary features.

#### **2.4.2 Restored Areas**

Approximately 900 acres of the Fernald Preserve were ecologically restored. Restored areas are those parts of the site that have been graded following remedial excavation, amended, planted, or enhanced to create the early stages of ecosystems comparable to native pre-settlement southwestern Ohio. The specific habitats restored include upland forest, riparian forest, tallgrass prairie and savanna, and wetlands and open water (Figure 2-2). In addition, previously existing habitats such as the pine plantations were enhanced.

The following are brief summaries of the habitat restorations. Details of the actual projects and further information on the restored areas are described in the *Natural Resources Restoration Plan* (NRRP), which is Appendix B of the *Consent Decree Resolving Ohio's Natural Resource Damage Claim against DOE* (State of Ohio 2008).

Upland Forest: Upland forest areas existed in a northern portion, in a southern portion, and on the western perimeter of the site. Restoration activities expanded these forested areas. The *Site-wide Characterization Report* (DOE 1993) describes the Fernald Preserve as existing in a transition zone between the Oak-Hickory and Beech-Maple sections of the Eastern Deciduous Forest province. That is, a mosaic of both Oak-Hickory and Beech-Maple forest types can be found in southwestern Ohio. Forest communities at the Fernald Preserve would gradually move toward one of these forest types, depending on site-specific factors such as topography and hydrology. Therefore, the restoration of upland forests at the Fernald Preserve focused on the establishment of this Beech-Maple/Oak-Hickory transition zone. The trees used are native to southwestern Ohio and are listed in the NRRP, Table 3-1.

# FERNALD LEGACY MANAGEMENT

## LAND USE

- 395 acres of Woodlots
- 332 acres of Prairie
- 120 acres of OSDF
- 81 acres of Wetlands
- 60 acres of Open Water
- 33 acres of Savanna
- 29 acres of Infrastructure



Figure 2-2



Graphic # 8131.26-2 7/09

Figure 2-2. Fernald Land Use

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **UNCONTROLLED IF PRINTED**

Riparian Forest: Riparian corridors existed along Paddys Run and the Storm Sewer Outfall Ditch. Restoration activities were conducted to expand these corridors through revegetation. The selected species of trees were those that can withstand periodic inundation, and they are listed in the NRRP. The Paddys Run floodplain was expanded as part of the long-term management plan for Paddys Run.

Tallgrass Prairie and Savanna: The former waste pit, former production, OSDF, and borrow (east field) areas were restored as a contiguous prairie. Some prairies and savannas were established along the western perimeter of the site, but the concentration was primarily in formerly disturbed areas. Prairie restoration involved amending soil, if necessary, and seeding grasses and forbs (wildflowers). All seeded grasses and forbs were native to the area. Savannas were established by planting a sparse mix of trees and shrubs, and seeding the area with native grasses.

While not considered a part of the restored prairies on site, the OSDF, located adjacent to both the former production area and the borrow area, was seeded with native prairie grasses to provide vegetative cover. The native grasses are being used because of their ecological benefits, drought tolerance, and ability to provide soil stability.

Wetlands and Open Water: Wetlands and open water areas were established throughout the site where topography permitted. The former production area has open water areas as a result of deep excavations, and wetlands are established throughout the site. DOE is responsible for providing 17.8 acres of mitigated wetlands under Section 404 of the Clean Water Act. In addition to mitigating wetlands, upland and riparian forest revegetation in various areas was designed to restore wet woods. Details and drivers for wetland mitigation are described in the NRRP. As a condition of the natural resource damage settlement with the State of Ohio, an enhanced wetland mitigation monitoring program was undertaken in 2009 (State of Ohio 2008).

### **2.4.3 Groundwater**

Groundwater remediation and monitoring will continue until the FRL of 30 ppb for uranium has been achieved. Groundwater monitoring will be required following the completion of remediation to ensure continued protectiveness of the remedy and to support the CERCLA 5-year reviews. The OMMP is included as Attachment A to the LMICP and describes the groundwater extraction system (e.g., well fields, treatment facility) used to complete the remedy. Additional information is included in Section 3.1.3 of the IC Plan. Long-term monitoring of groundwater will be required around the OSDF. The exact approach to groundwater monitoring has been continually refined, with input from the local community and regulators.

### **2.4.4 Uncertified Areas**

Soils have yet to be certified at two facilities on site: the CAWWT and the South Field Valve House (Figure 2-3). There are also subgrade utility corridors that were not certified at closure (Figure 2-3). These facilities and utilities primarily support the ongoing groundwater remedy and are located below certified areas.

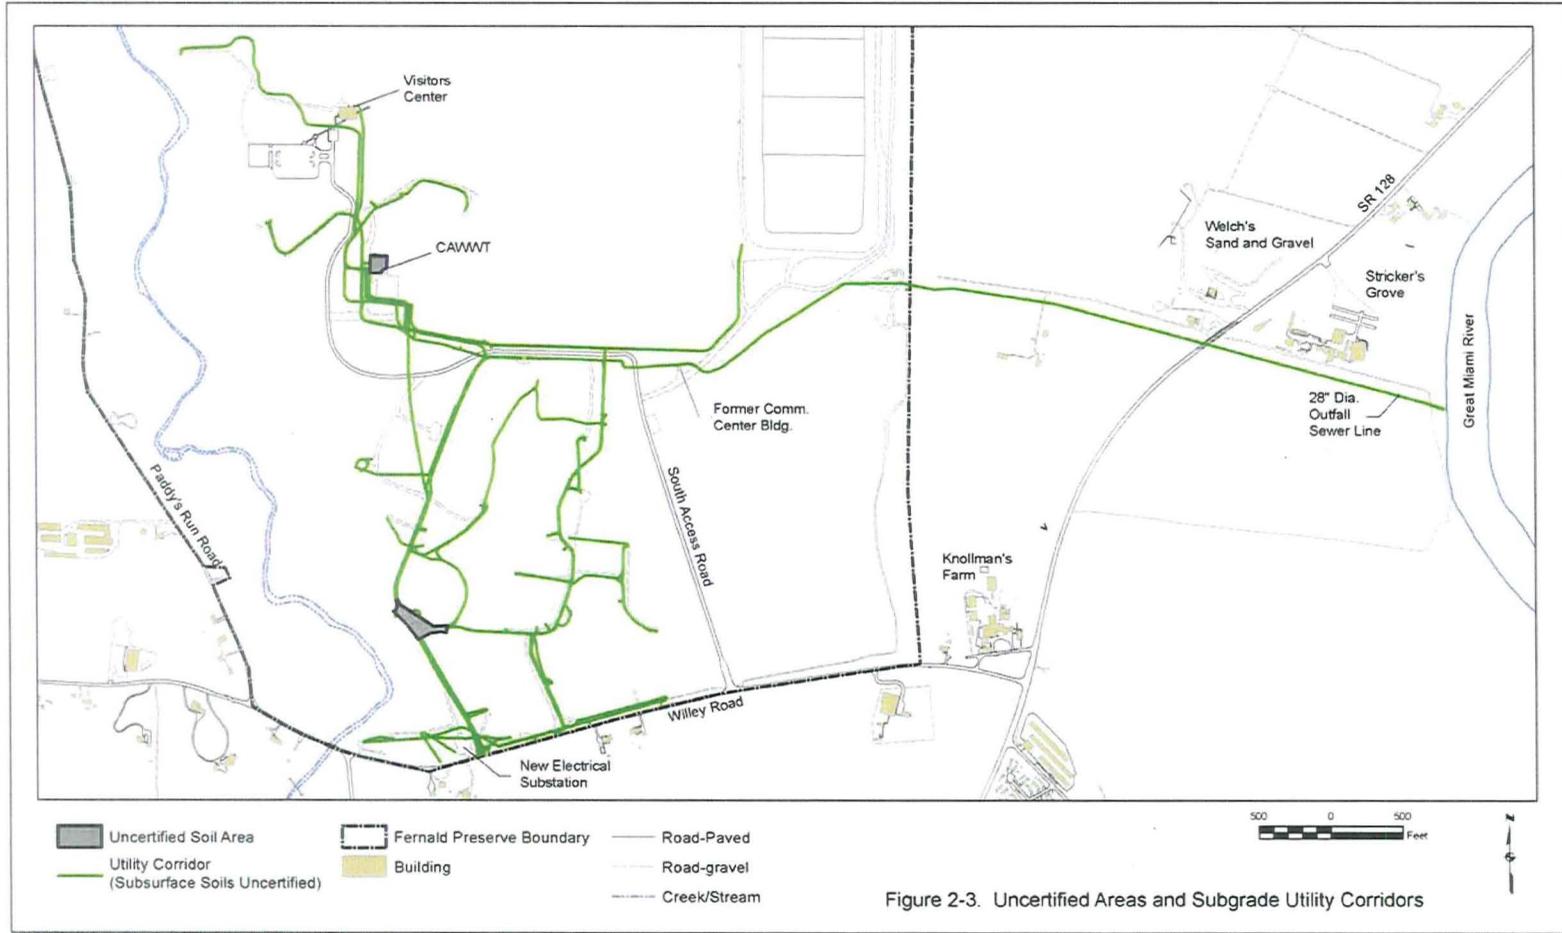


Figure 2-3. Uncertified Areas and Subgrade Utility Corridors

Figure 2-3. Uncertified Areas and Subgrade Utility Corridors

## **UNCONTROLLED IF PRINTED**

The 60-inch Main Drainage Corridor culvert and an adjacent 18-inch culvert were left in place even though fixed contamination remains within the culverts. Both culverts are located directly below the OSDF leachate conveyance system and the main effluent line running between the CAWWT and the Great Miami River. Because of their locations, these culverts could not be removed without potentially impacting ongoing CAWWT and OSDF operations. The 18-inch culvert is completely buried, and grating was installed on the ends of the 60-inch culvert to prevent access.

The subgrade utility corridors will be certified following the completion of groundwater remediation, when these systems are no longer needed and are removed. Soils within the footprints of the CAWWT and South Field Valve House will be certified when these facilities are no longer needed, are removed from service, and are decommissioned and dismantled. Because the groundwater remediation end date is uncertain, no firm schedule for soil certification in the corridors can be established.

The existing paved roadways themselves cannot be certified; however, the soil beneath them is certified.

### **2.4.5 Existing Infrastructure and Facilities**

A few facilities remain on site. These include the CAWWT and supporting infrastructure; extraction wells, associated piping, and utilities; the outfall line to the Great Miami River; the restoration storage shed; the former Communications Building; and the Visitors Center.

DOE refurbished the former Silos Warehouse for use as an on-site Visitors Center, which was completed in summer 2008. The Visitors Center contains information and context on the remediation of the Fernald Preserve, including information on site restrictions, ongoing maintenance and monitoring, and residual risk. It also provides historical information and photographs, a meeting place, and other educational resources. A primary goal of the Visitors Center is to fulfill an informational and educational function within the surrounding community. The information made available at the center also serves as an institutional control.

The Visitors Center is maintained and operated under the direction of LM. DOE will periodically evaluate the use of the Visitors Center and the programming provided there and will obtain community input on decisions regarding changes to and the ongoing operation of the Visitors Center.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

### **3.0 Scope of Legacy Management at the Fernald Preserve**

Post-closure requirements include maintaining the remedies and ensuring the protectiveness of human health and the environment. Other post-closure activities include monitoring and maintaining the Fernald Preserve property, facilities, and structures that remain. Post-closure requirements at the Fernald Preserve are the responsibility of LM. Within LM, the Office of Site Operations (LM-20) is responsible for ongoing surveillance and maintenance at the Fernald Preserve and the continuation of the groundwater remedy.

The commitments in the RODs relevant to legacy management include the following:

- DOE will achieve the FRLs for all contamination attributed to the Fernald Preserve. Sitewide cleanup levels for soil are documented in the OU2 ROD (DOE 1995a) and in the OU5 ROD (DOE 1996) based on a recreational use and undeveloped park (i.e., green space) scenario. The FRLs do not allow unrestricted use of the Fernald Preserve, and institutional controls are required.
- According to the OU2 ROD, the Fernald Preserve will remain under federal ownership. Therefore, any final land-use alternative and legacy management planning must include DOE's commitment to continued federal ownership.
- Commitments for other environmental monitoring will be carried out as long as appropriate according to the existing RODs.

Maintaining institutional controls at the Fernald Preserve is a fundamental component of legacy management and includes ensuring that no residential or agricultural uses and only limited recreational uses occur on the property. Activities such as swimming, hunting, fishing, and camping are prohibited. Additional information regarding prohibited activities is included in the IC Plan, Section 2.1. The intent of this Legacy Management Plan is to provide an overview of institutional controls required for the Fernald Preserve to support legacy management. The separate IC Plan is required for the Fernald Preserve according to DOE's commitment to EPA in the OU5 ROD (DOE 1996). DOE and EPA guidance were used to identify planned institutional controls at the Fernald Preserve. The IC Plan will continue to be updated annually, as necessary, based on changing site conditions and input from the community and regulators. Section 4.4 of this Legacy Management Plan discusses the 5-year review process and how it relates to legacy management, including institutional controls.

The scope of legacy management activities at the Fernald Preserve can be divided into three categories: (1) the operation and maintenance of the remedies, (2) surveillance and maintenance in restored areas, and (3) public involvement. Legacy management activities related to the maintenance of the remedies include monitoring and maintaining the OSDF, the CAWWT and supporting infrastructure, the extraction wells and associated piping, and the active outfall line to the Great Miami River. Also included is the decontamination and dismantling of the aquifer remediation infrastructure (CAWWT, well system, etc.). The OMMP includes the details of the monitoring and maintenance of the CAWWT, groundwater restoration systems, and the active outfall line. Legacy management activities also include ensuring that remedy-driven restrictions on access to and use of the Fernald Preserve are enforced, that aquifer remediation is continued, and that information is properly managed.

## **UNCONTROLLED IF PRINTED**

Legacy management in restored areas includes ensuring that natural and cultural resources are protected in accordance with applicable laws and regulations. Any amenities supporting access to and use of the Fernald Preserve will be kept in a safe configuration. The cleanup levels established for the Fernald Preserve ensured that the site was remediated to a level consistent with recreational use.

The potential reburial of Native American remains is another initiative that has been considered at the Fernald Preserve since 1999. DOE agreed to make land available for the reinterment of Native American remains with the following understandings:

- The land remains under federal ownership.
- DOE will not take responsibility for, or manage, the reinterment process. DOE will neither fund nor implement maintenance and monitoring.
- The remains must be culturally affiliated with a modern-day tribe. The National Park Service had no objections to the reinterment process as long as the “repatriations associated with the reburials comply with the Native American Graves Protection and Repatriation Act as applicable.”
- Records must be maintained for all repatriated items reinterred under this process. DOE is not responsible for these records.

Thus far, several federally recognized tribes have been contacted regarding this offer of land for reinterment purposes. To date, DOE has received only one response from a modern-day tribe with repatriated remains under the Native American Graves Protection and Repatriation Act. The Miami Tribe of Oklahoma has informed DOE that they are not interested in using the site. DOE has received no other responses from modern-day tribes and is no longer pursuing the effort. The proposal may be reconsidered in the future if other modern-day tribes with repatriated remains come forward.

Legacy management activities related to public involvement include ongoing communication with the public regarding continuing groundwater remediation, legacy management activities, and the future of the Fernald Preserve. Emphasis will also be placed on educating the public about the site’s former production activities, its remediation, and its land use restrictions. Displays and programs at the Visitors Center and outreach programs at local schools and organizations will help LM meet this objective.

### **3.1 Legacy Management of the OSDF**

The OU2 ROD (DOE 1995a) states that the Fernald Preserve will remain under federal ownership. DOE has committed to the goal of ensuring legacy management activities of the OSDF in perpetuity. The PCCIP (Attachment B) for the OSDF outlines the routine legacy management activities for the initial 30 years. The activities include routine inspections and ongoing monitoring of the LCS, the LDS, and groundwater in the vicinity of the OSDF. DOE will conduct a CERCLA review every 5 years and will issue a report summarizing the results of the review to the appropriate regulatory agencies. Periodic monitoring and maintenance of the LCS and the vegetative cap of the OSDF will be necessary, as will the occasional maintenance of signs, fencing, and the buffer zone around the OSDF. The inspections and monitoring are discussed in greater detail in the IC Plan.

## **UNCONTROLLED IF PRINTED**

The extent of legacy management activities will continue to be defined on the basis of regulatory requirements, community and regulatory input, and agreements between DOE, EPA, and OEPA. More information about the maintenance and monitoring requirements for the LCS, the capping and cover system, and the support systems for the OSDF are included in the IC Plan and supporting documents.

### **3.2 Surveillance and Maintenance of Restored Areas**

According to the OU5 ROD (DOE 1996), DOE will protect the existing natural resources at the Fernald Preserve. The monitoring and maintenance of restored areas focus on ensuring that natural resources are protected in accordance with appropriate laws and regulations, such as the Clean Water Act and the Endangered Species Act. Wetlands and threatened or endangered species are examples of natural resources that will be monitored. Maintenance of ecologically restored areas is further detailed as part of the NRRP (State of Ohio 2008). The NRRP requires long-term maintenance of restored areas in order to ensure that restoration goals are met.

Restored areas will be inspected to ensure that protected natural resources are maintained in accordance with applicable laws and regulations. The physical disturbance of restored areas will not be permitted unless it is authorized by LM (if necessary, in consultation with EPA). Soil and vegetation will not be removed from the Fernald Preserve unless LM authorizes their removal.

Existing cultural resource areas, including the reinterment area that resulted from the public water supply project, is a part of the undeveloped park and requires inspections to ensure their preservation, and to determine if natural forces, vandalism, or looting are affecting the resources. Corrective actions will be implemented if there is evidence that natural forces or human activities threaten the integrity of a site.

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## **4.0 Oversight of Legacy Management at the Fernald Preserve**

### **4.1 Office of Legacy Management Responsibilities**

LM is responsible for the oversight of the Fernald Preserve during legacy management and will ensure that all legacy management activities are conducted as required. LM makes the decisions regarding changes in surveillance, maintenance, engineering, access, public use, and other issues. LM also manages any contractors hired to perform work required for legacy management purposes and ensures that the contractors have the skills necessary to perform the work. Additionally, LM is responsible for communicating with regulators and the public regarding the legacy management of the Fernald Preserve.

### **4.2 Role of the Site Contractor and Use of Subcontracts**

A site contractor, or contractors, will support LM under the Legacy Management Support (LMS) contract, will work closely with and communicate regularly with LM, and will be the physical presence at the site. LMS contractor personnel will be responsible for operating the groundwater remediation systems; conducting inspections, monitoring, and sampling; collecting all data; developing the reports; and making those reports available to the public. Maintenance activities for the OSDF are the LMS contractor responsibility as well. The LMS contractor will notify LM in the event of an emergency and will take action to prevent damage to the site.

Operation and maintenance tasks, such as minor repairs to fencing, gates, signs, or components of the groundwater infrastructure, may be carried out by additional subcontractor services. Repairs that require earthwork, erosion control, seeding, mowing, clearing, herbicide application, or repair to pumps and piping will be completed by subcontractor services.

The LMS contractor will procure goods and services according to DOE-approved procurement policies and procedures. These procedures use the best commercial practices and are in compliance with the requirements and intent of the Federal Acquisition Regulations and DOE acquisition regulations. The terms and conditions in subcontracts incorporate the required flow-down clauses from the prime contract.

As technical leads identify site requirements, contractor staff will develop a scope of work and initiate a solicitation package. The package will generally include statements of work, health and safety requirements, estimated costs, and required approvals. The written contracts will also include the appropriate restrictions and prohibited activities for the work to be performed on site. In cases where similar existing subcontracts were issued, the existing work scope may be used as a framework for a new subcontract. New subcontracts may be developed through a competitive bid process or through the negotiation of a sole-source procurement. The type of procurement will be determined by analyzing the nature of the work scope, the critical nature of the services, and the importance of historical information known only by the previous contractor. Although LM intends to maximize the use of new subcontracts for most services, there may be a need to request the assignment of an existing subcontract in unique circumstances to ensure continuation of a service.

### **4.3 Role of Regulators**

LM is required to implement the requirements outlined in the IC Plan subject to enforcement by EPA. The regulators will ensure that DOE is performing the required legacy management operations, surveillance, and maintenance activities at the Fernald Preserve, as agreed upon by DOE and EPA, in consultation with OEPA, in the LMICP. Both EPA and OEPA will be provided with all reporting on the legacy management activities at the Fernald Preserve. Both EPA and OEPA will be notified of any institutional control breaches as outlined in Section 4.0 of the IC Plan. Both EPA and OEPA will be involved in overseeing the legacy management activities at the Fernald Preserve.

### **4.4 CERCLA 5-Year Reviews**

Under CERCLA, if use of a site is limited because a certain level of contamination remains, a review of the remedy at that site is required every 5 years. CERCLA 5-year reviews at the Fernald Preserve will focus on the protectiveness of the remedies associated with each of the five OUs. Summaries of the inspections conducted for the OSDF, the CAWWT, the groundwater restoration system, and the active outfall line to the Great Miami River will also be included. To facilitate the review, a report addressing the ongoing protectiveness of the remedies will be prepared and submitted to EPA and OEPA. The institutional controls portion of the report will include the data collected from monitoring and sampling; summaries of inspections of the Fernald Preserve, the OSDF site, and the OSDF cap conducted during the 5-year period; and a discussion of the effectiveness of the institutional controls. If it is determined that a particular control is not meeting its objectives, then required corrective actions will be included. The review may lead to revisions to the monitoring and reporting protocols. The last CERCLA 5-year review was completed in August 2006. Therefore, the next review is due in 2011.

### **4.5 Reporting Requirements**

The annual Site Environmental Report will be submitted to EPA and OEPA, and distributed to key stakeholders on June 1 of each year. It will provide information on institutional controls, monitoring, maintenance, site inspections, and corrective actions while continuing to document the technical approach and summarizing the data for each environmental medium, along with summarizing CERCLA, RCRA, and waste management activities. The report will also include water quality and water accumulation rate data from the OSDF monitoring program. The summary report serves the needs of both the regulatory agencies and other key stakeholders. The detailed appendixes accompanying the Site Environmental Report are intended for a more technical audience, including the regulatory agencies, and will serve to fulfill National Emissions Standards for Hazardous Air Pollutants (Title 40 *Code of Federal Regulations* Part 61, Subpart H) reporting requirements, as necessary. Additionally, other reporting, such as the National Pollutant Discharge Elimination System monthly discharge reports, will continue as required under other regulatory programs and will be addressed outside the annual Site Environmental Reports.

## **5.0 Records Management**

The long-term retention of records and dissemination of information is another critical aspect of legacy management. LM will manage records that are needed for legacy management purposes. Records will be dispositioned in accordance with DOE requirements at the National Archives and Records Administration or a federal records center for their required retention period. Records that have reached the end of the scheduled retention period will be reviewed and approved by management for final destruction or rescheduled for additional retention. For legacy management purposes, LM will retain copies of selected records documenting past remedial activities (e.g., CERCLA Administrative Record [AR]) in the public reading room located at the Delta Building, 10995 Hamilton-Cleves Highway, Harrison, Ohio 45030. Within 60 days of EPA's approval of this LMICP, the LM website will be updated to include the most recent version of the Fernald Preserve LMICP.

### **5.1 Types of Data Required for Legacy Management**

Data considered critical for legacy management purposes have been divided into four categories: historical data, RI/FS process and results, remediation data, and post-closure data. Table 5-1 presents the types of information that fall into each category.

In fall 2002 DOE personnel began working with stakeholder groups to identify critical records in the four categories and ensure that the appropriate types of information and records were being retained to support legacy management. The ongoing interface with stakeholders will allow DOE to retain the appropriate information to support future legacy management needs.

### **5.2 Legacy Management Records Custodian**

LM assumed custodianship of the Fernald records when the site transitioned from DOE's Office of Environmental Management to LM in fiscal year 2007. Site records fall under the DOE retention schedules and will remain in DOE custody for the required, pre-established retention period.

### **5.3 Records Storage Location**

Fernald records are currently stored at two locations: the National Archives, Great Lakes Region, in Dayton, Ohio, and the National Archives, Great Lakes Region, in Chicago. Their respective websites are <http://www.archives.gov/great-lakes/contact/frc-dayton.html> and <http://www.archives.gov/great-lakes/contact/frc-chicago.html>. Fernald records will be transferred to a facility located in Morgantown, West Virginia, when construction is completed; additional information regarding the Morgantown facility will be available then. The facility's completion is scheduled for winter 2010.

### **5.4 Public Access Requirements**

Stewards and stakeholders, whether located in the surrounding communities or in remote locations, will require easy access to copies of the Fernald Preserve CERCLA AR. The Visitors Center houses computing facilities for acquisition and access to electronic copies of the

**UNCONTROLLED IF PRINTED**

CERCLA AR. The CERCLA AR documents for the Fernald Preserve were scanned into industry-standard searchable Adobe Acrobat portable document format (PDF) files for viewing over the Internet. The AR documents are available to the public on the LM website (<http://www.lm.doe.gov/CERCLA/SiteSelector.aspx>). The documents are searchable by document number, document date, and document title and by searching the text of the document. The CERCLA AR will be updated as new documents are created.

Fernald Preserve environmental data are available to the public through LM's Geospatial Environmental Mapping System (<http://www.lm.doe.gov/Fernald/Sites.aspx>). Examples of the electronic data include environmental sampling and monitoring data, OSDF monitoring data, and site inspection photographs.

**UNCONTROLLED IF PRINTED**

*Table 5-1. Types of Data Needed to Support Legacy Management Activities*

Data Category	Summary of Information Required
Historical Data	<ul style="list-style-type: none"> <li>• Real estate records</li> <li>• Information pertaining to the acquisition of property</li> <li>• Process documents/reports (summary level)</li> <li>• Cultural resource records</li> <li>• Photographs (significant for legacy management purposes)</li> </ul>
RI/FS Process and Results	<ul style="list-style-type: none"> <li>• Risk assessments</li> <li>• Public comments</li> <li>• RI/FS reports for each OU</li> <li>• RODs for each OU</li> <li>• ROD amendment documents</li> </ul>
Remediation Data	<p><b>For Soil:</b></p> <ul style="list-style-type: none"> <li>• Design and excavation plans</li> <li>• Documentation of the certification process for each area/phase</li> <li>• Certification reports*</li> </ul> <p><b>For Groundwater:</b></p> <ul style="list-style-type: none"> <li>• Pump-and-treat system design documents</li> <li>• Groundwater monitoring data</li> <li>• Groundwater extraction data</li> <li>• Design and monitoring data for the CAWWT</li> </ul> <p><b>For Environmental Monitoring:</b></p> <ul style="list-style-type: none"> <li>• Integrated Environmental Monitoring Plan reports*</li> <li>• Regular updates*</li> </ul> <p><b>For Buildings and Structures:</b></p> <ul style="list-style-type: none"> <li>• Plans for decommissioning and dismantling buildings and structures</li> </ul> <p><b>For the OSDF:</b></p> <ul style="list-style-type: none"> <li>• Design, construction, material placement and closure documentation</li> <li>• Leak detection/leachate monitoring data</li> <li>• Cover/cap monitoring data</li> </ul> <p><b>For Restoration:</b></p> <ul style="list-style-type: none"> <li>• Design plans</li> <li>• Implementation documentation</li> <li>• Completion reports</li> <li>• Monitoring data*</li> </ul> <p><b>General:</b></p> <ul style="list-style-type: none"> <li>• Remedial Design/Remedial Action Reports</li> <li>• Aerial photographs taken during remediation processes</li> </ul>
Post-Closure Data	<ul style="list-style-type: none"> <li>• Decision documents on land use</li> <li>• Documents on public-use decisions</li> <li>• All monitoring and maintenance data for the OSDF</li> <li>• All monitoring and maintenance data for the restored areas*</li> <li>• All institutional control data</li> <li>• Drawings of remaining facilities (including the OSDF)</li> </ul>
*Will require retention of electronic data.	

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **6.0 Funding**

Currently, legacy management activities at the various DOE facilities are funded through the annual appropriations process. Funding for sites in the long-term surveillance and maintenance program is maintained in a separate line item in the LM budget. For the time being, this process for funding legacy management will continue; however, DOE will continue to investigate other funding and management options.

It is anticipated that LM funds will be available for monitoring and maintaining the OSDF, managing leachate, remediating the aquifer, and ensuring that applicable laws and regulations are adhered to in restored areas. DOE will keep the public informed of its plans to fund legacy management activities as new information becomes available.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 7.0 References

40 CFR 61. U.S. Environmental Protection Agency, "National Emission Standards for Hazardous Air Pollutants," Subpart H, "National Emission Standards for Emission of Radionuclides Other Than Radon from Department of Energy Facilities," *Code of Federal Regulations*, July 1, 2008.

CERCLA (Comprehensive Environmental Response, Compensation, and Liability Act of 1980), as amended. Title 42 *United States Code* Section 9601 et seq.

DOE Orders 144.1, *Department of Energy American Indian Tribal Government Interactions and Policy*, January 16, 2009.  
200.1A, *Information Technology Management*, December 23, 2008.  
430.1B Chg. 1, *Real Property Asset Management*, February 8, 2008.  
435.1 Chg. 1, *Radioactive Waste Management*, July 9, 1999.  
450.1A, *Environmental Protection Program*, June 4, 2008.  
5400.5 Chg. 2, *Radiation Protection of the Public and the Environment*, January 7, 1993.

DOE Policy 430.1, *Land and Facility Use Planning*, July 9, 1996.

DOE Policy 454.1, *Use of Institutional Controls*, April 9, 2003.

DOE (U.S. Department of Energy), 1993. *Site-wide Characterization Report*, Final, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, May.

DOE (U.S. Department of Energy), 1994. *Memorandum: The Secretary of Energy's Land and Facility Use Policy*, December 21.

DOE (U.S. Department of Energy), 1995a. *Final Record of Decision for Remedial Actions at Operable Unit 2*, 7021 U-004-501.3, Final, Fernald Environmental Management Project, DOE, Fernald Area Office, Cincinnati, Ohio, May.

DOE (U.S. Department of Energy), 1995b. *Pre-design Investigation and Site Selection Report for the On-site Disposal Facility*, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, July.

DOE (U.S. Department of Energy), 1996. *Final Record of Decision for Remedial Actions at Operable Unit 5*, 7478 U-007-501.4, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, January.

DOE (U.S. Department of Energy), 1998a. *Historical Documentation of Facilities and Structures at the Fernald Preserve*, 20900-RP-0002, Revision 0, Fernald Environmental Management Project, DOE, Fernald Area Office, Cincinnati, Ohio, January.

DOE (U.S. Department of Energy), 1998b. *Historical Documentation of the Fernald Site and Its Role within the U.S. Department of Energy's Weapon Complex*, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio.

## UNCONTROLLED IF PRINTED

DOE (U.S. Department of Energy), 1998c. *Site-wide Excavation Plan*, 2500-WP-0028, Revision 0, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, July.

DOE (U.S. Department of Energy), 1999a. *From Cleanup to Stewardship*, DOE/EM-0466, Office of Environmental Management, October.

DOE (U.S. Department of Energy), 1999b. *The Long-Term Control of Property: Overview of Requirements in Orders DOE 5400.1 and DOE 5400.5*, Information Brief, EH-412-0014/1099, Office of Environmental Policy and Guidance, October.

DOE (U.S. Department of Energy), 2000a. *Institutional Controls in RCRA and CERCLA Response Actions at Department of Energy Facilities*, DOE/EH-413-0004, Office of Environmental Policy and Guidance, August.

DOE (U.S. Department of Energy), 2000b. *Memorandum: Long-Term Stewardship "Guiding Principles,"* Ohio Field Office, Miamisburg, Ohio.

DOE (U.S. Department of Energy), 2001a. *A Report to Congress on Long-Term Stewardship*, Volumes 1 and 2, R-01-025, DOE Office of Environmental Management, Office of Long-Term Stewardship, January.

DOE (U.S. Department of Energy), 2001b. *Explanation of Significant Differences for Operable Unit 5*, Final, Fernald Environmental Management Project, DOE, Fernald Area Office, Cincinnati, Ohio, October.

DOE (U.S. Department of Energy), 2001c. *Long-Term Stewardship Study*, Volumes 1 and 2, Final Study, DOE, Office of Environmental Management, Office of Long-Term Stewardship, October.

EPA (U.S. Environmental Protection Agency), 2000. *A Site Manager's Guide to Identifying, Evaluating, and Selecting Institutional Controls at Superfund and RCRA Corrective Action Cleanups*, EPA 540-F-00-005, OSWER 9355.0-784FS-P, Office of Solid Waste and Emergency Response, September.

Executive Order 13423, *Strengthening Federal Environmental, Energy, and Transportation Management*, Executive Office of the President, January 24, 2007.

GeoSyntec, 1997. *Final Design Calculation Package; On-site Disposal Facility*, Volume 1, Revision 0, prepared for Fernald Environmental Management Project, U.S. Department of Energy Fernald Area Office, Cincinnati, Ohio, May.

ICF (ICF Kaiser Consulting Group), 1998. *Managing Data for Long-Term Stewardship*, Working Draft, prepared for Fernald Environmental Management Project, DOE, Fernald Area Office, Cincinnati, Ohio, March.

State of Ohio, 2008. *Consent Decree Resolving Ohio's Natural Resource Damage Claim against DOE*, State of Ohio v. United States Department of Energy, et al., Civil Action No. C-1-86-0217, Judge Spiegel.

**UNCONTROLLED IF PRINTED**

**Volume II**  
**Institutional Controls Plan**

**April 2010**

**U.S. Department of Energy**

**Revision 4**  
**Final**

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

**UNCONTROLLED IF PRINTED**

**Emergency Contact**

**Grand Junction 24-hour  
Monitored Security Telephone Number**

**(877) 695-5322**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## Contents

Acronyms and Abbreviations .....	iii
Executive Summary .....	v
1.0 Introduction.....	1-1
1.1 Purpose and Organization of This Institutional Controls Plan .....	1-2
1.2 Summary of Attachments .....	1-5
1.3 Definition and Purpose of Institutional Controls .....	1-6
1.4 Types of Institutional Controls .....	1-6
1.5 Agency Requirements for Institutional Controls .....	1-7
1.6 Updates to the Institutional Controls Plan .....	1-10
2.0 Controls to Eliminate Disturbance and Unauthorized Use of the Fernald Preserve.....	2-1
2.1 Fernald Preserve.....	2-1
2.1.1 Proprietary Controls and Points of Contact .....	2-1
2.1.2 Governmental Controls.....	2-2
2.1.3 Preventing Unauthorized Use of the Fernald Preserve .....	2-2
2.1.3.1 Informational Devices.....	2-2
2.1.3.2 Security of Site Facilities and Infrastructure.....	2-4
2.1.3.3 Routine Inspection of Property .....	2-4
2.2 OSDF .....	2-8
2.2.1 Proprietary Controls and Points of Contact .....	2-8
2.2.2 Governmental Controls.....	2-8
2.2.3 Preventing Unauthorized Use .....	2-8
3.0 Controls to Minimize Human and Environmental Exposure to Residual Contaminants .....	3-1
3.1 Fernald Preserve.....	3-1
3.1.1 Fernald Preserve Inspections .....	3-1
3.1.2 Surface Water Discharge .....	3-3
3.1.3 Groundwater Remedy and Monitoring .....	3-3
3.2 On-Site Disposal Facility .....	3-4
3.2.1 OSDF Inspection and Maintenance .....	3-8
3.2.2 Leak Detection/Leachate Monitoring .....	3-10
3.2.3 Leachate Management .....	3-10
4.0 Contingency Planning.....	4-1
4.1 Unacceptable Disturbances or Use .....	4-1
4.2 Suspected Contaminated Soil, Material, or Debris.....	4-2
4.3 Unexpected Cultural Resource Discoveries.....	4-2
4.4 Notification Process .....	4-3
4.5 Coordination with Other Agencies .....	4-3
5.0 Information Management and Public Involvement .....	5-1
5.1 Information Management.....	5-1
5.1.1 Fernald Preserve Data and Information .....	5-1
5.1.2 OSDF Data and Information.....	5-1
5.1.3 Reporting.....	5-2
5.2 Public Involvement .....	5-2
5.2.1 Current Public Involvement via Groups and Organizations.....	5-3
5.2.2 Ongoing Decisions and Public Involvement.....	5-4
5.2.3 Public Access to Information.....	5-5
6.0 References.....	6-1

## **Figures**

Figure 1-1. Fernald Land Use .....	1-3
Figure 2-1. Fernald Preserve Site Configuration .....	2-5

## **Tables**

Table 1-1. Controls on Disturbance and Use of the Fernald Preserve .....	1-8
Table 1-2. Controls on Disturbance and Use of the On-Site Disposal Facility .....	1-9
Table 3-1. Controls to Minimize Human and Environmental Exposure to Residual Contaminants at the Fernald Preserve.....	3-2
Table 3-2. Controls to Minimize Human and Environmental Exposure to Residual Contaminants at the On-Site Disposal Facility.....	3-5

## **Appendixes**

Appendix A	Records of Decision and Associated Documents
Appendix B	Institutional Control Records as Stated in the Records of Decision
Appendix C	Fernald Preserve Contact Information
Appendix D	Examples of OSDF and Fernald Preserve Inspection Forms

## **Attachments**

Attachment A	Operations and Maintenance Master Plan for Aquifer Restoration and Wastewater Treatment
Attachment B	Post-Closure Care and Inspection Plan
Attachment C	Groundwater/Leak Detection and Leachate Monitoring Plan
Attachment D	Integrated Environmental Monitoring Plan
Attachment E	Community Involvement Plan

**UNCONTROLLED IF PRINTED**

**Acronyms and Abbreviations**

CAWWT	converted advanced wastewater treatment facility
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CIP	Community Involvement Plan
CFR	<i>Code of Federal Regulations</i>
DAAP	University of Cincinnati College of Design, Art, Architecture, and Planning
D&D	decontamination and demolition
DOE	U.S. Department of Energy
EM	U.S. Department of Energy Office of Environmental Management
LM	U.S. Department of Energy Office of Legacy Management
EPA	U.S. Environmental Protection Agency
FCAB	Fernald Citizens Advisory Board
FEMP	Fernald Environmental Management Project
FRESH	Fernald Residents for Environmental Safety and Health
FRL	final remediation level
GEMS	Geospatial Environmental Mapping System
GWLMP	Groundwater/Leak Detection and Leachate Monitoring Plan
IC Plan	Institutional Controls Plan
IEMP	Integrated Environmental Monitoring Plan
LCS	leachate collection system
LDS	leak detection system
LMICP	<i>Comprehensive Legacy Management and Institutional Controls Plan</i>
NPDES	National Pollutant Discharge Elimination System
OAC	<i>Ohio Administrative Code</i>
OEPA	Ohio Environmental Protection Agency
OMMP	Operations and Maintenance Master Plan for the Aquifer Restoration and Wastewater Project
OSDF	on-site disposal facility
OU	operable unit
PCCIP	Post-Closure Care and Inspection Plan
ppb	parts per billion
RCRA	Resource Conservation and Recovery Act
RI/FS	remedial investigation/feasibility study
ROD	record of decision

**UNCONTROLLED IF PRINTED**

SEP Sitewide Excavation Plan  
WAC waste acceptance criteria  
WCS Waste Control Specialists, LLC

## **Executive Summary**

This *Comprehensive Legacy Management and Institutional Controls Plan (LMICP)* was developed to document the planning process and the requirements for the long-term care, or legacy management, of the Fernald Preserve. The LMICP is a two-volume document with supporting documents included as attachments to Volume II. Volume I provides planning details for management of the Fernald Preserve that go beyond those identified as institutional controls in Volume II. Primarily, Volume II is a requirement of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA), providing institutional controls that will ensure that the cleanup remedies implemented at the Fernald Preserve will protect human health and the environment. The format and content of Volume II follows U.S. Environmental Protection Agency (EPA) requirements for institutional controls. Once approved, Volume II becomes enforceable under CERCLA authority.

Volume I is the Legacy Management Plan. This plan is not a required document under the CERCLA process, and it is not a legally enforceable document. It provides the U.S. Department of Energy (DOE) Office of Legacy Management (LM) with a plan for managing the Fernald Preserve and fulfilling DOE's commitment to maintain the Fernald Preserve following closure. The plan discusses how DOE, specifically LM, will approach the legacy management of the Fernald Preserve. It describes the surveillance and maintenance of the entire site, including the on-site disposal facility (OSDF). It explains how the public will continue to participate in the future of the Fernald Preserve. Also included in the Legacy Management Plan is a discussion of records and information management. The plan concludes with a discussion on funding for legacy management of the site.

Volume II is the Institutional Controls Plan (IC Plan). The IC Plan is required under the CERCLA remediation process when a physical remedy does not allow for full, unrestricted use, or when hazardous materials are left on site. The plan is a legally enforceable CERCLA document and is part of the remedy for the site (an EPA requirement). The plan outlines the institutional controls that are established for and enforced across the entire site, including the OSDF, to ensure that human health and the environment continue to be protected following the implementation of the remedy. The IC Plan has five attachments that lend support to and provide details regarding the established institutional controls. The attachments provide further information on the continuing groundwater remediation (pump-and-treat) system (Attachment A), the OSDF cap and cover system (Attachment B), the leak detection and leachate management systems for the OSDF (Attachment C), the environmental monitoring that will continue following closure (Attachment D), and the Community Involvement Plan (Attachment E), a CERCLA-required document developed by DOE. The Community Involvement Plan explains in detail how DOE will ensure that the public has appropriate opportunities for involvement in post-closure activities.

The LMICP was first approved in August 2006. It is anticipated that the LMICP revisions will be finalized by January each year, to correspond with calendar-year monitoring and reporting. EPA and Ohio Environmental Protection Agency comments will be addressed between October and January.

**UNCONTROLLED IF PRINTED**

The future LMICP schedule will be as follows:

- Each June, the annual Site Environmental Report will be submitted. It will make recommendations based on the previous year's monitoring information.
- Each September, an annual review of the LMICP will be submitted. It will identify updates as necessary.
- Each January, the LMICP will be finalized to correspond with the monitoring and reporting schedule.

Pertinent information associated with the CERCLA 5-year reviews will be included in the LMICP revisions as needed.

## 1.0 Introduction

The U.S. Department of Energy (DOE) manages the Fernald Preserve, owned by the federal government, which is situated on a 1,050-acre tract of land approximately 18 miles northwest of Cincinnati, Ohio. The Fernald Preserve is located near the unincorporated communities of Ross, Fernald, Shandon, and New Haven. Land use in the area consists primarily of residential areas, farming, gravel excavation operations, light industry, and parks.

The Comprehensive Environmental Response Compensation and Liability Act (CERCLA) is the primary driver for the environmental remediation of the Fernald Preserve. The site was divided into five operable units (OUs), and a remedial investigation and feasibility study (RI/FS) was conducted for each unit. Based on the results of the RI/FSs, Records of Decision (RODs) were issued outlining the selected remedy for each OU.

- **ROD for OU1, Waste Pits Area**—The remedy for OU1 included removing all material from the waste pits, stabilizing the material by drying it, and shipping it off site for disposal. OU1 field activities ended June 2005.
- **ROD for OU2, Other Waste Units**—The remedy for OU2 included removing material from the various units, disposing of material that meets the on-site waste acceptance criteria (WAC) in the on-site disposal facility (OSDF), and shipping all other material off site for disposal. The WAC were developed by DOE and regulators, with input from the stakeholders and the public, to strictly control the type of waste disposed of on site. The WAC are documented in the *Waste Acceptance Criteria Attainment Plan for the On-site Disposal Facility* (DOE 1998b). OU2 field activities ended November 2003.
- **Final ROD for OU3, Production Area**—The OU3 remedy included decontaminating and decommissioning all contaminated structures and buildings, recycling waste materials whenever possible, disposing of material that meets the on-site WAC in the OSDF, and shipping all other material off site for disposal. OU3 field activities ended October 2006.
- **ROD for OU4, Silos 1–4**—The OU4 remedy included removing and treating all material from the silos, dismantling the silos, and shipping the waste materials and silo debris off site for disposal. OU4 field activities ended May 2006 (field activities relate to the final shipment of OU4 waste off the Fernald Site), and the Silo 1 and 2 waste was shipped to a Waste Control Specialists, LLC (WCS) facility in Andrews, Texas. The waste has been held in interim storage at WCS since it was shipped off site.

On May 29, 2008, the State of Texas granted a byproduct license to WCS. This will allow 3,766 canisters of Silos 1 and 2 waste to be permanently disposed of at WCS. The ROD has a milestone of October 31, 2009, for "initiation" of permanent disposal. WCS will require 6 months to construct the disposal cell, allowing disposal to "commence" in fiscal year 2009.

- **ROD for OU5, Environmental Media**—OU5 includes all environmental media, such as soil, sediment, surface water, groundwater, and vegetation. The *Site-Wide Excavation Plan* (SEP) (DOE 1998a) describes the remediation of soils, which includes the excavation of soils that exceed the risk-based final remediation levels (FRL) for a list of constituents of concern as listed in the SEP. The OU5 ROD (DOE 1996) describes the approved remediation method of pump-and-treat for groundwater until levels of uranium in groundwater are less than 30 parts per billion (ppb). In the original ROD, the FRL for uranium in groundwater was

## **UNCONTROLLED IF PRINTED**

20 ppb. After the U.S. Environmental Protection Agency (EPA) and the Ohio Environmental Protection Agency (OEPA) approved the change, the FRL was raised to 30 ppb, as written in the *Explanation of Significant Differences for Operable Unit 5* (DOE 2001). OU5 field activities related to care and maintenance of the OSDF and aquifer restoration are ongoing.

A list of the RODs and all associated documents is included in Appendix A of this volume.

The Declaration of Physical Completion, or closure, occurred on October 29, 2006. The construction of the OSDF and all site cleanup activities—with the exception of the ongoing actions necessary to achieve the final cleanup of the Great Miami Aquifer—were completed. Once the aquifer is restored, the converted advanced wastewater treatment facility (CAWWT) and associated infrastructure will be decommissioned and dismantled, and the utility corridors and the CAWWT footprint will be remediated (see Volume I, Figure 2–4). Modeling results indicate that the projected date of completion of aquifer restoration is 2026.

Ecological restoration followed remediation and was the final step to completing the cleanup of the site. Ecological restoration activities at the site were also being implemented to address wetland mitigation requirements under the Clean Water Act and to stabilize and revegetate areas impacted during remediation.

The OSDF, located on the eastern side of the Fernald Preserve, is complete. The OSDF consists of eight disposal cells, the footprint of which covers an area of approximately 75 acres. A buffer area and a perimeter fence are established around the disposal facility, and the total OSDF area is approximately 120 acres. Approximately 900 acres of the Fernald Preserve have been ecologically restored, having been graded following excavations, amended, seeded, planted, or otherwise enhanced to create ecosystems comparable to native presettlement southwestern Ohio. A few facilities remain on site. These include the Visitors Center, CAWWT and supporting infrastructure, extraction wells and associated piping and utilities, the outfall line to the Great Miami River, the former Dissolved Oxygen Building, the Restoration storage shed, and the former Communications Building. Figure 1–1 shows the Fernald Preserve's land use.

The DOE Office of Environmental Management (EM) was responsible for the remediation of the Fernald Site. Post-remediation responsibilities have transitioned to the DOE Office of Legacy Management (LM). LM is responsible for the post-remediation operations (including decontaminating and dismantling the aquifer remediation infrastructure), maintenance, and enforcement of institutional controls at the site.

### **1.1 Purpose and Organization of This Institutional Controls Plan**

This Institutional Controls Plan (IC Plan) outlines the institutional controls established and enforced since remediation was completed, with the exception of the groundwater remediation at the Fernald Preserve. This IC Plan documents DOE's approach to maintaining institutional controls as required by EPA under CERCLA. The institutional controls outlined in this plan are designed to ensure the continued protection of human health and the environment following closure of the site. LM is responsible for monitoring, maintaining, reporting on, and implementing institutional controls at the Fernald Preserve. This IC Plan will be reviewed annually to determine if revisions are required. All revisions will be subject to regulatory agency review and will be made available to the public. This IC Plan will also be reviewed every

# FERNALD LEGACY MANAGEMENT

## LAND USE

- 395 acres of Woodlots
- 332 acres of Prairie
- 120 acres of OSDF
- 81 acres of Wetlands
- 60 acres of Open Water
- 33 acres of Savanna
- 29 acres of Infrastructure



Figure 1-1



Graphic # 8131.26-1 7/09

Figure 1-1. Fernald Land Use

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **UNCONTROLLED IF PRINTED**

5 years in conjunction with the CERCLA 5-year review, and revisions will be made as necessary. Revisions can always be made on an as-needed basis if the results of site and OSDF inspections and monitoring require them.

In addition, changes to any of the support plans attached to this IC Plan may trigger revisions to the IC Plan. The approved IC Plan is part of the CERCLA remedy for the Fernald Preserve.

The documents attached to this IC Plan provide further detail and more subject-specific information regarding institutional controls and other post-closure activities. These documents include:

- Attachment A—Operations and Maintenance Master Plan for the Aquifer Restoration and Wastewater Treatment (OMMP).
- Attachment B—Post-Closure Care and Inspection Plan (PCCIP).
- Attachment C—Groundwater/Leak Detection and Leachate Monitoring Plan (GWLMP).
- Attachment D—Integrated Environmental Monitoring Plan (IEMP).
- Attachment E—Community Involvement Plan (CIP).

### **1.2 Summary of Attachments**

The OMMP (Attachment A) establishes the design logic and priorities for the major flow and water treatment decisions needed to maintain compliance with the Fernald Preserve's National Pollutant Discharge Elimination System (NPDES) permit and ROD (OU5) surface water discharge limits. The OMMP is designed to guide and coordinate the extraction, collection, conveyance, treatment, and discharge of all groundwater and leachate (from the OSDF). A summary of the information in the OMMP is included in Section 3.1.3, "Groundwater Remedy and Monitoring."

The PCCIP (Attachment B) addresses the inspection, monitoring, and maintenance activities necessary to ensure the continued proper performance of the OSDF. Key concepts addressed include ownership, access controls and restrictions, deed and use restrictions, environmental monitoring, OSDF cap and buffer area inspections, custodial maintenance, contingency repair, corrective actions, emergency notifications, reporting, and public involvement. Additional details from this plan are included in Section 3.2.1, "OSDF Inspection and Maintenance."

The GWLMP (Attachment C) specifies the frequencies and parameters being monitored in four horizons for each cell of the OSDF. These horizons are the leachate collection system (LCS), the leak detection system (LDS), perched water in the glacial overburden, and the Great Miami Aquifer (both upgradient and downgradient of each cell). Cell-specific data from these four horizons are evaluated holistically to verify the integrity of the cells. To date, the data from this comprehensive leak detection program indicate that the liner systems for all the cells are performing within the specifications established in the OSDF design documentation. The GWLMP will be reviewed with the *Comprehensive Legacy Management and Institutional Controls Plan* (LMICP) annually until the next CERCLA 5-year review. Any modifications to the plan will be based on analysis of the data collected from the ongoing leak detection sampling. The GWLMP governs the post-closure leak detection and leachate monitoring program for the

## **UNCONTROLLED IF PRINTED**

OSDF. Further details from the GWLMP are included in Section 3.2.2, "Leak Detection/Leachate Monitoring."

The IEMP (Attachment D) directs environmental monitoring program elements that support site remediation activities. The document outlines all regulatory requirements for sitewide monitoring, reporting, and remedy performance tracking activated by the applicable or relevant and appropriate requirements identified in the remedy selection documents. The various elements of environmental monitoring that are addressed in the IEMP include groundwater monitoring (Section 3.0), surface water, treated effluent, and sediment (Section 4.0), and Dose Assessment Program (Section 5.0). Section 6.0 provides a review and summary of the various programs and reporting requirements.

The CIP (Attachment E) documents how DOE will ensure that the public has appropriate opportunities for involvement in site-related decisions, including site controls, management, and monitoring.

### **1.3 Definition and Purpose of Institutional Controls**

Institutional controls are important to help minimize the potential for exposure to, and the release of, residual contaminants, ensuring the protection of human health and the environment. Institutional controls are also important in helping to protect engineered remedies by providing a means to ensure that the remedy remains effective, is not showing signs of failure, or is not being vandalized or damaged by outside elements (natural or human) in any way. Section 1.4 describes the types of institutional controls at the site.

EPA, in *Institutional Controls: A Site Manager's Guide to Identifying, Evaluating, and Selecting Institutional Controls at Superfund and RCRA Corrective Action Cleanups* (EPA 2000), has defined institutional controls as administrative or legal controls (i.e., non-engineered) that help to minimize the potential for human exposure to contamination or protect the integrity of a remedy. Institutional controls work by limiting land or resource use by providing information to modify or guide human behavior at the site.

DOE has defined institutional controls as mechanisms designed to appropriately limit access to or uses of land and facilities, to protect cultural and natural resources, to maintain the physical security of DOE facilities, and to prevent or limit inadvertent human and environmental exposure to residual contaminants. Institutional controls include methods to preserve knowledge and to inform current and future generations of hazards and risks (DOE 2000).

Although the DOE and EPA definitions differ slightly—DOE includes physical controls, such as fences and gates, as institutional controls—they both focus on the goal of protecting human health and the environment from residual hazards.

### **1.4 Types of Institutional Controls**

The types of institutional controls being used at the Fernald Preserve, which are outlined in this plan, serve two functions: (1) to eliminate the disturbance and monitor the use of the Fernald Preserve and (2) to minimize human and environmental exposure to residual contaminants, as described below. The site was divided into two subsections for institutional control purposes: the

## **UNCONTROLLED IF PRINTED**

Fernald Preserve and the OSDF. The OSDF includes the disposal facility and its buffer area. This area is enclosed by a fence and gates that are locked at all times, unless authorized personnel require access. The Fernald Preserve is all of the remaining property on site. The Fernald Preserve Visitors Center and associated trails and overlooks are accessible to the unescorted public. The two sections of the site are treated separately because of the greater restrictions that apply to the OSDF.

- **Controls to Eliminate Disturbance and Monitor Use of the Fernald Preserve (Section 2.0)**—Describes institutional controls, applicable to both the Fernald Preserve and the OSDF, that are designed to limit access and land use. These controls focus on ensuring that the Fernald Preserve remains in a configuration consistent with the designated land use and that unauthorized uses of the Fernald Preserve do not occur. These include proprietary controls; governmental controls; and the prevention of unauthorized use by means of informational devices, security, physical barriers, and routine inspections. As part of the informational devices, the Visitors Center was established to house site information. Also discussed are the methods of controlling, restricting, or prohibiting recreational activities. (Refer to Table 1–1 and Table 1–2 for a summary of these controls.)
- **Controls to Minimize Human and Environmental Exposure to Residual Contaminants (Section 3.0)**—Describes the institutional controls (i.e., monitoring and sampling) used to ensure the continued protection of human health and the environment. These controls focus on maintaining engineered systems and infrastructure that are designed to protect human health and the environment. This category also includes the use of the Visitors Center to provide educational information on the site remedy and measures required to monitor and maintain the remedy. These include routine inspections, permits, continuing groundwater remedial activities, routine maintenance and monitoring, and leachate management practices.

### **1.5 Agency Requirements for Institutional Controls**

The need for institutional controls is described in the OU2 and OU5 RODs (Appendix B). Page 9–16 of the OU5 ROD states: “One element of the selected remedy that will be used to ensure protectiveness is institutional controls, including continued access controls at the site during the remediation period, alternative water supplies to affected residential and industrial wells, continued federal ownership of the disposal facility and necessary buffer zones, and deed restrictions to preclude residential and agricultural uses of the remaining regions of the Fernald Environmental Management Project (FEMP) property.” The intent of the IC Plan is to describe the institutional controls, both physical and administrative, used at the Fernald Preserve. This IC Plan was submitted to EPA and OEPA under the OU5 ROD as a primary document and is part of the remedy for the Fernald Preserve.

**UNCONTROLLED IF PRINTED**

*Table 1-1. Controls on Disturbance and Use of the Fernald Preserve*

<b>Control</b>	<b>Requirement</b>	<b>Frequency</b>	<b>Scope</b>
<b>Proprietary Controls</b> 1. Establish points of contact	1. LM guidance	1. Initially and when updates are needed	1. Provide primary and backup points of contact for emergencies. Points of contact will be updated in the Legacy Management Plan as needed. The LM 24-hour emergency line is (877) 695-5322.
2. Ownership	2. OU2 ROD OU5 ROD LM guidance	2. Not applicable	2. The federal government will maintain ownership of site property. Management is the responsibility of LM.
<b>Governmental Controls</b> 1. Notations on land records or real estate restrictive license	1. OU2 ROD OU5 ROD	1. Annual verification	1. If management of portions of the Fernald Preserve (outside of the disposal facility area) is transferred to another federal entity at any time, all zoning and real estate restrictions will be communicated to the appropriate parties, and proper notifications will be provided as required.
<b>Preventing Unauthorized Use Of The Fernald Preserve</b> 1. Informational devices	1. OU2 ROD OU5 ROD	1. Not applicable	1. Informational devices <ul style="list-style-type: none"> <li>• The Visitors Center provides information on site remediation, site restrictions, ongoing maintenance and monitoring, and residual risks.</li> <li>• In order to maintain the integrity of the site, access may need to be limited or restricted in some areas. Signs indicating restricted access will require monitoring and maintenance to ensure their legibility and integrity.</li> </ul>
2. Security of the site	2. OU2 ROD OU5 ROD	2. Daily	2. Security <ul style="list-style-type: none"> <li>• There will be routine patrols of the Fernald Preserve and perimeter postings to prevent unauthorized access and use of the site.</li> <li>• Site facilities and structures will be locked when personnel are not present during non-business hours.</li> <li>• Some site facilities and structures will be fenced and locked at all times, and only authorized access will be permitted.</li> </ul>
3. Routine site inspections	3. OU2 ROD OU5 ROD	3. Annually	3. Formal inspections will be conducted to ensure that infrastructure, signs and postings, fences and gates, perimeter areas, and access points are in a secure and safe configuration according to the Fernald Preserve Area Post-Closure Inspection Checklist (refer to Appendix D).

**UNCONTROLLED IF PRINTED**

*Table 1-2. Controls on Disturbance and Use of the On-Site Disposal Facility*

<b>Control</b>	<b>Requirement</b>	<b>Frequency</b>	<b>Scope</b>
<b>Proprietary Controls</b> 1. Establish points of contact	1. OAC 3745-27-11(B)(3) OAC 3745-66-18(c)(3) OAC 3745-68-10 40 CFR Sec. 258.61(c)(2) 40 CFR Sec. 265.118(c)(3) 40 CFR Sec. 264.118(b)(3)	1. Initially and when updates are needed	1. Provide primary and backup points of contact to ensure authorized and emergency access. Points of contact are provided in Table 4-2 of the PCCIP. Updates will be provided as needed. The LM 24-hour emergency number is (877) 695-5322.
2. Ownership	2. OU2 ROD OU5 ROD	2. Not applicable	2. The federal government will maintain property ownership of the area comprising the OSDF and associated buffer areas. Management is the responsibility of LM.
<b>Governmental Controls</b> 1. Notations on land records or real estate restrictive license	1. OU2 ROD OU5 ROD	1. Annual review	1. If real estate restrictions are in place, annually verify that they are still in place. Restrictions will be provided in the deed, and proper notifications will be provided as required.
<b>Preventing Unauthorized Access to the OSDF</b> 1. Informational devices	1. OU2 ROD	1. Not applicable	1. Signs and postings include information on restrictions, access information, contact information, and emergency information.
2. Engineered barriers	2. OU2 ROD	2. Not applicable	2. Access to the OSDF is physically restricted by means of fences, gates, and locks.
3. Routine OSDF inspections	3. OU2 ROD OU5 ROD	3. Quarterly	3. Inspect the OSDF as specified in the PCCIP.

## **1.6 Updates to the Institutional Controls Plan**

The future LMICP schedule will be as follows:

- Each June, the annual Site Environmental Report will be submitted. The report will make recommendations based on the previous year's monitoring information.
- Each September, an annual review of the LMICP will be submitted. It will identify updates as necessary.
- Each January, the document will be finalized to correspond with the monitoring and reporting schedule.

Upon EPA and OEPA approval, it is anticipated that the LMICP will be finalized by January each year to correspond with calendar-year monitoring and reporting. Between October and January, EPA and OEPA comments will be addressed.

## **2.0 Controls to Eliminate Disturbance and Unauthorized Use of the Fernald Preserve**

### **2.1 Fernald Preserve**

The primary institutional controls established to eliminate disturbance and unauthorized use of the Fernald Preserve include continued federal ownership, real estate restrictions (if necessary), and using access controls and inspections to prevent unauthorized use of the Fernald Preserve. The institutional controls established to eliminate disturbance and unauthorized use of the Fernald Preserve are discussed in the following subsections and are summarized in Table 1-1.

#### **2.1.1 Proprietary Controls and Points of Contact**

Proprietary controls are controls that originate from the responsibilities associated with the ownership of property. These controls are established to ensure that the Fernald Preserve remains in a configuration consistent with the designated land use and that unauthorized uses do not occur. In the case of the Fernald Preserve, the federal government will maintain ownership, as stated in the OU2 ROD (DOE 1995). Primary and secondary points of contact have been established for emergency purposes, to ensure authorized access, and to ensure open communication (Appendix C). If an on-site emergency occurs, if unacceptable behavior is observed, or if someone has questions, the points of contact should be contacted.

The actions and items listed below are prohibited to ensure the ongoing protection of the site and anyone using the site. Prohibited actions will be clearly posted at site access points. The following list of prohibited actions and items applies to all unauthorized personnel:

- Alcohol and illegal drugs
- Firearms
- Removal or intentional damage of plants
- Mushroom gathering
- Soil excavation
- Removal or damage of archaeological materials
- Swimming and wading
- Camping
- Hunting, trapping, and fishing
- Dumping
- Fires, open flames, and smoking
- Tampering, manipulating, or damaging structures, fences, signs, water control devices, or any other federal property
- Traveling off public roadways and trails
- Pets of any kind

## UNCONTROLLED IF PRINTED

An interim residual risk assessment was performed to evaluate post-closure risks associated with the Fernald Preserve. The risk assessment was carried out in two phases. Phase I focused on the development of a Geographic Information System-based risk assessment tool to evaluate the final land use receptors identified in the OU5 ROD (i.e., undeveloped park user, expanded trespasser, and off-site farm resident) using certification data available in early 2006. This phase was completed in early 2007, and subsequent planning activities determined that there was no long-term need to maintain this tool for future risk assessment work. Phase II produced the *Interim Residual Risk Assessment Report*, which was released as Revision 1 in July 2007 (DOE 2007). This report demonstrates that the incremental lifetime cancer risk to six receptors (undeveloped park user, museum visitor, museum worker, groundskeeper, building maintenance personnel, and construction workers) that visit or work at the site is less than  $1 \times 10^{-4}$  lifetime cancers, which is consistent with CERCLA guidance. The receptors are exposed to residual contamination in the air, soil, and surface-water pathways. All pathways will be evaluated after the completion and certification of the groundwater remedial actions.

Land use restrictions may be modified or terminated in consultation with EPA and OEPA.

### 2.1.2 Governmental Controls

A part of the governmental controls at the Fernald Preserve will be the use of real estate notations and restrictions, should they become necessary (i.e., another organization would have the responsibility of managing the property). Notations on land records or similar restrictive real estate licenses will be in place for the Fernald Preserve and off-site property that is impacted by Fernald Preserve activities. LM will ensure that real estate notations remain in place as long as they are needed. In addition, if the management of any part of the site is transferred from DOE to another federal entity, DOE will ensure that the controls remain in place. According to the OU2 and OU5 RODs, LM will annually review deed restrictions, if implemented, to ensure that they remain in effect with the local authorities. A review of notations or real estate restrictions and other institutional controls will also be part of the CERCLA 5-year review process.

If DOE leases or transfers the management of the property to an entity other than DOE, the appropriate regulatory approvals will be secured, and restrictions and limitations will be communicated and implemented (e.g., zoning restrictions). In such cases, DOE will work with the agency to ensure that institutional controls for the active site will remain effective. This may be documented in a Memorandum of Understanding or other appropriate instrument. A description of the various types of institutional controls pertaining to the ownership or transfer of DOE land is included in the *Institutional Controls in RCRA and CERCLA Response Actions at Department of Energy Facilities* (DOE 2000).

### 2.1.3 Preventing Unauthorized Use of the Fernald Preserve

#### 2.1.3.1 Informational Devices

Signs posted along the perimeter of the Fernald Preserve are designed to discourage public access to the site at locations other than the Willey Road entrance. These signs state the following:

## **UNCONTROLLED IF PRINTED**

### Authorized Personnel Only

Site access should be made through the Willey Rd. entrance.  
In case of an emergency or to report suspicious activities or items, call (513) 910-6107 or (877) 695-5322 after hours.

The unauthorized entry upon any facility, installation, or real property subject to the jurisdiction, administration, or in the custody of the Department of Energy, which has been designated as a subject to the provisions contained in Title 10, Code of Federal Regulations (CFR), Part 860, is prohibited. The unauthorized carrying, transporting, or otherwise introducing or causing to be introduced, any dangerous weapon, explosive or other dangerous instrument or material likely to produce substantial injury or damage to persons or property, into or upon such facility, installation, or real property is likewise prohibited.

Whoever willfully violates these regulations, shall, upon conviction, be punishable by a fine of not more than \$5,000. Whoever willfully violates these regulations with respect to any facility, installation, or real property enclosed by a fence, wall, floor, roof, or other structural barrier, shall be guilty of a misdemeanor and, upon conviction, shall be punished by a fine not to exceed \$100,000 or imprisonment for not more than one year, or both. (Title 42, United States Code, § 2278(a); Title 18, United States Code, § 3571).

By authority of Section 229 of the Atomic Energy Act of 1954, as amended (Title 42, United States Code, § 2278(a)) and Title 10, CFR, Part 860 of the rules and regulations of the Department of Energy, this facility, installation, or real property has been designated as subject to these regulations by the United States Department of Energy. Trespassers may be subject to the provisions stated above.

Final site configuration includes postings at access points and other strategic locations, indicating prohibited activities and site contact information (Figure 2-1).

DOE opened a Visitors Center on site in the former Silos Warehouse, which was refurbished. The Visitors Center was completed in the summer of 2008. It contains information on and context for the remediation of the Fernald Preserve, including information on site restrictions, ongoing maintenance and monitoring, and residual risks. The Visitors Center also houses a computer (so that visitors may access electronic copies of documents and records), a meeting place, and other educational information as appropriate. A primary goal of the Visitors Center is to fulfill an informational and educational function within the community. The information in the Visitors Center serves as an institutional control, makes visitors aware of the Fernald Preserve's history and current condition, and helps prevent unsafe disturbances and uses of the site.

The Visitors Center is maintained and operated under the direction of LM. With stakeholder input, DOE will periodically evaluate the use of the Visitors Center and the programming provided there. The conceptual design of the Visitors Center was completed by the University of Cincinnati, with input from stakeholders. DOE will continue to obtain stakeholder input on decisions regarding changes to the Visitors Center or its ongoing operation.

Realizing that certain structures needed to remain at the Fernald Preserve to support the continued management of the site, DOE reconciled the OU3 ROD via a fact sheet (DOE 2006a).

## **UNCONTROLLED IF PRINTED**

The structures subject to the OU3 ROD reconciliation were those that were present solely to support the legacy management of the site. Other facilities at the site, under the authority of OU5, are required for the continued implementation of the ongoing groundwater remedy, the maintenance of the OSDF, and environmental monitoring.

### **2.1.3.2 Security of Site Facilities and Infrastructure**

During non-business hours, site facilities and structures will be locked when personnel are not present. A gate installed at the main site access location, the south Willey Road Entrance, will be open during the day to allow for public access. Other access points (for example, those along Paddys Run Road) are protected with access controls consisting of cables mounted on posts. Some site infrastructure, such as the OSDF restricted area, the CAWWT, and unhooded extraction wells, have fences constructed around them and will remain locked to prevent unauthorized access. Controls also include enforcing the land use restrictions, maintaining fences and other infrastructure (as needed), and replacing or updating postings as needed to ensure the site's security (Figure 2-1).

An on-site LM presence is responsible for routine patrols and inspections of the Fernald Preserve. The patrols will ensure that no unauthorized use of the site is occurring and that facilities and structures are secure. Any unauthorized activity should be reported to the site contact immediately (Appendix C).

The public also plays a role in ensuring the security and safety of the site. The new on-site Visitors Center (see Section 2.1.3.1) will result in community traffic and a public presence on the site. The final site configuration includes posting contact information at access points and other strategic locations (visible to the public); members of the community may call anytime they notice anything out of the ordinary or suspicious, or if they just have questions.

### **2.1.3.3 Routine Inspection of Property**

In 2007, formal inspections of site property and infrastructure were conducted quarterly as an effective means of ensuring that institutional controls were in place; however, depending on the time of year, some portions of the site are difficult to access due to obstacles such as dense vegetation and the presence of water. Beginning in 2008, portions of the site are inspected each quarter when areas are most easily and safely accessible. For example, the north woodlot and Paddys Run corridor are inspected in the winter, and the former production area is inspected in the summer. These area inspections will include verifying that no unauthorized access or use of the site is taking place, verifying that the desired results from restoration activities (e.g., seeding and planting) are being achieved, verifying that nuisance species are not out of control or are not responding to mitigation efforts, documenting the presence of newly formed erosion or debris in the area, and ensuring that institutional controls are being maintained. The distance between transects will be no more than 100 feet (ft), and may be less depending on the number of participants.

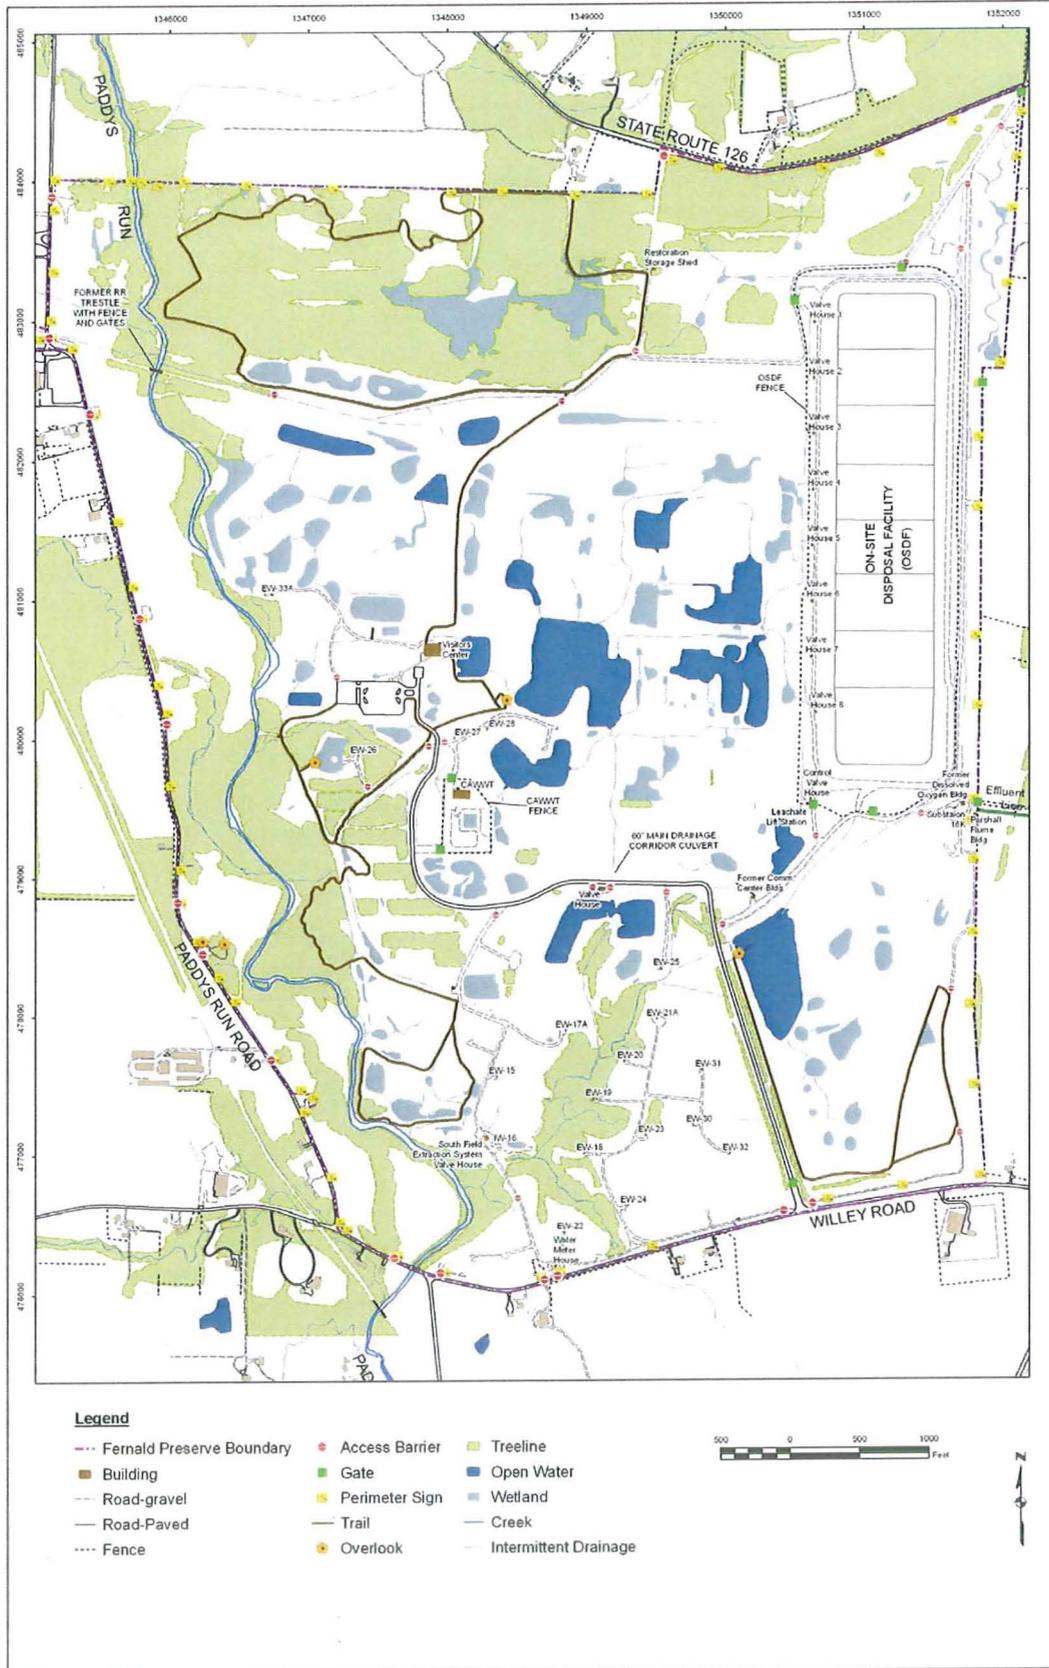


Figure 2-1. Fernald Preserve Site Configuration

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **UNCONTROLLED IF PRINTED**

All areas of the Fernald Preserve are inspected annually. In addition to area walkdown inspections, point-specific institutional control inspections for the entire site occur every quarter. These point-specific inspections include the following: access points, perimeter authorized vehicle access locations, perimeter signs, fences, interior authorized vehicle access locations, buildings and structures, the 60-inch culvert, uncertified areas, and roads and parking areas (Figure 2-1). Area-specific walkthroughs occur more frequently as activities (e.g., maintenance projects, ecological monitoring) warrant. Trails and overlooks are inspected weekly to ensure they are safe for public use. Results of the site inspections are included in the annual Site Environmental Report.

Grating that was installed to prevent access to the 60-inch Main Drainage Corridor culvert is inspected as part of the quarterly point-specific institutional control inspection. This culvert, along with an adjacent 18-inch culvert that is completely buried, was left in place even though it has fixed radiological contamination. These culverts are located directly below the OSDF leachate conveyance system and the main effluent line running between the CAWWT and the Great Miami River. Because of their location, these culverts could not have been removed without potentially impacting ongoing CAWWT and OSDF operations. Instead, metal grating was installed to prevent access to the 60-inch culvert. Site inspections will ensure that the 60-inch culvert grating is in place and is serviceable, and that the 18-inch culvert is not exposed through erosion or other ground disturbance. The fact sheet identifying clean buildings and structures for beneficial reuse under legacy management provides additional information regarding these culverts (DOE 2006a).

The CAWWT and the groundwater restoration systems are also inspected. Details of this process are included in Attachment A.

Findings for the site inspection, point-specific institutional control inspection, and weekly trail inspection are recorded on inspection forms. Example inspection forms are included in Appendix D. Findings are generally mapped or identified in the field using pin flags (yellow flags are used for items of radiological concern). The pin flag must be clearly marked or labeled to correspond with the documentation of the inspector. All findings are consolidated and, if further action is warranted, logged into a maintenance action item list (Appendix D), where resolution is tracked. The site inspections, how they are conducted, and elements of the inspections will evolve and be refined as site conditions and activities change. The inspection process will be reviewed carefully each year, and revisions will be made as necessary.

DOE has a voting membership with the Ohio Utility Protection Service. With this membership, DOE will be notified anytime an entity will be digging within a quarter of a mile of the site. DOE will then be able to contact the contractor or company doing the work to ensure that they are not impacting the Fernald Preserve property.

LM has an on-site manager who is responsible for the management and monitoring of the post-closure site, along with other duties, including managing the organization of and conducting formal inspections of site property. LM exercises a portion of this responsibility through various subcontracts.

## **2.2 OSDF**

The primary institutional controls for the disturbance and use of the OSDF include continued federal ownership, real estate restrictions (if necessary), and the prevention of unauthorized use of the OSDF and its associated buffer area. Engineered barriers, such as fencing, gates, and locks, are also important institutional controls (Figure 2-1). The institutional controls for the OSDF are summarized in Table 1-2. The table includes descriptions of the institutional controls, places where the institutional controls are referred to, and the requirements that drive the institutional controls. Primary and secondary points of contact have been established for emergency purposes, to ensure authorized access, and to ensure open communication (Appendix C). The OSDF will continue to be inspected quarterly, as specified in the PCCIP.

### **2.2.1 Proprietary Controls and Points of Contact**

Proprietary controls are controls that originate from the responsibilities associated with the ownership of property. The first is that the federal government will maintain ownership of the OSDF property in perpetuity, as stated in the OU2 ROD. The management of the OSDF (along with the management of the Fernald Preserve) transferred from EM to LM, but the OSDF and the site will always remain under federal ownership. The second is that primary and secondary points of contact have been established for emergency purposes, to ensure authorized access, and to ensure open communication.

### **2.2.2 Governmental Controls**

A fundamental part of governmental controls will be the use of real estate notations and restrictions. Notations on land records or similar restrictive real estate licenses are in place for the land occupied by the OSDF. LM will ensure that real estate notations remain in place. DOE will also maintain the responsibility of managing and maintaining the OSDF and all other activities needed to ensure that remedies remain effective. Any contracted support employees required to implement specific aspects of maintenance and monitoring will be made aware of all restrictions regarding the use and disturbance of the OSDF.

### **2.2.3 Preventing Unauthorized Use**

Physical barriers to restrict access to the OSDF and its surrounding buffer area include exclusion fencing, gates, and locks, which will be maintained. Signs and postings include information on restrictions, access information, contact information, and emergency information (Figure 2-1). Weather-resistant signs around the OSDF say the following:

CAUTION,  
Underground Radioactive Material,  
Contact Site Manager Prior to Entry  
513-910-6107

## **UNCONTROLLED IF PRINTED**

Signs on the access gates to the OSDF contain slightly different information. The gate signs contain the following information:

- The name of the site.
- The international symbol indicating the presence of radioactive material.
- A notice that trespassing is forbidden on this U.S. government-owned site.
- A local DOE telephone number and a 24-hour DOE emergency telephone number; this telephone number will be recorded in agreement with local agencies to notify DOE in the event of an emergency or breach of site security or integrity.

The final configuration of the OSDF includes monuments installed at the corners of the engineered disposal facility, and markers placed on the top and the east and west toes of the cell caps (indicating the boundaries between the cell caps). The corner monuments consist of concrete cylinders 12 inches in diameter and 48 inches long. They are installed to a depth of 42 inches, with 6 inches of concrete remaining above the surface. A brass plate with pertinent identification and location information is flush-mounted to the top surface of the concrete. The individual cell markers are brass plates with pertinent identification and location information attached to a brass rod and flush-mounted to the ground surface.

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## 3.0 Controls to Minimize Human and Environmental Exposure to Residual Contaminants

### 3.1 Fernald Preserve

The preliminary interim residual risk assessment performed for the second CERCLA 5-year review of the Fernald Preserve showed that the remedy is protective of human health and the environment. Section 6.4.4, "Review of Post-Remedial Action Contaminant Toxicity Assumptions," in the *Second Five-Year Review Report for the Fernald Closure Project* (DOE 2006d) explains the assessment process for residual constituents. Table 6-3, "Comparison of the CRARE [Comprehensive Remedial Action Risk Evaluation] and Present Risk for All Pathways," illustrates that the risks are below CERCLA limits. This preliminary interim residual risk assessment has been replaced by the final *Interim Residual Risk Assessment Report* (DOE 2007) as discussed in Section 2.0.

Institutional controls have been established for the Fernald Preserve to minimize the potential for human and environmental exposure to residual contaminants, ensuring that it is below acceptable limits. These controls include the inspection and maintenance of engineered systems and infrastructure designed to protect human health and the environment, and monitoring and sampling to ensure continued protection from exposure. Sections 3.3.1 through 3.1.3 and Table 3-1 provide additional information about these controls.

#### 3.1.1 Fernald Preserve Inspections

In 2007, DOE conducted formal quarterly inspections of the Fernald Preserve to ensure that institutional controls were being maintained and were functioning as intended, and that there were no activities being conducted on site that would pose a threat to human health or the environment, including any prohibited activities (Section 2.1.1). After a year, the frequency of the inspections was reevaluated. The Fernald Preserve inspections are now conducted annually. Specific quadrants are inspected quarterly so the entire site has been inspected during the year. Section 2.1.3.3 describes the inspection process for the Fernald Preserve in more detail.

A list of prohibited activities is posted at the primary site access points. Inspections of the area outside the OSDF are performed and documented on the Fernald Preserve Field Walkdown Inspection Form or the Fernald Preserve Institutional Control Inspection Form (Appendix D), as appropriate, to ensure that there is no digging or soil removal of any kind, including wind or water erosion, and that infrastructure designed and in place for protecting against human exposure to contaminants, such as fences and signs, are in good condition and functioning as intended. Inspections also include the CAWWT, the groundwater restoration system, and the active outfall line. The inspection of the active outfall line includes ensuring sufficient soil coverage over the pipeline in an area where the soil is cultivated by a local farmer. A proper check of the soil cover on the outfall line involves locating the line in the area of concern (with surveying) and use of a hand probe or shovel to check the depth of the line to ensure that there are at least 30 inches of cover. The soil cover check is completed annually in the fall, after the harvest. If soil cover over the pipeline is insufficient, DOE will notify the landowner and the regulators. DOE will then take the necessary corrective actions, in consultation with the landowner. The inspection of uncertified areas (Volume I, Figure 2-3) includes ensuring that there is no digging or disturbance of the soils and no tampering with any signs that may be posted to define the areas.

**UNCONTROLLED IF PRINTED**

Table 3-1. Controls to Minimize Human and Environmental Exposure to Residual Contaminants at the Fernald Preserve

Control	Requirement	Frequency	Scope
Fernald Preserve Inspections	OU2 ROD OU5 ROD	Annually, with point-specific institutional controls inspected quarterly and on-site trail inspections conducted weekly.  Frequency will be reevaluated through the CERCLA 5-year review process.	Inspect infrastructure in place for protection against human exposure to contaminants, such as fences and postings, to ensure their proper condition and function. <ul style="list-style-type: none"> <li>• Ensure that there is no removal of soil by wind or water erosion. Inspect water control structures, swales, and discharge points.</li> <li>• Inspect access control grating on the 60-inch Main Drainage Corridor culvert.</li> <li>• Conduct an inspection to ensure that prohibited activities, such as digging, off-road travel, camping, or hunting, are not taking place on site.</li> </ul>
Surface Water Discharge Inspections	NPDES	Annually	<ul style="list-style-type: none"> <li>• Inspect surface water drainages and discharge to ensure that water is not being impacted by other means, and that drainages are functioning properly.</li> <li>• Discharge points to Paddys Run will be inspected for general water quality conditions (e.g., presence or absence of scum, foam, oil sheen, turbidity, color, other putrescent or unusual material). Upgradient drainage channels may be inspected for excessive erosion and obstructions.</li> <li>• Inspect active outfall line to ensure that sufficient soil cover is present.</li> <li>• The Great Miami River will be inspected at the point of the Fernald Preserve discharge for the same general water quality conditions identified above.</li> </ul>
Groundwater Remedy Sampling and Monitoring	IEMP	Frequency of sampling and monitoring of groundwater is dependent upon the effectiveness of the remediation efforts and will vary over time.	Monitor groundwater to ensure that the remedy is functioning properly until remedy certification is complete. Details are provided in the IEMP.

## **UNCONTROLLED IF PRINTED**

Grating that was installed to prevent access to the 60-inch Main Drainage Corridor Culvert is inspected as well. More frequent inspections may be required under certain circumstances (a pattern of unauthorized activities or uses). If warranted, more frequent inspections will be carried out to ensure that site restrictions are being maintained. Since completion of the Visitors Center, a workforce is present on site daily. It is part of the workforce's responsibilities to help ensure that prohibited activities are not taking place.

### **3.1.2 Surface Water Discharge**

Until the groundwater remedy is complete, and as long as surface water discharges to the Great Miami River, an NPDES permit or similar permit mechanism needs to be in place. Monitoring and reporting to maintain compliance with the permit requirements will be part of post-closure responsibilities at the Fernald Preserve. Once there is no longer any surface water discharge to the river, the permit for surface water discharge may be closed out. Prior to the completion of the remedy, if it is decided that monitoring a particular outfall location is no longer necessary, LM may request that OEPA remove that particular location from the permit at that time. OEPA issues and maintains the NPDES permit.

### **3.1.3 Groundwater Remedy and Monitoring**

The institutional controls to prevent the use of groundwater in the off-property area where groundwater contamination is greater than the 30 ppb uranium final remediation level consist of the following:

- The DOE-funded public water system, which provides an alternate water supply for residents in the areas affected by groundwater contamination from the Fernald Preserve.
- The Hamilton County water well permitting process. Drinking water wells cannot be installed until a permit has been obtained from the Hamilton County Health Department. DOE will ensure that the Health Department is aware of the off-property areas where groundwater contamination is greater than 30 ppb uranium. DOE has sent a letter and map documenting the contaminated area to the Hamilton County Health Department and requested that no permits be issued in this area, given the contamination and the ongoing aquifer remediation (DOE 2006c). Additionally, the letter requests that DOE be notified of any proposed drilling activities in the vicinity of the plume. If DOE is made aware of any drilling activities in the area of the off-site plume, the regulators must be notified.
- Daily well field operational inspections and routine groundwater sampling. Operational personnel make daily rounds of the South Plume well field and will be instructed to notify management of any unusual activity in the area (e.g., well drilling). Groundwater sampling personnel will also be in the area of the South Plume for routine groundwater monitoring and will be instructed to notify management of any unusual activities.

Aquifer restoration operations and maintenance activities are part of an ongoing remedial action governed by the OU5 ROD. The requirements for the operations and maintenance activities are outlined in the OMMP (Attachment A). The OMMP, as originally written, defines the operating philosophy for the extraction and re-injection treatment systems (re-injection is not being used at this time), the establishment of operational constraints and conditions for given systems, and the establishment of the process for reporting and instituting corrective measures to address

## **UNCONTROLLED IF PRINTED**

exceedances in discharge limits. How to address exceptional operating conditions is also addressed.

Section 2.0 of the OMMP discusses the general commitments of the aquifer restoration and provides details regarding the aquifer cleanup levels, discharge limits, groundwater treatment capacity, groundwater treatment decisions, extraction rates, and injection rate and quality (although injection is no longer used). Section 3.0 of the OMMP goes into more specific detail about the design of the groundwater remediation systems, well field designs, and pump details. Section 4.0 discusses the projected flow during remediation activities. Section 5.0 discusses the Operations Plan, Section 6.0 discusses operations and maintenance, and Section 7.0 discusses roles and responsibilities. Sections 6.0 and 7.0 provide information that pertains directly to institutional controls.

Groundwater will be treated to help meet uranium discharge limits specified in the OU5 ROD until discharge limits can be achieved by blending untreated water alone. Eliminating groundwater treatment will not be pursued (1) at the expense of compromising mass removal or (2) if significant deviations from desired aggressive pumping rates are required. The CAWWT will undergo decontamination and demolition (D&D) once it has been documented to EPA and OEPA that the facility is no longer needed to meet uranium discharge limits.

When DOE has certified the groundwater remedy complete (which is defined in the *Fernald Groundwater Certification Plan* [DOE 2006b]) and EPA has approved it, well field infrastructure will be decommissioned and disposed of. All needed soil excavation and certification associated with D&D of the CAWWT and the removal of well field infrastructure will be in accordance with SEP (DOE 1998a) requirements.

Post-remedy long-term groundwater monitoring will be conducted. Requirements are defined in the Fernald Groundwater Certification Plan and will be implemented through the IEMP (Attachment D). Post-remedy long-term groundwater monitoring will be evaluated as part of the CERCLA 5-year reviews.

### **3.2 On-Site Disposal Facility**

Institutional controls are necessary for the OSDF and its buffer area to ensure the prevention of human and environmental exposure to residual contaminants. Further information about these controls is given below and is included in Table 3–2. Details regarding OSDF inspection and maintenance are included in the PCCIP (Attachment B). The OSDF was constructed to permanently contain impacted materials derived from the remediation of the OUs at the Fernald Preserve. All material placed in the OSDF was required to meet pre-established WAC. The WAC are presented in Table 3–1 of the PCCIP. Table 3–2 of the PCCIP provides a description of the types of material or material categories that were allowed in the OSDF. The design and construction of the OSDF is described in Section 3.0. Section 4.0 of the PCCIP discusses the institutional controls for the OSDF, which have been included and summarized in this IC Plan. Table 4–1 of the PCCIP shows institutional controls for the OSDF as they were identified in the OU2 and OU5 RODs.

**UNCONTROLLED IF PRINTED**

*Table 3-2. Controls to Minimize Human and Environmental Exposure to Residual Contaminants at the On-Site Disposal Facility*

Control	Reference	Requirement	Frequency	Scope
<b>OSDF Inspection and Maintenance</b> 1. Routine OSDF cap inspection	1. PCCIP	1. OAC 3745-66-18(A) and (C) 40 CFR Sec. 264.118(b)(2) 40 CFR Sec. 265.118(c)(2) OU5 ROD	1. Quarterly for the toe and specific ICs. For site walkdown, semiannually, in the spring and fall (to coincide with mowing/burning and favorable weather conditions.)	1. Detect and record any change in the following: <ul style="list-style-type: none"> <li>• General health, density, and variety of vegetation cover.</li> <li>• Presence of deep-rooted woody species.</li> <li>• Evidence of burrowing animals on the cover.</li> <li>• Presence, depth, and extent of erosion or surface cracking, indicating possible cap deterioration.</li> <li>• Visibly noticeable subsidence, either locally or over a large area—any sufficient to pond water.</li> <li>• Presence and extent of any leachate seeps.</li> <li>• Integrity of run-on and runoff control features.</li> <li>• Integrity of benchmarks.</li> </ul> Section 4.0 describes the process for contingency planning and notification.
2. Unscheduled OSDF cap inspection	2. PCCIP	2. OU5 ROD	2. As needed	2. Unscheduled inspections will be carried out as needed under specific circumstances (e.g., follow-up of maintenance, after significant natural events). Follow-up or contingency inspections will be conducted no more than 30 days after repair (refer to Section 4.0) to investigate and quantify specific problems encountered during a routine scheduled inspection, a special study, or another DOE or regulatory agency activity. Follow-up inspections determine whether the cover/cap stability is threatened and evaluate the need for maintenance, repairs, or corrective actions. Contingency inspections may be situation-unique inspections ordered by DOE or regulatory agencies.

**UNCONTROLLED IF PRINTED**

Table 3-2 (continued). Controls to Minimize Human and Environmental Exposure to Residual Contaminants at the On-Site Disposal Facility

Control	Reference	Requirement	Frequency	Scope
3. Routine OSDF cap custodial and preventive maintenance	3. PCCIP	3. OAC 3745-66-18(A) and (C) 40 CFR Sec. 264.118(b)(2) 40 CFR Sec. 265.118(c)(2) OU5 ROD OU2 ROD	3. As needed	3. Routine custodial and preventive maintenance consists of the following: upkeep of the vegetation cover, general mowing, clearing of debris, removal of woody weeds and seedlings, reseeding.
4. Routine OSDF site area inspection	4. PCCIP	4. OAC 3745-66-18(A) and (C) 40 CFR Sec. 264.118(b)(2) 40 CFR Sec. 265.118(c)(2) OU5 ROD OU2 ROD	4. Quarterly for the toe and specific ICs. For site walkdown, semiannually, in the spring and fall (to coincide with mowing/burning and favorable weather conditions).	4. Inspect the adjacent area within approximately 0.25 mile of the OSDF buffer area. Describe evidence of land use changes. <ul style="list-style-type: none"> <li>Evaluate natural drainage courses in the immediate vicinity of the OSDF to determine whether there is a threat to the OSDF integrity. Walk approximately 1,000 ft of adjacent natural drainage courses and note unusual or changed sediment deposits, large debris accumulations, manmade or natural constrictions, and recent or potential channel changes.</li> <li>Evaluate and record the development of gullies.</li> <li>Evaluate growth of vegetation in channels.</li> <li>Determine the condition and required maintenance of on-property roads.</li> <li>Inspect and record the area adjacent to the OSDF for erosion channels, accumulations of sediment, evidence of seepage, and signs of animal or human intrusion.</li> </ul>
5. Unscheduled OSDF site area inspection	5. PCCIP	5. OU5 ROD OU2 ROD	5. As needed	5. Investigate reports that site integrity may be compromised. Conduct follow-up or contingency inspections to investigate and quantify specific problems encountered during a routine scheduled inspection, special study, or other DOE or regulatory agency activity. Determine whether the support systems are threatened, and evaluate the need for maintenance, repairs, or corrective actions. Contingency inspections are situation-unique inspections ordered by DOE when it receives information indicating that site integrity has been or may be threatened.

**UNCONTROLLED IF PRINTED**

Table 3-2 (continued). Controls to Minimize Human and Environmental Exposure to Residual Contaminants at the On-Site Disposal Facility

Control	Reference	Requirement	Frequency	Scope
6. Routine OSDF site area custodial and preventive maintenance	6. PCCIP	6. OAC 3745-66-18(A) and (C) 40 CFR Sec. 264.118(b)(2) 40 CFR Sec. 265.118(c)(2) OU5 ROD	6. As needed	6. <ul style="list-style-type: none"> <li>Repair/replace fencing, gates, locks, and signs due to normal wear, severe weather conditions, or vandalism.</li> <li>Mow/clear undesired woody vegetation; reshape, reseed, and repair banks; unplug culverts; and clean out run-on/runoff diversion channels.</li> </ul>
<b>Leak Detection/ Leachate Monitoring</b> 1. OSDF leachate and environmental monitoring	1. GWLMP and IEMP	1. OAC 3745-27-6 OAC 3745-54-90 through 99 (applicable portions) <sup>a</sup> DOE 435.1	1. Varying frequencies depending on sampling stage (e.g., baseline)	1. <ul style="list-style-type: none"> <li>A routine monitoring program will be maintained for four zones within and beneath the OSDF. These zones include the LCS, the LDS, perched water within the glacial overburden, and the Great Miami Aquifer (GWLMP Section 3.2.1). Samples from the four zones are being collected and analyzed as specified in the GWLMP.</li> <li>Environmental monitoring parameters and frequencies are identified in the IEMP.</li> </ul>
<b>Leachate Management</b>	GWLMP	OU5 ROD GWLMP	As needed	Leachate will continue to be treated.

<sup>a</sup>OAC 3745-54-90 through 99 are not applicable in entirety (refer to the OSDF GWLMP, Appendix A).

## **UNCONTROLLED IF PRINTED**

Section 5.0 of the PCCIP discusses environmental monitoring activities that are necessary to continue during the post-closure care period, including air monitoring, groundwater monitoring, and the monitoring of other media (e.g., surface water, vegetation). Section 6.0 addresses routine inspections, which are important institutional controls. Section 3.2.1 of this IC Plan addresses these inspections in detail. Also addressed in the PCCIP are unscheduled inspections (Section 7.0), custodial monitoring and contingency repairs (Section 8.0), and emergency notifications (Section 10.0).

### **3.2.1 OSDF Inspection and Maintenance**

DOE conducts inspections and maintenance on the OSDF cap and cover system. Inspections were conducted quarterly for 2 years following the completion of Cells 7 and 8. The frequency of inspections was to be reevaluated following the 2 years of quarterly monitoring. Beginning in spring 2009, walkover cap inspections of the entire OSDF cap will now occur semiannually, in the spring and fall. During the winter months, safely accessing the OSDF and scheduling of the inspection is difficult due to the frequency of inclement weather. During the summer months, vegetation on the majority of the cap is so dense that walking on the cap is difficult, and visibility of the ground surface is greatly reduced, limiting the quality of the actual inspection. Spring and fall walkdowns will be timed to take advantage of recent mowing and favorable weather conditions.

Although the frequency of complete cell cap walkdowns is now semiannual, quarterly inspections of the OSDF will continue. Areas of recent revegetation or other significant maintenance will be walked down quarterly. In addition, the cap along the toe of the slope, as well as drainage features and institutional controls related to the OSDF (e.g., fencing, signs, locks) will continue to be inspected quarterly. Custodial and preventive maintenance and unscheduled inspections will be conducted as needed. Table 3-2 provides current details on the required inspections and maintenance.

Routine inspections include monitoring the health of the vegetative cover, the presence of deep-rooted woody species, evidence of burrowing animals, the extent of surface erosion or cracking, subsidence, if any, the extent of any leachate seeps, the integrity of runoff controls, and the integrity of benchmarks. Inspections also include evaluating the condition of physical access controls (fences, gates, locks, and signs); observing adjacent properties for evidence of land use changes; evaluating natural drainage courses in the immediate vicinity; and inspecting the general area for erosion, excess sediment, seepage, and signs of human or animal intrusion. If determined necessary or appropriate, the frequency of the routine inspections may be revised through the CERCLA 5-year reviews. More-frequent monitoring, due to changes in the cap or surrounding areas, is always a possibility; however a decrease in frequency would require discussion, review, and approval at the time of the 5-year review. Routine custodial maintenance includes the upkeep of the vegetative cover, general mowing, the clearing of debris and woody plants, and reseeding.

The monitoring and management of the OSDF vegetative cover will be carried out to optimize the establishment and continued growth of the native grass mix specified and seeded on the OSDF cap. Monitoring will consist of the collection of data to determine the percentage of native cover on the OSDF cap. Data on the Cell 1 cap were collected in summer 2005, the fourth growing season after seeding. Cell 2 cap data were collected in 2007, Cell 3 cap data were collected in 2008, and Cells 4, 5, 6 and 7 cap data were collected in 2009; these data collection

## **UNCONTROLLED IF PRINTED**

dates also correspond to the fourth growing season after seeding. Sample collection consists of establishing a grid on each cell cap and collecting data from random one-meter quadrat locations within the grid. Data are collected once during each sampling event in late summer. LM issues the results of data collection to the regulatory agencies as soon as practical after the data have been compiled and processed, but no later than October 15 of the collection year.

Routine management of the OSDF cap includes mowing and baling in the spring to control woody vegetation. Mowing and baling occurs on a 3-year rotation. Cells 1, 2, and 3 were mowed in 2007; Cells 4, 5, and 6 were mowed in 2008; and Cells 7 and 8 were mowed in 2009. Additional mowing may take place to manage weeds and promote native grass and forb establishment. If the spring mowing is not possible, it will be postponed until the following fall. Baling of the cut grasses will remove thatch and promote prairie-grass growth. Selective herbicide will be used as needed to control invasive or nuisance plants that are identified on the cap. Controlled burning of the cell cap would be the best management tool to maximize the growth of prairie grass. Working with the community and regulators, LM will maintain the cap vegetation (including the possibility of burning) to properly manage the selected seed mixture. Decisions regarding management of the cell caps are made after percent-native-cover data are collected.

As stated, the goal is to optimize the establishment of native grasses on the OSDF cap. DOE and the regulatory agencies agree that the goal is not necessarily to establish a functioning prairie on the OSDF cap. Native grasses (e.g., big bluestem, little bluestem, switch grass) are more drought-tolerant than cool-season grasses, and their complex root structures will provide additional stability. A pass/fail criterion will not be set for the performance of the native grasses on the OSDF cap. However, a goal of 50 percent native cover has been considered for restored prairies on the site and will be used as a goal for native grasses on the OSDF. If the concentration of native grasses remains at or above 50 percent, management and monitoring will continue as outlined above. If the concentration of native grasses falls below 50 percent, LM will work with the regulatory agencies to develop an appropriate plan to increase the concentration of native grasses. Steps taken may include, but are not limited to, selective reseeding, installing native grass plugs, increasing the use of selective herbicide, and further considering controlled burns on the cap, or some combination of these. The requirement to maintain 90 percent cover at all times after seeding on the OSDF cap will remain unchanged to minimize cap erosion. The 90 percent cover requirement applies to all vegetation on the cap and is not specific to native grasses.

Unscheduled inspections will be conducted as needed if specific circumstances warrant. An example would include following up on the completion of a maintenance action or conducting a cap inspection after an unusually large storm. Based on the results and determinations made from the inspections, DOE will take appropriate actions to address any identified problems.

The maintenance and monitoring of the general support systems for the OSDF will include ensuring that physical access controls and restrictions are maintained, conducting routine inspections of the OSDF and surrounding area, performing routine maintenance activities, and monitoring the environment. Table 3-1 provides additional information on the required monitoring and maintenance.

The federal government will remain the property owner, and access to the OSDF and buffer area will continue to be restricted in perpetuity by means of fences, gates, locks, and warning signs (Figure 2-1). Only the federal government will authorize access, which will be limited to personnel conducting inspections, custodial maintenance, and corrective action.

### **3.2.2 Leak Detection/Leachate Monitoring**

Routine OSDF leak detection and leachate monitoring is currently governed by the GWLMP (Attachment C). Table 3-2 includes some of the details. Section 3.0 of the GWLMP provides the regulatory analysis and strategy for the OSDF monitoring. The regulatory drivers come from the applicable or relevant and appropriate requirements identified in the OU2, OU3, and OU5 RODs. Section 4.0 of the plan provides a significant amount of information on the OSDF leak detection monitoring program. The text includes the program elements, monitoring frequencies, selection of analytical parameters, and data evaluation. Section 5.0 is a discussion of the leachate management monitoring program. It covers the management approach and monitoring needs. Section 6.0 provides the reporting requirements and the notification and response actions for when flow in the leak detection system exceeds action levels, which could be an indication of a failure in the cap or liner and could pose a threat to human health or the environment. Table 6-1 of the GWLMP outlines these actions in detail.

### **3.2.3 Leachate Management**

Also involved in the maintenance and monitoring of the OSDF system is the management of the leachate that enters the LCS. Additional information regarding leachate management is also found in Appendix D of the GWLMP. Leachate will be treated through the CAWWT until the CAWWT is no longer available (the CAWWT is not expected to be decommissioned before the 2010 to 2011 time frame). A passive leachate treatment system is an option after the CAWWT is no longer available. Long-term treatment needs for the OSDF leachate during the period after the CAWWT is decommissioned will be reevaluated in 2009 (prior to the shutdown and D&D of the CAWWT). It is expected that by 2009, approximately 3 years after the last cell is capped, the leachate flow will be stabilized at a low level, and the leachate chemistry will be stable and well defined. The quantity of leachate collected, treated, and discharged will continue to be documented. Leachate will be sampled and analyzed as specified in the OSDF GWLMP.

## **4.0 Contingency Planning**

Site inspections, monitoring activities, and maintenance activities are designed to identify problems before they develop into a need for corrective action. In the unlikely case that a natural event, vandalism, or other event threatens the integrity or operation of the OSDF or remainder of the site, corrective actions will be carried out to mitigate the problem. In addition, DOE will evaluate the factors that caused the problem and ensure that the possibility of reoccurrence is minimized or avoided.

To the extent that contingency actions can be anticipated or planned, they have been, and will continue to be, incorporated into the LMICP or attached support plans. Unanticipated contingency actions will be subject to CERCLA processes prior to implementation. Stakeholders, regulatory agencies, and the public will be notified of any unanticipated contingency actions under CERCLA that have to be implemented.

### **4.1 Unacceptable Disturbances or Use**

If an unacceptable condition or disturbance occurs at the Fernald Preserve during legacy management, corrective actions will be employed, and appropriate notifications will occur. Unacceptable conditions regarding the disturbance or use of the Fernald Preserve may include unauthorized access to the site (e.g., off-road vehicles), attempts to use soil or water on the site in an inappropriate manner, attempts to access the OSDF, or damage to fencing, gates, or postings. Section 2.1.1 provides an extensive listing of those actions that are prohibited and apply to all unauthorized personnel. Unacceptable conditions related to exposure to residual contaminants could include damage or disruption to the OSDF or attempts to use groundwater still undergoing remediation.

Contingency inspections are unscheduled inspections ordered by DOE when it receives information indicating that site integrity has been or may be threatened. Events that could trigger contingency inspections include severe vandalism, intrusion by humans or livestock, severe rainstorms, or unusual events of nature such as tornadoes or earthquakes. If any unacceptable activities were found to be occurring on site, LM would implement the appropriate corrective actions, both to repair damage, if required, and to prevent or reduce the chances of reoccurrence. Some of the possible corrective actions LM may consider are increasing the frequency of surveillances by site personnel, requesting patrols by local law enforcement personnel, adding surveillance cameras, evaluating and possibly revising current postings at the site, and prosecuting individuals caught engaging in prohibited, destructive, or disruptive behavior.

Events that have caused severe damage to the OSDF or that pose an immediate threat to human health and the environment will be immediately reported to EPA and OEPA. Detailed information regarding OSDF contingency inspections, corrective actions, and reporting are contained in the PCCIP (Attachment B).

Minor maintenance actions such as seeding small areas, minor erosion repairs on the OSDF or other parts of the site, the replacement of postings and signs, minor fence and gate repairs, and minor maintenance of site infrastructure will not be subject to the notification process described above. The need for minor maintenance will be identified on routine inspection forms issued to EPA and OEPA and will be subject to follow-up inspections as discussed above.

## **4.2 Suspected Contaminated Soil, Material, or Debris**

Suspected contaminated soil, material, or debris is defined as items found by either Fernald Preserve workers or visitors to the Fernald Preserve that could pose an environmental or health hazard. The potential hazard may be radiological (e.g., contaminated metal, concrete, asphalt, tile), discolored soils, unidentified objects or containers, or suspect liquids exposed by erosion or excavation.

Upon discovery, the suspect soil, material, or debris will be marked with a pin flag, and Radiological Controls or Health and Safety personnel shall be notified. The radiological control technician will follow proper protocol addressed in the *Fernald Preserve Procedure for Suspect Material or Debris Discoveries* (DOE 2009) for surveillance and disposition of the material or debris.

For debris, DOE-approved limits for contamination from residual radioactive material will be used to determine the proper disposal method. For soils with evidence of contamination (i.e., removable contamination or removed debris with instrument readings above background), these areas will be marked for additional investigation. Debris that does not meet the unrestricted release criteria and soils that exceed the cleanup criteria will be transported to an off-site disposal facility for disposal in accordance with the terms of the Amended Consent Agreement and EPA's Off-Site Rule. If unexpected large-scale soil contamination is identified, the protocol in the SEP (DOE 1998a) will be followed, which is the same protocol that will be used for the uncertified areas described in Volume I, Section 2.4.4.

The disposal of any contaminated debris or soil will be handled on a case-by-case basis once adequate historical knowledge of the soil is compiled and any additional characterization is complete. Until then, temporary storage in covered stockpiles or drums (depending on volume) will be established, and a path forward through final disposition will be developed for review and approval by appropriate agencies as necessary.

Although not expected, any tagged Fernald property items suspected to be from Fernald that are found on site or off site are to be reported by calling either the S.M. Stoller Fernald Preserve manager at (513) 648-3333 during business hours or the 24-hour LM emergency number at (877) 695-5322.

## **4.3 Unexpected Cultural Resource Discoveries**

Although excavation activities on the Fernald Preserve are expected to be limited, several planned excavations will be associated with public amenity construction, erosion repair, and the eventual removal of the CAWWT and associated aquifer restoration infrastructure. If unexpected cultural resources are identified within an excavation, the site procedure for handling unexpected cultural resource discoveries will be followed. This includes isolating the affected area until the on-call subcontractor can perform the necessary investigation. This follows the same process used during remediation and restoration activities. DOE will continue to consult with the appropriate parties, such as the State of Ohio Historic Preservation Office, to determine an appropriate course of action.

#### **4.4 Notification Process**

Upon discovering any institutional control breaches, LM will notify EPA and OEPA of the breaches and of DOE's plan for correcting them. Stakeholder notifications will be handled as deemed appropriate by DOE. LM will address any activity that is inconsistent with the institutional control objective or use restrictions as soon as practical, but in no case will the process begin later than 10 days after LM becomes aware of the violation.

DOE will notify EPA and OEPA regarding how it has addressed or will address the breach within 10 days of the initial notification. A follow-up inspection will occur within 30 days of the completion of any corrective action. The results of follow-up inspections will be provided to EPA and OEPA.

#### **4.5 Coordination with Other Agencies**

LM sent letters to the Hamilton County Sheriff's Department; the Butler County Sheriff's Department; and Ross, Crosby, and Morgan Township police and fire officials requesting that they notify LM if they observe any unauthorized human intrusion or unusual natural event.

LM sent a letter to the Ohio Earthquake Information Center, located at Alum Creek State Park in Delaware County, Ohio, requesting that they notify LM of any earthquake activity near the Fernald Preserve.

LM will monitor emergency weather notification system announcements and has requested notification from the National Weather Service (either Wilmington or Cincinnati) of severe weather alerts.

To notify LM of site concerns, the public may use the 24-hour security telephone numbers monitored at the DOE facility in Grand Junction, Colorado. The 24-hour security telephone numbers will be posted at site access points and other key locations on the site.

**THE 24-HOUR EMERGENCY NUMBER  
(877) 695-5322**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **5.0 Information Management and Public Involvement**

### **5.1 Information Management**

The long-term retention of records and dissemination of information is another critical aspect of legacy management. LM will manage records that are needed for legacy management purposes. Records will be dispositioned in accordance with DOE requirements at the National Archives and Records Administration or a federal records center for their required retention period or destroyed once they have reached the end of their required retention. LM will retain copies of selected records documenting past remedial activities (e.g., CERCLA Administrative Record [AR]) for legacy management purposes. In addition, newly acquired CERCLA AR records will be available to stakeholders. LM will also manage any centralized system to provide stakeholders with access to information.

For institutional control purposes, LM will retain and manage copies of selected information or data documenting past remedial activities (e.g., soil certification) and the design and contents of the OSDF. In addition, newly acquired information or data related to remedy performance will be readily available to the regulatory agencies and the public. LM currently uses the Geospatial Environmental Mapping System (GEMS), a Web-based application, to provide the agencies and the public with Internet access to electronic environmental groundwater, surface water, sediment, and OSDF analytical data. Additionally, GEMS provides access to site and OSDF inspection photographs. Environmental dosimeter, air particulate, and radon data are available as downloadable files on the LM Web site (<http://www.lm.doe.gov/Fernald/Sites.aspx>).

An index of the AR documents for the Fernald Preserve is available on the LM website (<http://www.lm.doe.gov/CERCLA/SiteSelector.aspx>). The index includes document number, document date, and document title. Instructions for ordering AR documents can be found on the LM website.

#### **5.1.1 Fernald Preserve Data and Information**

Site inspection data will include information from inspections of the general site area, perimeter, access points, infrastructure, and signs and postings. The Fernald Preserve Field Walkdown Inspection Form (Appendix D) will be used to collect the data and document the inspection. The site inspection reports are available at <http://www.lm.doe.gov/Fernald/Sites.aspx>.

The IEMP (Attachment D) defines environmental monitoring requirements for the Fernald Preserve. Monitoring data will include all environmental monitoring data associated with the site, including groundwater remediation data and ecological restoration monitoring data.

#### **5.1.2 OSDF Data and Information**

OSDF inspection data will include information from inspections of the cap, infrastructure (e.g., LCS/LDS pipe networks), perimeter fencing, buffer area, and signs and postings. The Fernald Preserve OSDF Walkdown Inspection Form and the LCS/LDS Inspection Checklists will be used to collect the data and document the inspections. The OSDF inspection reports are available at <http://www.lm.doe.gov/Fernald/Sites.aspx>.

## **UNCONTROLLED IF PRINTED**

The GWLMP (Attachment C) specifies the frequencies and parameters being monitored in four horizons for each cell of the OSDF.

### **5.1.3 Reporting**

The annual Site Environmental Report will continue to be submitted to EPA, OEPA, and the community on June 1 of each year. It will provide information on institutional controls, monitoring, maintenance, site inspections, and corrective actions while continuing to document the technical approach and summarizing the data for each environmental medium. It will also summarize CERCLA, Resource Conservation and Recovery Act (RCRA), and waste management activities. The report will include water quality and water accumulation rate data from the OSDF monitoring program. The summary report serves the needs of the regulatory agencies and other key stakeholders. The accompanying detailed appendixes of the Site Environmental Report are intended for a more technical audience, including the regulatory agencies, and will fulfill National Emissions Standards for Hazardous Air Pollutants (Title 40 *Code of Federal Regulations* Part 61 [40 CFR 61], Subpart H) reporting requirements, as necessary. Additional continued reporting requirements under other regulatory programs will be addressed outside the annual Site Environmental Reports (e.g., NPDES monthly discharge reports).

Once it is determined that the institutional controls are functioning, the remedy is performing as intended, and the groundwater remediation is effective, the reporting frequency may be reevaluated. In the event of unacceptable conditions or disturbance, more frequent notification and reporting will be required as defined in Section 4.0.

Under CERCLA, a review of the remedy is required every 5 years at sites where the level of remaining contaminants limits site use. The CERCLA 5-year reviews at the Fernald Preserve will focus on the protectiveness of the remedies associated with each of the five OUs. Also included will be summaries of the inspections conducted for the OSDF, the CAWWT, the groundwater restoration system, and the active outfall line to the Great Miami River. To facilitate the review, a report addressing the ongoing protectiveness of the remedies will be prepared and submitted to the EPA and OEPA. The institutional controls portion of the report will include the data collected from monitoring and sampling, summaries of the inspections conducted of the Fernald Preserve and OSDF site and cap during the 5-year period, and a discussion of the institutional controls' effectiveness. If it is determined that a particular control is not meeting its objectives, then required corrective actions will be included. The review may lead to revisions to the monitoring and reporting protocols.

## **5.2 Public Involvement**

The public played an important role in the remediation process at the Fernald Preserve, and the community remains involved in legacy management. DOE has written the CIP (Attachment E) to document how DOE will ensure the public's continued involvement in a variety of site-related decisions and activities, including post-closure monitoring. The CIP is a CERCLA-required document, replacing the current Community Relations Plan, also required under CERCLA. Although the CIP contains all the requirements for public involvement under CERCLA, it also includes DOE's policy for public involvement, which extends beyond CERCLA requirements. Therefore, the CIP clearly identifies those elements that are not enforceable.

### **5.2.1 Current Public Involvement via Groups and Organizations**

Several groups followed the remediation and cleanup process at the Fernald Preserve, including the Fernald Citizens Advisory Board (FCAB), Fernald Residents for Environmental Safety and Health (FRESH), and the Fernald Community Alliance (formerly known as Fernald Living History Inc.). The FCAB was established to formulate cleanup policy and to help guide the cleanup activities at the site. Representatives that included local residents, governments, businesses, universities, and labor organizations constituted the advisory board membership. In 1995, the FCAB issued recommendations to DOE on remedial action priorities, cleanup levels, waste disposition alternatives, and future uses for the Fernald Preserve property. The FCAB was actively involved in the final remediation and restoration activities for the Fernald Preserve, with monthly full-board meetings and meetings of the FCAB Stewardship Committee. DOE worked closely with the FCAB until September 2006, when the FCAB held its final meeting.

FRESH was formed by local residents in 1984 and has played an important role in providing community input on the characterization and remediation of the Fernald Preserve. The group held its final public meeting in November 2006, after 22 years of environmental activism.

The FCAB had co-sponsored (along with FRESH, the Community Reuse Organization, and the Fernald Living History Project) four "Future of Fernald" workshops. The workshops were open to the public and gave the community input on the final public-use decisions as described in the *Master Plan for Public Use of the FEMP* (DOE 2002). The later workshops led to the recommendation of a multi-use education facility at the site.

The Fernald Community Alliance, formerly known as Fernald Living History Inc., is dedicated to ensuring that the history of Fernald is available for future generations. The group remains active and is looking to expand its member base.

A list of other stakeholders considered to be critical for legacy management planning at the Fernald Preserve is given below. Additional stakeholders may be identified in the future.

- Local government and enforcement agencies
- Local volunteer organizations
- Local residents
- Universities
- Local school groups
- Environmental organizations
- Native American tribes
- Native American organizations
- Natural Resource trustees
- Regulatory agencies
- Fernald Community Alliance
- Local historical societies
- Local businesses

### **5.2.2 Ongoing Decisions and Public Involvement**

The regulatory requirements that drive legacy management activities at the Fernald Preserve will continue to be evaluated. A database developed by Florida International University (FIU 2002) is a starting point in the identification of applicable requirements, but additional review and decision making are still needed.

The Visitors Center was completed in 2008. The design phase of the Visitors Center was completed in 2007 and included community involvement from the very beginning. In 2006, a faculty/student team from the University of Cincinnati (College of Design, Architecture, Art, and Planning [DAAP], Center for Design Research and Innovation) conducted a series of meetings with the community to produce a conceptual design for the reuse of an existing warehouse on the Fernald property. The plan for the new Visitors Center also included opportunities in landscape, sustainability, graphics, exhibits, branding, and delivering documentation of ideas suitable for transfer to a commercial architect-builder team for implementation. Information on the use and progress of the Visitors Center is provided through LM community meetings, Fernald Community Alliance meetings, regular e-mail updates, the Preserve Highlights newsletter, and at the Public Environmental Information Center.

From June to September 2007, a University of Cincinnati summer studio from DAAP worked to deliver a conceptual design specifically for the exhibits within the Visitors Center. Two subsequent presentations were given to the community with their final recommendations. Throughout 2007 and the first 6 months of 2008, the community was involved in meetings to finalize the design of the Visitors Center and the exhibit area. The Visitors Center opened on August 20, 2008.

Input on future legacy management planning decisions will occur through formal document reviews, community meetings, roundtables, workshops, and other forums. Currently, DOE holds briefings for interested stakeholders. DOE expects to continue these updates using a similar forum/format throughout legacy management. The CIP (Attachment E) also discusses methods of reporting to the public.

Another process involving the public is the CERCLA 5-year review. The 5-year reviews are performed pursuant to CERCLA Section 121, "The National Contingency Plan" (40 CFR 300), and the Comprehensive 5-Year Review Guidance (EPA 2001). These regulations state that a public comment and review period will be provided so that interested persons may submit comments. Input from the public regarding the legacy management of the site and the ongoing groundwater remediation will always be considered, just as it was during the remediation of the site.

## **UNCONTROLLED IF PRINTED**

### **5.2.3 Public Access to Information**

LM will continue to make available to the public documents pertaining to the Fernald Preserve. A public reading room is located at the Delta Building, 10995 Hamilton-Cleves Highway, Harrison, Ohio, 45030. The reading room contains the CERCLA AR in hard-copy format. Additionally, the Visitors Center houses computing facilities for acquisition and access to electronic copies of the CERCLA AR. The CERCLA AR documents for the Fernald Preserve were scanned into industry-standard searchable Adobe Acrobat Portable Document Format (PDF) files for viewing over the Internet. The AR documents are available to the public on the LM website (<http://www.lm.doe.gov/CERCLA/SiteSelector.aspx>). The documents are searchable by document number, document date, document title, and by searching the text of the document. The CERCLA AR will be updated as new documents are created.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## UNCONTROLLED IF PRINTED

### 6.0 References

- 40 CFR 61. U.S. Environmental Protection Agency, "National Emission Standards for Hazardous Air Pollutants," *Code of Federal Regulations*, July 1, 2008.
- 40 CFR 300. U.S. Environmental Protection Agency, "National Oil and Hazardous Substances Pollution Contingency Plan," *Code of Federal Regulations*, July 1, 2008.
- 42 USC 103. "Comprehensive Environmental Response, Compensation, and Liability Act," Section 121 et seq., as amended by the Superfund Amendments and Reauthorization Act of 1986 (SARA), Public Law 99-499, *United States Code*, October 1986.
- DOE (U.S. Department of Energy), 1995. *Final Record of Decision for Remedial Actions at Operable Unit 2*, 7021 U-004-501.3, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, May.
- DOE (U.S. Department of Energy), 1996. *Final Record of Decision for Remedial Actions at Operable Unit 5*, 7478 U-007-501.4, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, January.
- DOE (U.S. Department of Energy), 1998a. *Site-Wide Excavation Plan*, 2500-WP-0028, Revision 0, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, July.
- DOE (U.S. Department of Energy), 1998b. *Waste Acceptance Criteria Attainment Plan for the On-site Disposal Facility*, 20100-PL-0014, Revision 0, Final, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, June.
- DOE (U.S. Department of Energy), 2000. *Institutional Controls in RCRA and CERCLA Response Actions at Department of Energy Facilities*, DOE/EH-413-0004, Office of Environmental Policy and Guidance, August.
- DOE (U.S. Department of Energy), 2001. *Explanation of Significant Differences for Operable Unit 5*, Final, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, October.
- DOE (U.S. Department of Energy), 2002. *Master Plan for Public Use of the Fernald Environmental Management Project*, 20900-PL-0002, Revision A, Draft, Fluor Fernald, Fernald Area Office, Cincinnati, Ohio, February.
- DOE (U.S. Department of Energy), 2006a. *Fact Sheet: The Fernald Closure Project Identifies Clean Buildings, Critical Structures, and Construction Materials for Beneficial Reuse Under Legacy Management*, Fluor Fernald, Fernald Area Office, Cincinnati, Ohio, December.
- DOE (U.S. Department of Energy), 2006b. *Fernald Groundwater Certification Plan*, Fluor Fernald, Fernald Area Office, Cincinnati, Ohio, April.

**UNCONTROLLED IF PRINTED**

DOE (U.S. Department of Energy), 2006c. DOE-0184-06, Letter to Hamilton County General Health District, August.

DOE (U.S. Department of Energy), 2006d, *Second Five-Year Review Report for the FCP*, 2500-RP-0044, Revision B, Draft, Fernald Area Office, Cincinnati, Ohio, March.

DOE (U.S. Department of Energy), 2007. *Interim Residual Risk Assessment Report*, Revision 1, Fernald Area Office, Cincinnati, Ohio, July.

DOE (U.S. Department of Energy), 2009. *Fernald Preserve Procedure for Suspect Material or Debris Discoveries*, LMS/FER/S02767, Revision 1, Office of Legacy Management, Grand Junction, Colorado, February.

EPA (U.S. Environmental Protection Agency), 2000. *A Site Manager's Guide to Identifying, Evaluating, and Selecting Institutional Controls at Superfund and RCRA Corrective Action Cleanups*, EPA 540-F-00-005, OSWER 9355.0-784FS-P, Office of Solid Waste and Emergency Response, September.

EPA (U.S. Environmental Protection Agency), 2001. *Comprehensive Five-Year Review Guidance*, OSWER Directive 9355.7-03B-P, Office of Solid Waste and Emergency Response, June.

FIU (Florida International University), 2002. *2006 and Beyond: Defining Long-Term Stewardship Requirements at Fernald*, Miami, Florida, November.

**UNCONTROLLED IF PRINTED**

**Appendix A**

**Records of Decision and Associated Documents**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Records of Decision and Associated Documents**

Federal Facility Compliance Agreement	1986
Work Plan (identifies specific units of the site for RI/FS)	1988
Consent Agreement	1990
Amended Consent Agreement	1991
Record of Decision for Operable Unit 4	1994
Interim Record of Decision for Operable Unit 3	1994
Record of Decision for Operable Unit 1	1995
Record of Decision for Operable Unit 2	1995
Final Record of Decision for Operable Unit 3	1996
Record of Decision for Operable Unit 5	1996
Explanation of Significant Differences for Operable Unit 4 Silo 3	1998
Recommendation that treatment of Silo 3 material be evaluated and implemented separately from treatment of Silos 1 and 2 material	
Final Record of Decision Amendment for Operable Unit 4 Silos 1 and 2	2000
Explanation of Significant Differences for Operable Unit 5	2001
Resulted in change of FRL for uranium in groundwater from 20 ppb to 30 ppb	
Explanation of Significant Differences for Operable Unit 1	2002
Recommendation for processing other FEMP waste streams through the Operable Unit 1 remediation facilities and processes	
Final Record of Decision Amendment for Operable Unit 1	2003
Final Record of Decision Amendment for Operable Unit 4 Silo 3	2003
Final Explanation of Significant Differences for Operable Unit 4 Silos 1 and 2	2003
Final Explanation of Significant Differences for Operable Unit 4	2005
Final Fact Sheet for Operable Unit 3	2006
Operable Unit 1 Final Remedial Action Report	2006
Operable Unit 2 Final Remedial Action Report	2006
Operable Unit 3 Final Remedial Action Report	2007
Operable Unit 4 Final Remedial Action Report	2006
Operable Unit 5 Interim Remedial Action Report	2008
Preliminary Close Out Report (U.S. EPA Document)	2006

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Appendix B**

**Institutional Control Records as Stated in the Records of Decision**

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## **UNCONTROLLED IF PRINTED**

### **Operable Unit 2 Record of Decision (DOE 1995)**

The selected remedy will include the following as institutional controls:

- Continued federal ownership of the OSDF site.
- OSDF access restrictions (fencing, gates, and warning signs) will be controlled by proper authorization and is anticipated to be limited to personnel for inspection, custodial maintenance, or corrective action.
- Restrictions on the use of property will be noted on the property deed before the property could be sold or transferred to another party.
- Groundwater monitoring following closure of the OSDF.

### **Operable Unit 5 Record of Decision (DOE 1996)**

Long-term maintenance will be provided as part of the selected remedy. The selected remedy includes the following key components for institutional controls and monitoring:

- Continuation of access controls at the Fernald Preserve, as necessary, during the conduct of remedial actions. Property ownership will be maintained by the federal government and will comprise the disposal facility and associated buffer areas.
- Maintenance of remaining portions of the Fernald Preserve (outside the disposal facility area) under federal ownership or control (e.g., deed restrictions) to the extent necessary to ensure the continued protection of human health commensurate with the cleanup levels established by the remedy. If portions of the Fernald Preserve are transferred or sold at any future time, restrictions will be included in the deed, as necessary, and proper notifications will be provided as required by CERCLA. EPA must approve of all ICs, including types of restrictions and enforcement mechanisms, if the property is transferred or sold.
- Maintenance of the on-property disposal facility, to ensure its long-term performance and the continued protection of human health and the environment.
- An environmental monitoring program conducted during and following remedy implementation to assess the short- and long-term effectiveness of remedial actions.
- Provision of an alternative water supply to domestic, agricultural, and industrial users relying upon groundwater from the area of the aquifer exhibiting concentrations of contaminants exceeding the final remediation levels. The alternative water supply will be provided until such time as the area of the aquifer impacting the user is certified to have attained the final remediation levels.

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

**UNCONTROLLED IF PRINTED**

**Appendix C**

**Fernald Preserve Contact Information**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Fernald Preserve Contact Information**

**EMERGENCY CONTACT**

Grand Junction 24-Hour Monitored Security Telephone Number  
877-695-5322

Fernald Preserve Emergency Telephone Number  
911 or 513-910-6107

Fernald OSDF Emergency Telephone Number  
911 or 513-910-6107

**OFFICE OF LEGACY MANAGEMENT—FERNALD**

Site Manager

Jane Powell  
Department of Energy  
Office of Legacy Management  
513-648-3148  
jane.powell@lm.doe.gov

S.M. Stoller—Fernald

Site Manager

Frank Johnston  
S.M. Stoller Corporation  
513-648-5294  
frank.johnston@lm.doe.gov

**UNCONTROLLED IF PRINTED**

**ENVIRONMENTAL AGENCIES**

Remedial Project Manager

U.S. Environmental Protection Agency  
Region V, SR-6J  
77 West Jackson Boulevard  
Chicago, Illinois 60604-3590  
312-886-0992  
www.epa.gov

Fernald Project Coordinator

Ohio Environmental Protection Agency  
401 East Fifth Street  
Dayton, Ohio 45402-2911  
937-285-6357  
www.epa.state.oh.us

U.S. Fish and Wildlife Service  
Suite H  
6950 American Parkway  
Reynoldsburg, Ohio 43068  
www.fws.gov

**FERNALD PRESERVE COMMUNITY INVOLVEMENT COORDINATOR**

Community Relations Specialist

Susan Walpole  
S.M. Stoller, Corporation  
513-648-4026

**LOCAL POLICE AUTHORITY**

Crosby Township/Hamilton County Police  
Administration Office  
513-825-1500

Ross Township/Butler County Police  
Administration Office  
513-863-2337, Ext. 1

Note: This information will be updated as necessary. Additional state and local contact information can be found in Appendix A (Information Contacts) of Attachment E, Community Involvement Plan.

**UNCONTROLLED IF PRINTED**

## **Appendix D**

### **Examples of OSDF and Fernald Preserve Inspection Forms**

***UNCONTROLLED IF PRINTED***

This page intentionally left blank







**UNCONTROLLED IF PRINTED**

FERNALD PRESERVE TRAIL INSPECTION FORM												
Date: _____				Inspector: _____								
Sheet No. _____ of _____												
Area	Type of Finding							Description	Photo? (file No.)	Follow-up		
	Trail surface	Barriers	Overlooks	Signage	Groundskeeping	Prohibited Activities	Other			Corrected	Maint. Required	Cont. Observation
<b>Weapons to Wetland Trail</b>												
<b>Lodge Pond Trail</b>												
<b>Shingle Oak Trail</b>												
<b>Blowetland Trail</b>												
<b>Eco Park</b>												
<b>Hickory Trail</b>												
<b>Sycamore Trail</b>												
Additional Notes												



**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Attachment A**

**Operations and Maintenance Master Plan  
for Aquifer Restoration and Wastewater Treatment**

**Fernald Preserve**

***UNCONTROLLED IF PRINTED***

This page intentionally left blank

## Contents

Acronyms and Abbreviations .....	v
1.0 Introduction.....	1-1
1.1 Scope of ARWWT and Objectives of the OMMP.....	1-1
1.2 Basis and Need.....	1-2
1.3 Relationship to Other Documents.....	1-3
1.4 Plan Organization.....	1-4
2.0 Summary of Regulatory Drivers and Commitments .....	2-1
2.1 Discharge Limits.....	2-1
2.1.1 OU 5 ROD .....	2-1
2.1.2 NPDES Permit .....	2-1
2.2 Source Water Treatment Requirements.....	2-2
2.2.1 Groundwater .....	2-2
2.2.2 Storm Water.....	2-2
2.2.3 OSDF Leachate.....	2-2
3.0 Descriptions of Major ARWWT Components .....	3-1
3.1 Groundwater Component.....	3-1
3.1.1 Current Groundwater Restoration Modules.....	3-1
3.1.1.1 South Plume Module.....	3-2
3.1.1.2 South Field Module.....	3-2
3.1.1.3 Waste Storage Area Module .....	3-8
3.1.1.4 Storm Sewer Outfall Ditch Infiltration .....	3-8
3.1.2 Groundwater Collection and Conveyance .....	3-9
3.1.3 Great Miami Aquifer Remedy Performance Monitoring.....	3-9
3.2 Other Site Wastewater Sources.....	3-12
3.3 Treatment Systems.....	3-12
3.3.1 CAWWT .....	3-12
3.4 Ancillary Facilities.....	3-12
3.4.1 Great Miami Aquifer.....	3-14
3.4.2 CAWWT Backwash Basin .....	3-14
3.4.3 Storm Water Retention Basin Valve House.....	3-14
3.4.4 South Field Valve House .....	3-14
3.4.5 Parshall Flume .....	3-14
3.4.6 OSDF Leachate Transmission System Permanent Lift Station .....	3-14
3.5 Current Treatment Performance .....	3-14
3.6 Current and Planned Discharge Monitoring .....	3-15
3.6.1 NPDES Monitoring.....	3-15
3.6.2 Radionuclide and Uranium Monitoring.....	3-15
3.6.3 IEMP Surface Water and Treated Effluent Monitoring Program.....	3-17
4.0 Projected Flows.....	4-1
4.1 Groundwater .....	4-1
4.1.1 OSDF Leachate.....	4-1
5.0 Operations Plan.....	5-1
5.1 Wastewater Treatment Operations Philosophy.....	5-1
5.2 CAWWT Operation .....	5-1
5.2.1 Ion-Exchange Vessel Rotation.....	5-2
5.3 Groundwater Treatment.....	5-2

**UNCONTROLLED IF PRINTED**

5.3.1	Groundwater Treatment Prioritization vs. Bypassing.....	5-2
5.4	Well Field Operational Objectives.....	5-2
5.5	Operational Maintenance Priorities .....	5-5
5.6	Operations Controlling Documents .....	5-5
5.7	Management and Flow of Operations Information.....	5-5
5.8	Management of Treatment Residuals .....	5-6
6.0	Operations Performance Monitoring and Maintenance.....	6-1
6.1	Management Systems .....	6-1
6.1.1	Maintenance and Support .....	6-1
6.1.2	Operations.....	6-2
6.1.2.1	Process Control .....	6-2
6.1.2.2	Standard Operating Procedures.....	6-2
6.1.2.3	Conduct of Operations .....	6-3
6.1.2.4	Training.....	6-3
6.2	Restoration Well Performance Monitoring and Maintenance .....	6-4
6.2.1	Restoration Well Descriptions .....	6-4
6.2.1.1	South Plume Extraction Wells.....	6-4
6.2.1.2	South Field and Waste Storage Area Extraction Wells .....	6-5
6.2.2	Factors Affecting System Operation.....	6-7
6.2.3	Maintenance and Operational Monitoring.....	6-9
6.2.3.1	Maintenance of the Pumps, Piping, and Controls.....	6-10
6.3	Treatment Facilities Performance Monitoring and Maintenance .....	6-13
6.3.1	Treatment Facilities Performance Monitoring.....	6-13
6.3.2	Treatment Facilities Maintenance Practices .....	6-14
6.4	Regulatory Issues.....	6-14
7.0	Organizational Roles, Responsibilities, and Communications.....	7-1
7.1	Organization Roles and Responsibilities .....	7-1
7.1.1	DOE Office of Legacy Management Fernald.....	7-1
7.1.2	Operating Contractor .....	7-1
7.2	Regulatory Agency Interaction.....	7-3
8.0	References.....	8-1

**Figures**

Figure 3-1.	ARWWT Facilities Locations Map.....	3-3
Figure 3-2.	ARWWT Timeline .....	3-5
Figure 3-3.	Extraction Wells for the Groundwater Remedy .....	3-6
Figure 3-4.	Current Groundwater Remediation/Treatment Schematic .....	3-10
Figure 3-5.	Groundwater Certification Process and Stages .....	3-11
Figure 3-6.	CAWWT Process Flow Diagram .....	3-13
Figure 3-7.	Monthly Average Uranium Concentration in the Effluent to the Great Miami River (through December 2008).....	3-16
Figure 6-1.	South Plume Module Extraction Well Installation Details .....	6-6
Figure 6-2.	South Field Module and Waste Storage Area Extraction Well Installation Details .....	6-8

**UNCONTROLLED IF PRINTED**

**Tables**

Table 3-1. Well Field Operating Status..... 3-7  
Table 4-1. Target Extraction Rate Schedule ..... 4-2  
Table 5-1. Well Field Operational Objectives ..... 5-3  
Table 6-1. Planned Outages of the South Plume Module Wells..... 6-10  
Table 6-2. Planned Outages of the South Field and Waste Storage Area Module Wells ..... 6-10

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **Acronyms and Abbreviations**

ARWWP	Aquifer Restoration Wastewater Project
ARWWT	Aquifer Restoration and Wastewater Treatment
AWWT	Advanced Wastewater Treatment Facility
CAWWT	Converted Advanced Wastewater Treatment Facility
D&D	decontamination and demolition
DOE	U.S. Department of Energy
EW	extraction well
LM	U.S. Department of Energy Office of Legacy Management
EPA	U.S. Environmental Protection Agency
ESD	Explanation of Significant Differences
EW	extraction well
FFCA	Federal Facilities Compliance Agreement
FRL	final remediation level
gpm	gallons per minute
HMI	Human-Machine Interface
IEMP	Integrated Environmental Monitoring Plan
lbs/yr	pounds per year
LMICP	Legacy Management and Institutional Controls Plan
LTS	Leachate Transmission System
NPDES	National Pollutant Discharge Elimination System
OAC	<i>Ohio Administrative Code</i>
OEPA	Ohio Environmental Protection Agency
OMMP	Operations and Maintenance Master Plan
OSDF	On-Site Disposal Facility
OU5	Operable Unit 5
PCS	process control station
PLS	permanent lift station
ppb	parts per billion
RA	remedial action
ROD	Record of Decision
RW	recovery well
SWRB	storm water retention basin

**UNCONTROLLED IF PRINTED**

$\mu\text{g/L}$       micrograms per liter  
VFD          variable frequency drive  
WSA          waste storage area

## **1.0 Introduction**

This document is the Operations and Maintenance Master Plan (OMMP) for Aquifer Restoration and Wastewater Treatment (ARWWT) at the U.S. Department of Energy's (DOE's) Fernald Preserve. The OMMP is a formal remedial design deliverable, originally prepared to fulfill Task 2 of the *Operable Unit 5 Remedial Design Work Plan* (DOE 1996a). It was first issued in November 1997. The OMMP has undergone several revisions and became part of the *Comprehensive Legacy Management and Institutional Controls Plan* (LMICP) in January 2006.

### **1.1 Scope of ARWWT and Objectives of the OMMP**

The scope of ARWWT includes the operation and maintenance of the site's groundwater and the On-Site Disposal Facility's (OSDF's) leachate management facilities.

The fundamental objectives of the OMMP are to guide and coordinate the extraction, collection, conveyance, treatment, and discharge of all groundwater and leachate during the post-closure period. Compliance with discharge limits includes a plan of the commitments, performance goals, operating schedule, treated water flow rates, direct discharge flow rates, and other operating priorities. This plan also provides the approach for the management of treatment residuals (e.g., backwash basin sediments, spent resins/filtration media) that are byproducts of the Fernald Preserve's wastewater treatment processes.

The OMMP serves as a comprehensive statement of management policy to ensure that planned modes of operation and maintenance for ARWWT are consistent with regulatory requirements and satisfy the Fernald Preserve's remedy performance commitments for groundwater restoration and wastewater treatment. The plan establishes the decision logic and priorities for the major flow and water treatment decisions needed to maintain compliance with the Fernald Preserve's National Pollutant Discharge Elimination System (NPDES) permit and Record of Decision (ROD)-based surface water discharge limits. The plan also provides the overall management philosophy and decision parameters to implement the day-to-day flow routing, critical-component maintenance, and treatment priority decisions. It is not intended to provide detailed, specific operating or maintenance procedures for ARWWT. The plan also serves to inform the U.S. Environmental Protection Agency (EPA) and the Ohio Environmental Protection Agency (OEPA) of the planned operational approaches and strategies that are intended to meet the regulatory agreements made during the Operable Unit 5 (OU5) remedial investigation/feasibility study (DOE 1995b, DOE 1995a) process and documented in the OU5 decision documents: the *Record of Decision for Remedial Actions at OU5* (DOE 1996b) (OU5 ROD), the *Explanation of Significant Differences for Operable Unit 5* (DOE 2001a), and the *Remedial Design Fact Sheet for Operable Unit 5 Wastewater Treatment Updates* (DOE 2004b).

The plan provides the basis for development of more-detailed internal operating procedure documents (e.g., standard operating procedures, standing orders, preventive maintenance plans) that are required for execution of work at the Fernald Preserve. The existing detailed procedural documents that govern the performance of water-related operations and maintenance activities at the Fernald Preserve are expected to be updated (revised, combined, or eliminated) as required to conform to the general strategies, guidelines, and decision parameters defined in this plan.

## 1.2 Basis and Need

The need for the OMMP arose in the mid 1990s, as DOE and regulators realized that the various water and wastewater flows that originate from Fernald Site remediation activities were in direct competition with one another for treatment resources. The wastewater treatment capacities at the Fernald Site had to be prioritized so that (1) discharge limits could be maintained, (2) a range of flow conditions at various time intervals could be accommodated, and (3) the detrimental effects of exceptional operating circumstances could be effectively managed. The need for treatment (and the accompanying hierarchy of treatment priorities) has varied over the span of the site remedy as new projects came on line, other projects were completed, and aquifer restoration activities progressed.

During development of the OU5 ROD, it was recognized that the monthly average concentration discharge limit for total uranium (established at 20 parts-per-billion [ppb] in the OU5 ROD and revised to 30 ppb in the *OU5 Explanation of Significant Differences*) could probably be met under average operating conditions, but that maintaining the limit may not be achievable during periods of exceptional operating conditions. It was further recognized that the application of the discharge limit was not considered as a required component of the remedy to ensure protectiveness, but rather as an appropriate performance-based objective that appeared reasonably attainable through the application of an appropriate level of water treatment. It was recognized that the performance-based discharge limit must be able to accommodate exceptional operating conditions expected to occur over the duration of the remedy. Two exceptional operating conditions were actually cited in the OU5 ROD; it would permit relief allowances from the total uranium monthly average concentration discharge limit, when necessary, for (1) storm water bypasses during high-precipitation events and (2) periodic reductions in treatment plant operating capacity that are necessary to accommodate scheduled maintenance activities.

Since storm water treatment is no longer required (other than a portion of the Converted Advanced Wastewater Treatment Facility [CAWWT] footprint), storm water bypasses are no longer required. At the time the ROD was signed, it was recognized that the OMMP would define the operating philosophy for (1) the extraction/re-injection and treatment systems, (2) the establishment of operational constraints and conditions for given systems, and (3) the establishment of the process for reporting and instituting corrective measures to address exceedances of discharge limits. The OMMP also contains detailed information about the manner in which exceptional operating conditions are to be accommodated and reported in the demonstration of discharge limit compliance.

The OMMP will be modified during the course of the remedy to accommodate changes to the treatment and well field systems or the retirement of individual restoration modules from service, once area-specific cleanup levels are achieved. The plan is intended to serve as a living guidance document to instruct operations staff in implementing required adjustments to the system over time. The OMMP will thus be evaluated periodically to ensure that the most recent instructions regarding treatment priorities and flow-routing decisions are available to system operators. Proper notifications for reporting maintenance shutdowns of the system, and the reporting and application of corrective measures to address exceedances of discharge limits, are also identified in the OMMP.

Prior to site closure in 2006, water treatment flows were reduced to groundwater and leachate from the OSDF. Elimination of remediation wastewater, impacted storm water, and sanitary

## UNCONTROLLED IF PRINTED

sewer wastewater provided an opportunity to reduce the size of the water treatment facility remaining to service the aquifer restoration and leachate treatment after site closure. Reducing the size of the treatment facility prior to site closure in 2006 reduced the amount of impacted materials that may need future off-site disposal.

Between October 2003 and March 2004, DOE conducted a series of meetings with public stakeholders, EPA, and the Fernald Citizens Advisory Board to identify a more cost-effective water treatment facility that would serve as a long-term replacement for the existing Advanced Wastewater Treatment (AWWT) facility. The interactions led to support for a plan to carve down the AWWT facility to permit the 1,800-gallons-per-minute (gpm) Phase III expansion system to remain as the long-term groundwater treatment facility. The 1,800-gpm CAWWT provided a 1,200-gpm capacity for groundwater and about 600 gpm of storm water capacity (including carbon treatment) to handle the last remaining storm water and remediation wastewater flows prior to site closure. Since those flows have ceased, the CAWWT now provides a dedicated long-term groundwater treatment capacity of up to 1,800 gpm.

In addition to the decrease in the size of the water treatment facility, operational approaches to the aquifer remedy were reevaluated and resulted in the elimination of well-based groundwater re-injection, since it was determined that this was not a cost-effective approach to aquifer restoration at Fernald. This OMMP reflects the aquifer restoration design provided in the *Waste Storage Area Phase II Aquifer Restoration Design Report* (DOE 2005b).

### 1.3 Relationship to Other Documents

The OMMP functions in tandem with several other major ARWWT design documents and support plans, such as Attachment D, *Integrated Environmental Monitoring Plan* (IEMP); various aquifer restoration module design packages; the *Remedial Action [RA] Work Plan* (DOE 1997b); and the *Fernald Groundwater Certification Plan* (DOE 2006a).

The environmental monitoring and reporting activities conducted in support of aquifer restoration performance decisions are specified in the IEMP. Information obtained through the IEMP will be used to (1) appraise groundwater restoration progress, (2) assess the need for changing groundwater extraction flow rates, and (3) assess the durations of groundwater extraction activities over the life of the remedy.

The initial design flow rates, planned installation sequence, detailed design basis, and overall restoration strategy for the aquifer restoration modules that constitute the groundwater remedy were developed in the *Baseline Remedial Strategy Report, Remedial Design for Aquifer Restoration* (DOE 1997a). The overall restoration strategy has been modified as a result of information gained from the ongoing remedy performance/operations monitoring and pre-design monitoring conducted in support of the Waste Storage Area (WSA) (Phases I and II) Modules and the South Field Extraction System (Phase II) Module.

The RA Work Plan (submitted to EPA and OEPA as Task 10 of the OU5 Remedial Design Work Plan) conveyed the enforceable RA construction schedule for the initial restoration modules brought online in 1998 (the Re-injection Demonstration Module, the South Field Extraction System Module, and the South Plume Optimization Module). It also contained the planning-level RA construction schedule for the remaining modules to be brought online in later years. With the

## **UNCONTROLLED IF PRINTED**

completion and startup of the Waste Storage Area Phase I Module in 2002 and the South Field Phase II Module in 2003, all the schedules specified in the RA Work Plan have been met.

The *Fernald Groundwater Certification Plan* (DOE 2006a) defines a programmatic strategy for certifying the completion of the aquifer remedy. The Certification Plan establishes the processes that will be used to achieve groundwater restoration and conduct certification. The preferred outcome is to certify that the OU5 ROD groundwater remediation goals have been achieved using the pump-and-treat remediation system that is currently operating at the site. The plan also covers other potential contingencies and exit scenarios. Any change to the operation of the aquifer remedy system needed to achieve certification will be controlled through the OMMP.

The OMMP has functioned in tandem with several other remedial design or design support plans prepared by other project organizations outside ARWWT. All the other site remediation projects have been completed; therefore, there is no longer a need to interface with other projects, as only a small flow of leachate from the OSDF and groundwater remains to be treated.

### **1.4 Plan Organization**

The plan is generally organized around the wastewater streams being managed by ARWWT. The sections and their contents are as follows:

- Section 1.0 Introduction: Presents an overview of the plan, its objectives, its relationship to other documents, and its organization.
- Section 2.0 Summary of Regulatory Drivers and Commitments: Discusses the applicable or relevant and appropriate requirements compliance crosswalk and provides a summary of the other commitments and guidelines that the OU5 ROD has activated for ARWWT.
- Section 3.0 Description of ARWWT Major Components: Identifies the major collection, conveyance, and treatment components that constitute the Fernald Preserve's system for managing groundwater and leachate, the treatment capacities that are available, and a schedule of major ARWWT activities throughout the aquifer restoration process.
- Section 4.0 Projected Flows: Provides an estimate of flow generation rates and durations for groundwater and leachate.
- Section 5.0 Operations Plan: Establishes the operations philosophy, treatment priorities and hierarchy, treatment operational decisions, well field operational objectives and decisions, maintenance priorities, controlling documentation, and the management and flow of operations information to successfully operate the groundwater and leachate transmission systems to achieve regulatory requirements and commitments.
- Section 6.0 Operations and Maintenance Methods: Addresses the general methods, guidelines, and practices used in managing equipment operation and maintenance; discusses some of the dedicated organizational resources and management systems that will help to ensure that ROD requirements are met; describes the key

**UNCONTROLLED IF PRINTED**

parameters used to monitor the performance of the groundwater and wastewater facilities; and describes the principal features and maintenance needs of the overall operation.

Section 7.0 **Organizational Roles, Responsibilities, and Communications:** Presents the organizational roles and responsibilities with respect to implementation of this OMMP; also presents the communications protocol for coordinating with EPA and OEPA.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 2.0 Summary of Regulatory Drivers and Commitments

Regulatory drivers and commitments, as they pertain to the successful operation of the CAWWT and associated groundwater extraction systems, involve source water treatment requirements and the specific effluent limits that need to be met. Other regulatory requirements, legal agreements, and agency commitments apply to the site as a whole, and those may apply to the CAWWT. However, these general Fernald Preserve drivers and commitments are not discussed further in this section.

### 2.1 Discharge Limits

The discharges from the Fernald Preserve to the Great Miami River are primarily associated with the groundwater remedy involving the treated effluent (primarily groundwater) from the CAWWT and extracted groundwater that is discharged without treatment. A small amount of leachate from the OSDF is also managed through the CAWWT. The combined effluent from the CAWWT is discharged to the Great Miami River through the Parshall Flume Building, which is the final monitoring point before effluent reaches the Great Miami River. The required effluent limits for this discharge are governed by the OU5 ROD for the uranium component of the discharge and by the NPDES permit (Permit No. 11O00004\*HD) for the non-uranium parameters.

#### 2.1.1 OU 5 ROD

Treatment will be applied to all discharges to the Great Miami River, to the extent necessary, to limit the total mass of uranium discharged through the Fernald Preserve outfall to the Great Miami River to no more than 600 pounds per year (lbs/yr). This mass-based discharge limit became effective upon the issuance of the OU5 ROD. Additionally, the necessary treatment will be applied to limit the concentration of total uranium in the blended effluent to the Great Miami River to no greater than 30 ppb. The 30 ppb discharge limit for uranium will be based on a monthly flow-weighted average concentration. This limit became effective December 1, 2001, based on the *Explanation of Significant Differences for Operable Unit 5* (DOE 2001c), which replaced the original 20 ppb standard that applied to the Fernald Site beginning January 1, 1998.

The OU5 ROD stipulates specific circumstances that necessitate relief from the concentration limit. Relief can be requested for maintenance activities. EPA approval must be obtained in advance by notification of these planned maintenance periods. The notification must be accompanied by a request for the uranium concentrations in the discharge not to be considered in the monthly averaging performed to demonstrate compliance with the 30 ppb total uranium discharge limit. Uranium contained in these bypass events will only be counted in the annually discharged mass, not in the monthly average concentration calculations.

#### 2.1.2 NPDES Permit

Under the Clean Water Act, as amended, the Fernald Preserve is governed by NPDES regulations that require the control of discharges of nonradiological pollutants to waters of the State of Ohio. The NPDES permit, issued by the State of Ohio, specifies discharge and sample locations, sampling and reporting schedules, and discharge limits. The Fernald Preserve submits

## **UNCONTROLLED IF PRINTED**

monthly reports on NPDES activities to OEPA. The Fernald Preserve's current NPDES permit, No. 11O00004\*HD, became effective on April 1, 2009, and will expire on March 31, 2014.

### **2.2 Source Water Treatment Requirements**

Three sources of wastewater have specific management requirements: groundwater, OSDF leachate, and storm water.

#### **2.2.1 Groundwater**

Groundwater treatment decisions are based on uranium concentrations in individual wells. Groundwater extracted from the higher-concentration wells goes to treatment, and water from the lower-concentration wells bypasses treatment and is discharged directly to the Great Miami River outfall line. The piping networks that convey on-property extracted groundwater have double headers, one connected to the main line to treatment and the other to the main discharge line. This design feature is not applicable to the off-property South Plume Module. The extracted groundwater from the South Plume Module is sent to either the treatment facilities or directly to the discharge outfall, depending on the uranium concentration in the combined flow from the six wells that this module comprises. The combined treated and untreated discharge will comply with the 30 ppb discharge limit and the 600-lb/yr mass-based limit as described in Section 2.1, "Discharge Limits."

#### **2.2.2 Storm Water**

It is not expected that any storm water will require treatment, since soil remediation and certification has been completed. Storm water treatment can be provided on a limited basis.

#### **2.2.3 OSDF Leachate**

*Ohio Administrative Code* (OAC) 3745-27-19, "Operational Criteria for a Sanitary Landfill Facility," requires the treatment of leachate. Leachate from the OSDF is a minimal flow and will likely have no bearing on operational decisions. However, it is required that leachate be treated through the CAWWT prior to discharge to the Great Miami River until the CAWWT is no longer needed. Prior to the cessation of CAWWT operations, DOE will have proposed and negotiated the future management of leachate with EPA and OEPA.

### 3.0 Descriptions of Major ARWWT Components

This section describes the major operating system components required to accomplish aquifer remedy commitments and goals. The site conveyance and treatment system components for managing the major wastewater streams are identified, as are treatment capacities. This section also describes key linkages between the components. Figure 3-1 depicts the facilities as well as groundwater wells on a projected view of the site. Figure 3-2 provides a timeline of major activities that have occurred and those that are projected to occur throughout the aquifer restoration process.

#### 3.1 Groundwater Component

Remediation of the Great Miami Aquifer will be achieved by completing area-specific groundwater restoration modules. These modules were specified in the following documents:

- Remedial Design/Remedial Action work plans for OU5.
- Baseline Remedial Strategy Report, Remedial Design for Aquifer Restoration.
- *Design for the Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas* (DOE 2001a).
- *Design for Remediation of the Great Miami Aquifer South Field (Phase II) Module* (DOE 2002).
- *Waste Storage Area (Phase II) Design Report* (DOE 2005b).

During 2003, new information became available (refer to the *Comprehensive Groundwater Strategy Report* [Fluor Fernald Inc. 2003]) that allowed for more refined groundwater modeling predictions of when aquifer restoration would be completed. The updated modeling predictions and groundwater remedy performance monitoring data both indicated that the aquifer restoration time frame would likely be extended beyond the dates previously predicted. The updated modeling also indicated that the use of groundwater re-injection via wells did not significantly reduce the time required to remediate the aquifer. As reflected in Figure 3-2, aquifer restoration activities are predicted to be necessary beyond the year 2020.

In 2005, EPA approved the *Fernald Groundwater Certification Plan* (DOE 2006a), a programmatic strategy for certifying the completion of the aquifer remedy. The Certification Plan established the processes that will be used to achieve groundwater restoration and conduct certification of the aquifer remedy. The Certification Plan relies on the IEMP and the OMMP for implementation of that process.

##### 3.1.1 Current Groundwater Restoration Modules

Three groundwater restoration modules are currently in operation:

- South Plume
- South Field (Phases I and II)
- Waste Storage Area (Phases I and II)

Figure 3-3 shows the geographical locations of each of these modules and associated wells. Subsections 3.1.1.1-3.1.1.3 provide descriptions of each of the modules.

### 3.1.1.1 South Plume Module

Five extraction wells were installed in 1993 at the leading edge of the off-property South Plume, as part of the South Plume removal action, to gain an early start on groundwater restoration. The South Plume removal action well system began pumping in August 1993. The primary intent of the original five-well system was to prevent further off-property migration of contamination within the groundwater plume. Two additional extraction wells came online in August 1998 for the active restoration of the central portion of the off-property plume. These two new wells, known as the South Plume Optimization Module have now been incorporated into the South Plume Module for remedy performance tracking and reporting. Figure 3-3 shows the locations of the wells, and Table 3-1 provides the operating status of the South Plume Module.

### 3.1.1.2 South Field Module

The South Field Module was installed in two phases. South Field Extraction System Phase I Module includes 10 extraction wells. In 1996, as part of an EPA-approved early-start initiative, the 10 extraction wells were installed on Fernald Site property near the south field/storm sewer outfall ditch. These wells are removing groundwater contamination in an on-property area of the southern uranium plume.

Since the installation of the 10 original extraction wells of the South Field Extraction Phase I Module, three new extraction wells were added to the module, three of the original wells were shut down, and one of the original wells was converted to a re-injection well. The three extraction wells that were shut down are all located in the upgradient area of the plume where total uranium concentrations in the Great Miami Aquifer are now below the final remediation level (FRL). An additional consideration in removing two of these three wells was to accommodate soil remedial activities near the wells.

The three new wells added to the South Field Phase I Module were installed at locations where total uranium concentrations were considerably above the groundwater FRL, in the eastern, downgradient portion of the South Field plume. Two of the three new wells were installed in late 1999 and began pumping in February 2000. The third well was installed in 2001 and became operational in 2002.

Phase II components of the South Field became operational in 2003. The components include:

- Four additional extraction wells, one in the southern waste unit area and three along the eastern edge of the on-property portion of the southern uranium plume.
- One additional re-injection well in the southern waste unit area. All re-injection wells have been removed from service.
- A converted extraction well, which was converted into a re-injection well. All re-injection wells have been removed from service.
- An injection pond, which is located in the western portion of the Southern Waste Units Excavations. The injection pond was removed from service along with all re-injection wells.

Table 3-1 provides the operational status of the currently configured South Field Extraction System Module (Phase I and Phase II components).

UNCONTROLLED IF PRINTED

Extraction Wells

- Waste Storage Area Module
- South Field Module
- South Plume Module
- OSDF Valve Houses
- ① CAWWT Facility
- ② SWRB Valve House
- ③ On-Site Disposal Facility
- ④ OSDF Permanent Lift Station
- ⑤ Parshall Flume
- ⑥ Underground Outfall Line to the Great Miami River
- ⑦ SSOD Water Supply Wells
- ⑧ South Field Valve House



CAWWT Facility



Two additional wells  
South Plume Module Off-Site Wells

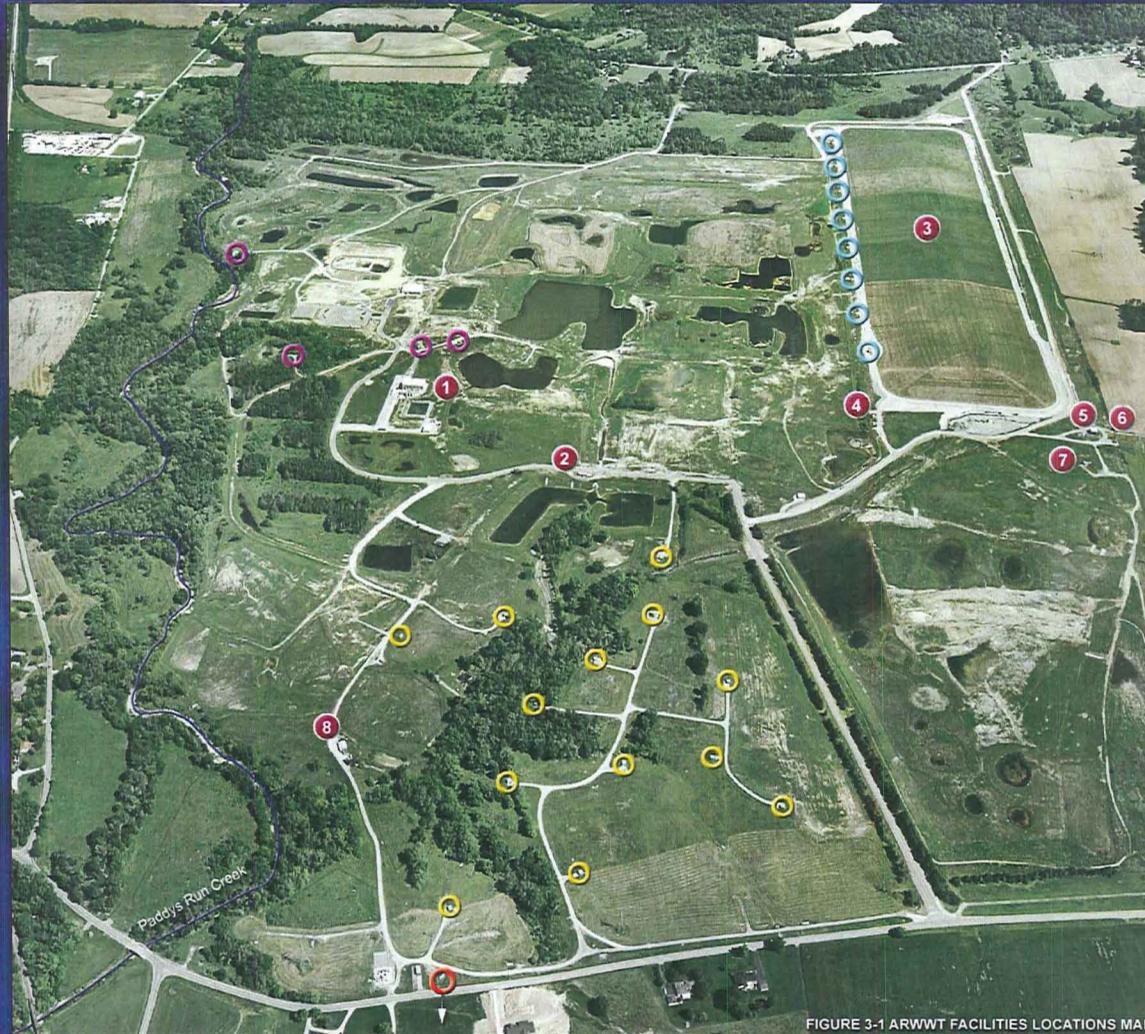


FIGURE 3-1 ARWWT FACILITIES LOCATIONS MAP

5658D 9/08

Figure 3-1. ARWWT Facilities Locations Map

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**ARWWT TIMELINE**

Aquifer Restoration		Wastewater Treatment	
		1952	STP
		1986	BSL/HNT
		1988	Storm Water Retention Basin (SWRB)
		1992	IAWWT Facility
South Plume Extraction Wells	1993		
		1994	SPIT Facility
		1995	AWWT Phases I/II
		1996	SDF
Injection Demonstration Module	1998	1998	AWWT Resin Regeneration System
South Plume Optimization Module			New STP Operational
South Field Extraction Module (Phase I)			AWWT Expansion
		1999	BSL Pump and Piping Modifications/Sludge Removal System
Waste Storage Area Module (Phase I)	2002		
South Field Extraction Module (Phase II)	2003		
Shut Down Well-based Re-injection	2004	2004	Shut Down AWWT Expansion for Conversion to CAWWT – 9/04
		2005	Reroute of Leachate to SWRB – 3/05
			Reroute WSA Storm Water to SWRB – 3/05
			BSL is Shut Down for D&D and Excavation – 3/05
			Begin Full-Scale Operation of CAWWT – 3/05
			Shut Down Sewage Treatment Plant for D&D and Excavation – 3/05
			Shut Down SDF for D&D and Excavation – 3/05
			Shut Down AWWT Phases I & II for Selective D&D and Excavation – 3-4/05
			Shut Down SPIT/IAWWT for D&D and Excavation – 7/05
			Reroute WSA Storm Water to CAWWT – 10/05
			Shut Down West SWRB for D&D and Excavation – 10/05
Waste Storage Area Module (Phase II)	2006	2006	Shut Down East SWRB for D&D and Excavation – 2/06
Pilot Plant Replacement Well			Reroute of OSDF Leachate/Storm Water Directly to CAWWT – 2/06
Storm Sewer Outfall Ditch Infiltration			CAWWT Backwash Basin Operational – 2/06
			OSDF Capped Sufficiently Such that OSDF Storm Water Can Be Routed to Free Release – 2006
			Transfer of Site from the DOE Office of Environmental Management (EM) to the DOE Office of Legacy Management (LM).
		2007	Groundwater Treatment to Meet Discharge Limits Projected to End Between 2007 and 2011
		2011	
South Plume Module – Stop P&T Operations*	2015		
South Plume Module – Certified Clean	2018		
South Field Module – Stop P&T Operations*	2022		
Waste Storage Area – Stop P&T Operations*	2023		
South Plume Module – Remove Infrastructure	2025		
South Field Module – Certified Clean			
South Field Module – Remove Infrastructure	2026		
Waste Storage Area – Certified Clean			
Waste Storage Area – Remove Infrastructure	2031		
Long-Term Monitoring Ends			

Note: Certified clean dates assume best case (3.25 years).

\* Stop P&T operations' dates are based on modeling reported in the WSA (Phase II) design report (Approach C).

Figure 3–2. ARWWT Timeline

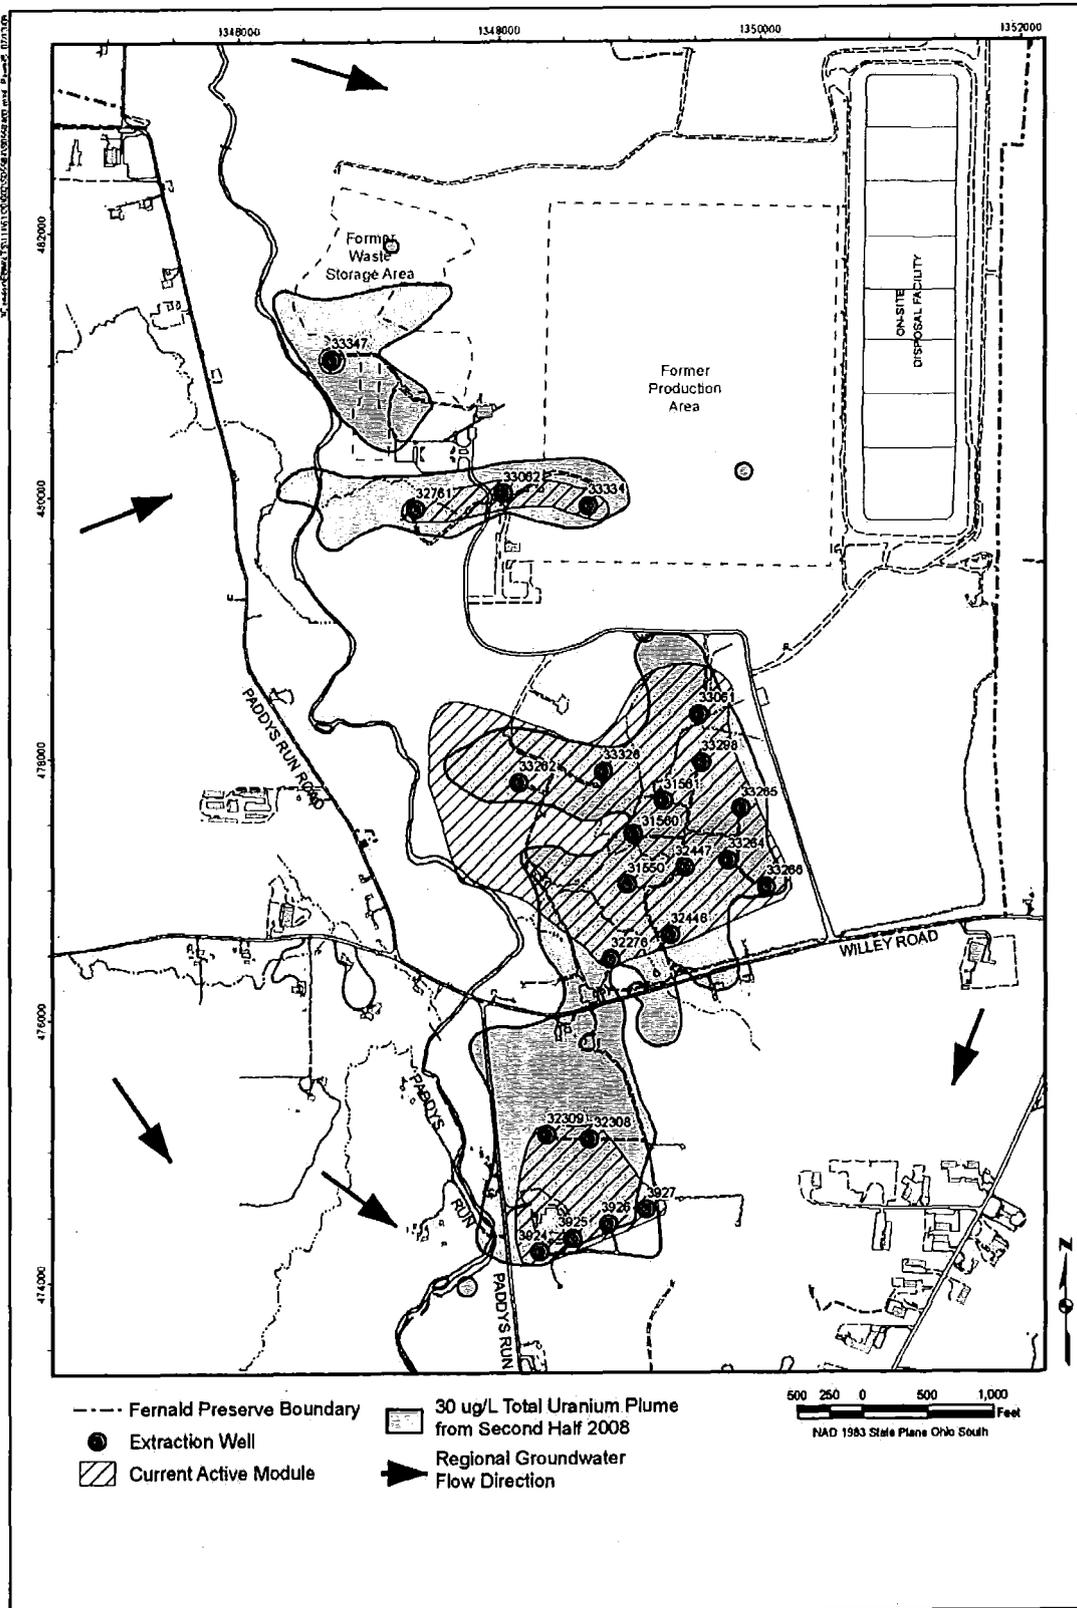


Figure 3-3. Extraction Wells for the Groundwater Remedy

**UNCONTROLLED IF PRINTED**

*Table 3-1. Well Field Operating Status*

<b>Module</b>	<b>Operations Identification</b>	<b>Database Identification</b>	<b>Date of Initial Operation</b>	<b>Current Status</b>	<b>Notes</b>
South Plume	RW-1	3924	08/27/93	Active	
South Plume	RW-2	3925	08/27/93	Active	
South Plume	RW-3	3926	08/27/93	Active	
South Plume	RW-4	3927	08/27/93	Active	
South Plume	RW-5	3928	08/27/93	Inactive	Turned off 9/11/94, not needed
South Plume	RW-6	32308	08/09/98	Active	
South Plume	RW-7	32309	08/09/98	Active	
South Field	EW-13	31565	07/13/98	Inactive	Turned off 5/22/01
South Field	EW-14	31564	07/13/98	Inactive	Turned off 12/19/01
South Field	EW-15	31566	07/13/98	Inactive	Turned off 8/7/98, replaced by EW-15A
South Field	EW-15a	33262	07/26/03	Active	
South Field	EW-16	31563	07/13/98	Inactive	Turned off 12/19/02, Converted to IW16
South Field	EW-17	31567	07/13/98	Inactive	Turned off 9/6/05, replaced by EW-17A
South Field	EW-17a	33326	09/13/05	Active	
South Field	EW-18	31550	07/13/98	Active	
South Field	EW-19	31560	07/13/98	Active	
South Field	EW-20	31561	07/13/98	Active	
South Field	EW-21	31562	07/13/98	Inactive	Turned off 3/13/03, replaced by EW-21A
South Field	EW-21a	33298	07/29/03	Active	
South Field	EW-22	32276	07/13/98	Active	
South Field	EW-23	32447	02/02/00	Active	
South Field	EW-24	32446	02/02/00	Active	
South Field	EW-25	33061	05/07/02	Active	
South Field	EW-30	33264	07/25/03	Active	
South Field	EW-31	33265	07/25/03	Active	
South Field	EW-32	33266	07/25/03	Active	
WSA	EW-26	32761	05/08/02	Active	
WSA	EW-27	33062	05/08/02	Active	
WSA	EW-28	33063	05/08/02	Inactive	Turned off 7/01/05, plugged and abandoned
WSA	EW-28a	33334	06/29/06	Active	
WSA	EW-33	33330		Inactive	Never installed, location moved
WSA	EW-33a	33347	10/05/06	Active	
Re-injection	IW-8	22107	09/02/98	Inactive	Turned off 12/31/01
Re-injection	IW-8A	33253	11/07/02	Inactive	Turned off 9/25/04
Re-injection	IW-9	22108	09/02/98	Inactive	Turned off 3/01/02
Re-injection	IW-9A	33254	11/07/02	Inactive	Turned off 9/25/04
Re-injection	IW-10	22109	09/02/98	Inactive	Turned off 9/25/04
Re-injection	IW-10A	33255	05/22/03	Inactive	Turned off 9/25/04
Re-injection	IW-11	22240	09/02/98	Inactive	Turned off 9/25/04
Re-injection	IW-12	22111	09/02/98	Inactive	Turned off 9/25/04
Re-injection	IW-16	31563	07/27/03	Inactive	Turned off 9/25/04
Re-injection	IW-29	33263	07/27/03	Inactive	Turned off 9/25/04
Re-injection	Inj. Pond	NA	07/27/03	Inactive	Turned off 9/25/04

## UNCONTROLLED IF PRINTED

### 3.1.1.3 Waste Storage Area Module

The Waste Storage Area Module was designed and installed in two phases. The Waste Storage Area Extraction System targets contaminants in the Great Miami Aquifer underlying the former Waste Storage Area (OU1 and OU4). Figure 3-3 shows the geographical location of the area. The *Design for Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas* (DOE 2001a) defines the Phase I design. Phase I addresses the plume of contamination defined in the vicinity of the Pilot Plant Drainage Ditch. The *Waste Storage Area (Phase II) Design Report* (DOE 2005b) defines the Phase II design. Phase II addresses the plume of contamination defined in the vicinity of the former Waste Pit Area.

Phase I of the Waste Storage Area Module consists of one 12-inch diameter well and two 16-inch-diameter extraction wells complete with submersible pumps with variable speed drives, well houses, electrical power, instrumentation and controls, fiber optic communications, and dual discharge headers (one for treatment and one for direct discharge). Operation of this phase of the module began on May 8, 2002. The easternmost well in the Phase I design (extraction well [EW] 33063 or EW-28) was taken out of service, then plugged and abandoned in July 2004 to make way for soil remediation activities. The well was replaced in 2005 and was brought online in 2006 prior to the site's transition from the DOE Office of Environmental Management (EM) to the DOE Office of Legacy Management (LM).

The *Design for Remediation of the Great Miami Aquifer in the Waste Storage Area and Plant 6 Area* (DOE 2001a) concluded that uranium concentrations in the Great Miami Aquifer beneath Plant 6 had naturally attenuated to concentrations below 20 ppb. While the current data indicate that no extraction wells and infrastructure will be needed for the former Plant 6 Area, monitoring of the area will continue until aquifer restoration certification is completed and approved by EPA and OEPA.

Phase II of the Waste Storage Area Module consists of one 16-inch-diameter well with a submersible pump, a variable speed drive, a well house, electrical power, instrumentation and controls, fiber optic communications, and a dual-discharge header.

### 3.1.1.4 Storm Sewer Outfall Ditch Infiltration

A test was conducted in 2005 to gauge seasonal flow of water in the storm sewer outfall ditch (SSOD) and to determine if recharge to the Great Miami Aquifer through the SSOD at a rate of 500 gpm was feasible (DOE 2005a). As reported in the *Groundwater Remedy Evaluation and Field Verification Plan* (DOE 2004a), infiltration through the SSOD at a rate of 500 gpm was predicted to decrease the cleanup time by 1 year. The study concluded, though, that the operation would not be cost effective. Subsequent discussions with EPA and OEPA in 2006 led to an agreement to proceed with a scaled-down version of the operation. Clean groundwater is being pumped into the SSOD to supplement natural storm water runoff in an attempt to accelerate remediation of the South Plume. Three wells on the east side of the site are being utilized to deliver as much clean groundwater as is needed to maintain a flow of approximately 500 gpm into the SSOD. This supplemental pumping will continue until the wells, pumps, or motors are no longer serviceable. At that time, the operation will be suspended, pending a determination that the remedy is benefiting from the operation.

### **3.1.2 Groundwater Collection and Conveyance**

An extensive system of collection and conveyance piping is required for the remediation of the Great Miami Aquifer. These piping systems were specified in the various module-specific design documents. Figure 3-4 provides an overview of the current well-field piping.

As described in Section 2, the piping network that conveys on-property extracted groundwater from the individual extraction wells has double headers, one connected to the main line to treatment and the other to the main discharge line as shown in Figure 3-4. The double headers allow for treatment/bypass decisions to be made on an individual-well basis for the on-property wells.

This design feature is not applicable to the off-property South Plume Module, which was largely in place prior to the design of the on-property piping network. Since individual well bypass/treatment lines are not available on the South Plume wells, treatment/bypass decisions for the six wells in this system are made on the basis of uranium concentration in the combined flow from all of the wells, as indicated in Figure 3-4.

### **3.1.3 Great Miami Aquifer Remedy Performance Monitoring**

Section 3 of the IEMP provides for the routine remedy-performance monitoring of the Great Miami Aquifer. Details of how the remedy performance data are being evaluated and the associated decision-making process are located in Section 3.7 of the IEMP. Figure 3-5 illustrates the groundwater certification process for the aquifer remedy. As illustrated in Figure 3-5, remedy performance monitoring is being conducted to assess the efficiency of mass removal and to gauge performance in meeting remediation objectives. If it is determined that aquifer restoration program expectations (as identified in the IEMP) are not being met, the design and operation of the aquifer restoration system will be evaluated to determine if a change needs to be implemented. A change to the operation of the aquifer restoration system would be implemented by a modification to this OMMP. A groundwater monitoring change, if found to be necessary, would be implemented through the IEMP review and approval process. If additional characterization data are needed (e.g., to determine the nature of a newly detected FRL exceedance), a modification to the IEMP would be implemented, or a new sampling plan would be prepared, depending on the anticipated size of the activity.

Before any required new extraction wells are put into operation, additional monitoring wells are installed to help monitor the performance of the new wells. The new extraction wells are also monitored for uranium concentration on a frequent basis just after startup. The sitewide groundwater data collected via the IEMP are used to assess the performance of the sitewide groundwater remedy. The data derived from the additional monitoring wells and new extraction well uranium monitoring are integrated with the IEMP groundwater monitoring such that area-wide interpretations can be made. Changes to the scope of the routine monitoring identified in the IEMP may be necessary based on the results of sampling conducted in the new monitoring and extraction wells. These changes would be accommodated as necessary through the prescribed IEMP review process.

UNCONTROLLED IF PRINTED

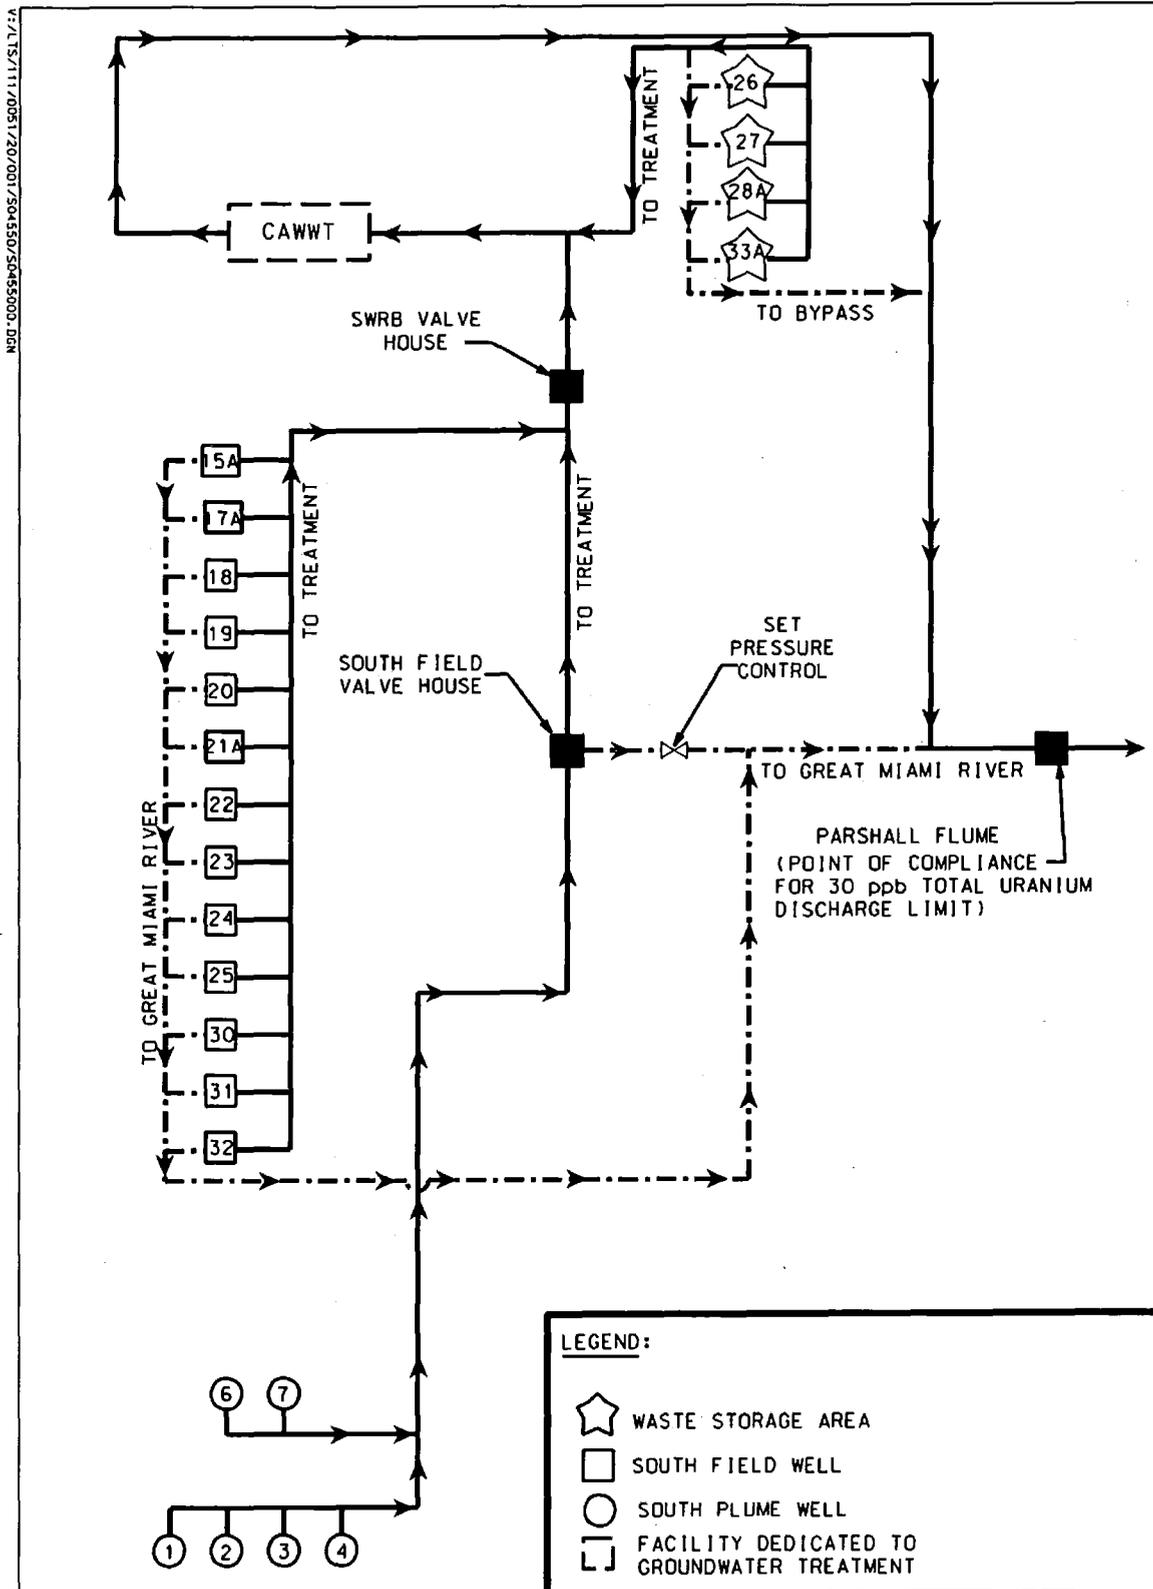


Figure 3-4. Current Groundwater Remediation/Treatment Schematic

UNCONTROLLED IF PRINTED

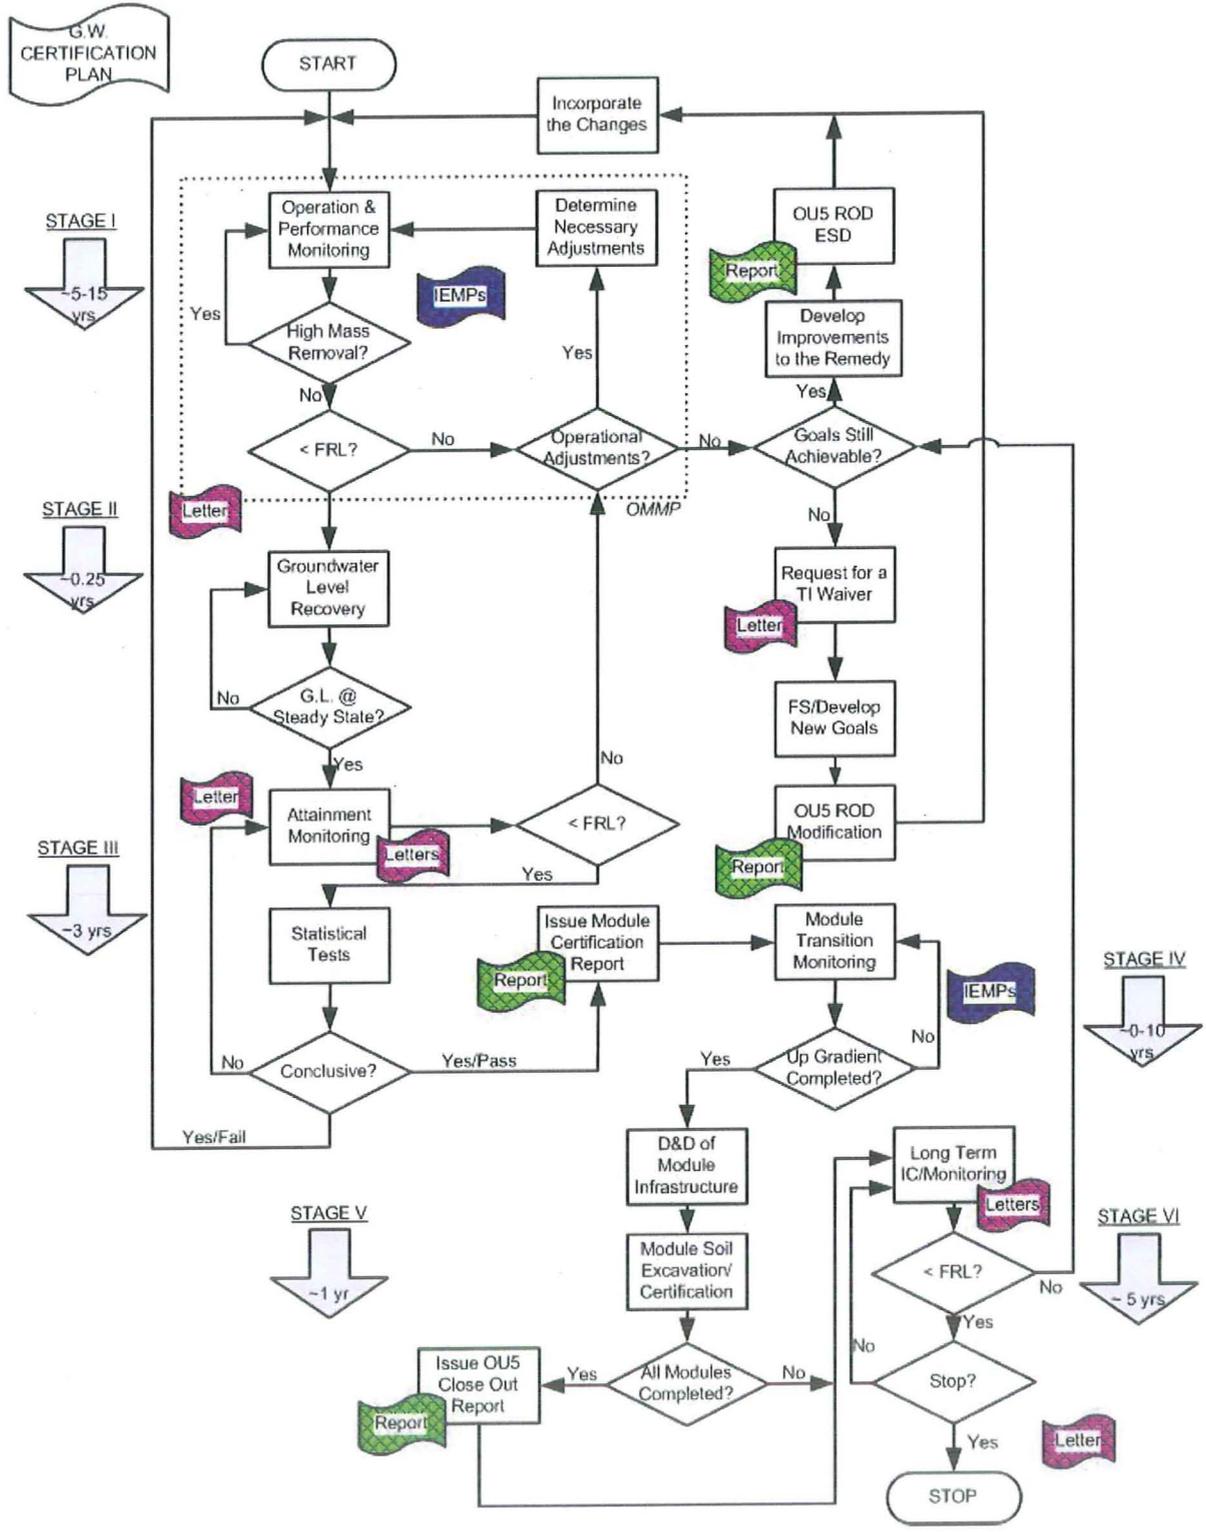


Figure 3-5. Groundwater Certification Process and Stages

## **UNCONTROLLED IF PRINTED**

Details of the annual reporting of groundwater remedy performance are also provided in the IEMP, Section 3.7. The reporting subsection provides the specific information to be reported in the comprehensive Sitewide Environmental Report.

### **3.2 Other Site Wastewater Sources**

Leachate from the OSDF is the only other significant source of wastewater to be treated. Small amounts of wastewater from the extraction well rehabilitation process are generated periodically. This wastewater is also treated. A small amount of storm water from portions of the CAWWT footprint will be collected and treated as necessary.

### **3.3 Treatment Systems**

As noted in Section 1, with site closure in 2006, several water treatment flows were eliminated (remediation and sanitary wastewater) or greatly reduced (storm water runoff) from the scope of the treatment operation. The elimination or reduction of these flow streams provided an opportunity to reduce the size of the water treatment facility that remained to service the aquifer restoration after site closure. The various facility shutdown dates are provided in Figure 3-2.

#### **3.3.1 CAWWT**

As noted in Section 1, the AWWT expansion system was “converted” to the long-term groundwater treatment facility. The CAWWT provides a dedicated long-term groundwater treatment capacity of up to 1,800 gpm. The CAWWT process flow diagram is provided in Figure 3-6. The unit processes of the CAWWT system include granular multimedia filtration and ion exchange on all three trains.

Operating the CAWWT to meet uranium discharge limits will most likely no longer be required after 2011 because it is projected that uranium discharge limits will be met without treatment. The test pump model is used to predict how long groundwater treatment will be required in order to meet uranium discharge limits. This model uses a spreadsheet to calculate a flow-weighted discharge concentration based on predefined pumping rates of the extraction wells, predefined treatment capabilities, and uranium concentrations measured in water pumped from the extraction wells. The current prediction of how long treatment will be needed is based on constant pumping rates defined for Modeling Approach C, treatment capabilities defined in the OMMP, and uranium concentration data collected at the extraction wells through 2004.

The 2011 prediction is based on trending the 95 percent upper confidence level of actual concentration data collected at extraction wells.

### **3.4 Ancillary Facilities**

A number of facilities support the operation of aquifer restoration and the treatment system. These facilities include headworks for equalizing flow, groundwater flow routing facilities, wastewater collection and transfer facilities, and discharge monitoring facilities.

UNCONTROLLED IF PRINTED

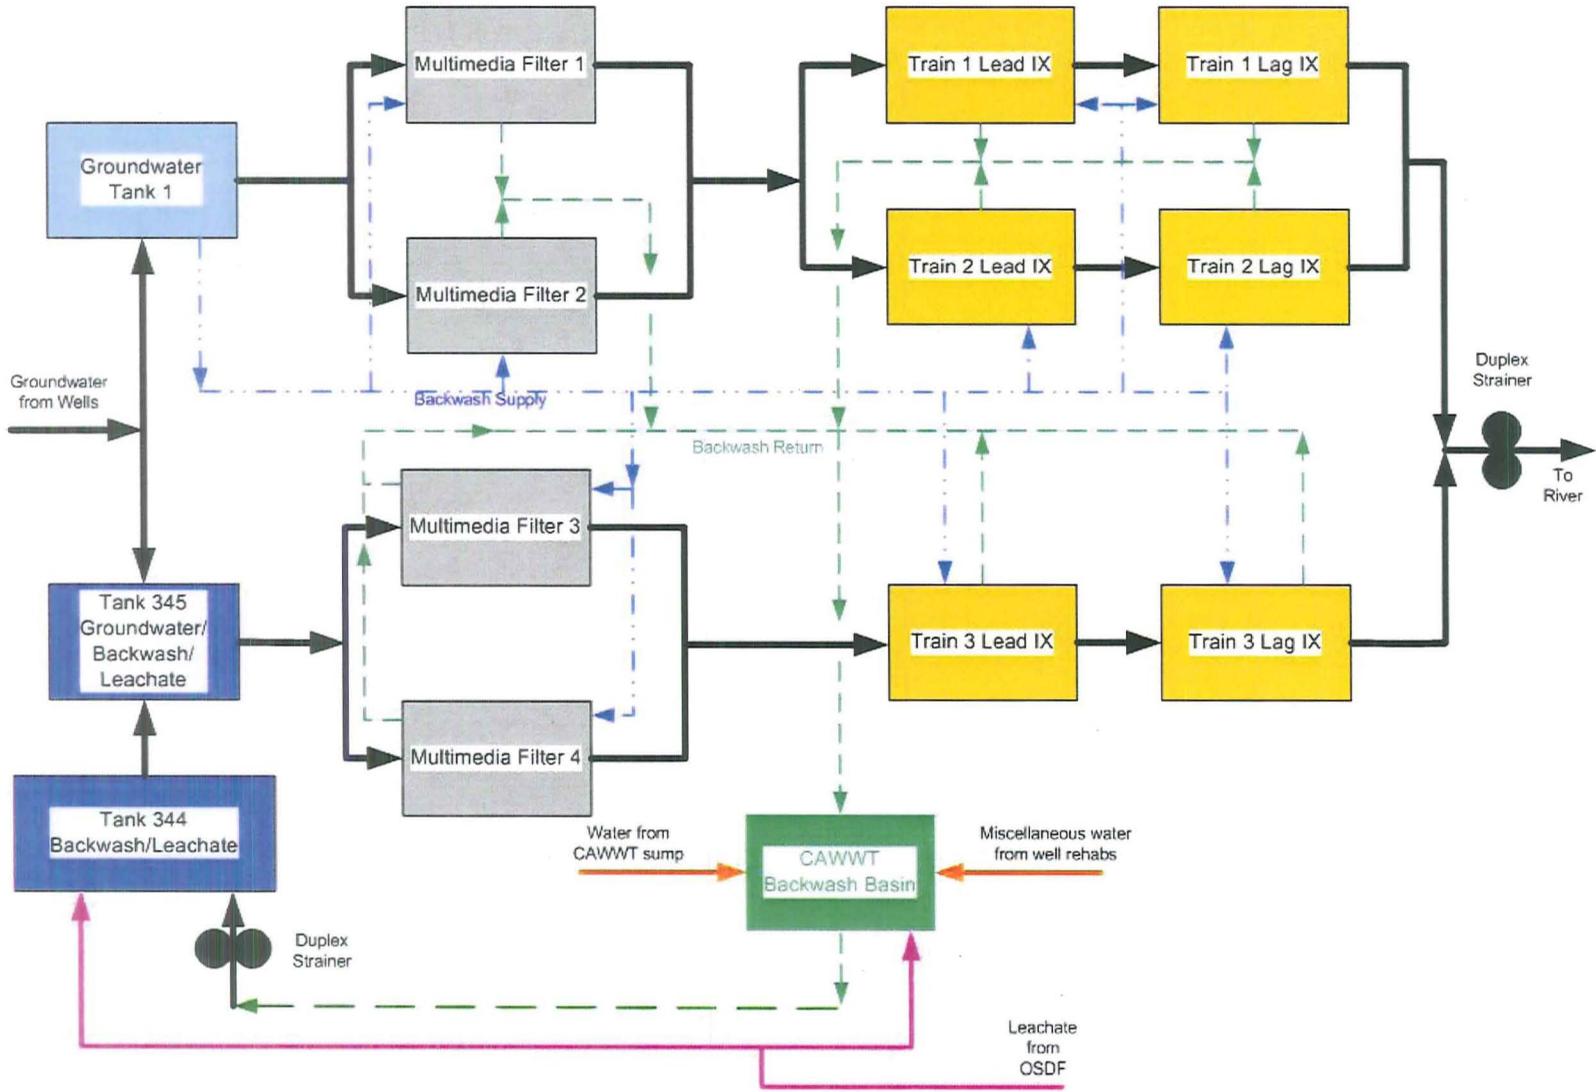


Figure 3-6. CAWWT Process Flow Diagram

## **UNCONTROLLED IF PRINTED**

### **3.4.1 Great Miami Aquifer**

No specific headworks exist for groundwater. However, because this flow can be adjusted by regulating the extraction wells, the aquifer itself serves as the headworks for groundwater.

### **3.4.2 CAWWT Backwash Basin**

The CAWWT includes a backwash basin. This basin is an aboveground, lined basin measuring 100 ft × 100 ft × 6 ft deep. It was installed December 2005 through January 2006 and became operational the week of January 30, 2006. The basin was designed to contain the last remaining impacted storm water prior to site closure and to serve as the facility to contain backwash water from the CAWWT multimedia filters and ion exchange vessels for the duration of CAWWT operations. The basin has an approximate working capacity of up to 400,000 gallons to allow for a minimum of 6 inches of freeboard at all times. The basin contains a baffle to separate the influent from the effluent and allow any solids backwashed from the filters and ion exchange vessels to settle prior to discharge back into the CAWWT treatment system.

### **3.4.3 Storm Water Retention Basin Valve House**

The Storm Water Retention Basin (SWRB) Valve House contains pipes that direct groundwater flow to the CAWWT for treatment. This facility also serves as the point of convergence for the effluent from the treatment system prior to discharge through the Fernald Preserve outfall pipeline.

### **3.4.4 South Field Valve House**

As part of the South Field Extraction System Phase I construction, a new South Field Valve House was constructed, upstream of the SWRB Valve House. The primary purpose of this valve house is to receive the combined South Plume Recovery System groundwater. It directs all or portions of the combined flow toward treatment or toward untreated discharge prior to its being combined with other groundwater flows.

### **3.4.5 Parshall Flume**

Downstream of the SWRB Valve House, the combined flows pass through the Parshall Flume and an associated outfall monitoring station for Fernald Preserve discharge flow measurement and monitoring.

### **3.4.6 OSDF Leachate Transmission System Permanent Lift Station**

Leachate from the OSDF drains by gravity to the valve houses located on the west side of each cell. From the valve houses, the leachate is routed to the leachate transmission system (LTS) Permanent Lift Station (PLS). When sufficient leachate collects in the PLS, it is pumped to the CAWWT for treatment.

## **3.5 Current Treatment Performance**

The performance of the ARWWT systems measured against the overriding goal of meeting OU5 ROD discharge standards relative to uranium as well as NPDES effluent limits has been satisfactory. The uranium mass loading limit of 600 lbs/yr has been met every year since the

## **UNCONTROLLED IF PRINTED**

requirement became effective in January 1998. As depicted in Figure 3-7, the monthly average concentration has been met every month since January 1998 with the exception of 5 months. The Fernald Preserve has been in compliance with NPDES effluent limits well in excess of 99 percent of the time since January 1995, the date the AWWT Phases I and II were placed into service.

### **3.6 Current and Planned Discharge Monitoring**

Currently, discharge monitoring is completed under two sampling programs. Conventional pollutants are monitored under the NPDES permit. Radionuclides and total uranium are monitored under the OU5 ROD and the *Federal Facilities Compliance Agreement (FFCA)* (EPA 1986). These two programs have been incorporated into the IEMP sampling program as described in Section 4 of the IEMP. These monitoring programs are described briefly in the Subsections 3.6.1 and 3.6.2.

#### **3.6.1 NPDES Monitoring**

Five locations are monitored under the current NPDES permit. Three of the locations relate to permitted Fernald Preserve wastewater/storm water discharge outfalls to State of Ohio waters (biowetlands overflow, Parshall Flume, storm sewer outfall ditch) and two relate to upstream and downstream monitoring (relative to the Fernald Preserve outfall line) of the Great Miami River. The permit (Ohio EPA Permit No. 11O00004\*HD) is administered by OEPA and granted to DOE at the Fernald Preserve. The effluent pollutant limitations, monitoring requirements, and reporting requirements are specified in the permit for each of the five monitored locations.

#### **3.6.2 Radionuclide and Uranium Monitoring**

The Fernald Preserve conducts a surface water sampling and analytical program for specific radionuclides that are potentially present in the regulated liquid effluent and in the uncontrolled storm water runoff from the site. Details of this program are provided in Section 4 of the IEMP.

The daily total uranium analysis of the site effluent to the Great Miami River is used to track compliance with OU5 ROD established limits. The Fernald Preserve is obligated to limit the total mass of uranium discharged through the outfall line to the Great Miami River to 600 lbs/yr while not exceeding a monthly average of 30 ppb.

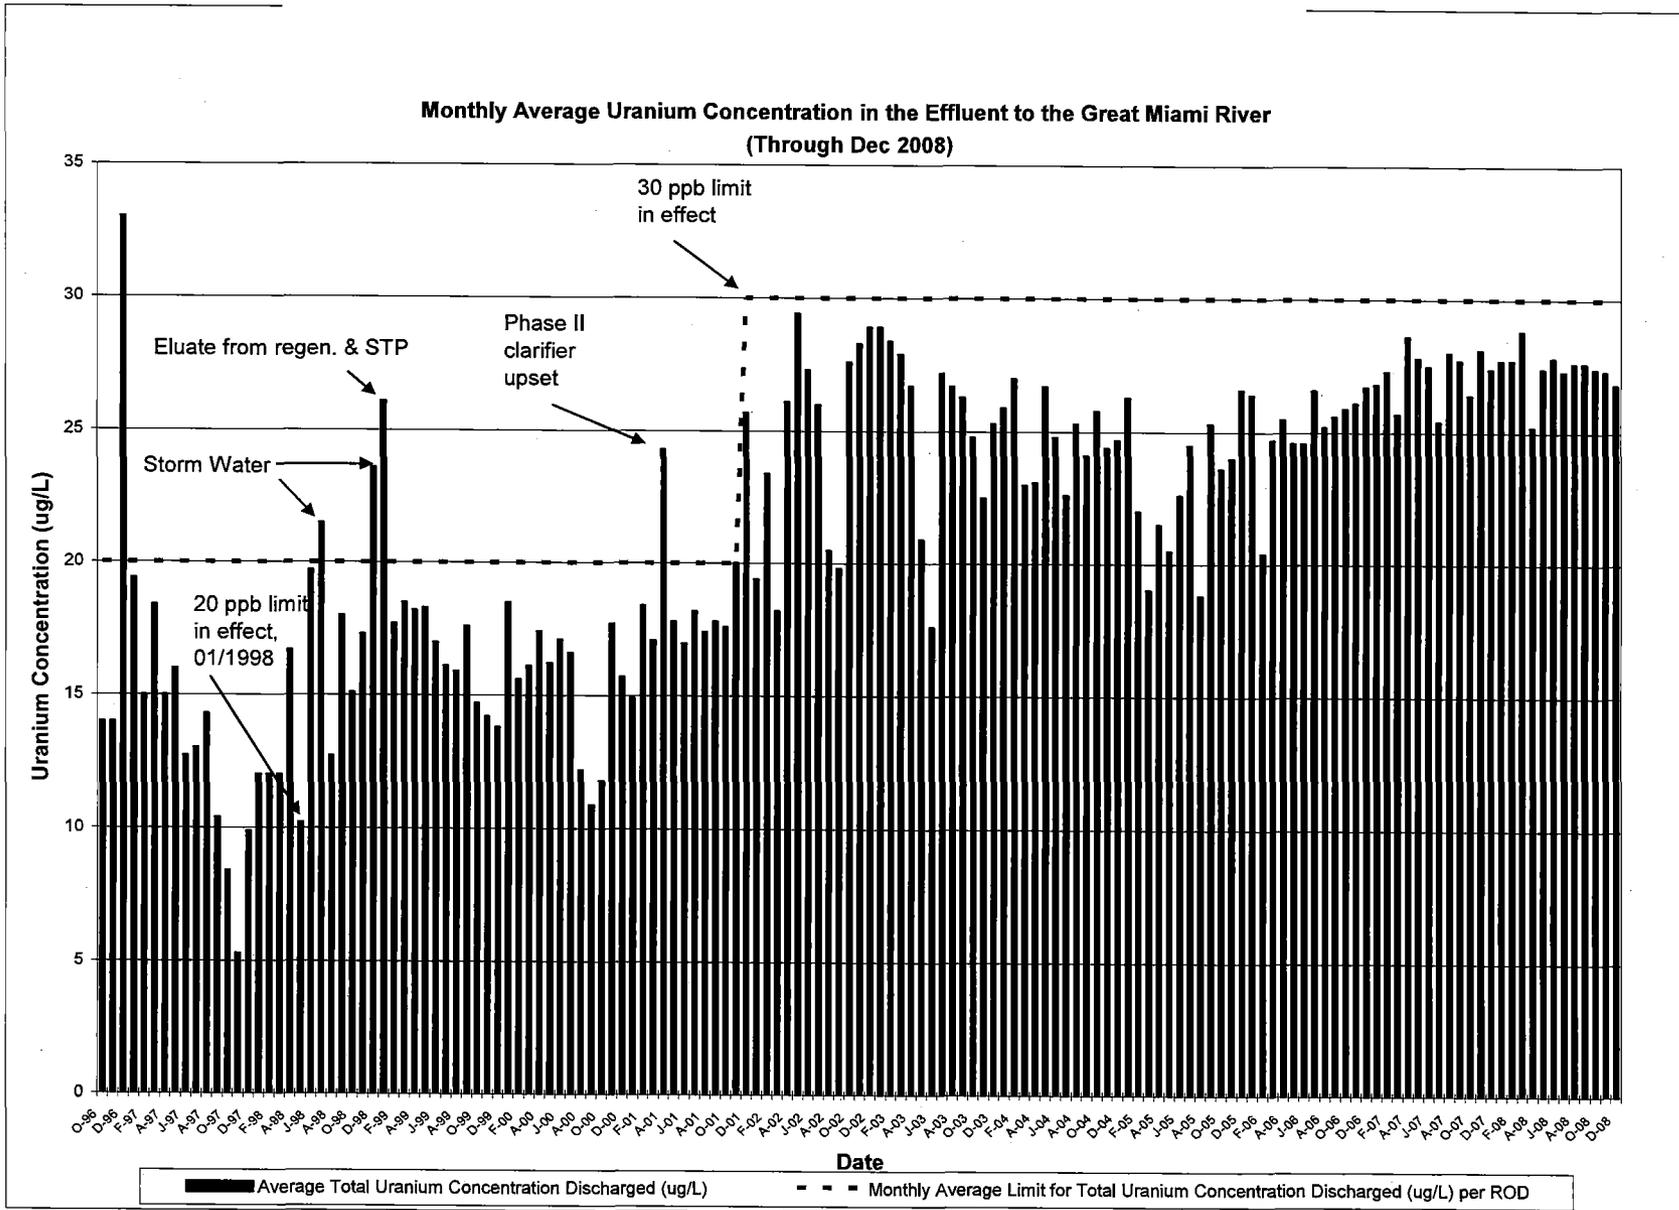


Figure 3-7. Monthly Average Uranium Concentration in the Effluent to the Great Miami River (through December 2008)

## **UNCONTROLLED IF PRINTED**

This daily effluent uranium analysis is also used to demonstrate compliance with the monthly average uranium concentration of 30 ppb uranium in the site discharge to the river. The original requirement for compliance with a monthly average concentration became effective on January 1, 1998, as established in the OU5 ROD. The OU5 ROD established this concentration at 20 ppb uranium, which was the compliance standard from January 1998 through November 2001. The monthly average concentration limit changed from 20 ppb to 30 ppb beginning December 1, 2001, as a result of EPA approval of the *Explanation of Significant Differences [ESD] for Operable Unit 5* in November 2001. This OU5 ESD changed the total uranium groundwater FRL from 20 ppb to 30 ppb and established the new monthly average concentration discharge standard. The 600-lbs/yr limit was unaffected by this ESD and remains in effect.

The monthly average uranium concentration is calculated by multiplying each daily flow by the uranium concentration of the flow-weighted composite sample for that day. The sum of the values obtained by multiplying the flow times by the concentration is then divided by the sum of the flows for the month. The result is a flow-weighted average monthly uranium concentration. The daily flow-weighted concentrations are then multiplied by 8.35 lbs/gallon to obtain the daily pounds of uranium discharged. The sum of the daily masses for the year is used to compare against the 600 lbs/yr limit.

If the monthly average uranium concentration exceeds the 30 ppb limit, the exceedance will be reported to the agencies. If a sequence of months (i.e., not a random occurrence) indicates an exceedance of the 30-ppb monthly average, then corrective measures will need to be evaluated. Depending on the reason for the sequence of exceedances, corrective actions could include replacement of resin in CAWWT ion exchange vessels, segregation of the South Plume Optimization wells discharged from the combined South Plume Optimization/South Plume Recovery System header to reduce the concentration of uranium in flow bypassing treatment or other such actions.

If corrective measures are deemed necessary, the situation will be outlined to the EPA and OEPA to reach consensus regarding what action (if any) is required.

### **3.6.3 IEMP Surface Water and Treated Effluent Monitoring Program**

Significant portions of the current and past programs (NPDES and FFCA) have been incorporated into the IEMP. Section 4 of the IEMP describes these two programs in more detail and also how these two programs have been integrated into the IEMP surface water and treated effluent sampling program. The IEMP also provides for additional monitoring above that required by the NPDES permit and the FFCA. This additional monitoring is performed as a supplement to monitor surface water and treated effluent for potential site impacts to various receptors during aquifer remediation. In addition to identifying the sampling program requirements, the IEMP provides a comprehensive data evaluation and associated decision-making and reporting strategy for surface-water and treated effluent.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **4.0 Projected Flows**

This section addresses the latest understanding of flows for groundwater and OSDF leachate.

### **4.1 Groundwater**

Extracted groundwater is the primary wastewater flow requiring treatment. Groundwater extraction rates can be controlled. Groundwater flows are defined such that discharge limits at the Parshall Flume, and capture of the 30 micrograms per liter ( $\mu\text{g/L}$ ) uranium plume, are achieved. The objective is to pump as aggressively as possible without exceeding discharge limits. The individual groundwater remediation modules that currently constitute the aquifer remedy are presented in Section 3.1. Figure 3-3 depicts the locations of all existing extraction wells. Table 4-1 provides the target extraction rate schedule for each of the wells currently operating. The combined modeled target pumping rate is approximately 4,775 gpm.

Throughout the duration of groundwater remediation, the pumping rates may be modified within system design and operational constraints, as necessary. These rate modifications will be made to maintain, to the degree possible, the aquifer restoration objectives outlined in the remedy design. An operational rate of 10 percent over the modeled pumping rates is being targeted to provide for anticipated and unanticipated downtime.

#### **4.1.1 OSDF Leachate**

As of June 2009, the total leachate flow from all eight cells of the OSDF had declined to about 3,700 gallons per week, or about 0.4 gpm. This flow stream is expected to continue to decline since the facility was completely capped in late 2006. The leachate collects in the PLS pump sump and from there is pumped to the CAWWT for treatment.

**UNCONTROLLED IF PRINTED**

Table 4-1. Target Extraction Rate Schedule

System ID	Location	Operations Identification	Database Identification	Target Extraction Rates (gpm)	Target Extraction Rates (gpm)
				11/06 to 04/01/15	04/01/15 to End
I	Waste Pits	EW-26	32761	300	500
I	Waste Pits	EW-27	33062	200	200
I	Waste Pits	EW-28a	33334	200	200
I	Waste Pits	EW-33a	33347	300	300
	<b>System Totals</b>	<b>Pumped</b>		<b>1,000</b>	<b>1,200</b>
II	South Field	EW-15a	33262	200	300
II	South Field	EW-17	31567	175	175
II	South Field	EW-18	31550	100	100
II	South Field	EW-19	31560	100	100
II	South Field	EW-20	31561	100	400
II	South Field	EW-21a	33298	200	300
II	South Field	EW-22	32276	300	400
II	South Field	EW-23	32447	300	400
II	South Field	EW-24	32446	300	300
II	South Field	EW-25	33061	100	100
II	South Field	EW-30	33264	200	400
II	South Field	EW-31	33265	300	400
II	South Field	EW-32	33266	200	200
	<b>System Totals</b>	<b>Pumped</b>		<b>2,575</b>	<b>3,575</b>
IV	South Plume	RW-1	3924	200	0
IV	South Plume	RW-2	3925	200	0
IV	South Plume	RW-3	3926	200	0
IV	South Plume	RW-4	3927	200	0
IV	South Plume	RW-6	32308	200	0
IV	South Plume	RW-7	32309	200	0
	<b>System Totals</b>	<b>Pumped</b>		<b>1,200</b>	<b>0</b>
	<b>Total Extraction</b>			<b>4,775</b>	<b>4,775</b>

## **5.0 Operations Plan**

This section contains the operations philosophy, treatment priorities, hierarchy of decisions, management and flow of operations information, and management of treatment residuals necessary to successfully operate the groundwater extraction and treatment systems to achieve regulatory requirements and commitments.

### **5.1 Wastewater Treatment Operations Philosophy**

The primary goals of wastewater treatment operations and maintenance are to (1) meet effluent discharge requirements, (2) provide sufficient treatment capacity such that the desired groundwater pumping rates can be maintained, and (3) provide for leachate treatment. In keeping with the principles of "as low as reasonably achievable," correct decisions in applying treatment are required to maximize the quantity of uranium removed from wastewater prior to its discharge to the Great Miami River. Maximizing uranium removal should result in compliance uranium discharge limits. Other regulatory discharge requirements, such as NPDES, must also be met. Influent streams to treatment and effluent streams from treatment as well as other process control sampling around specific unit operations (e.g., ion exchangers) is completed for uranium and other appropriate constituents as necessary to provide information needed to help ensure that the goals are met. Sampling under the NPDES permit and the IEMP is performed to verify that requirements and effluent limits for discharges to the Great Miami River are met.

### **5.2 CAWWT Operation**

As discussed in Section 3, the only remaining treatment system is the CAWWT. The effluent from this system and bypassed (untreated) groundwater combine at the Parshall Flume to form the Fernald Preserve's regulated discharge to the Great Miami River.

The priority for treatment will always be OSDF leachate and the extraction wells with the highest uranium concentrations. Groundwater sent to treatment typically contains a uranium concentration of 45 to 65 ppb. Groundwater is fed to two treatment systems at the CAWWT. The 1,200-gpm system treats only groundwater. The 600-gpm system treats groundwater, leachate from the OSDF, and water from the CAWWT backwash basin.

The CAWWT backwash basin collects backwash from all CAWWT ion exchange vessels and multimedia filters, water from the CAWWT sump, and water from well and pump rehabilitations. Water from the basin is pumped to the 600-gpm treatment system at a flow rate adequate to ensure that the basin level does not reach 5 ft. Groundwater flow to the 600-gpm system is reduced as necessary to maintain a low level in the basin. The basin will maintain at least 6 inches of freeboard at all times.

Shift supervision is provided as necessary, 365 days per year. As the supervisor of all operations and maintenance activities that occur on a particular shift, the shift supervisors are responsible for ensuring that treatment and monitoring equipment is operated, maintained, and repaired so that the necessary treatment throughput is achieved. Operations and maintenance are performed in accordance with all appropriate standard operating procedures, standards, and specifications. Additionally, process engineering support personnel are on call to provide assistance in problem solving.

### **5.2.1 Ion-Exchange Vessel Rotation**

The CAWWT ion exchange system has trains of two ion-exchange vessels operating in series: lead and lag. When the ion exchange resin in both vessels is new, the majority of uranium is removed in the lead vessel. As the lead vessel becomes loaded with uranium, more passes through into the lag vessel. As the lag vessel becomes loaded, more uranium passes into the discharge stream. When the uranium concentration in the discharge from a lead ion exchange vessel approaches or equals the concentration of the influent, the resin is removed from the vessel and replaced with new resin. The lag vessel is moved into lead, and the vessel containing new resin is placed in lag.

## **5.3 Groundwater Treatment**

The CAWWT provides up to 1,800 gpm treatment for groundwater. Wells are pumped to treatment or bypass as described in the next section. The set points at which the wells are pumped are typically set to approximately 10 percent more than the groundwater remedy target set point to account for downtime.

### **5.3.1 Groundwater Treatment Prioritization vs. Bypassing**

Treatment of groundwater well discharges are prioritized in order of uranium concentration; the highest uranium concentration wells are routed to treatment until the treatment capacity necessary to meet the site's uranium discharge limit is utilized. Remaining well discharges are bypassed around treatment to the Parshall Flume. As shown schematically in Figure 3-4, treatment/bypass decisions for the Southfield and Waste Storage Area extraction wells are made on a well-by-well basis. The existing four South Plume off-property leading-edge wells, combined with the two wells of the South Plume Optimization Project, are routed as a group either for treatment, full bypass, or partial bypass, since piping does not exist for well-by-well treatment/bypass decision. The off-property South Plume wells are typically routed directly to bypass at the South Field Valve House, since their combined uranium concentration is very near or less than 30 ppb uranium.

## **5.4 Well Field Operational Objectives**

Several objectives must be considered when well field operational decisions are made. These objectives are listed in Table 5-1 along with the anticipated actions required to achieve each objective. At times the objectives conflict; therefore, operational decisions are generally made by ARWWP management. Decisions that affect well field operations are communicated to EPA and OEPA in the IEMP reports. Changes in groundwater restoration well pumping set points are transmitted to shift supervisors by the ARWWP manager.

In addition to the objectives listed in Table 5-1, uranium concentration rebound will be measured annually. Uranium contamination bound to aquifer sediments in the unsaturated portion of the Great Miami Aquifer has been identified under some source areas at the site. Uranium bound to unsaturated aquifer sediments will remain bound unless water levels rise and saturate the sediments, allowing the uranium to dissolve into the groundwater.

**UNCONTROLLED IF PRINTED**

Table 5-1. Well Field Operational Objectives

Objectives	Actions Required
<p>Operate individual wells within constraints imposed by system design and equipment. Key constraints include:</p> <ul style="list-style-type: none"> <li>• Pumping equipment is limited to a range of flows that will dictate the flexibility of extraction rates for individual wells.</li> <li>• Hydraulic capacity of the piping limits extraction rates.</li> <li>• Control range of flow control valves and variable frequency drives (VFDs) for pump motors bound the range of extraction rates for individual wells.</li> <li>• Capacity of existing electrical service to each well.</li> <li>• Average entrance velocity of water moving into the screen should not exceed 0.1 ft per second.</li> </ul>	<p>Operate well pumps and motors according to manufacturer recommendations.</p> <p>Operate extraction well systems within design constraints.</p>
<p>Perform necessary equipment/well maintenance in accordance with established schedules.</p>	<p>According to OMMP, Section 6.</p>
<p>Maintain compliance with the discharge limits of 30 µg/L monthly average uranium concentration and 600 lbs/yr for the combined site water discharged to the Great Miami River.</p>	<p>Monitor discharge concentrations.</p> <p>Modify well set points as necessary to maintain compliance with discharge limits.</p> <p>Evaluate well set points and treatment routing monthly.</p> <p>Use flow-weighted average-concentration calculations to predict how changes to set points and routing will affect discharge concentrations.</p> <p>Compare predictions with actual measurements to evaluate if/how predictions can be improved.</p> <p>Maintain well set points to the degree possible.</p>
<p>Minimize impact to the Paddys Run Road Site plume.</p>	<p>Pumping from well 3924 (RW-1) should not exceed 300 gpm.</p> <p>Pumping from well 3925 (RW-2) should not exceed 300 gpm (if well 3924 is pumping) and 400 gpm (if well 3924 is not pumping).</p> <p>Pumping from well 3926 (RW-3) should not exceed 500 gpm if either well 3924 or well 3925 goes down.</p> <p>If the actual capture zone differs significantly from that defined via previous modeling, it may be determined that the pumping rates noted above require modification to maintain this objective. Required modifications will be made based on additional modeling projections and verified based on field data.</p>

**UNCONTROLLED IF PRINTED**

*Table 5-1 (continued). Well Field Operational Objectives*

<p>Maintain capture of the 30 µg/L uranium plume along the southern administrative boundary.</p>	<p>The following pumping rates for each South Plume well provides for the capture (within system constraints) of the uranium plume along the administrative boundary:</p> <p align="center">                     well 3924 at 200 gpm                      well 3925 at 200 gpm                      well 3926 at 200 gpm                      well 3927 at 200 gpm                 </p> <p>Adjust the pumping rates of the remaining operable wells in the South Plume module to maintain capture along the administrative boundary when (1) any single South Plume Module well outage for 1 week or more occurs or (2) multiple well outages occur for 3 days or more.</p> <p>If the actual capture zone differs significantly from that defined via previous modeling, it may be determined that the pumping rates noted above require modification to maintain this objective. Required modifications will be made based on additional modeling projections and verified based on field data.</p>
<p>Maintain hydraulic capture of the remaining portions of the 30 µg/L uranium plume (within areas of active modules).</p>	<p>Establish pumping rates based on model predictions of required pumping rates to maintain a desired area of capture.</p> <p>Determine the actual area of capture created when the wells are operating at the modeled rates based on groundwater elevation contour maps derived from field measurements.</p> <p>Adjust pumping rates within system design and operational constraints, if warranted, when the actual area of capture is not consistent with the modeled area of capture. This will be done in an effort to establish an area of capture consistent with the desired area of capture, as modeled.</p>
<p>Minimize duration of cleanup time for off-property portion of the 30 µg/L uranium plume.</p>	<p>Give priority to keeping South Plume and South Plume Optimization wells online when other wells have to be shut down.</p> <p>Maximize pumping rates within the following constraints and considerations: system design and equipment, hydraulic capacity of the aquifer, regulatory limits, interaction with other modules, and remedy performance.</p>
<p>Minimize duration of cleanup time for on-property portions of the uranium plume.</p>	<p>Maximize pumping rates within the following constraints and considerations: system design and equipment, hydraulic capacity of the aquifer, regulatory limits, interaction with other modules.</p>
<p>Minimize migration of on-property portion of the plume to off-property areas.</p>	<p>Balance pumping from the South Field Extraction and South Plume Modules such that the stagnation zone is at or south of Willey Road.</p>
<p>Minimize drawdown in off-property areas.</p>	<p>Do not exceed 110 percent of the points defined in Table 4-1 unless directed by ARWWP management.</p>

Annual shutdown of all extraction wells (with the exception of the four leading-edge South Plume recovery wells) is conducted to allow water levels within the aquifer to rise. An evaluation of aquifer water levels collected since 1988 indicates that seasonal water levels are usually at their highest level during June and July. Shutting down the extraction wells when seasonal water levels are high will maximize the saturation of as much of the aquifer sediments as possible. Water levels will be measured at key locations (by hand and downhole transducer/data logger) before, during, and after the shutdown to record the resulting water level change. The uranium concentration in the pumped groundwater immediately after the wells are restarted will be compared to pre-shutdown concentrations to determine the amount of concentration rebound that occurred. Shutdown times are subject to change.

## **UNCONTROLLED IF PRINTED**

The well field downtime period will also be used to conduct well field and water treatment system maintenance.

### **5.5 Operational Maintenance Priorities**

Maintaining the treatment facilities online includes ensuring that all equipment is operating properly, that adequate personnel are assigned to operate the treatment systems safely, and that the combined treatment and bypassing systems are used to maintain uranium concentrations below 30 ppb as measured in the site effluent at the Parshall Flume. Following is a list of operational maintenance priorities in their order of importance:

1. Keep the Parshall Flume discharge point and sampling system online. If the discharge monitoring system were to become nonoperational, discharge monitoring of effluent to the river from the Fernald Preserve would have to be collected manually. The sampling system must be operational so that accurate reports of uranium and NPDES contaminant levels can be made.
2. Keep the CAWWT treatment trains operating at the capacity necessary to maintain compliance with the site's uranium discharge limits.
3. Keep South Plume recovery wells 1 through 4 operating at desired set points.
4. Keep all extraction wells operating at the desired set points.

Section 6.0 provides more-specific details of managing equipment operation and maintenance.

### **5.6 Operations Controlling Documents**

Operations at the wastewater treatment facilities are controlled directly by standing orders and standard operating procedures described in *Legacy Management Fernald Operating Procedures* (DOE 2006b). Standing orders translate the DOE orders, conduct of operations principles, guidelines, and procedures into performance requirements for personnel involved in operating the wastewater treatment facilities. The standing orders were written to ensure that all operations are conducted in full conformance with DOE conduct of operations requirements.

Section 6.1.2 provides a more extensive discussion of standard operating procedures and standing orders. Standing orders and standard operating procedures implement the requirements of this plan. The OMMMP is not intended to replace standing orders or standard operating procedures.

### **5.7 Management and Flow of Operations Information**

Samples are taken from each of the CAWWT trains on a regular basis to ensure that uranium is still being removed by the resin. Project personnel review the results of sample analysis as necessary to evaluate system performance and determine if any of the treatment system ion exchange vessels need to be removed from service for resin replacement.

The project issues monthly operations reports that summarize flow rates and flow totals as well as uranium concentrations from the CAWWT and the wells. Information on required well pumping rates is communicated from the manager of the ARWWP to the operations personnel as

## **UNCONTROLLED IF PRINTED**

specified in the Legacy Management Support *Conduct of Operations Manual* (LMS/POL/S04374).

### **5.8 Management of Treatment Residuals**

Treatment residuals consist of exhausted ion exchange resin and used multimedia filters. These materials will ultimately be disposed of off site at a licensed disposal facility. They will be transported using a subcontractor qualified to transport radioactive materials. Unused tankage at the CAWWT may be used for interim storage of treatment residuals until the CAWWT is decommissioned.

## **6.0 Operations Performance Monitoring and Maintenance**

This section describes the general methods, guidelines, and practices used in managing equipment operation and maintenance and presents planned maintenance and monitoring requirements for the groundwater restoration wells to support successful long-term operation of the groundwater restoration system.

Managing equipment operation and maintenance in the context of this document includes not only routine control panel monitoring and repair work, but also the preventive, predictive, and proactive actions used to maximize equipment operating efficiency and capacities. This section presents some of the management systems that will help to ensure that the OU5 ROD requirements continue to be met, describes the key parameters used to monitor performance of the groundwater and wastewater facilities, and describes the principal features and maintenance needs of the overall operation.

The treatment system and restoration well system performance parameters and maintenance requirements have unique differences. The treatment system is designed and built with redundant features and equipment to reduce potential downtime (e.g., installed spare pumps and lead-lag ion exchange units). Those features are not economically practical for the well systems. The equipment in the treatment systems has more easily discernible indicators of equipment condition and is more easily accessed for monitoring by operating personnel walk-through than the underground well system. The methods used to measure the equipment condition and the specific measurable goals for the two systems also are different.

The activities described in this section also provide the basis for routine maintenance of the system and for monitoring the system performance to determine if more extensive maintenance activities are required. Regularly scheduled maintenance minimizes system downtime. Continuous operation of the well system, within practical limitations, is required to maintain groundwater restoration objectives at the Fernald Preserve.

This plan describes monitoring and maintenance activities and their frequencies, based on current projections. The need for and frequency of these activities may change based on future experience gained through the operation, maintenance, and monitoring of the extraction wells that are currently operating. Parameter monitoring frequency may change as well. This plan will be revised as necessary during the life of the groundwater restoration process.

### **6.1 Management Systems**

#### **6.1.1 Maintenance and Support**

A qualified subcontractor under the direction of LM personnel will provide maintenance for the well field and treatment system. Preventive maintenance will be performed on the schedule recommended by the equipment manufacturer.

The technical staff directly supports facility operation and maintenance. The technical staff members work together to resolve issues and improve operations. They also provide troubleshooting and technical assistance to the day-to-day operations and maintenance groups.

## UNCONTROLLED IF PRINTED

The facilities consist of standard high-capacity filter-packed water wells and conventional water and wastewater treatment unit processes that are typical for the industry. The equipment is expected to continue to have good reliability and has well-documented maintenance guidelines. Routine maintenance practices, as documented by the original equipment manufacturer's maintenance manuals, have been used to provide the basis for maintenance procedures and practices. Maintenance feedback and component manufacturer suggestions have been used to develop a spare parts list and stock inventories of the most frequently used parts. The availability of spare parts will assist in minimizing downtimes associated with all maintenance activities.

### 6.1.2 Operations

Operating personnel play an important role in maximizing equipment operating efficiency and capacity. One significant duty of the facility operating personnel is to identify and report existing and potential future equipment problems. Operating personnel perform routine scheduled checks, inspections, and walk-throughs of the facilities and systems. Potential problems and maintenance needs are reported to supervisors, and maintenance work orders are initiated. Operating personnel maintain shift logbooks that document activities and specific actions taken during each shift. Information in the logbooks is used as the basis for transfer of duty from one shift to the next. The logbooks are kept as a historical record of operational activities. Management and technical staff periodically review the logbooks and roundsheets as additional assurance that the systems are being operated effectively.

#### 6.1.2.1 Process Control

Facilities are staffed by operating personnel daily. The operating personnel at CAWWT monitor the process using a computerized control system located in the control room. The control system receives input from process meters (e.g., tank level and process flow meters) and from devices that indicate equipment status (e.g., valve position limit switches and motor run relays). The control system outputs control signals to regulate the process (e.g., control valve positioning and motor start/stop control). The control system uses desktop-style computer equipment (monitors, keyboards, and pointing devices) to provide a graphic human-machine interface (HMI) for the process monitoring and control. The control system HMI includes various process graphics screens that depict portions of the treatment system in piping and instrumentation diagram format and provide real-time process measurements and information. The control system has graphic process trending capabilities, process alert and alarm management, and a historical database of all operating personnel input and process alert/alarms. The control system also provides an interface with all well systems to provide enhanced real-time monitoring and remote controls. The operating personnel at CAWWT also access process and equipment information by making "walking rounds" of all equipment in the process.

#### 6.1.2.2 Standard Operating Procedures

Each operation is performed in accordance with approved standard operating procedures that are developed by the technical staff with the assistance of operations personnel. Standard operating procedures can be found in the *Legacy Management Fernald Operating Procedures (DOE 2006b)*. The standard operating procedures are reviewed periodically and revised as necessary for the safe and consistent operation of treatment processes.

## **UNCONTROLLED IF PRINTED**

Standard operating procedures provide step-by-step instructions for performing wastewater treatment operations activities. They also contain health and safety precautions that employees must follow while performing the steps in the procedure. The procedures are written from the perspective of the operating personnel who will be performing the steps.

Standard operating procedures also contain instructions as to when management must be notified of nonroutine operating conditions or events and to whom in management these conditions must be reported. Standard operating procedures include such activities as:

- Horiba water quality meter calibration, operation, and maintenance.
- IEMP surface water sampling.
- NPDES sampling.
- Daily operations at the Parshall Flume.
- Enhanced permanent LTS operation.
- CAWWT system operations.
- Recovery and extraction well fields.
- DPD method for free and total chlorine test.
- Soluble uranium by kinetic phosphorescence analyzer (KPA).
- Standing orders for Wastewater Treatment Operations.

### 6.1.2.3 Conduct of Operations

DOE Order 5480.19, *Conduct of Operations Standards*, is implemented for operations and maintenance through standing orders. The standing orders spell out the specific methods used by the project for the implementation of all 18 chapters of DOE Order 5480.19. The chapter titles (which are indicative of the important operational protocol) are "Operations, Organization, and Administration," "Shift Routines and Operating Practices," "Control Area Activities," "Communications," "Control of On-Shift Training," "Investigation of Abnormal Events," "Notifications," "Control of Equipment and System Status," "Lockouts and Tagouts," "Independent Verification," "Log Keeping," "Operations Turnover," "Operations Aspects of Facility Chemistry and Unique Processes," "Required Reading," "Timely Orders to Operators," "Operations Procedures," "Operator Aid Postings and Equipment," and "Piping Labeling." Implementation of the standing orders helps to ensure clarity, consistency, and a common purpose in the day-to-day activities.

### 6.1.2.4 Training

A training and qualification program is in place to ensure that all operating personnel involved in treating wastewater are qualified and competent for their positions. The goal of the training and qualification program is to prepare personnel for the operations team and to continually improve the team's knowledge and capabilities.

## 6.2 Restoration Well Performance Monitoring and Maintenance

This section describes the key performance monitoring and maintenance guidelines for the groundwater restoration well systems. To complete the aquifer restoration within the model-predicted time frames, a high level of on-stream time at the modeled pumping rates is needed for each well. Actual target pumping rates are set at around 110 percent of the modeled target pumping rates to provide for downtime. Some well downtime is expected and can be accommodated. However, lengthy outages can adversely impact the planned goals. An upgraded well maintenance program has been developed to address this issue. More frequent component preventive maintenance checks along with periodic formal performance testing and well and pump cleaning were identified and included as major program elements to improve well operating efficiency.

### 6.2.1 Restoration Well Descriptions

This section provides a general description of the extraction wells that constitute the active groundwater restoration modules. The active modules are the South Plume, South Field, and the Waste Storage Area.

#### 6.2.1.1 South Plume Extraction Wells

The South Plume Module includes six wells that are used to pump groundwater from the off-property portion of the Great Miami Aquifer plume to the Fernald Preserve's South Field Valve House. In the valve house, flow from the following south plume wells is routed to treatment or to the Great Miami River, as necessary, to maintain compliance with discharge limits:

Extraction Well ID	Common Well ID	Formal Site Well ID
EW-1	RW-1	3924
EW-2	RW-2	3925
EW-3	RW-3	3926
EW-4	RW-4	3927
EW-6	RW-6	32308
EW-7	RW-7	32309

Each of the South Plume extraction wells contains a submersible pump/motor assembly and has a pitless-type adapter near the ground surface that transitions the vertical pump discharge piping to the underground force main. The underground force main from wells RW-1, RW-2, RW-3, and RW-4 passes through individual underground valve pits. These valve pits contain several components of the individual well's control system. RW-6 and RW-7 do not use underground valve pits to contain any control system components. All control components for these two wells are located in the South Plume Valve House building.

The design of the flow control systems for each of these six wells is identical; flow is controlled by a flow control loop consisting of a magnetic flow meter, a process control station (PCS), and a motor-operated flow-control valve. Each well can be controlled locally by the PCS or remotely by the computerized control system located at the CAWWT. The normal operational mode is to have the wells operated remotely from the CAWWT computer control system via the local PCS.

## **UNCONTROLLED IF PRINTED**

Additionally, a local set point is input into the PCS so that the well can automatically revert to local control if communication with the CAWWT computer control system is interrupted.

The desired flow rate set point for each is entered into the computer control system and PCS at the CAWWT and the South Plume Valve House, respectively. This value is compared continuously to the actual flow measured by the magnetic flow meter. When required, the CAWWT computer control system or PCS adjusts the position of the flow control valve to maintain the desired flow. Pump "Start" and "Stop" can be controlled by the HMI or the PCS and can also be controlled from the pump starter panel. The starter panels for RW-1 through RW-4 are located at the individual wellheads, and the starter panels for RW-6 and RW-7 are located in the South Plume Valve House.

In addition, each South Plume extraction well is equipped with isolation valves, check valves, an air release, and a pressure-indicating transmitter. The pressure-indicating transmitters are tied to process interlocks that will shut the pumps down if high or low pressures are maintained for extended periods, indicating a closed valve or catastrophic system leak, respectively. This interlock is intended to protect the pump/motor assemblies from damage due to closed discharge valves or to shut down the pumps if no system backpressure is sensed. Critical control components are protected by lightning/surge arresters to help prevent damage to the control system during electrical storms.

Routine water level monitoring within the well is performed during regularly scheduled performance monitoring or more frequently if required.


Installation details of the South Plume extraction wells are shown in Figure 6-1.

### 6.2.1.2 South Field and Waste Storage Area Extraction Wells

The South Field and Waste Storage Area Modules include 13 and 4 wells, respectively, which are used to pump groundwater from the Great Miami Aquifer to the Fernald Preserve water treatment facilities or to the Great Miami River if treatment is not required to achieve uranium discharge limits. These wells are as follows:

<b>Extraction Well ID</b>	<b>Common Well ID</b>	<b>Formal Site Well ID</b>
EW-15A	EW-15A	33262
EW-17A	EW-17A	31567
EW-18	EW-18	31550
EW-19	EW-19	31560
EW-20	EW-20	31561
EW-21A	EW-21A	31562
EW-22	EW-22	32276
EW-23	EW-23	32447
EW-24	EW-24	32446
EW-25	EW-25	33061
EW-30	EW-30	33264
EW-31	EW-31	33265
EW-32	EW-32	33266
WSA Well 26	EW-26	32761
WSA Well 27	EW-27	33062
WSA Well 28A	EW-28A	33334
WSA Well 33A	EW-33A	33347

UNCONTROLLED IF PRINTED

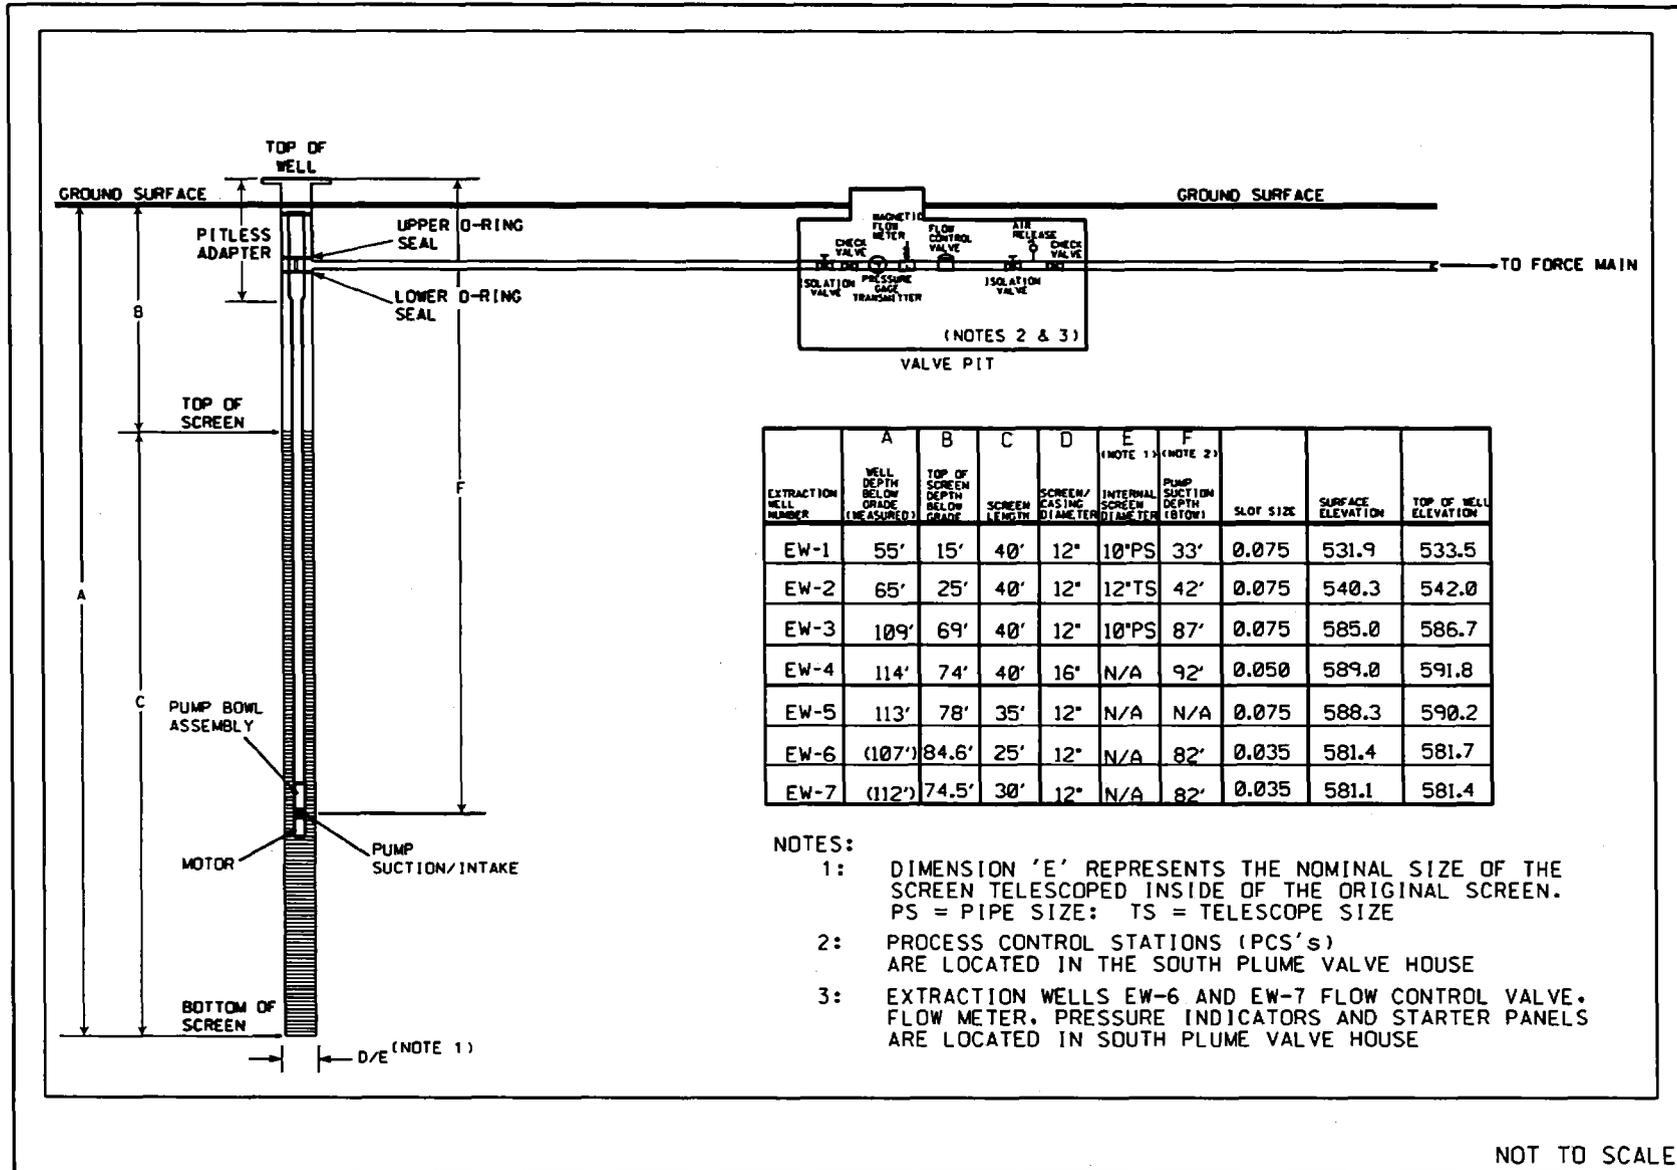

NOT TO SCALE

V:\LTS\111\0051\20\001\504552\50455200.DGN

Figure 6-1. South Plume Module Extraction Well Installation Details

## **UNCONTROLLED IF PRINTED**

Each of the 13 South Field and 4 Waste Storage Area extraction wells is of similar design with the exception of the well depth, screen length, and screen slot size. Each contains a submersible pump/motor assembly. Groundwater is pumped from the below-grade pump to the wellhead at the ground surface via the vertical discharge piping. At the wellhead, this piping is routed horizontally through a magnetic flow meter and into the individual well houses. All of the individual well control components are located at these well houses.

The flow control system for each of the 17 extraction wells is identical; flow is controlled by a flow-control loop consisting of a magnetic flow meter, a PCS, and a variable frequency drive (VFD). Each extraction well can be controlled locally by the PCS or remotely by the computerized control system located at the CAWWT (HMI). The normal operational mode is to have the wells operated remotely from the CAWWT computer control system, via the local PCS. Additionally, a local set point is input to the PCS so that the well can automatically revert to local control if communication with the CAWWT computer control is interrupted.

The desired flow rate set point for each extraction well is entered into the HMI and PCS at the CAWWT and the individual well houses, respectively. This value is compared continuously to the actual flow rate measured by the magnetic flow meter. When required, the CAWWT HMI or PCS adjusts the pump motor speed via the VFD to maintain the desired flow. Pump "Start" and "Stop" can be controlled by the CAWWT HMI or the PCS and can also be controlled at the VFD.

In addition, each extraction well is equipped with isolation valves, check valves, an air release, and a pressure-indicating transmitter. Routine water level monitoring within the well is performed during regularly scheduled performance monitoring and more frequently if required.

Installation details of the South Field Extraction wells and Waste Storage Area wells are shown in Figure 6-2.

### **6.2.2 Factors Affecting System Operation**

The original five extraction wells of the South Plume groundwater restoration module began operating in August 1993 as part of the OU5 South Plume Removal Action. In the intervening time, valuable operational experience and knowledge has been gained that is being used to optimize long-term operation of extraction wells sitewide. This experience has resulted in identification of factors affecting operation life and efficiency, some of which were unknown at the start of pumping operations. These factors have either already been addressed or are incorporated into planned maintenance.

To better understand the factors affecting large-scale groundwater pumping operations, Moody's of Dayton, a water well maintenance and installation contractor, was consulted. Moody's has served the water well industry throughout the Great Miami Aquifer for more than 30 years and has extensive experience maintaining large-capacity wells for a number of major water supply systems. Frequencies for routine maintenance and monitoring activities were selected using recommendations from their evaluation of the South Plume Extraction well system and their experience working with systems of similar magnitude in the regional aquifer. Well maintenance protocol was further refined in 2008 based on additional consultation with Smith-Comeskey Groundwater Science LLC.

UNCONTROLLED IF PRINTED

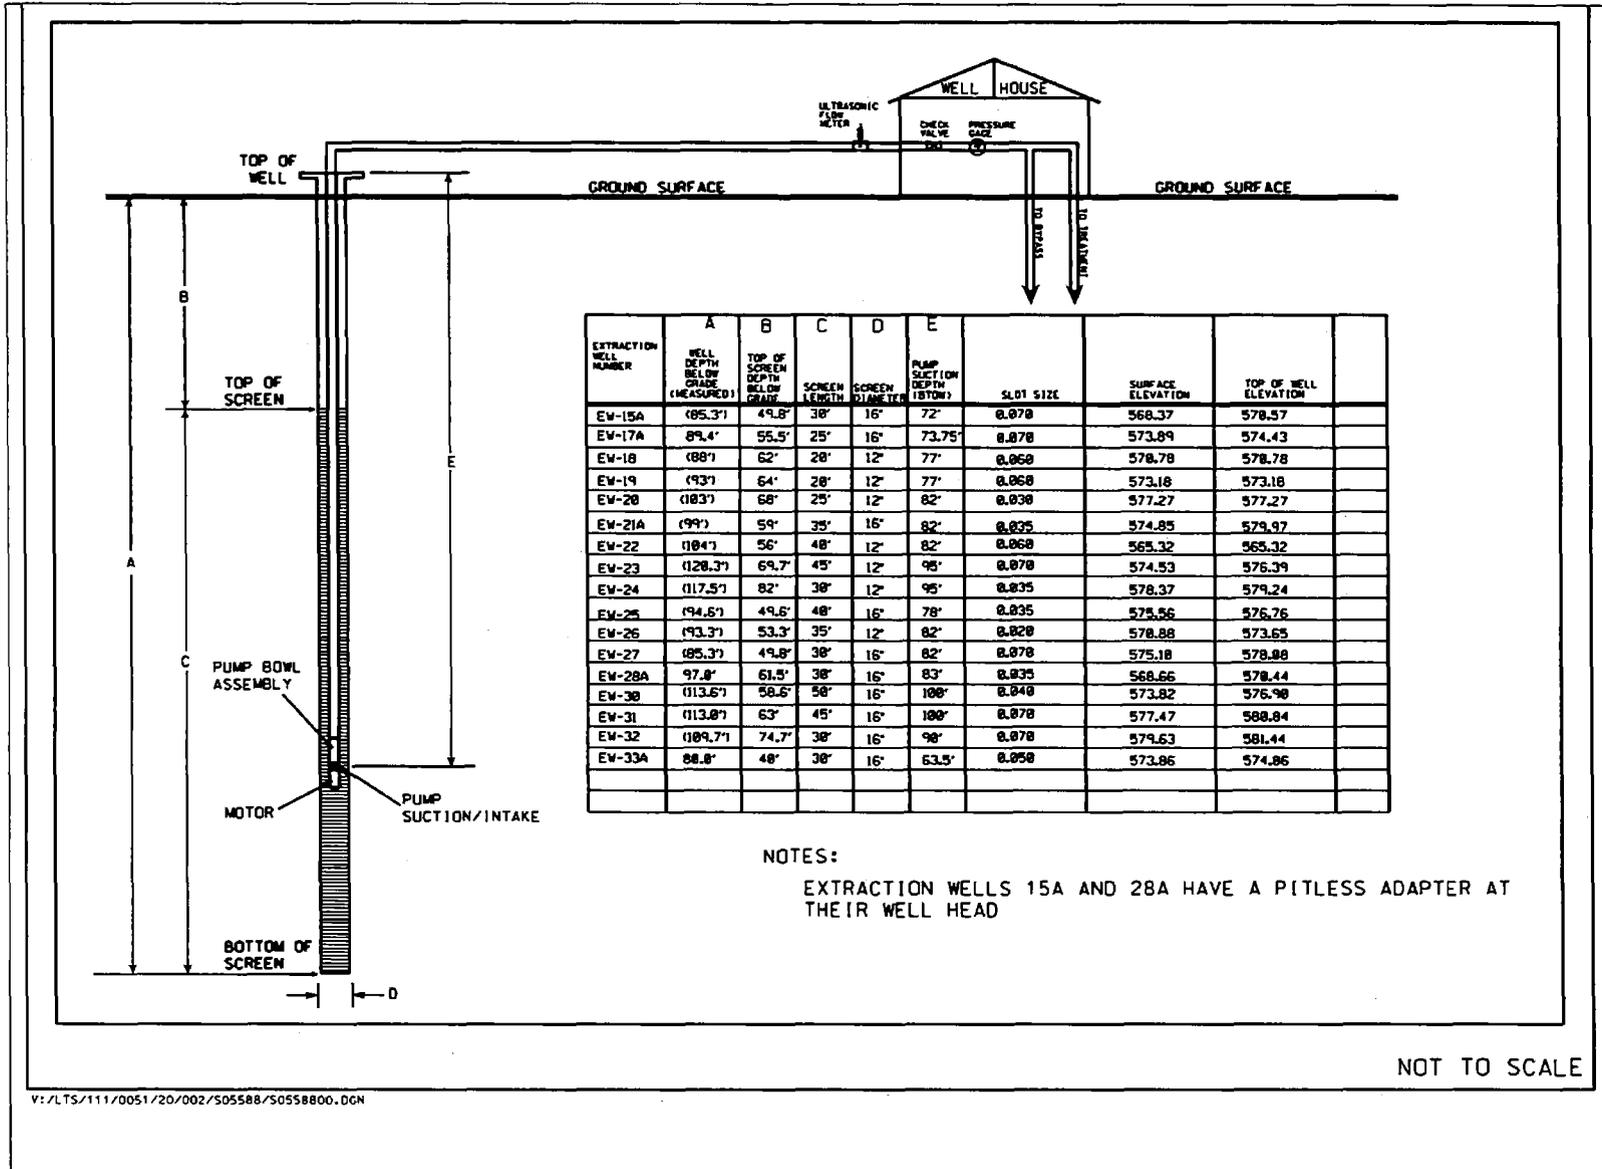


Figure 6-2. South Field Module and Waste Storage Area Extraction Well Installation Details

## **UNCONTROLLED IF PRINTED**

Several factors affect the performance of the extraction wells. In addition, a number of other specific requirements of the Fernald Preserve's system complicate these factors. All of these factors and requirements were considered in developing this plan. First, all the Fernald Preserve's extraction wells are placed in and are extracting water from the uppermost portions of the Great Miami Aquifer. This fact complicates both pump/motor cooling and iron fouling of the extraction well screen. Normal water well practice would place the screened section of the well deeply in the aquifer, and the pump/motor assembly would be placed above the screen in a submerged section of blank casing. Since the extraction wells are intended to intercept a plume of contamination located near the top of the aquifer, the screened sections begin near the normal water level. In order to provide the required submergence of the pump/motor assembly, this assembly must be placed within the screened section. The high flow rates required for plume capture combined with the "surgical" removal of the contamination plume have led to difficulties ensuring that the flow of water passing the motor is adequate for cooling.

Placement of the pump/motor assembly within a screen that is located near the aquifer water table also complicates the impacts of iron-fouling. Moody's and Groundwater Science have confirmed that iron fouling is prevalent throughout the regional aquifer and that the details of the Fernald Preserve installation enhance the problem. These conditions and the fact that this region of the Great Miami Aquifer contains some of the highest concentrations of iron and iron-fouling bacteria have resulted in fouling of the well screens and other downstream equipment.

Continuous operation of the extraction wells also exacerbates the factors noted above. Normal water well industry practice does not require pumping wells to operate continuously. Typical water supply well systems pump between 6 and 10 hours per day and have spare wells that can be rotated in and out as demand requires (especially when maintenance is required). The Fernald Preserve's extraction well system, however, runs continuously and has no spare wells to compensate for wells taken out of service for maintenance. In fact, when a well is shut down for an extended period to perform maintenance, the remaining wells may need to increase their flow to continue the planned capture of the plume.

### **6.2.3 Maintenance and Operational Monitoring**

Several routine activities are performed to optimize performance of the extraction wells in the South Plume, South Field, and Waste Storage Area groundwater restoration modules. The following maintenance and operational monitoring activities are described in this section:

- Routine system maintenance, which includes maintenance actions related to valves, instrumentation, and controls associated with each extraction well, and
- Operational monitoring, which includes quarterly monitoring of extraction well capacity and pump/motor assembly performance.

Table 6-1 lists planned outages for the South Plume Module wells, and Table 6-2 lists planned outages for the South Field and Waste Storage Area wells. Routine well/screen maintenance (i.e., superchlorination) is no longer an activity of the OMMP. Advice from the site water well drilling and maintenance subcontractor and Groundwater Science personnel coupled with lessons learned by operating extraction wells at the Fernald Preserve for over 13 years indicate that the superchlorination procedure is not effective and in fact may exacerbate well and pump fouling.

## UNCONTROLLED IF PRINTED

Table 6-1. Planned Outages of the South Plume Module Wells

Item	Description	Frequency	Duration per Event
1	Performance Testing	Quarterly	4 hours/well
2	Process Control Station	Annually	4 hours/well
3	Pressure Transmitter Calibration	Annually	2 hours/well
4	Magnetic Flow Meter Clean and Calibrate <sup>a</sup>	Semiannually	4 hours/well
5	Check Valve Inspect/Clean	Semiannually	4 hours/well
6	Flow Control Valve and Actuator Cleaning	Annually	8 hours/well
7	Rehabilitation	Variable	3 weeks
8	Well/Pump Cleaning	Variable	1-2 days

<sup>a</sup>Flow meter calibration may occur as a post-maintenance test using a portable flow meter.

Table 6-2. Planned Outages of the South Field and Waste Storage Area Module Wells

Item	Description	Frequency	Duration per Event
1	Performance Testing	Quarterly	4 hours/well
2	Process Control Station	Annually	4 hours/well
3	Pressure Transmitter Calibration	Annually	2 hours/well
4	Magnetic Flow Meter Clean and Calibrate <sup>a</sup>	Semiannually	8 hours/well
5	Check Valve Inspect/Clean	Semiannually	4 hours/well
6	Rehabilitation	Variable	3 weeks
7	Well/Pump Cleaning	Variable	1-2 days

<sup>a</sup>Flow meter calibration may occur as a post-maintenance test using a portable flow meter.

### 6.2.3.1 Maintenance of the Pumps, Piping, and Controls

These maintenance activities are directed primarily at the valves, instrumentation, and controls associated with each extraction well. These actions are incorporated into the ARWWT maintenance tracking spreadsheet. This spreadsheet helps to ensure that routine maintenance is performed when required. In addition to formal preventive maintenance activities, several routine system checks are performed by operations personnel, between scheduled preventive maintenance activities, to ensure that equipment is functioning properly.

The following is a list of preventive maintenance and operational checks that are routinely performed:

#### Process Control Station: Annual

The PCSs for each of the recovery and extractions wells are taken out of service annually. At this time, the operational setup parameters for the specific wells are verified and/or updated to reflect current operating conditions. This is anticipated to require an outage of 4 hours per well.

#### Flow Meters: Clean and Calibrate Semiannually

Cleaning and calibration of the flow meter is estimated to require an outage of 4 hours per extraction well in the South Plume and 8 hours for each on-property extraction well.

## **UNCONTROLLED IF PRINTED**

### Check Valves: Inspect and Clean Seat Semiannually

Inspection and cleaning of the check valve is estimated to require an outage of 4 hours per extraction well.

The piping configuration for extraction wells RW-1 through RW-4 includes two check valves. The original check valve cannot be inspected or maintained without removal from the piping system and, because of its location at the extreme end of the piping run in the valve pit, requires that the entire South Plume extraction well system be shut down and drained. The redundant check valve was installed between isolation valves and is a "swing-check" valve that is equipped with a removable inspection plate. Inspection and cleaning of this check valve requires that the individual extraction well be shut down for approximately 4 hours. Extraction wells RW-6 and RW-7 and all of the on-property extraction wells have a single in-line check valve that is removed, inspected, and cleaned. This maintenance activity is estimated to require each well to be shut down for approximately 4 hours.

### Flow Control Valves and Actuators: Disassemble and Inspect Annually

Extraction wells RW-1 through RW-4, RW-6, and RW-7 each use motor-operated flow control valves. These are required to be inspected and cleaned annually to prevent the buildup of iron-fouling bacteria encrustation. This maintenance activity will require each well to be shut down for approximately 8 hours.

### Pressure-Indicating Transmitters: Annual Calibration

Each extraction well has a pressure-indicating transmitter that is used in performance testing to determine the pump's discharge head (pressure). Accurate pressure sensing in the full range of pumping pressures is required for accurate testing. Annual testing and calibration of these transmitters is estimated to require an outage of 2 hours per well.

### Operational Monitoring

The main system performance indicators for the South Plume and South Field extraction well modules are gathered and summarized in performance tests conducted quarterly. These tests monitor the specific capacity of each recovery/extraction well and the pump/motor assembly performance. The test results are used to determine the need for well and pump cleaning, well redevelopment, or pump/motor rebuilding. The information helps minimize unscheduled, unplanned emergency maintenance and shortens the duration of well outages. Several of the parameters measured may be monitored more frequently to develop additional system data for trending purposes.

### Parameters to Be Monitored

Extraction well operating parameters that are required to be routinely monitored include the following:

- Water level—static and pumping
- Flow
- Discharge pressure
- Motor amperage draw

## **UNCONTROLLED IF PRINTED**

### Water Level Monitoring

Water level, both static and pumping, is perhaps the most critical parameter measured and therefore needs to be measured routinely. The drawdown from static water level to the pumping water level is used to calculate a specific capacity for the well and is a direct indication of the degree of fouling of the well screen and the adjacent formation. The installation depth of the extraction well pump/motor assemblies has been established, based upon an anticipated worst-case drawdown of 10 ft below the seasonal low static water levels. Historical data were reviewed to determine seasonal lows. While each setting has some added submergence to be conservative, pumping levels are monitored routinely to ensure that adequate pump/motor submergence is maintained and to prevent severe component damage.

If the pumping water level measured during the quarterly performance testing approaches the top of the pump's bowl assembly, rehabilitation efforts may be necessary. Rehabilitation efforts include cleaning of the well using dual swab and airlift pumping to remove debris. After cleaning, the well will be acid-treated to break down encrustation on the well screen and within the local formation. This will then be followed by chlorination to inhibit future iron-fouling bacterial growth. These processes may, if necessary, be repeated several times to ensure that the well has been rehabilitated to its optimal condition.

### Flow Monitoring

The ability of an extraction well pump/motor to sustain the desired flow is a key indicator of the health of the flow meter, controls, VFD, well, and pump/motor assembly. Specific testing to determine the ability of a pump/motor assembly to perform as expected will be completed quarterly. Additionally, individual extraction well flow is monitored continuously by the flow controller for each well. The actual flow verses the controller set point is checked by operations personnel from the HMI at the CAWWT at least once per day. Any significant deviation from the flow set point is investigated, and required maintenance actions are determined and carried out.

### Discharge Pressure Monitoring

Pump discharge pressure, coupled with flow, is monitored quarterly to assess the pump/motor assemblies' performance against the manufacturers published performance.

### Amperage

As with flow and pressure, amperage is a good indicator of how the pump/motor assembly is performing. During performance testing, motor amperage draw is measured on each of the three phases of the electrical supply. Amperage draw is compared to the motor manufacturer's published specifications. Amperage should be below the manufacturer's full-load amperage and should be approximately equal across the phases of the motor. An imbalance of greater than 20 percent across the phases indicates a motor or electrical supply situation that triggers more extensive diagnosis. Additional diagnostics and repairs are not within the scope of this plan.

## **UNCONTROLLED IF PRINTED**

### Performance Testing

Performance testing of the extraction wells is generally conducted quarterly to assess their condition; this testing requires an outage of approximately 4 hours per well. Static water-level measurements are made prior to each performance test. This measurement serves as the basis for computing drawdown within the extraction well. System flow, discharge pressure, pumping level, and motor amperage per phase are measured at each of three to five different flows for the extraction well. These flows include maximum flow (discharge valve fully open) and zero flow conditions (discharge valve closed).

The results of these measurements are used to determine the condition of the pump/motor and of the well. Results are summarized in two ways. First, the flow and discharge head is plotted and compared to the pump manufacturer's published information and to previously developed head/flow curves. Second, the static water level and pumping levels are used to calculate drawdown and specific capacity within the extraction well at various flows. As plugging of the well screen due to iron fouling and encrustation progresses, drawdown within the well increases for a given flow rate. If the drawdown becomes excessive, well rehabilitation efforts will likely be required.

The static water level and pumping levels are used to calculate drawdown and specific capacity (flow rate divided by drawdown) within the recovery/extraction well at various flows. As fouling and encrustation of the well progresses, drawdown within the well increases for a given flow rate (the specific capacity decreases). The need for well screen maintenance activities is triggered by excessive drawdown. Maintenance work will be planned, scheduled, and performed to avoid costly damage to equipment such as well pump/motor assembly and to avoid lengthy outages.

Additionally, the amperage draw of the well at various flows is compared to previous readings and pump/motor manufacturers' published information.

### **6.3 Treatment Facilities Performance Monitoring and Maintenance**

This section describes the key performance monitoring parameters and maintenance needs for the wastewater treatment systems and their ancillary facilities. Based on past performance, meeting the Fernald Preserve effluent discharge uranium limit of 30 ppb on a monthly average basis is routinely achievable.

#### **6.3.1 Treatment Facilities Performance Monitoring**

The CAWWT uses strong base-anion exchange as the final unit process for uranium removal. The strong base-anion exchange resins have a strong affinity for the uranyl carbonates in the Fernald Preserve's wastewater. The technology is reliable; however, treatment to the effluent levels required at the Fernald Preserve (i.e., <30 ppb) is not widely practiced in wastewater systems. An expected performance of the CAWWT system has been used in this plan to demonstrate the ability to meet the ROD effluent requirements. The performance expectations are, for the most part, based on historical Fernald Site operating experience, using new resin, as opposed to vendor performance guarantees or widely published data.

Measurable parameters for the CAWWT system are the total volume of water treated, the influent and effluent uranium concentrations and mass, and the total mass of uranium removed

## **UNCONTROLLED IF PRINTED**

by treatment. The Fernald Preserve total effluent flow rate is metered. Flow-weighted composite samples of the effluent are analyzed daily for total uranium. Those two parameters are used to measure compliance with the OU5 ROD requirements for uranium discharge in the Fernald Preserve's effluent. Additionally, each CAWWT treatment train has flow measurement and control. The individual treatment systems are also routinely sampled at strategic process locations, including the inlet and outlet of each ion exchange vessel. The sample results and treatment flow rates are reported, tracked, and used to determine the need for troubleshooting, process adjustments, and corrective actions. All of the routine uranium analytical work is conducted in a laboratory located within the CAWWT, Building 51A.

### **6.3.2 Treatment Facilities Maintenance Practices**

Because the treatment systems have spare equipment installed along with bypass piping and valving, most of the routine preventive maintenance and repair work in the systems can be accomplished without a unit shutdown. Some planned maintenance activities will result in treatment system outages. The OU5 ROD provides for relief allowances from the effluent discharge limit of a monthly average of 30 ppb uranium concentration during periods of treatment plant scheduled maintenance. Decisions regarding well operations during treatment plant scheduled maintenance will be made on a case-by-case basis. For planned maintenance shutdowns, advance EPA approval will be obtained for relief allowances that may be requested. Some breakdowns will lead to system shutdowns. Loss of utilities or a failure in the CAWWT's computerized control system would result in a system shutdown. All treatment systems will fail safely on loss of a utility or a major component and are not complicated to restart.

### **6.4 Regulatory Issues**

Current extraction well rehabilitation screen- and pump-cleaning efforts require the use of a blend of glycolic and hydrochloric acids (e.g., Cotey Chemicals Liquid Acid Descaler). The hydrochloric acid is used to break down flow-limiting mineral encrustation on the well screen/pump, and the glycolic acid removes fouling caused by bacterial growth. The spent hydrochloric-glycolic acid blend is purged from the well by pumping to a portable tank. The tank is emptied into the CAWWT backwash basin for subsequent treatment at the CAWWT and discharge to the Great Miami River via the Parshall Flume.

The use of these acids in well rehabilitation and well and pump cleaning to date has been monitored closely. OEPA has been notified and has approved of the intended chemical additions and subsequent discharges. After the addition of these chemicals, the water pumped initially from the extraction well is turbid, contains iron residual and dissolved scale, and has a low pH.

Dilution of this stream in the CAWWT backwash basin is adequate to prevent turbidity and low pH from exceeding NPDES outfall limits.

## **7.0 Organizational Roles, Responsibilities, and Communications**

This section presents the organizational roles and responsibilities with respect to implementation of this OMMP. Also presented are information needs and communications protocol for coordination with other Fernald Preserve project organizations, and interaction with EPA and OEPA.

### **7.1 Organization Roles and Responsibilities**

#### **7.1.1 DOE Office of Legacy Management Fernald**

DOE is responsible for providing direction and oversight of all activities at the Fernald Preserve.

#### **7.1.2 Operating Contractor**

S.M. Stoller is the Legacy Management Support contractor for the Fernald Preserve. The OMMP falls under the responsibility of the site's ARWWT project.

The ARWWT project is responsible for all engineering, design, and construction activities for the OMMP, which include:

- Engineering functional requirements, design basis, and detailed design drawings and documents.
- Title III engineering support during construction.
- Start-up plans, system operability test procedures, and test supervision.
- Standard start-up review plans and coordinating resolution of operational issues.
- Technical support of well field and water treatment operations.
- Coordination of project-specific activities associated with procurement and management of construction contractors.

The ARWWT project is also responsible for all aquifer restoration planning and defining groundwater monitoring/reporting activities within the project, which include:

- Developing and maintaining the aquifer restoration strategy.
- Defining groundwater remedy performance monitoring requirements.
- Completing groundwater data evaluation and reporting.
- Providing technical input on recovery well operation and maintenance.
- Providing technical input to operations regarding compliance with discharge limits.
- Providing technical input to design and construction of site groundwater extraction systems.
- Preparing required CERCLA documentation (e.g., RA Work Plan, aquifer remedy design documents, the IEMP groundwater section, and various other required reports).

## **UNCONTROLLED IF PRINTED**

The ARWWT team is also responsible for all operations and maintenance activities within the project, which include:

- Operation of groundwater extraction well systems.
- Operation of all site wastewater conveyance and treatment systems and their ancillary facilities.
- Estimating, planning, and executing corrective and preventive maintenance.
- Training and qualification of operators and supervisors.
- Developing, reviewing, and revising standard operating procedures.
- Sampling of process streams for compliance with operational parameters and established regulatory limits.

Site Environmental Monitoring/Data Management and Reporting personnel are responsible for:

- Collection of groundwater monitoring samples and aquifer water level data.
- Coordination of sample analysis, data management, and preparation of the annual Site Environmental Report.
- Analysis of wastewater treatment operations process control samples.

Site Environmental Compliance personnel are responsible for:

- Fulfilling site NPDES reporting requirements.
- Analysis of state and federal regulations to identify project-specific regulatory requirements.

The site Health and Safety team, in conjunction with S.M. Stoller corporate Health and Safety personnel, are responsible for the following Health and Safety activities within the project:

- Development and revision of Health and Safety project matrices for operations, maintenance, and construction.
- Radiological monitoring of activities.
- Industrial health monitoring of activities.
- Oversight of construction and operations safety programs.
- Safety design reviews and technical input.

Individual project team members are responsible for the safe execution of the work assigned to them and have the right to stop work if unsafe conditions are observed.

## **UNCONTROLLED IF PRINTED**

The S.M. Stoller Project Controls and Finance personnel, in conjunction with the ARWWT project manager, are responsible for:

- Project cost and schedule baseline development and maintenance.
- Cost performance and variance reporting.
- Estimate at completion funding analysis and reporting.
- Change proposal and cost-savings coordination.
- Project quality assurance oversight.

### **7.2 Regulatory Agency Interaction**

As noted in Sections 1.0 and 3.0, Attachment D (the IEMP) provides for the collection and reporting of groundwater remedy performance (Section 3.0) and treated effluent (Section 4.0) information that supports operational decisions regarding groundwater restoration and water treatment. The current plan is that well field and treatment operational summaries are included in the annual Site Environmental Report. These summaries allow for agency input as ARWWT progress. In addition, the NPDES reporting will continue as outlined in Section 4.0 of Attachment D. The ARWWT participation in meetings and conference calls will continue as necessary.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 8.0 References

- DOE Order 5480.19 Change 2, *Conduct of Operations Standards*, October 23, 2001.
- DOE (U.S. Department of Energy), 1995a. *Feasibility Study Report for OU5*, Final, Fernald Environmental Management Project, Cincinnati, Ohio, June.
- DOE (U.S. Department of Energy), 1995b. *Remedial Investigation Report for OU5*, Final, Fernald Environmental Management Project, Cincinnati, Ohio, March.
- DOE (U.S. Department of Energy), 1996a. *Remedial Design Work Plan for Remedial Actions at OU5*, Final, Fernald Environmental Management Project, Cincinnati, Ohio, August.
- DOE (U.S. Department of Energy), 1996b. *Record of Decision for Remedial Actions at OU5*, Final, Fernald Environmental Management Project, Cincinnati, Ohio, January.
- DOE (U.S. Department of Energy), 1997a. *Baseline Remedial Strategy Report, Remedial Design for Aquifer Restoration*, 2505-RP-0003, Revision 0, Final, Fernald Environmental Management Project, Cincinnati, Ohio.
- DOE (U.S. Department of Energy), 1997b. *Remedial Action Work Plan for Aquifer Restoration at OU5*, 2505-WP-0030, Revision 0, Final, Fernald Environmental Management Project, Cincinnati, Ohio.
- DOE (U.S. Department of Energy), 2001a. *Design for the Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas*, Revision A, Draft Final, Cincinnati, Ohio, April.
- DOE (U.S. Department of Energy), 2001b. *Explanation of Significant Differences for Operable Unit 5*, Final, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, October.
- DOE (U.S. Department of Energy), 2002. *Design for Remediation of the Great Miami Aquifer South Field (Phase II) Module*, 52462-RP-0001, Revision A, Draft Final, Fluor Fernald, Fernald Area Office, Cincinnati, Ohio, May.
- DOE (U.S. Department of Energy), 2004a. *Groundwater Remedy Evaluation and Field Verification Plan*, Fernald Closure Project, Cincinnati, Ohio, June.
- DOE (U.S. Department of Energy), 2004b. *Remedial Design Fact Sheet for Operable Unit 5 Wastewater Treatment Updates*, Fernald Closure Project, Cincinnati, Ohio.
- DOE (U.S. Department of Energy), 2005a. *Storm Sewer Outfall Ditch*, Revision 0, Final, Fernald Closure Project, Cincinnati, Ohio, June.
- DOE (U.S. Department of Energy), 2005b. *Waste Storage Area (Phase II) Design Report*, 52424-RP-0004, Revision A, Draft Final, Fernald Closure Project, Cincinnati, Ohio, June.

**UNCONTROLLED IF PRINTED**

DOE (U.S. Department of Energy), 2006a. *Fernald Groundwater Certification Plan*, 51900-PL-0002, Revision 1, Fernald Closure Project, Cincinnati, Ohio, April.

DOE (U.S. Department of Energy), 2006b. *Legacy Management Fernald Operating Procedures*, Revision 0, Office of Legacy Management, Grand Junction, Colorado.

EPA (U.S. Environmental Protection Agency), 1986. *Federal Facilities Compliance Agreement*, Federal Facilities Restoration and Reuse Office.

Fluor Fernald Inc., 2003. *Comprehensive Groundwater Strategy Report*, Final, Revision 0, Fernald Closure Project, U.S. Department of Energy Fernald Area Office, Cincinnati, Ohio, June.

LMS/POL/S04374, *Conduct of Operations Manual*, continually updated. Prepared by S.M. Stoller Corporation for the U.S. Department of Energy Office of Legacy Management, Grand Junction, Colorado.

O.A.C. 3745-27, "Ohio Solid Waste and Infectious Waste Regulations," *Ohio Administrative Code*, November 1, 2007.

**UNCONTROLLED IF PRINTED**

**Attachment B**

**Post-Closure Care and Inspection Plan**

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## Contents

Acronyms and Abbreviations .....	iii
1.0 Introduction.....	1-1
1.1 Plan Scope and Duration.....	1-1
1.2 Plan Organization.....	1-1
1.3 Responsible Parties .....	1-2
1.4 Related Plans.....	1-2
2.0 Pertinent Requirements .....	2-1
2.1 Overview.....	2-1
2.2 Pertinent Requirements.....	2-1
2.3 Functional Requirements .....	2-1
2.4 General Design Criteria .....	2-1
2.5 Other Requirements .....	2-9
3.0 Final Site Conditions .....	3-1
3.1 Site History .....	3-1
3.2 Location and Description of the OSDF Area.....	3-4
3.3 OSDF As-Built .....	3-4
3.4 OSDF Baseline Photographs.....	3-6
3.5 OSDF Site Inspection Photographs .....	3-7
4.0 Institutional Controls and Points of Contact.....	4-1
4.1 Introduction.....	4-1
4.2 Points of Contact.....	4-2
4.3 Ownership .....	4-2
4.4 Access Controls/Restrictions and Security Measures.....	4-2
4.5 Deed Notations and Use Restrictions .....	4-3
5.0 Environmental Monitoring.....	5-1
5.1 Introduction.....	5-1
5.2 Groundwater Monitoring .....	5-1
5.3 Monitoring of Other Media.....	5-1
6.0 Routine Scheduled Inspections .....	6-1
6.1 Introduction.....	6-1
6.2 Routine Facility Inspections .....	6-1
6.2.1 Preliminary Considerations.....	6-1
6.2.1.1 Frequency and Timing of Inspections.....	6-1
6.2.1.2 Inspection Team.....	6-2
6.2.1.3 Familiarization with Site Characteristics .....	6-2
6.2.1.4 Preparations for Conducting Site Inspections.....	6-2
6.2.2 Conduct of OSDF Inspection.....	6-2
6.2.3 OSDF Inspection Field Procedures.....	6-3
6.2.3.1 Adjacent Off-Site Features .....	6-3
6.2.3.2 Monuments .....	6-3
6.2.3.3 Crest and Slopes.....	6-4
6.2.3.4 Periphery .....	6-5
6.2.3.5 Diversion Channels.....	6-5
7.0 Unscheduled Inspections .....	7-1
7.1 Introduction.....	7-1
7.2 Follow-up Inspections.....	7-1
7.2.1 Objectives and Procedures.....	7-1

**UNCONTROLLED IF PRINTED**

7.2.2	Schedule and Reporting .....	7-2
7.3	Contingency Inspections .....	7-2
8.0	Custodial Maintenance and Contingency Repair .....	8-1
8.1	Introduction .....	8-1
8.1.1	Security System .....	8-1
8.1.2	Impacted Materials Containment System .....	8-1
8.2	Conditions Requiring Maintenance or Repair Actions .....	8-1
8.3	Maintenance and Repair .....	8-3
8.3.1	Security System .....	8-3
8.3.2	Cap and Final Cover System .....	8-3
8.3.3	Run-on and Runoff Drainage Features .....	8-6
9.0	Post-Closure Corrective Actions .....	9-1
9.1	Introduction .....	9-1
9.2	Future Corrective Actions and Response Actions .....	9-1
10.0	Emergency Notification and Reporting .....	10-1
10.1	Introduction .....	10-1
10.2	Agency Agreements .....	10-1
10.3	Unusual Occurrences and Earthquakes .....	10-1
10.4	Meteorological Events .....	10-2
11.0	Community Relations .....	11-1
12.0	References .....	12-1

**Tables**

Table 2-1.	ARARs and To-Be-Considered Criteria .....	2-2
Table 3-1.	On-Site Disposal Facility Waste Acceptance Criteria .....	3-2
Table 3-2.	OU3 Material Categories and Descriptions .....	3-3
Table 3-3.	Pre-Design Investigation Objectives and Field Components .....	3-5
Table 3-4.	Aerial Photography Specifications .....	3-7
Table 3-5.	Site Features, Photo Frequency, and Reporting Mechanisms .....	3-8
Table 4-1.	Institutional Controls as Key Components in the RODs .....	4-1
Table 4-2.	Points of Contact .....	4-2
Table 7-1.	Possible Problem Situations and Responses .....	7-2
Table 8-1.	Examples of Conditions That May Require Custodial Maintenance or Contingency Repair .....	8-2
Table 8-2.	Site Security System Inspection and Maintenance Activities .....	8-3
Table 8-3.	Drainage Channel System Inspection and Maintenance Activities .....	8-4

## Acronyms and Abbreviations

ARARs	applicable or relevant and appropriate requirements
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CFR	<i>Code of Federal Regulations</i>
DOE	U.S. Department of Energy
LM	U.S. Department of Energy Office of Legacy Management
EPA	U.S. Environmental Protection Agency
FFCA	Federal Facility Compliance Agreement
ft	feet
GWLMP	Groundwater/Leak Detection and Leachate Monitoring Plan
HWMU	Hazardous Waste Management Unit
IC Plan	Institutional Controls Plan
IEMP	Integrated Environmental Monitoring Plan
LCS	leachate collection system
LDS	leak detection system
LMICP	<i>Comprehensive Legacy Management and Institutional Controls Plan</i>
mg/kg	milligram per kilogram
OAC	<i>Ohio Administrative Code</i>
ODNR	Ohio Department of Natural Resources
OEPA	Ohio Environmental Protection Agency
OSDF	on-site disposal facility
OU	operable unit
PCCIP	Post-Closure Care and Inspection Plan
pCi/g	picocuries per gram
PVC	polyvinyl chloride
RCRA	Resource Conservation and Recovery Act
ROD	record of decision
WAC	waste acceptance criteria

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **1.0 Introduction**

This Post-Closure Care and Inspection Plan (PCCIP) covers the long-term care of the Fernald Preserve's on-site disposal facility (OSDF) and its associated buffer area. This plan has been developed to address reasonably expected circumstances that may arise during the post-closure care period, or legacy management, of the Fernald Preserve. Other relevant key concepts addressed by this PCCIP are ownership, access controls and restrictions, deed and use restrictions, environmental monitoring, inspections (scheduled, unscheduled, and contingency), custodial maintenance, contingency repair, corrective actions, emergency notification and reporting, and public involvement.

The PCCIP has undergone several revisions and became part of the *Comprehensive Legacy Management and Institutional Controls Plan* (LMICP) in January 2006.

### **1.1 Plan Scope and Duration**

This PCCIP establishes the inspection, monitoring, and maintenance activities necessary to ensure the continued proper performance of the OSDF. The facilities and structures covered by this PCCIP include the following:

- Security system (e.g., fences, gates, warning signs).
- Permanently surveyed benchmarks, corner monuments, and cap survey anchors.
- OSDF run-on/runoff controls.
- OSDF final cover (referred to as the "cap").

As specified in the Records of Decision (RODs) and in accordance with appropriate regulations, the initially established duration of the post-closure care period is 30 years, subject to potential future modification. The applicable regulations are the Ohio solid waste rule (*Ohio Administrative Code* [OAC] 3745-27-14[A]) in lieu of federal solid waste regulation (Title 40 *Code of Federal Regulations* [CFR] §258.61[a]), and Ohio hazardous waste rules OAC 3745-66-17 and 3745-68-10 in lieu of federal hazardous waste regulations 40 CFR §§265.117(a)(1) and 264.117(a)(1), respectively. Care and maintenance of the OSDF will continue in perpetuity.

### **1.2 Plan Organization**

The remainder of this plan is organized as follows:

- The remainder of Section 1.0 presents a description of the parties responsible for this plan and the support plans that are to be used in conjunction with this plan.
- Section 2.0 addresses the requirements pertinent to this plan.
- Section 3.0 addresses final site conditions at closure of the OSDF.
- Section 4.0 addresses institutional controls and points of contact.
- Section 5.0 addresses environmental monitoring.
- Section 6.0 addresses routine scheduled inspections.

## **UNCONTROLLED IF PRINTED**

- Section 7.0 addresses unscheduled inspections.
- Section 8.0 addresses custodial maintenance and contingency repair.
- Section 9.0 addresses corrective actions.
- Section 10.0 addresses emergency notification and reporting.
- Section 11.0 addresses public involvement.
- Section 12.0 presents references.

### **1.3 Responsible Parties**

The governing document for the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) response actions at the Fernald Preserve is the Amended Consent Agreement between the U.S. Department of Energy (DOE) and the U.S. Environmental Protection Agency (EPA) Region V, signed in September 1991. Responsibility for implementation of the PCCIP lies with DOE as the lead agency responsible for CERCLA activities at the Fernald Preserve and with EPA as the oversight agency. The DOE Office of Legacy Management (LM) has the ultimate authority for ensuring that the post-closure care of the OSDF meets all the goals, standards, specifications, and requirements of this PCCIP.

### **1.4 Related Plans**

Several other support plans have been prepared for the OSDF remedial action project and should be used in conjunction with this plan, or referred to for information on how contaminated materials were placed into the OSDF. The other plans containing information relevant to this plan are listed below with a brief statement of the relationship to this plan. These plans are accessible either electronically or in hard copy.

- *Permitting Plan and Substantive Requirements for the On-Site Disposal Facility* (DOE 1998): Identifies the administrative and substantive requirements for the National Pollutant Discharge Elimination System permit, and the substantive requirements for all of the operable units' (OUs') on-site disposal needs for the Wetlands Nationwide Permit, the Ohio Solid Waste Permit to Install, and the Resource Conservation and Recovery Act (RCRA) permit; additionally, discusses how the requirements relate to the OSDF, presents the plan for compliance with the requirements, and discusses additional applicable or relevant and appropriate requirements (ARARs) that are not related to the issuance of a specific permit.
- *Construction Quality Assurance Plan; On-Site Disposal Facility* (GeoSyntec 2001a): Contains procedures used to evaluate soils and other features of the OSDF liner and final cover system.
- *Final Design Criteria Package; On-Site Disposal Facility* (GeoSyntec 1997): Provides the design of the OSDF and includes the *Final Remedial Design Work Plan*, which presents the design approach for the OSDF.
- *Impacted Materials Placement Plan; On-Site Disposal Facility* (GeoSyntec 2005): Outlines waste acceptance criteria (WAC) for the OSDF and contains procedures used to place the contaminated materials into the OSDF.

## **UNCONTROLLED IF PRINTED**

- *Surface Water Management and Erosion Control Plan; On-Site Disposal Facility* (GeoSyntec 2001b): Provides details of permanent erosion and sediment controls and surface water controls for the OSDF, including maintenance requirements for channels and sediment controls.
- *Groundwater/Leak Detection and Leachate Monitoring Plan* (Attachment C to the LMICP): Provides details on the leak detection monitoring program for the OSDF, addresses monitoring within the OSDF in the leachate collection system (LCS) and leak detection system (LDS), and the underlying groundwater in the till immediately underneath the OSDF and the groundwater in the Great Miami Aquifer.
- *Systems Plan, Collection and Management of Leachate for the On-Site Disposal Facility* (DOE 2001): Describes the inspection, monitoring, and maintenance activities that will be undertaken at the Fernald Preserve to collect and manage leachate collected from the OSDF.
- *Integrated Environmental Monitoring Plan (IEMP)* (Attachment D to the LMICP): Defines the environmental monitoring and reporting requirements, including post-closure requirements.
- *Work Plan for Removal and In-Place Abandonment of the OSDF Cell 1 Final Cover Monitoring System* (GeoSyntec 2006): Explains the process used to remove and abandon in place the Cell 1 final cover monitoring system.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 2.0 Pertinent Requirements

### 2.1 Overview

Regulatory and other requirements pertinent to this plan primarily take the form of ARARs and to-be-considered criteria as determined by the ROD for each of the various Fernald Preserve OUs, functional requirements, and general design criteria. These are addressed in the following subsections.

### 2.2 Pertinent Requirements

ARARs and to-be-considered criteria that should be addressed by this plan are provided in Table 2-1 as obtained from the *Final Record of Decision for Remedial Actions at Operable Unit 2* (DOE 1995a), the *Final Record of Decision for Remedial Actions at Operable Unit 5* (DOE 1996a), and the *Operable Unit 3 Record of Decision for Final Remedial Action* (DOE 1996b), as identified by the *X* in the appropriate column. Additional regulatory requirements that are appropriate guidance for development or maintenance of this plan have been identified and are indicated by an *X* in the *Permitting Plan and Substantive Requirements for the On-Site Disposal Facility* (DOE 1998) column but no *X* in the previous columns.

### 2.3 Functional Requirements

The Final Design Criteria Package (GeoSyntec 1997) contains a variety of functional requirements that have been established for the OSDF. The functional requirements pertinent to this plan are to:

- Protect the OSDF from damage caused by precipitation and storm water run-on and runoff.
- Route run-on and runoff to designated diversion channel locations for appropriate management.
- Discharge surface water to existing watercourses in accordance with applicable regulatory and DOE requirements.

The surface water management system should be maintained such that it will continue to perform in a manner that meets the project requirements for long-term conditions (i.e., after site physical completion). The system should prevent storm water run-on to the OSDF and uncontrolled storm water runoff from the OSDF. Features of the long-term surface water management system were constructed to require minimal monitoring and maintenance. The system was integrated, to the extent possible, with existing topography, features, and facilities.

### 2.4 General Design Criteria

The OSDF Design Criteria Package also identifies a number of general design criteria for the OSDF. The general design criteria pertinent to this plan are:

- Long-term erosion and sediment control features for the OSDF were designed for the 2,000-year, 24-hour storm event (design criterion for assumption of a DOE Performance Category 2 facility).

**UNCONTROLLED IF PRINTED**

- Long-term run-on/runoff control structures for the OSDF were designed to limit interruption and damage (i.e., washout) of the OSDF in the 2,000-year, 24-hour storm event (design criterion for assumption of a DOE Performance Category 2 facility); run-on should be controlled and diverted away from and around the OSDF using swales, channels, or diversion berms.

*Table 2-1. ARARs and To-Be-Considered Criteria*

#	Title	Requirements	OU2 ROD	OU3 ROD	OU5 ROD	OSDF Permitting Plan
<b>PLANS</b>						
1	Ohio Municipal Solid Waste Rules—Sanitary Landfill Facility Permit to Install Application OAC 3745-27-06(C)(7)	• Prepare a post-closure plan as detailed in OAC 374-27-11(B).	X	X	X	X
		• Prepare a leachate monitoring plan to ensure compliance with OAC 3745-27-19(M)(4).	X	X	X	X
		• Prepare a leachate contingency plan as required by OAC 3745-27-19(K)(6).	X	X	X	X
		• Prepare a groundwater detection monitoring plan as required by OAC 3745-27-10 and, if applicable, a groundwater quality assessment plan and/or corrective measures plan required by OAC 3745-27-10.	X	X	X	X
2	Ohio Municipal Solid Waste Rules—Final Closure of Sanitary Landfill Facility OAC 3745-27-11(B)	The owner shall prepare a post-closure plan which shall contain: <ul style="list-style-type: none"> <li>• The name and location of the facility and unit(s) included in the plan.</li> <li>• A description of the post-closure activities.</li> <li>• The name, address, and telephone number of the person or office to contact regarding the unit(s) of the facility during the post-closure care period. The Ohio Environmental Protection Agency (OEPA) shall be notified of any changes.</li> </ul>			X	X
3	Ohio Hazardous Waste Interim Standards Rules—Post-Closure Plan: Amendment of Plan OAC 3745-66-18(A) and (C)	The owner of a hazardous waste disposal unit shall have a written post-closure plan, which shall identify the activities that will be carried on after closure of each unit and the frequency of those activities, and include at least: <ul style="list-style-type: none"> <li>• A description of the planned monitoring activities and frequencies at which they will be performed.</li> <li>• A description of the planned maintenance activities and frequencies at which they will be performed, to ensure (a) the integrity of the cap and final cover or other containment systems, and (b) the function of the monitoring equipment.</li> <li>• The name, address, and telephone number of the person or office to contact about the hazardous waste disposal unit or facility during the post-closure period.</li> </ul>				X

**UNCONTROLLED IF PRINTED**

Table 2-1 (continued). ARARs and To-Be-Considered Criteria

#	Title	Requirements	OU2 ROD	OU3 ROD	OU5 ROD	OSDF Permitting Plan
<b>CLOSURE AND POST-CLOSURE OBJECTIVES</b>						
4	Ohio Municipal Solid Waste Rules—Final Closure of a Sanitary Landfill Facility OAC 3745-27-11(H)	At final closure of a landfill facility: <ul style="list-style-type: none"> <li>All land surfaces shall be graded to prevent ponding of water where solid waste has been placed. Drainage facilities shall be provided to direct surface water from the landfill facility.</li> <li>A groundwater monitoring system shall be designed and installed in accordance with OAC 3745-27-10, if a system is not already in place.</li> </ul>	X	X		X
5	Ohio Municipal Solid Waste Rules—Final Closure of a Sanitary Landfill Facility OAC 3745-66-11(O)	Closure of the sanitary landfill facility must be completed in a manner that minimizes post-closure formation and release of leachate to surface water to the extent necessary to protect human health and the environment.	X	X		X
6	Ohio Hazardous Waste Interim Standards Rules—Closure Performance Standard OAC 3745-66-11	The owner shall close his facility in a manner that: <ul style="list-style-type: none"> <li>Minimizes the need for further maintenance.</li> <li>Controls, minimizes, or eliminates to the extent necessary to protect human health and the environment, post-closure escape of hazardous waste, hazardous constituents, leachate, contaminated runoff, or hazardous waste decomposition products to the groundwater, or surface waters, or to the atmosphere.</li> <li>Complies with closure requirements.</li> </ul>		X	X	X
7	Ohio Hazardous Waste Landfill Rules—Closure and Post-closure OAC 3745-68-10(A) (in lieu of 40 CFR § 265.310[a])	At final closure of the landfill, the owner or operator must cover the landfill with a final cover designed and constructed to: <ul style="list-style-type: none"> <li>Provide long-term minimization of migration of liquids through the closed landfill.</li> <li>Function with minimum maintenance.</li> <li>Promote drainage and minimize erosion or abrasion of the cover.</li> <li>Accommodate settling and subsidence so that the cover's integrity is maintained.</li> <li>Have a permeability less than or equal to the permeability of any bottom liner system or natural subsoil present.</li> </ul>		X	X	X

**UNCONTROLLED IF PRINTED**

Table 2-1 (continued). ARARs and To-Be-Considered Criteria

#	Title	Requirements	OU2 ROD	OU3 ROD	OU5 ROD	OSDF Permitting Plan
8	Ohio Municipal Solid Waste Rules—Operational Criteria for a Sanitary Landfill Facility OAC 3745-27-19-(J)(1) and (4)	Surface water shall be diverted from areas where solid waste has been deposited. The facility shall be designed, constructed, maintained, and provided with surface water control structures, as necessary, to control run-on and runoff of surface water to ensure minimal infiltration of water through the cover material and cap system, and minimal erosion of the cover material and cap system. If ponding or erosion occurs on areas of the landfill facility where solid waste had been deposited, action will be taken to correct the conditions causing the ponding or erosion.	X	X	X	X
9	Ohio Municipal solid Waste Rules—Operational Criteria for a Sanitary Landfill Facility OAC 3745-27-19(E)(26)	The integrity of the engineered components of the landfill facility shall be maintained and any damage to, or failure of, the components shall be repaired.	X	X	X	X
<b>DURATION OF POST-CLOSURE CARE PERIOD</b>						
10	Ohio Municipal Solid Waste Rules— Post-Closure Care of Sanitary Landfill Facilities OAC 3745-27-14(A) (in lieu of RCRA Subtitle D)	Following completion of final closure activities in accordance with OAC 3745-27-11, post-closure care activities shall be conducted at the sanitary landfill facility for a minimum of 30 years.	X	X	X	X
11	Ohio Hazardous Waste Interim Standards Rules— Post-Closure Care and Use of Property OAC 3745-66-17(A) (in lieu of 40 CFR §265.117[a][1])	Post-closure care must begin after completion of the unit and continue for 30 years after that date, unless shortened or extended by the Ohio Director of Environmental Protection in accordance with OAC 3745-66-18(G) (40 CFR §265.117[a][2]).  Note: Identified in OU5 ROD as applicable only to existing Hazardous Waste Management Units (HWMUs).			X	
12	Ohio Municipal Solid Waste Rules— Post-Closure Care of Sanitary Landfill Facilities OAC 3745-27-14(A)(1) and (2) (in lieu of RCRA Subtitle D)	Post-closure care activities for all sanitary landfill facilities shall include, but are not limited to:  • Continuing operation and maintenance of the leachate management system, surface water management system... and the groundwater monitoring system.  • Maintaining the integrity and effectiveness of the cap system, including making repairs to the cap system as necessary to correct the effects of erosion and preventing run-on and runoff from eroding or otherwise damaging the cap system.	X	X	X	X

**UNCONTROLLED IF PRINTED**

Table 2-1 (continued). ARARs and To-Be-Considered Criteria

#	Title	Requirements	OU2 ROD	OU3 ROD	OU5 ROD	OSDF Permitting Plan
13	Ohio Hazardous Waste Interim Standards Rules—Post-Closure Care and Use of Property OAC 3745-66-17(A)(1) (in lieu of 40 CFR §265.117[a][1])	Post-closure care must consist of at least the following: <ul style="list-style-type: none"> <li>Monitoring and reporting.</li> <li>Maintenance and monitoring of waste containment systems.</li> </ul> <p>Note: Identified in OU5 ROD as applicable only to existing HWMUs.</p>			X	
14	Ohio Hazardous Waste Landfill Rules—Closure and Post-Closure OAC 3745-68-10(B) (in lieu of 40 CFR §265.310[b])	After final closure, the owner or operator must comply with post-closure requirements, including maintenance and monitoring throughout the post-closure care period. The owner or operator must: <ul style="list-style-type: none"> <li>Maintain the integrity and effectiveness of the final cover, including making repairs to the cap as necessary to correct the effects of settling, subsidence, erosion, or other events.</li> <li>Continue to operate the leachate collection and removal system until leachate is no longer detected.</li> <li>Maintain and monitor the LDS.</li> <li>Maintain and monitor the groundwater monitoring system.</li> <li>Prevent run-on and runoff from eroding or otherwise damaging the final cover.</li> <li>Protect and maintain surveyed benchmarks.</li> </ul>		X	X	X
15	Ohio Hazardous Waste Landfill Rules—Closure and Post-Closure OAC 3745-68-10(D) (in lieu of 40 CFR § 265.310[b])	During the post-closure period, the owner of a hazardous waste landfill must: <ul style="list-style-type: none"> <li>Maintain the function and integrity (integrity and effectiveness) of the final cover.</li> <li>Maintain and monitor the leachate collection, removal, and treatment system to prevent excess accumulation of leachate in the system.</li> <li>Protect and maintain surveyed benchmarks.</li> </ul>		X	X	X
<b>MODIFICATIONS TO POST-CLOSURE CARE PLAN OR PERIOD</b>						
16	Ohio Hazardous Waste Interim Standards Rules—Post-Closure Plan; Amendment of Plan OAC 3745-66-18(D)	The owner may amend the post-closure plan any time during the active life of the facility or during the post-closure period.				X
17	Ohio Hazardous Waste Interim Standards Rules—Post-Closure Plan; Amendment of Plan OAC 3745-66-18(G)  (continued on next page)	The post-closure plan and length of the post-closure care period may be modified any time prior to the end of the post-closure care period. A modification of the post-closure plan may include, where appropriate, the temporary suspension rather than permanent deletion of one or more post-closure care requirements. At the end of specified period of				X

**UNCONTROLLED IF PRINTED**

Table 2-1 (continued). ARARs and To-Be-Considered Criteria

#	Title	Requirements	OU2 ROD	OU3 ROD	OU5 ROD	OSDF Permitting Plan
		suspension, the Ohio Director of Environmental Protection would then determine whether the requirements should be permanently discontinued or reinstated to prevent threats to human health and the environment.				
<b>PROPERTY USE RESTRICTIONS</b>						
18	Ohio Hazardous Waste Interim Standards Rules—Post-Closure Care and Use of Property OAC 3745-66-17(C) (in lieu of 40 CFR §265.117(c))	Post-closure use of property on or in which hazardous wastes remain after partial or final closure must never be allowed to disturb the integrity of the final cover, liner(s), or any other component of the containment system, or the function of the facility's monitoring systems, unless the Ohio Director of Environmental Protection approves otherwise.  Note: Identified in OU5 ROD as applicable only to existing HWMUs.  Note: If clean closure is performed, then post-closure care is not required.			X	
19	Ohio Hazardous Waste Landfill Rules—Closure and Post-Closure OAC 3745-68-10(D)(5)	During the post-closure period, the owner of a hazardous waste landfill must restrict access to the landfill as appropriate for its post-closure use.		X	X	X
20	Ohio Municipal Solid Waste Rules—Final Closure of a Sanitary Landfill Facility OAC 3745-27-11(H)(5)(a)	The owner shall file—with the board of health having jurisdiction, with the county recorder of the county in which the facility is located, and with the Ohio Director of Environmental Protection—a plat of the unit(s) of the sanitary landfill facility and information describing the acreage, exact location, depth, volume, and nature of the solid waste deposited in the unit(s) of the sanitary landfill facility.		X		X
21	Ohio Hazardous Waste Interim Standards Rules—Survey Plat OAC 3745-66-16	The owner shall submit—to the local zoning authority, or the authority with jurisdiction over local land use, and to the Ohio Director of Environmental Protection—a survey plat, prepared and certified by a professional land surveyor, indicating the location and dimensions of landfill cells or other hazardous waste disposal units with respect to permanently surveyed benchmarks. The plat must contain a note, prominently displayed, which states the owner's obligation to restrict disturbance of the hazardous waste disposal unit in accordance with OAC 3745-66-17(C).		X		X
22	Ohio Hazardous Waste Interim Standards Rules—Post-Closure Notices OAC 3745-66-19(A)	The owner shall submit—to the local zoning authority, or the authority with jurisdiction over local land use, and to the Ohio Director of Environmental Protection—a record of the type, location, and quantity of hazardous wastes disposed of within each cell or disposal unit of the facility.				X

**UNCONTROLLED IF PRINTED**

Table 2-1 (continued). ARARs and To-Be-Considered Criteria

#	Title	Requirements	OU2 ROD	OU3 ROD	OU5 ROD	OSDF Permitting Plan
<b>DEED NOTATION</b>						
23	Ohio Municipal Solid Waste Rules—Final Closure of a Sanitary Landfill Facility OAC 3745-27-11(H)(5)(b)	<p>The owner shall record a notation on the deed to the sanitary landfill facility property, or on some other instrument which is normally examined during title search, that will notify in perpetuity any potential purchaser of the property that:</p> <ul style="list-style-type: none"> <li>• The land has been used as a sanitary landfill facility.</li> <li>• Includes information describing acreage, exact location, depth, volume, and nature of solid waste deposited in the sanitary landfill facility.</li> </ul>	X	X		X
24	Ohio Hazardous Waste Interim Standards Rules—Post-Closure Notices OAC 3745-66-19(B)	<p>The owner shall record, in accordance with state law, a notation on the deed of the facility property, or on some other instrument which is normally examined during title search, that will notify in perpetuity the potential purchasers of the property that:</p> <ul style="list-style-type: none"> <li>• The land has been used to manage hazardous wastes.</li> <li>• Its use is restricted under the Ohio Administrative Code closure and post-closure rules.</li> <li>• The survey plat and record of the type, location, and quantity of hazardous wastes disposed of within each cell or hazardous waste unit of the facility as required by OAC 3745-66-16 and 3745-66-19(A) have been filed with the local zoning authority or the authority with jurisdiction over local land use and with the Ohio Director of Environmental Protection.</li> </ul>				X
25	Ohio Hazardous Waste Interim Standards Rules—Post-Closure Notices OAC 3745-66-19(C)	<p>If the owner or any subsequent owner of the land upon which a hazardous waste disposal unit was located wishes to remove hazardous wastes and hazardous waste residues in satisfaction of the criteria in OAC 3745-66-17(C), the owner may request that the Ohio Director of Environmental Protection approve either or the following:</p> <ul style="list-style-type: none"> <li>• The removal of the notation on the deed to the facility property or other instrument normally examined during title search.</li> <li>• The addition of a notation to the deed or instrument indicating the removal of the hazardous waste.</li> </ul>				X

**UNCONTROLLED IF PRINTED**

Table 2-1 (continued). ARARs and To-Be-Considered Criteria

#	Title	Requirements	OU2 ROD	OU3 ROD	OU5 ROD	OSDF Permitting Plan
<b>OTHER DOE CRITERIA</b>						
26	Disposal Site Closure/Post-Closure DOE Order 5820.2A, Chapter III (3)(j)—This order has been replaced with DOE Order 435.1 Chg 1.	<ul style="list-style-type: none"> <li>• During post-closure, residual radioactivity levels for surface soil shall comply with existing DOE decommissioning guidelines.</li> <li>• Inactive disposal facilities, disposal sites, and disposal units shall be managed in conformance with RCRA, CERCLA, and the Superfund Amendments and Reauthorization Act of 1986, as amended.</li> <li>• Corrective measures shall be applied to new disposal sites or individual disposal units if conditions occur or are forecasted that could jeopardize attainment of the performance objectives [of the unit].</li> <li>• Termination of monitoring and maintenance activity at closed facilities or sites shall be based on an analysis of site performance at the end of the institutional control period.</li> </ul>	X	X	X	
27	Environmental Monitoring DOE Order 5820.2A, Chapter III(3)(k)—this order has been replaced with DOE Order 435.1 Chg 1.	<p>I.1.E.(7) Environmental Monitoring. Radioactive waste management facilities, operations, and activities shall meet the environmental monitoring requirements of DOE Order 5400.1, <i>General Environmental Protection Program</i>; and DOE Order 5400.5, <i>Radiation Protection of the Public and the Environment</i>.</p> <p>IV.R.(3)(a) The site-specific performance assessment and composite analysis shall be used to determine the media, locations, radionuclides, and other substances to be monitored.</p> <p>IV.R.(3) Disposal Facilities.</p> <ul style="list-style-type: none"> <li>• (C) The environmental monitoring programs shall be capable of detecting changing trends in performance to allow application of any necessary corrective action prior to exceeding the performance objectives in this chapter.</li> </ul>	X	X	X	

**UNCONTROLLED IF PRINTED**

## **2.5 Other Requirements**

In addition to the requirements contained in the OSDF Design Criteria Package, the following requirements have been incorporated into this plan:

- Disturbed areas should be stabilized (i.e., vegetated) after the area has been reconstructed to final grade.
- General practices for inspection and maintenance of erosion and sediment control features should be as recommended by the Ohio Department of Natural Resources Division of Soil and Water Conservation document *Rainwater and Land Development: Ohio's Standards for Storm Water Management, Land Development, and Urban Stream Protection* (ODNR 1996 or its most current revision).

Other criteria relevant to this plan consist of those industry standard practices that have proven effective at other waste disposal facilities. Inspection and monitoring requirements from the manufacturers and suppliers of material and equipment installed at the OSDF are also criteria relevant to this plan.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 3.0 Final Site Conditions

### 3.1 Site History

In July 1986, DOE and EPA signed a Federal Facilities Compliance Agreement (FFCA), addressing impacts to the environment associated with the federally operated site known as the Fernald Environmental Management Project. DOE agreed to conduct the FFCA investigation as a remedial investigation/feasibility study in accordance with guidelines of CERCLA. In November 1989, the Fernald Site was included on the EPA National Priorities List. The FFCA was later amended by the June 1990 Consent Agreement between DOE and EPA, which was further modified by amendment in September 1991.

In accordance with the September 1991 Amended Consent Agreement, EPA approved and signed the OU2 ROD on June 8, 1995; the OU5 ROD on January 31, 1996; and similarly, the OU3 ROD for Final Remedial Action on September 24, 1996. The design of the OSDF, as currently developed, is presented in the *Final Design Criteria Package; On-Site Disposal Facility* (GeoSyntec 1997). The Final Design Criteria Package includes the *Final Remedial Design Work Plan for Remedial Actions at OU2* (DOE 1995b), which presents the design approach for the OSDF and which was submitted to EPA in August 1995 and subsequently approved in November 1995. The Ohio Environmental Protection Agency (OEPA), which actively participated throughout the CERCLA response process, also concurred with the documentation and decisions to date.

The OSDF was constructed to permanently contain impacted materials derived from the remediation of the OUs at the Fernald Site. All material placed in the OSDF was required to meet OSDF WAC. The OU2 ROD established radiological WAC of 346 picocuries per gram (pCi/g) of uranium-238 or 1,030 milligrams per kilogram (mg/kg) total uranium for all soil and soil-like impacted material destined for the OSDF. Similarly, the OU5 ROD established additional radiological and chemical WAC for OU5 soils destined for the OSDF. The OU3 ROD established radiological WAC for debris materials destined for the OSDF of 105 grams technetium-99. These radiological/chemical WAC have been compiled and presented in Table 3-1. The impacted materials sent to the OSDF from OU3 may also have included small material contributions from OUs 1 and 4. Any material from OUs 1 and 4 destined for the OSDF met the OU3 WAC. In addition to the radiological/chemical WAC discussed above, the *Impacted Materials Placement Plan* (GeoSyntec 2005) presents physical WAC for the OSDF.

The volume of the impacted material that was destined for disposal in the OSDF was originally estimated at 2.9 million cubic yards (2.2 million cubic meters) bank/unbulked. Approximately 80 percent of this volume was expected to consist of impacted soil, and the remainder would be building demolition rubble, fly ash, lime sludge, municipal solid waste, and small quantities of miscellaneous other materials. After soil and soil-like material, debris from demolition of buildings in the former production area was expected to constitute the largest volume of impacted material for OSDF disposal. The OU3 ROD indicates that impacted debris could be assigned to one of ten material categories. Only material from seven of these categories was disposed of in the OSDF. The seven material categories of impacted debris allowed for disposal in the OSDF are presented in Table 3-2, which also gives descriptions of the materials making up the categories.

**UNCONTROLLED IF PRINTED**

Table 3-1. On-Site Disposal Facility Waste Acceptance Criteria

#	Constituent of Concern	Soil <sup>a</sup>		Debris <sup>b</sup>
		OU2	OU5 <sup>d</sup>	OU3
<b>Radionuclides:</b>				
1	Neptunium-237		3.12 × 10 <sup>9</sup> pCi/g	105 g
2	Strontium-90		5.67 × 10 <sup>10</sup> pCi/g	
3	Technetium-99		29.1 pCi/g	
4	Uranium-238	346 pCi/g		
	Total Uranium	1,030 mg/kg	1,030 mg/kg	
<b>Inorganics:</b>				
5	Boron		1.04 × 10 <sup>3</sup> mg/kg	
6	Mercury <sup>c</sup>		5.66 × 10 <sup>4</sup> mg/kg	
<b>Organics:</b>				
7	Bromodichloromethane		9.03 × 10 <sup>-1</sup> mg/kg	
8	Carbazole		7.27 × 10 <sup>4</sup> mg/kg	
9	Alpha-chlordane		2.89 mg/kg	
10	Bis (2-chlorisopropyl) ether		2.44 × 10 <sup>-2</sup> mg/kg	
11	Chloroethane		3.92 × 10 <sup>5</sup> mg/kg	
12	1,1-Dichloroethene <sup>c</sup>		11.4 mg/kg	
13	1,2-Dichloroethene <sup>c</sup>		11.4 mg/kg	
14	4-Nitroaniline		4.42 × 10 <sup>-2</sup> mg/kg	
15	Tetrachloroethene <sup>c</sup>		128 mg/kg	
16	Toxaphene <sup>c</sup>		1.06 × 10 <sup>5</sup> mg/kg	
17	Trichloroethene <sup>c</sup>		128 mg/kg	
18	Vinyl chloride <sup>c</sup>		1.51 mg/kg	

<sup>a</sup>maximum concentration

<sup>b</sup>maximum total mass

<sup>c</sup>RCRA-based constituent of concern

<sup>d</sup>Constituents that have established maximums that serve as WACs; other compounds that will not exceed designated Great Miami Aquifer action levels within 1,000-year performance period, regardless of starting concentration in the OSDF, are not listed.

Sources:

OU2 ROD (DOE 1995a)

OU3 ROD (DOE 1996b)

OU5 ROD (DOE 1996a)

**UNCONTROLLED IF PRINTED**

Table 3-2. OU3 Material Categories and Descriptions

<b>Category A</b>	<b>Category B</b>	<b>Category D</b>	<b>Category E</b>	<b>Category G</b>	<b>Category H</b>	<b>Category I</b>
<b>Accessible Metals</b>	<b>Inaccessible Metals</b>	<b>Painted Light Gauge Metals</b>	<b>Concrete</b>	<b>Non-regulated Asbestos-Containing Material</b>	<b>Regulated Asbestos-Containing Material</b>	<b>Miscellaneous Materials</b>
Structural and miscellaneous steel	<ul style="list-style-type: none"> <li>• Doors</li> <li>• Conduit/wire/cable tray</li> <li>• Electrical wiring and fixtures</li> <li>• Electrical transformers</li> <li>• Miscellaneous electrical items</li> <li>• HVAC equipment</li> <li>• Material handling equipment</li> <li>• Process equipment</li> <li>• Miscellaneous equipment</li> <li>• Piping</li> </ul>	<ul style="list-style-type: none"> <li>• Ductwork</li> <li>• Lead flashing</li> <li>• Louvers</li> <li>• Metal wall and roof panels</li> </ul>	<ul style="list-style-type: none"> <li>• Asphalt</li> <li>• Slabs</li> <li>• Columns</li> <li>• Beams</li> <li>• Foundations</li> <li>• Walls</li> <li>• Masonry</li> <li>• Clay piping</li> </ul>	<ul style="list-style-type: none"> <li>• Ceiling demolition</li> <li>• Feeder cable</li> <li>• Fire brick</li> <li>• Floor tile</li> <li>• Transite wall and roof panels</li> </ul>	<ul style="list-style-type: none"> <li>• Ductwork insulation</li> <li>• Piping insulation</li> <li>• Personal protective equipment</li> <li>• Copper scrap metal pile</li> </ul>	<ul style="list-style-type: none"> <li>• Polyvinyl chloride (PVC) conduit</li> <li>• Basin liners</li> <li>• Fabric</li> <li>• Drywall</li> <li>• Building insulation</li> <li>• Miscellaneous debris</li> <li>• Personal protective equipment</li> <li>• PVC piping</li> <li>• Roofing build-up</li> <li>• Process trailers</li> <li>• Non-process trailers</li> <li>• Windows</li> <li>• Wood</li> </ul>

Source: Table 4-2, OU3 Material Categories/Description, OU3 ROD (DOE 1996b).

Note: Only those seven material categories allowed for on-site disposal according to the OU3 ROD are presented.

### **3.2 Location and Description of the OSDF Area**

A pre-design investigation was performed to define the most suitable location for the OSDF within an identified area at the Fernald Site, based on the OU2 and OU5 Remedial Investigation/Feasibility Study. The results of that investigation are presented in the *Pre-design Investigation and Site Selection Report for the On-site Disposal Facility* (DOE 1995c). The report, its objectives, and its results are summarized below.

The identified best area is located on the east side of the Fernald Site property and measures approximately 2,000 feet (ft) east to west by 5,300 ft north to south. This location was considered the best location for an OSDF because it has the greatest thickness of gray clay, which provides a protective layer over the underlying Great Miami Aquifer. Fate and transport modeling and risk assessments in the OU2 and OU5 feasibility studies have shown that a disposal facility in this area, based on a feasible facility design and a 12-ft-thick gray clay layer, would be protective of human health and the environment. The identified best area is bounded on the north, east, and south using the OEPA siting requirements (buffer from property line and water supply wells). The western boundary incorporates areas with greater than 12 ft of gray clay, with the exception of the northern portion of the west boundary line, which was determined based on identification of sand lenses within the gray clay.

Planning meetings between DOE, EPA, and OEPA resulted in a pre-design investigation that had three objectives (identified in Table 3-3). Results of the pre-design investigation served as the basis for selecting the location within the identified best area for siting the OSDF. The selected location, measuring 800 ft east to west by 4,300 ft north to south, provided suitable space for the estimated 2.5 million cubic yards of impacted materials and met applicable OEPA siting requirements. The gray clay thickness is greater than the minimum 12-ft thickness established in the OU2 ROD (DOE 1995a) for protection of the Great Miami Aquifer; the gray clay is actually greater than 15 ft thick within the selected location, and approximately 75 percent of the selected location has a 20- to 50-ft thickness of gray clay. The investigation identified minimal amounts of interbedded granular material, none of which would offer a rapid migration pathway through the gray clay.

### **3.3 OSDF As-Built**

The design approach for the OSDF is presented in the *Final Remedial Design Work Plan for Remedial Actions at Operable Unit 2* (DOE 1995b). The design approach of the OSDF, as currently developed, is presented in the *Final Design Criteria Package; On-Site Disposal Facility* (GeoSyntec 1997). The design of the OSDF includes a liner system, impacted material placement, final cover system, leachate management system, surface water management system, and other ancillary features.

As-built conditions of the completed OSDF are documented with a set of as-built record drawings and photographs. These drawings were developed by DOE or its contractor, and were used to prepare the topographic map discussed in this section. This information illustrates baseline conditions for comparison to future conditions during the post-closure period. These drawings will be used to document changes in the physical site conditions of the OSDF over time and to develop a corrective action plan, if required. The drawings are accessible at the site, either electronically or in hard copy.

## UNCONTROLLED IF PRINTED

Table 3-3. Pre-Design Investigation Objectives and Field Components

#	Objective	Field Components
1	Identify the most suitable hydrogeology within the identified best area	Verification of the gray clay thickness Identification of interbedded granular material
2	Verify protection of human health and the environment	Verification of existing vertical and horizontal uranium contamination  Actual uranium solubility Uranium retardation Lateral and vertical gradients Background concentrations of uranium in water in the vadose zone
3	Develop field information for the design of the OSDF	Location and extent of interbedded granular material  Obtain geotechnical information in the footprint of the OSDF

The final OSDF site map was compiled from a final topographic map of the Fernald Site. The final topographical survey was conducted in accordance with the standards of the *Manual of Photogrammetry* (ASPRS 1980). The following specifications were used in developing the map, in accordance with the appropriate regulations (Ohio solid waste rules OAC 3745-27-06[B][2] and 3745-27-11[H][5][a], and Ohio hazardous waste general new facility rule OAC 3745-54-18 and hazardous waste interim status facility rule OAC 3745-66-16):

- A scale of 1 inch = 200 ft (1 mm = 2.4 m).
- A contour interval of 5 ft (1.5 m).
- A coverage area of the OSDF site and a distance of 1,000 ft.
- North arrow displayed.

In addition to existing topography, the maps will define the following:

- Property lines of the land owned by DOE.
- Limits of impacted material placement.
- Outline of the toe and crest of the OSDF.
- The individual phases/cells of the OSDF.
- OSDF site property boundaries, fences, gates, and access roads.
- Location and extent of permanent storm water run-on and runoff control features.
- Vegetation, streams, lakes, springs, and other surface waters.
- Survey control stations/benchmarks.
- Permanent site surveillance features (e.g., monuments, markers, signs).

## **UNCONTROLLED IF PRINTED**

- Wetlands (if any) within the limits of impacted material placement and within 200 ft of the limits of impacted material placement.
- Limits of a regulatory floodplain (i.e., 100-year floodplain as depicted on a federal insurance administration flood map, according to OAC 3745-27-01 and 3745-54-18[B]).
- Site coordinate system.
- Existing residences, land uses, zoning classifications, property ownership, political subdivisions, and communities.
- Underground utilities (sewers, water lines, electric cables), field tiles, French drains, pipelines.
- Location (if any) within 200 ft of the limits of impacted material placement of any fault which has had displacement in Holocene time (OAC 3745-54-18[A]).
- All public and private water supply wells within 2,000 ft of the limits of impacted material placement (using a scale insert if necessary), and the current status of each, including depth, use, and where applicable, abandonment date, based on publicly available information.  
**Note:** DOE plans to update information on water supply wells only during the CERCLA 5-year reviews.

These as-built drawings were submitted to EPA and OEPA. The map will be revised as part of the CERCLA 5-year review, if necessary. When the OSDF map is updated, the revised map will include the year of revision, the revision number, and the type of the activity or event that triggered the need for the revision.

All drawings, disposal facility site maps, and photographs will be archived. DOE is responsible for maintaining and archiving these maps, drawings, and photographs as part of the OSDF permanent record.

### **3.4 OSDF Baseline Photographs**

A photographic record of the final conditions after closure of the final cell of the OSDF is included and maintained in the OSDF permanent site file. This record consists of a series of aerial and ground photographs that provide a baseline visual record of final site construction and final site conditions to complement the as-built drawings. In particular, this set of aerial photographs provides a permanent record of site conditions, enabling future inspectors to monitor changes in site conditions (e.g., erosion patterns, vegetation changes, land use) over time. The need for new aerial photographs will be evaluated at the CERCLA 5-year reviews. Table 3-4 summarizes the anticipated specifications for the aerial photographs.

## UNCONTROLLED IF PRINTED

Table 3-4. Aerial Photography Specifications

Area to be photographed	Final disposal site plus a minimum of 0.25 mile (0.4 kilometer) beyond its boundaries unless site conditions require otherwise.
Products to be delivered	One set of vertical color, infrared stereo contact prints; glossy, double-weight, not trimmed; 9 inch × 9 inch (230 millimeters [mm] × 230 mm): Scale: 1 inch = 200 ft (1 mm = 2.4 meters) (1:2,400)  Index map showing flight lines and frame numbers: Scale: 1 inch = 1,000 ft (1:12,000)  One set of natural color, low oblique photographs taken from a minimum of two different angles with 90-degree rotation. If 35mm or 70mm film is used, glossy double-weight 8-inch × 10-inch enlargements; if 9-inch × 9-inch format is used, glossy double-weight contact prints.
Flight date	To be determined; mid to late summer, at peak of photosynthetic response of vegetation, unless the flight is to be used exclusively for topographic mapping.
Camera	Vertical photos: Precision, 9-inch × 9-inch (230 mm × 230 mm) format.  Oblique photos: A 35-millimeter (single lens reflex) or larger format camera is acceptable.
Film	Vertical photos: Eastman-Kodak Aerochrome Infrared 2443 or its equivalent.  Oblique photos: Eastman-Kodak Aerocolor Negative Film 2445 or its equivalent.
Filter	Infrared (vertical) photos: Wratten No. 12 or No. 15.  Color (oblique) photos: Skylight.
Flight line coverage	60 percent end overlap; 30 percent average side overlap.
Ground control	Control stations will be second order, Class 1, for horizontal control, and third order for vertical control (standard U.S. Geological Survey map accuracy specifications).

### 3.5 OSDF Site Inspection Photographs

Photographs are taken annually and during the quarterly site inspections to document conditions at the OSDF and its surrounding permanent features. These photographs provide a continuous record for monitoring changing conditions over time. The photographs can be compared with the baseline photographs to monitor site integrity.

Each photograph is recorded individually in a site-inspection photo log. An appropriate description of the feature photographed will be entered into the log. If possible, a photograph will include a reference point such as a survey monument, boundary monument, site marker, or monitoring well.

For specific areas where a photograph is used to monitor change over time, the photo location and the azimuth should be recorded, and all subsequent photographs should be taken from the same orientation to provide an accurate picture of changing conditions.

**UNCONTROLLED IF PRINTED**

Copies of quarterly site-inspection photographs will be included in inspection reports. Annual inspection photographs are posted on Geospatial Environmental Mapping System (GEMS), a Web-based application used to manage and provide agencies and the public with Internet access to electronic data (<http://www.lm.doe.gov/Fernald/Sites.aspx>). All site-inspection photographs taken, as well as all corresponding photo log forms, will be maintained in the permanent OSDF file.

Quarterly inspection photographs typically include cell cap side slopes and associated drainages. Photographs used for inspection follow-up are taken as needed. Additional OSDF features are documented with annual photographs. Table 3–5 summarizes the type and frequency of photo-documentation.

*Table 3–5. Site Features, Photo Frequency, and Reporting Mechanisms*

<b>Features</b>	<b>Frequency</b>	<b>Reporting Mechanism</b>
Permanent site surveillance features	Annually	GEMS
Inner and outer drainages	Quarterly	Reports
Fences, gates, warning signs, access roads, perimeter roads, paths, toe, and drainages	Annually	GEMS
The OSDF (top, sides, buffer area, and surrounding area). Panoramic sequences of photographs from selected vantage points may be used for this purpose.	Annually	GEMS
Any evidence of erosion (e.g., gullies, rivulets, rills) that the inspector considers significant and documents in the inspection notes	As needed	Reports
Any evidence of burrowing animals	As needed	Reports
Any off-OSDF features that may affect the OSDF in the future and that the inspector considers significant and documents in the inspection notes	As needed	Reports
General vegetation (OSDF side slope), presence of woody vegetation and invasive plant species	Quarterly	Reports
General vegetation (OSDF top slope and buffer area), presence of woody vegetation and invasive plant species	Annually	GEMS
Any evidence of ponded water	As needed	Reports
Erosion protection material (riprap)	As needed	Reports
Evidence of leachate seeps	As needed	Reports
Survey control points for local coordinate system	Annually	GEMS
Damaged monitoring wells	As needed	Reports

In addition to the above, any new or potential problem areas identified during an inspection will be documented with photographs. Photographs can also be taken to record developing trends and to allow inspectors to make reasonable decisions concerning additional inspections, custodial maintenance or repairs, or corrective action.

## 4.0 Institutional Controls and Points of Contact

### 4.1 Introduction

This section discusses the institutional controls that will be in place for the OSDF and its buffer area during the post-closure care period (legacy management). The IC Plan (Volume II of the LMICP) is the enforceable governing document for institutional controls for the Fernald Preserve, and this PCCIP provides supporting details for the OSDF. Table 4-1 presents a compilation of the institutional controls for the OSDF and its buffer area, as identified in the OU2 and OU5 RODs. Environmental monitoring (item 5), inclusive of groundwater monitoring (item 4), is discussed in Section 5.0 of this PCCIP. This PCCIP, in general, addresses the maintenance program (item 6). The remainder of Section 4.0 discusses the remaining items (1, 2, and 3).

Table 4-1. Institutional Controls as Key Components in the RODs

#	Component	OU2 ROD	OU5 ROD
<b>Institutional Controls</b>			
1	Ownership	The selected remedy will include the following as institutional controls: "continued federal ownership of the [OSDF] site" <sup>2a</sup>	"Institutional controls, such as . . ." <sup>5a</sup> "property ownership will be maintained by the federal government of the area comprising the [on-site] disposal facility and associated buffer areas" <sup>5b</sup>
2	Access Controls/Restrictions	"access restrictions (fencing)" <sup>2a</sup>	"access controls" <sup>5a</sup>
3	Deed Notations/Use Restrictions	"restrictions on the use of property will be noted on the property deed before the property could be sold or transferred to another party" <sup>2c</sup>	"deed restrictions" <sup>5a</sup> ; "if portions of the Fernald property [outside the disposal facility area] are transferred or sold at any future time, restrictions will be provided in the deed, and proper notifications will be provided as required" <sup>5b</sup>
4	Groundwater Monitoring Program	"groundwater monitoring" <sup>2a</sup> . . . "following closure of the on-site disposal facility" <sup>2b</sup>	See entry 5 below, but not identified as an institutional control
<b>Other Key Components of the Selected Remedy</b>			
5	Environmental Monitoring program	See entry 4 above.	"long-term environmental monitoring program" <sup>5a</sup>
6	Maintenance Program	"maintenance of the on-site disposal facility" <sup>2b</sup>	"maintenance program to ensure the continued protectiveness of the remedy" <sup>5a</sup>

<sup>2a</sup>Declaration, Description of the Selected Remedy, p. D-2, OU2 ROD (DOE 1995a).

<sup>2b</sup>Decision Summary, Section 9.1 Key Components, p. 9-2, OU2 ROD (DOE 1995a).

<sup>2c</sup>Responsiveness Summary, Section 3.0 Summary of Issues and Responses, Issue 7 C Future Use/Ownership, p. RS-3-33, OU2 ROD (DOE 1995a).

<sup>5a</sup>Declaration Statement, Description of the Selected Remedy, p. D-ii, OU5 ROD (DOE 1996a).

<sup>5b</sup>Decision Summary, Section 9.1 Key Components, p. 9-18, OU5 ROD (DOE 1996a).

## UNCONTROLLED IF PRINTED

### 4.2 Points of Contact

Points of contact by either the name or position title, address, and telephone number of the person or office to contact about the OSDF during the post-closure care period are provided in Table 4–2, in accordance with appropriate regulations (Ohio solid waste rule OAC 3745-27-11[B][3] in lieu of federal solid waste regulation 40 CFR §258.61[c][2], and Ohio hazardous waste rules OAC 3745-66-18[C][3] and 3745-68-10 in lieu of federal hazardous waste regulations 40 CFR §§265.118[c][3] and 264.118[b][3], respectively). Table 4–2 presents the on-site points of contact and an emergency contact number that is accessible 24 hours a day. These points of contact will serve to ensure that access to the facility will be possible for appropriate authorized personnel after closure and in the case of an emergency. An updated copy of this plan will be maintained at each of the locations identified in Table 4–2.

Table 4–2. Points of Contact

	Title of Contact	Telephone	Mailing Address
1	LM	513-648-3148	10995 Hamilton-Cleves Highway Harrison, Ohio 45030-9728
2	S.M. Stoller	513-648-5294	10995 Hamilton-Cleves Highway Harrison, Ohio 45030-9728
3	DOE Grand Junction 24-hour number	877-695-5322	N/A

Due to the duration of the post-closure period, DOE anticipates that the points of contact are likely to change over time. DOE will notify the regulatory agencies of any changes to the points of contact via modification to this PCCIP.

### 4.3 Ownership

As presented in item 1 of Table 4–1, property ownership of the area comprising the OSDF and its associated buffer areas will be maintained by the federal government (e.g., DOE or a successor federal agency).

### 4.4 Access Controls/Restrictions and Security Measures

As long as the federal government maintains property ownership, access to the OSDF will be restricted by means of fences, gates, and warning signs. Access to those areas within the fencing will be controlled by DOE authorization and will be limited to personnel for inspection, custodial maintenance, corrective actions, or other DOE-authorized activity. The fences, gates, and warning signs are covered by the inspection and custodial maintenance components of the post-closure care program implemented under this PCCIP (refer to Sections 7.0 and 9.0) and the IC Plan (Volume II of the LMICP).

To provide additional security, a warning sign with the following information will be placed on the access gates to the OSDF:

- The name of the site.
- The international symbol indicating the presence of radioactive material.

## **UNCONTROLLED IF PRINTED**

- A notice that trespassing is forbidden on this U.S. Government-owned site.
- A local DOE telephone number and a 24-hour DOE emergency telephone number; this same 24-hour telephone number will be recorded in agreements with local agencies to notify DOE in the event of an emergency or breach of site security or integrity.
- In addition to the entrance signs, weather-resistant signs are mounted on the chain-link fence surrounding the OSDF at approximately equal spacing. The signs have the international symbol indicating the presence of radioactive material and state the following:

### **CAUTION**

**Underground Radioactive Material,  
Contact Site Manager Prior to Entry  
513-910-6107**

The effectiveness of site security measures (e.g., fence condition, locked gate) will be monitored through routine scheduled site inspections (refer to Section 6.0).

#### **4.5 Deed Notations and Use Restrictions**

If management of the OSDF is transferred from DOE to another federal entity, real estate restrictions will be included in the deed, and proper notifications will be provided as required by the appropriate rules and regulations. Specific details and the exact language appropriate to the specific parcels of property will need to be developed and inserted at the time the deed notice is recorded.

In such an event, signed certification that the notation in the deed has been recorded will be submitted to the EPA regional administrator and the Ohio Director of Environmental Protection in accordance with appropriate regulations (Ohio solid waste rule OAC 3745-27-11[H][5] in lieu of federal solid waste regulation 40 CFR §258.60[I], and Ohio hazardous waste rules OAC 3745-66-19[A] and [B], and 3745-68-10[B] in lieu of federal hazardous waste regulations 40 CFR §§265.119[b][1] and 264.119[b][1]), accompanied by a copy of the document in which the notation has been placed.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **5.0 Environmental Monitoring**

### **5.1 Introduction**

The primary element of environmental monitoring associated with the OSDF post-closure care period is groundwater monitoring. This section describes the focus and scope of the plans for the groundwater monitoring that is continuing for the OSDF.

### **5.2 Groundwater Monitoring**

Groundwater monitoring for the OSDF is currently presented in the OSDF Groundwater/Leak Detection and Leachate Monitoring Plan (GWLMP) (Attachment C to the LMICP). The focus of that plan is the leak detection monitoring program for the OSDF, addressing monitoring both within the OSDF (in the LCS and LDS) and the underlying groundwater (in the till layer immediately underneath the OSDF and the groundwater in the Great Miami Aquifer). Although the temporal coverage of that plan began in part prior to the placement of impacted material/remediation waste into the OSDF, its coverage continues during the legacy management of the site. The GWLMP will be revised over time to better define the monitoring strategy and its individual components; DOE will complete any revisions in consultation with EPA and OEPA.

If a leak is detected from the OSDF, DOE will consult with EPA and OEPA in accordance with the requirements established in the GWLMP for notifications and response actions.

### **5.3 Monitoring of Other Media**

All environmental monitoring is covered by both the GWLMP and the IEMP. Monitoring under the IEMP indicates the additional media to be monitored (e.g., surface water, sediment) and includes sampling frequencies and constituents to be analyzed.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **6.0 Routine Scheduled Inspections**

### **6.1 Introduction**

This section establishes inspection techniques and frequency as required by the appropriate regulations (Ohio hazardous waste rules OAC 3745-66-18[A] and [C] in lieu of federal hazardous waste regulations 40 CFR §§264.118[b][2] and 265.118[c][2]). Components covered by these inspections are:

- Security system (e.g., fences, gates, locks, warning signs).
- Final cover system.
- Run-on and runoff control systems.
- Surveyed benchmarks—at least three third-order benchmarks on separate sides of the OSDF within easy access to the limits of waste/impacted materials placement (Ohio solid waste rule OAC 3745-27-08[C][7][a]–[c], and Ohio hazardous waste rule OAC 3745-68-10[D][4] in lieu of federal hazardous waste regulation 40 CFR §265.310[b][6]).

### **6.2 Routine Facility Inspections**

Discussed in this section are those background details and preliminary considerations necessary to conduct routine scheduled site inspections, including the inspection team, frequency and timing of inspections, and inspection aids. Also discussed are the procedures for routine scheduled site inspections.

#### **6.2.1 Preliminary Considerations**

##### **6.2.1.1 Frequency and Timing of Inspections**

Routine scheduled inspections were conducted quarterly at the OSDF until the closure of the Fernald Closure Project. The objective of these inspections was to establish and record physical modifications to the OSDF through many seasonal cycles and to provide a basis for decisions regarding future inspections. Inspections were conducted quarterly for 2 years following completion of cells 7 and 8. After the 2-year period, the frequency was to be reevaluated. Since October 2008, 2 years after completion of the OSDF, the OSDF cap inspections occur semiannually, in spring and fall. During the winter months, safely accessing the OSDF and scheduling of the inspection is difficult due to frequent inclement weather. During the summer months, vegetation on the majority of the cap is so dense that walking on the cap is difficult, and visibility of the ground surface is greatly reduced, limiting the quality of the actual inspection. Inspection of the institutional controls related to the OSDF (fencing, signs, locks, etc.) will continue to occur quarterly as part of the point-specific institutional control inspections. Areas of recent revegetation and repair activities will continue to be inspected quarterly. The frequency may also be re-evaluated through the CERCLA 5-year review process.

Should the inspectors find that weather conditions at the site are not conducive to making a complete and thorough inspection, they will use the opportunity to observe and record changes to the cover, diversion channels, and other site features. The remainder of the inspection tasks will then be rescheduled to a more favorable day.

## **UNCONTROLLED IF PRINTED**

### **6.2.1.2 Inspection Team**

The inspection team for routine scheduled inspections will consist of a chief inspector and one or more assistants. The minimum number on a team is two; more can be assigned depending on the conditions expected at the site at the time of inspection. If only two inspectors are assigned, one will be a geotechnical or civil engineer, and the second will be an ecologist. Prior to each inspection, DOE or its contractor will determine the size of the inspection team. EPA and OEPA will be notified of the scheduled dates and times of these routine inspections so they may send representatives to accompany the inspection team.

The chief inspector will have a degree in civil engineering or soil mechanics, and at least 5 years of experience (or an equivalent amount of experience and education) in projects involving the planning and implementation of earthen structure designs. Where possible, the chief inspector will have made at least one site inspection as an assistant inspector. Assistant inspectors will have degrees and experience complementing the chief inspector, as appropriate, for the expected site conditions. Assistants will have a minimum of 3 years experience (or an equivalent amount of experience and education) in their field. Prior to each inspection, DOE or its contractor will designate the chief inspector and assistants.

### **6.2.1.3 Familiarization with Site Characteristics**

The site inspection team will become familiar with the OSDF site by reviewing this PCCIP, and the most recent inspection report.

### **6.2.1.4 Preparations for Conducting Site Inspections**

After site familiarization, the inspection team must make preparations to conduct the field inspection. This requires the inspection team to:

- Obtain approval to enter adjacent property (if required).
- Assemble the equipment needed to conduct the inspection. Equipment may include such items as cameras, binoculars, tape measure, optical ranging devices, Brunton compass or equivalent, photo scale stick, erasable board, additional signs, and wire flags.

## **6.2.2 Conduct of OSDF Inspection**

The primary objective of the routine scheduled OSDF inspection is to identify potential problems at an early stage prior to the need for significant maintenance or repairs. The inspection team will be guided by a knowledge and understanding of the processes that could adversely change the disposal facility. A fundamental part of the inspection will be the detection of change, and particularly the progressive change, over a number of years due to slow processes. The inspection will include the following:

- Security of fences, gates, and locks, as well as the condition of applicable warning signs.
- General health and density of the vegetation cover.
- Presence of any deep-rooted, woody species.
- Evidence of burrowing by animals on the cover.

## **UNCONTROLLED IF PRINTED**

- Presence, depth, and extent of erosion or surface cracking, indicating possible cap deterioration.
- Visibly noticeable subsidence, either localized or over a large area, especially that will allow for the ponding of water.
- Presence and extent of any leachate seeps.
- Integrity of run-on and runoff control features.
- Integrity of benchmarks.
- Integrity of monitoring wells.

Any findings observed during the inspections will be recorded on the Fernald Preserve OSDF Walkdown Inspection Form (Appendix D in Volume II). Section 6.2.3 below describes the details of the OSDF field inspection process.

### **6.2.3 OSDF Inspection Field Procedures**

#### **6.2.3.1 Adjacent Off-Site Features**

A reconnaissance of the adjacent area within approximately 0.25 mile of the Fernald Preserve property line will be conducted as part of the OSDF inspection. Any evidence of a change in land use will be described. In general, any increase of human activity in the vicinity increases the probability of either inadvertent or purposeful intrusion into the site.

Evaluation will be made of whether the drainage courses in the immediate vicinity of the OSDF pose any threat to the continued integrity of the OSDF. An observation from a prominent topographic feature will be made first, looking for indications of high water levels, areas of active erosion and sedimentation, and potential changes in channel position.

Reaches of adjacent drainage courses will then be walked for approximately 1,000 ft, and notes will be made of unusual or changed sediment deposits, large debris accumulations, manmade or natural constrictions, and recent or potential channel changes. Any such features will be documented with photographs, which will include recognizable landmarks and known objects for scale.

Similarly, any gullies, or locations that appear to be favorable to the development of gullies, will be examined. The portion of the head of the gully will be the most important observation, but the shape of the cross section will give an indication of the degree of the activity, and any interruption in the longitudinal profile may suggest rejuvenation or the presence of a local base level.

#### **6.2.3.2 Monuments**

Each survey monument and cell boundary marker will be examined for evidence of disturbance. If any have been disturbed, a recommendation for their re-establishment and possible protective action will be made.

A walking traverse of the fence will be made to inspect the condition of fencing, gates, locks, and signs. Evidence of deterioration, damage, or vandalism will be noted. Any breaks in the OSDF perimeter fence, or conditions which might lead to a break, will be described. Signs will

## **UNCONTROLLED IF PRINTED**

be evaluated for legibility, proper location, and information. If human intrusion is indicated, an effort will be made to determine whether it was inadvertent or purposeful, and whether it poses any threat to the integrity of the OSDF. Missing, badly damaged, or defaced signs will be replaced in a timely manner.

### **6.2.3.3 Crest and Slopes**

The crest of the OSDF is an obvious vantage point from which to examine the site and surrounding area. Observations, with the aid of binoculars, will be made in all directions from the crest of any features which are anomalous or unexpected, and which may require further inspection. These will be recorded on the inspection form. Examples of such features that might be observed include changes in soil color, distressed vegetation patterns, trails, and patterns of erosion.

When conducting a walkover of a cell cap, the following process is used. Transects, at approximately 50-yard intervals, will be walked along the crest and sideslopes. A search will be made for evidence of differential settling, subsidence, and cracks, if any. The patterns of cracks and evidence of subsidence will be described in an overlay and photographed. The depth and width of the cracks will be measured; notes will be made of any points at which the cracks extend below the outer erosion barrier.

Erosion of the crest is not expected to be a problem because of the low slopes. However, differential settling or sliding along the slopes may cause flow concentrations that may disturb that protection, and thus irregularities will be examined for early evidence of erosion. Evidence of wind erosion, including the presence of ripple marks, partially exhumed vegetation, the presence of pedestal rocks, or obvious lag gravels, will be noted. The OSDF will be vegetated as part of the closure activities; therefore, careful examination will be made to determine areas of distressed or sparse vegetation, or the presence of deep-rooted, woody species.

Changes to the OSDF are most likely to occur in the lower portions of the slopes. Therefore, an examination at the toe of the slope will be a key part of the inspection. A traverse at the toe of the slope will be made during each inspection.

Settlement or sliding, although highly unlikely, will be apparent by the presence of bulges and depressions, cracks, and scarps. If any such features are observed, the extent of the area affected, whether the area is stable or likely to continue moving, and the nature of the movement that is occurring (settlement, planar, or rotational sliding) will be determined. Evidence of related erosion will be noted. Photographs showing detail and area perspective will be taken of any such features observed.

General health of grass cover and signs of stressed or dead grass will be noted. Grass density and coverage will be inspected. Any areas with sparse vegetation or no vegetation will be mapped and described. The presence of any woody vegetation or noxious/invasive plants will be noted.

During these inspections, the slopes will be examined for evidence of animal intrusion, burrowing, changes in vegetation, and human activity. Regularly used trails (human or animal) can concentrate runoff and encourage erosion; any such trails observed will be mapped and described. Any signs of small animal trails or burrows will be noted, and an effort will be made

## **UNCONTROLLED IF PRINTED**

to tentatively identify the species. If animal burrows have been observed during previous inspections, the burrow sites will be examined for indications of current activity.

Erosion of vegetated slopes will first be apparent by the development of rills and rivulets, which extend only part way up the slope. If they are present, their spacing, length, depth, and width will be measured and noted. Particular attention will be placed on evidence of integration of the drainage and development of a master channel. Such a development can, in a short time, evolve into a gully.

Evidence of removal of the cover, extensive vandalism to signs and monuments, or the presence of well-established trails will be described in detail.

### **6.2.3.4 Periphery**

The area adjacent to the OSDF will be examined during the traverse at the toe of the slope. Features to be looked for and described, if present, include erosion channels, accumulations of sediment, evidence of seepage, and signs of animal or human intrusion.

### **6.2.3.5 Diversion Channels**

Each diversion channel will be walked its entire on-property length to determine whether the channels have been functioning, and can be expected to continue as designed. The channels and sideslopes will be examined for evidence of erosion or sedimentation, slides or incipient erosion channels, debris, or growing vegetation. The side slopes of the diversion channels also will be examined for evidence of piping or burrowing by animals, which could lead to sloughing of material into the channel.

For portions of the channel that have riprap (or a concrete spillway), the soil or rock material adjacent to the structure will be examined carefully for evidence of unstable conditions such as piping or destructive currents. The riprap (or concrete) will be examined for evidence of deterioration caused by weathering or erosion. At those portions of the channel slopes that are rock, plant colonization will be slow to develop but will gradually occur. The inspection procedure is expected to record this gradual colonization by noting the extent of vegetation, its location, and its cover density.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **7.0 Unscheduled Inspections**

### **7.1 Introduction**

An unscheduled inspection may be triggered by reports or information that the OSDF site integrity has been or may be compromised. The two types of unscheduled inspections anticipated (follow-up inspections and contingency inspections) are discussed in the following subsections.

### **7.2 Follow-up Inspections**

Follow-up inspections investigate and quantify specific problems encountered during a routine scheduled inspection, special study, or other DOE or other regulatory agency activity. They determine whether processes currently active at or near the site threaten site security or stability, and they evaluate the need for custodial maintenance, repairs, or corrective action. They will also be conducted to evaluate the effectiveness of corrective measures and contingency repairs that have been implemented. Some of the situations that may require a follow-up inspection include:

- Unforeseen subsidence of the OSDF slopes or its foundation.
- Gullying that has cut through or is threatening to cut through the outer cover.
- Slides on the slopes of the OSDF.
- Seepage.
- Change in the position of an adjacent stream channel.
- Indications of rapid headward cutting of a nearby gully.
- Cracks that extend deeply (greater than 6 inches) into the slopes.
- Presence of animal burrows on the OSDF or in its diversion channels.
- Invasion of trees or shrubs onto the vegetation cover of the OSDF.
- Removal of some of the material from the OSDF cover.
- Corrective measures or contingency repair has been implemented.

Follow-up inspections will be made by technical specialists in a discipline appropriate to the problem that has been recognized. That is, if erosion is a problem, the inspectors will be individuals knowledgeable in evaluating erosion, such as a soils scientist or geomorphologist; if settlement or sliding is the problem, a geotechnical engineer; if changes in an adjacent stream, a hydrologist; if plant invasion, a botanist; and the like.

The follow-up inspection begins with an on-site visit to determine the need for definitive tests or studies. Additional visits may be scheduled if more data are needed to draw conclusions and recommend corrective action. If repair or corrective action is warranted, DOE will notify EPA, OEPA, appropriate local officials, and other appropriate local stakeholders.

#### **7.2.1 Objectives and Procedures**

These investigations include all additional investigations or studies necessary to evaluate the continued effectiveness of the OSDF for containment of the encapsulated materials. The

## UNCONTROLLED IF PRINTED

procedures used will be those required in the judgment of DOE and will depend upon the nature and severity of the problem. Representative and appropriate responses for several possible problems are listed in Table 7-1.

Table 7-1. Possible Problem Situations and Responses

Situation	Representative Response
Gullying on slopes	Measurement or mapping not done as part of routine scheduled inspection will be done.  The primary objective is to determine the factors that led to the initiation of the gully. This might involve evaluation of the erosion barrier design parameters or site drainage, and the role of sheet erosion, rill formation, slides, or burrows. The product will be a recommendation for maintenance and preventive measures, if required.
Headward gully erosion	Procedures to determine the rate of headcutting will be established and implemented.  A line of reference stakes (capped rebar) upstream from the gully head is a simple and effective method of measuring change in the position of the gully; comparison of periodic aerial photographs might also be useful. An understanding of why dissection is occurring and any limiting conditions will be sought. The product will be a recommendation for maintenance and preventive measures, if required.
Invasive vegetation	Species identification and abundance will be determined if large trees or shrubs invade the vegetation cover of the OSDF.  If deep-rooted species are present, analysis of plant material for radionuclides and heavy metals might be done. An eradication program might be recommended; if so, cover repair would also be undertaken.
Creep	The occurrence of creep can be determined by setting rows of stakes parallel to contours on the side slopes, which will gradually tilt downslope if creep is occurring. The rate of creep can best be determined by marking a number of rock fragments on the slopes, and accurately determining their location in relation to additionally emplaced survey monuments over a number of years.
Landslides	Upon evidence of a slide or debris flow, an additional investigation will be made.  The area and volume affected, the type of movement, and causal factors will be determined. Drilling, hand augering, or excavation might be necessary. The product will be a recommendation for what remedial and preventive maintenance are required.

### 7.2.2 Schedule and Reporting

Once a routine scheduled inspection has identified a concern, DOE will notify EPA and OEPA and begin a follow-up inspection by submitting a preliminary assessment of the concern and a plan for follow-up inspection. Upon review by EPA and OEPA, DOE will implement the inspection plan. Once the follow-up inspection is completed, DOE will recommend maintenance or other appropriate action to be performed, as needed.

### 7.3 Contingency Inspections

Contingency inspections are unscheduled situation-unique inspections ordered by DOE when it receives information indicating that site integrity has been or may be threatened. Events that could trigger contingency inspections include severe vandalism, intrusion by humans or livestock, severe rainstorms, or unusual events of nature such as tornadoes or earthquakes.

## **UNCONTROLLED IF PRINTED**

Events that have caused severe damage to the OSDF or that pose an immediate threat to human health and the environment will be immediately reported to EPA and OEPA.

A preliminary inspection/assessment report of each contingency inspection triggered by such an unusual event will be submitted to EPA and OEPA within 60 days of the initial report that damage or disruption has occurred at the OSDF site. At a minimum, this report will include:

- Problem/event description.
- Preliminary assessment of the custodial maintenance or repair or corrective action required.
- Conclusions and recommendations.
- Assessment data, including field and inspection data and photographs.
- Names and qualifications of the field inspectors.

A copy of the report and all other data and documentation from such a contingency inspection will be maintained in the permanent site file and will be submitted to EPA and OEPA.

After EPA and OEPA have reviewed the preliminary inspection/assessment report, DOE will submit a corrective action plan (for those events requiring corrective action) for EPA review and approval in accordance with a schedule to be determined on a case-by-case basis by consultation between DOE, EPA, and OEPA. Based on the findings of these reports, DOE will implement the corrective action.

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## 8.0 Custodial Maintenance and Contingency Repair

### 8.1 Introduction

This section explains the procedures to be used by DOE to determine when maintenance or contingency repairs are needed at the OSDf. In general, the decision to conduct maintenance or contingency repair will be based on the results of follow-up site inspections or contingency site inspections (refer to Section 7.0 for both), which assess problems at the site.

This section will establish maintenance activities and their frequency, fulfilling the requirements to do so established in the appropriate regulations (Ohio hazardous waste rules OAC 3745-66-18[A] and [C] in lieu of federal hazardous waste regulations 40 CFR §§265.118[c][2] and 264.118[b][2]). The following subsections address custodial maintenance of the security system (e.g., fencing, gates, signage) and the impacted materials containment system.

#### 8.1.1 Security System

Custodial maintenance of the security system may require the repair and replacement of sections of fences, gates, locks, and signs due to normal wear, severe weather conditions, or vandalism.

#### 8.1.2 Impacted Materials Containment System

Custodial maintenance of the impacted materials containment system will require:

- Maintaining the integrity and effectiveness of the final cover, including making repairs to the cap/cover as necessary to correct the effects of settling, dead vegetation, subsidence, erosion, leachate outbreaks, or other events (Ohio solid waste rule OAC 3745-27-14[A], and Ohio hazardous waste landfill rule OAC 3745-68-10 in lieu of federal hazardous waste regulation 40 CFR §265.310).
- Mowing.
- Seeding and mulching repaired areas or areas that are lacking required vegetation cover.
- Maintaining surface water run-on and runoff drainage features to prevent erosion of, or other damage to, the final cover (Ohio solid waste rule OAC 3745-27-14[A], and Ohio hazardous waste landfill rule OAC 3745-68-10 in lieu of federal hazardous waste regulation 40 CFR 265.310).
- Controlling burrowing animals.

## 8.2 Conditions Requiring Maintenance or Repair Actions

Inspection reports and monitoring results will be reviewed, and site conditions will be compared from inspection to inspection so that trends of changing conditions can be determined.

Identifiable trends will provide a means for predicting when maintenance or repairs will be needed. DOE, in conjunction with EPA and OEPA, will decide whether to initiate custodial maintenance or contingency repair. After the decision to initiate maintenance or a contingency repair, a statement of work will be prepared for the work to be performed. The maintenance or repair action required to correct a site problem will depend on the nature of the problem. Although the details of maintenance or repair actions that may be needed throughout the post-closure care period cannot be reliably predicted in advance, examples of conditions that

**UNCONTROLLED IF PRINTED**

may require custodial maintenance or that may trigger contingency repairs are outlined in Table 8-1, along with the appropriate actions.

When compared with contingency repairs, custodial maintenance is expected to be generally less costly, smaller in scale, and more frequent in occurrence. In contrast, contingency repairs are very unlikely to be needed; however, repair costs may be more substantial due to the size of the workforce and the technical skills required for repairs.

*Table 8-1. Examples of Conditions That May Require Custodial Maintenance or Contingency Repair*

Condition	Appropriate Actions
<b>Custodial Maintenance</b>	
1. Damage due to normal wear, severe weather conditions, or vandalism to survey control monuments.	<ul style="list-style-type: none"> <li>Reestablish survey control monuments.</li> </ul>
2. Growth of woody species such as deep-rooted shrubs or trees on the cover.	<ul style="list-style-type: none"> <li>Remove deep-rooted shrubs or trees from the cover.</li> <li>Backfill root hole with soil, compact to reestablish grade, and reestablish the regular vegetative cover via seeding.</li> </ul>
3. Development of animal burrows on the cover or in the diversion channels.	<ul style="list-style-type: none"> <li>Control or eradication of burrowing animals.</li> <li>Backfill burrow hole with soil, compact to reestablish grade, and reestablish the regular vegetative cover via seeding.</li> <li>If the problem becomes extensive, the services of a professional exterminator will be retained.</li> </ul>
<b>Contingency Repair</b>	
4. Development of rills or gullies deeper than 6 inches with near-vertical walls and no vegetative cover.	<ul style="list-style-type: none"> <li>Fill in gullies or rills with soil, compact to reestablish grade, and reestablish the regular vegetative cover via seeding and mulching<sup>1,2</sup>.</li> </ul>
5. Surface rupture where the dimensions of the cracks are larger than 1 inch wide by 10 ft long by 1 ft deep, which would indicate severe shrinkage of cover materials or differential settlement.	<ul style="list-style-type: none"> <li>Reconstruction of slope segments where slumping, mass wasting, liquefaction, or other severe events have occurred.</li> <li>Root cause analysis, evaluate corrective actions and preventive measures, implement recommended actions<sup>1,2</sup>.</li> </ul>
6. Instability of the slopes to the point where mass wasting or liquefaction has occurred due to earthquakes, differential settlement, or other causes.	<ul style="list-style-type: none"> <li>Reconstruction of slope segments where slumping, mass wasting, liquefaction, or other severe events have occurred.</li> <li>Root cause analysis, evaluate corrective actions and preventive measures, implement recommended actions<sup>1,2</sup>.</li> </ul>
7. Encroachment of stream channels or gullies into the disposal facility or its buffer area.	<ul style="list-style-type: none"> <li>Reconstruction of cover or other features<sup>1</sup>.</li> <li>Root cause analysis, evaluate corrective actions and preventive measures, implement recommended actions<sup>1,2</sup>.</li> </ul>
8. Flood damage to the site in the form of new channels, or debris deposits.	<ul style="list-style-type: none"> <li>Reconstruction of cover or other features<sup>1</sup>.</li> <li>Root cause analysis, evaluate corrective and preventive measures/actions, implement recommended actions<sup>1,2</sup>.</li> </ul>
9. Human intrusion has resulted in removal of cover materials.	<ul style="list-style-type: none"> <li>Reconstruction of cover or other features<sup>1</sup>.</li> <li>Root cause analysis, evaluate corrective actions and preventive measures, implement recommended actions<sup>1,2</sup>.</li> </ul>
<sup>1</sup> This might involve general regrading in the area to modify drainage and/or the use of temporary drainage structures and controls to reduce runoff velocities until vegetation has been reestablished.	
<sup>2</sup> Severe or repetitive occurrences might best be addressed via a corrective action (refer to Section 10.0).	

### 8.3 Maintenance and Repair

The following subsections discuss custodial maintenance for the security system, the cap and final cover, and the run-on and runoff drainage features.

#### 8.3.1 Security System

The security system established for the OSDF includes fencing, gates, locks, and warning signs. The routine custodial maintenance and repairing of the security systems include conducting visual inspections and repairing or replacing affected components. Possible problems include deterioration, erosion, or frost heave of fence post anchors resulting in fence damage. Normal wear, deterioration, and vandalism are also possible on fencing, gates, locks, and signs.

Table 8-2 presents the inspection and maintenance activities for these features.

*Table 8-2. Site Security System Inspection and Maintenance Activities*

<b>Component</b>	<b>Inspection Frequency</b>	<b>Condition</b>	<b>Remedy</b>	<b>Maintenance</b>
Fence	Quarterly	<ul style="list-style-type: none"> <li>• Damaged fence fabric or posts</li> <li>• Under-fence erosion</li> </ul>	<ul style="list-style-type: none"> <li>• Repair or replace as necessary</li> <li>• Repair erosion or extend fence as necessary</li> </ul>	<ul style="list-style-type: none"> <li>• Repair or replace as necessary</li> <li>• Provide erosion and sedimentation control</li> </ul>
Gates	Quarterly	<ul style="list-style-type: none"> <li>• Tampering or damage to locks</li> </ul>	<ul style="list-style-type: none"> <li>• Repair or replace as necessary</li> </ul>	<ul style="list-style-type: none"> <li>• Install proper locks</li> </ul>
Warning signs	Quarterly	<ul style="list-style-type: none"> <li>• Damaged or missing warning signs</li> </ul>	<ul style="list-style-type: none"> <li>• Repair or replace as necessary</li> </ul>	<ul style="list-style-type: none"> <li>• Install or re-attach warning signs to fence or gates</li> </ul>
<b>Notes:</b> 1. Site security system shall be inspected after the occurrence of major earthquakes (refer to Section 10.3).				

#### 8.3.2 Cap and Final Cover System

The routine custodial and preventive maintenance of the cap and final cover includes the visual inspection of benchmark integrity, the upkeep of the vegetation cover, general mowing, the clearing of debris, the removal of woody weeds and seedlings, and reseeding. These activities will be performed as needed as identified during the routine inspections (refer to Section 6.0). Table 8-3 presents the custodial maintenance schedule for these features. When excessive localized depression is indicated by persistent water ponding, repairs will be performed.

**UNCONTROLLED IF PRINTED**

Table 8-3. Drainage Channel System Inspection and Maintenance Activities

<b>Component</b>	<b>Inspection Frequency</b>	<b>Condition</b>	<b>Remedy</b>	<b>Maintenance</b>
Drainage channels	Quarterly	<ul style="list-style-type: none"> <li>• Free-flowing</li> <li>• Clogging by sediment or debris</li> <li>• Scouring, other evidence or erosion, or other damage</li> </ul>	<ul style="list-style-type: none"> <li>• None—desired condition</li> <li>• Remove accumulated debris or sediment</li> <li>• Repair damage</li> </ul>	<ul style="list-style-type: none"> <li>• None—desired condition</li> <li>• Remove accumulated debris or sediment</li> <li>• Maintain as-built or undertake corrective action</li> </ul>
Grade control structures	Quarterly	<ul style="list-style-type: none"> <li>• Free-flowing</li> <li>• Clogging by sediment or debris</li> <li>• Scouring, undermining, other evidence of erosion, or other damage</li> </ul>	<ul style="list-style-type: none"> <li>• None—desired condition</li> <li>• Remove accumulated debris or sediment</li> <li>• Repair damage</li> </ul>	<ul style="list-style-type: none"> <li>• None—desired condition</li> <li>• Remove accumulated debris or sediment</li> <li>• Remove emergent vegetation</li> <li>• Maintain as-built or undertake corrective action</li> </ul>
Culverts	Quarterly	<ul style="list-style-type: none"> <li>• Free-flowing</li> <li>• Clogging by sediment or debris</li> <li>• Other damage</li> </ul>	<ul style="list-style-type: none"> <li>• None—desired condition</li> <li>• Remove accumulated debris or sediment</li> <li>• Repair damage</li> </ul>	<ul style="list-style-type: none"> <li>• None—desired condition</li> <li>• Remove accumulated debris or sediment</li> <li>• Maintain as-built or undertake corrective action</li> </ul>
<b>Notes:</b> 1. Drainage system shall be inspected after the occurrence of major earthquakes (refer to Section 11.3).				

The native seed mixes used on the OSDF cover benefit from periodic mowing, baling, and prescribed burning. Mowing will normally occur in the spring at a time when the final cover system is reasonably dry. Mowing will not occur on a cap if it is determined that the mowing will have an adverse effect on the vegetation. Mowing equipment shall not cause the rutting or disturbance of topsoil. If the cell cap cannot be mowed in the spring, then the mowing will be postponed until the following fall. The cell caps will be mowed and baled on a 3-year rotation (cell caps 1, 2, and 3 the first year; cells 4, 5, and 6 the second; then cells 7 and 8 the third). Additional mowing may take place as a means of weed control or as a method to promote native grass establishment. As described in Section 3.2.1 of Volume II, prescribed burning would be a preferred management alternative to mowing and baling.

Woody reproduction that develops on the OSDF final cover systems shall be eliminated by hand, mechanically, chemically, or by fire. Many woody species maintain their root systems when cut and will rapidly resprout. The root system continues to grow through repeated cuttings and can become extensive. For this reason, chemical herbicides (spraying of individual trees and shrubs) or fire shall be preferred for woody species control, as eradication of the whole plant including the root system is a primary goal. A combination of mechanical and chemical treatment where cut stumps are treated with herbicide to prevent resprouting may also be considered. DOE will evaluate the most effective method for managing woody species vegetation on the OSDF based on available equipment, expertise, and cost.

## **UNCONTROLLED IF PRINTED**

Inspection/investigation, corrective maintenance, or contingency repair of the cover may be required for one of the following reasons:

- Formation of localized depressions caused by subsidence of the emplaced impacted materials.
- Progressive deterioration of the cover caused by erosion.
- Destruction of a portion of the cover by some gross physical event.

Settlement is not expected to be a significant problem, as the OSDF contains little putrescible waste. In the case of localized depressions, it will likely be necessary to strip existing topsoil in the affected area and stockpile it in an adjacent area. General soil would then be used to fill the settled area to restore uniform grades in order to promote proper drainage. Topsoil would then be replaced. Where this phenomenon occurs in the upper cover, simple regrading and filling of the depression with compacted fill will likely be satisfactory. All affected areas will be reseeded and mulched immediately upon completion of repairs.

The following are typical steps to repair excessive settlement:

- [1] When maintenance is required, the amount of soil needed should be estimated, and arrangements for stockpiling or delivery should be made in advance to minimize the amount of time the repair area is disturbed.
- [2] Install temporary silt control and surface water controls.
- [3] Remove and stockpile topsoil and vegetative soil layers. Segregate as necessary.
- [4] Vegetative soil material can be added to the existing vegetative soil layer portion of the cover, or the existing vegetative soil material can be excavated, and appropriate fill placed to bring the area to acceptable grades.
- [5] Document vegetative soil layer placement and compaction in accordance with the original construction quality assurance program (GeoSyntec 2001a).
- [6] Replace vegetative and topsoil layers, and revegetate. Care should be taken during final grading to ensure that the area is tracked perpendicular to the slope to minimize channeling by surface water.

Progressive deterioration of the cover caused by erosion will likely be addressed by reconstruction of the cover in that area and by improvement of the erosion problem. This may involve some general regrading in the area to modify drainage and the use of temporary drainage structures and controls to reduce runoff velocities until vegetation has been reestablished.

## **UNCONTROLLED IF PRINTED**

### **8.3.3 Run-on and Runoff Drainage Features**

Diversion and drainage channels surrounding the OSDF collect runoff and divert run-on. The channels may require mowing and, from time to time, reshaping to control the runoff. Vegetation growth in and around diversion channels will be maintained by periodic mowing and clearing. Mowing of the vegetation on the same schedule as the OSDF final cover system (refer to Section 8.3.2) will ensure proper maintenance of the channels. Any large plants or seedlings will be removed to prevent sediment buildup and damage caused by roots. Reseeding and mulching will be performed as needed in bare areas to prevent excessive erosion.

During the routine inspections (refer to Section 6.0), the drainage channels will be examined for erosion. Any problems identified by inspections will be repaired to conform as closely as possible to the original construction specifications and drawings. To the extent possible, appropriate measures will be taken to prevent problems from reoccurring.

Maintenance of the diversion channel system might be needed in areas of excessive sediment buildup, sloughing of banks, or plugging of culverts due to sediment and vegetation buildup. The grade control structures—rocks placed at an inlet, outlet, or along the length of a drainage channel—might also require maintenance for sediment and vegetation buildup. Appropriate actions will be taken to address these situations, including cleaning out and re-contouring channels, repairing banks, and unplugging culverts. Table 8-3 presents the inspection and custodial maintenance schedule for these features.

## **9.0 Post-Closure Corrective Actions**

### **9.1 Introduction**

Previous sections of this plan address maintenance or repair activities for the OSDF, which are directed at routine or custodial problems. This section discusses at the conceptual level the steps necessary to evaluate and correct situations of more significant concern. Those steps include:

- Preliminary assessment of the situation.
- Development of a technical approach and work plan.
- Identification of alternatives.
- Evaluations of alternatives.
- Identification of the preferred alternative.
- Public involvement.
- Selection of the corrective action/response action alternative.
- Implementation of the selected alternative.

### **9.2 Future Corrective Actions and Response Actions**

The following points are important to keep in mind, based upon legislation and regulations in effect at the time of formulation of this plan:

- The Fernald Preserve has been listed on the National Priorities List.
- Response actions under CERCLA have been and are being conducted at the Fernald Preserve to remediate the threats (or potential threats) to human health and the environment from past releases and potential releases at the site.
- Regardless of whether the Fernald Preserve is deleted from the National Priorities List in the future, any future corrective actions/response actions would be conducted as a response action under CERCLA, either as a removal action or a remedial action as appropriate to the situation.

The inspection and maintenance activities identified throughout this plan will be the mechanism to identify, and address as appropriate, situations needing maintenance or repair activities of a custodial or routine nature. DOE will consult with EPA and OEPA whenever it identifies a situation believed worthy of more significant attention.

When there is a situation that requires significant attention, the first focus will be identification of the perceived problem (“problem statement”). This should include, as possible based upon existing information, a preliminary assessment of the nature of the problem and its threats to human health and the environment. This step is intended to be a remedial or removal site evaluation, as those terms are currently used in the National Oil and Hazardous Substances Pollution Contingency Plan (40 CFR 300). The intended outcome of this first step is an assessment of the seriousness of the situation and a determination of the time-criticalness of response action. From this, the appropriate course of CERCLA response action (removal action or remedial action) will be decided.

**UNCONTROLLED IF PRINTED**

Regardless of removal or remedial course of action, the next step would be development of a technical approach, including identification of objectives, activities to fulfill those objectives, and associated time frames. The embodying document would vary depending on the course of CERCLA response action identified as appropriate:

- [1] If a time-critical removal action is necessary, then a removal action work plan will be required.
- [2] If a non-time-critical removal action is necessary, then an engineering evaluation/cost analysis will be required.
- [3] If a remedial action is necessary, then a work plan for a focused feasibility study will be required.

For numbers 2 and 3, above, the process will include the following:

- Identification of alternatives.
- Evaluation of alternatives.
- Identification of the preferred alternative.
- Public involvement.
- Selection of the corrective action/response action alternative.
- Implementation of the selected alternative.

## **10.0 Emergency Notification and Reporting**

### **10.1 Introduction**

The OSDF was designed to comply with EPA and OEPA standards with minimum maintenance and oversight during the post-closure care period. However, unforeseen events could create problems that could affect the disposal facility's ability to remain in compliance with these standards. Therefore, DOE has requested notification from local, state, and federal agencies of discoveries or reports of any purposeful intrusion or damage at the site, as well as the occurrence of earthquakes, tornadoes, or floods in the area of the OSDF. Such notification would trigger a contingency inspection, as discussed in Section 7.3.

### **10.2 Agency Agreements**

LM issued letters to the Hamilton County sheriff's department, the Butler County sheriff's department, and the Ross, Crosby, and Morgan Township police and fire officials, requesting that they notify LM if they observe any unauthorized human intrusion or unusual natural event.

LM issued a letter to the Ohio Earthquake Information Center, located at Alum Creek State Park in Delaware County, Ohio, requesting that they notify LM in the event of an earthquake in the vicinity of the Fernald Preserve.

LM will monitor emergency weather notification system announcements and has requested notification from the National Weather Service (either Wilmington or Cincinnati) of severe weather alerts.

To notify LM of site concerns, the public may use the 24-hour security telephone numbers monitored at the DOE facility in Grand Junction, Colorado. The 24-hour security telephone numbers will be posted at site access points and other key locations on the site.

#### **THE 24-HOUR EMERGENCY NUMBER**

**877-695-5322**

### **10.3 Unusual Occurrences and Earthquakes**

As the major portion of the OSDF is within Hamilton County, DOE has requested that the Hamilton County sheriff's department notify DOE of any unusual occurrences in the area of the OSDF that may affect surface or subsurface stability, as well as any reports of vandalism or unauthorized entry. DOE has also requested the same from the Butler County sheriff's department.

Because the Fernald Preserve and the OSDF are not in an active seismic zone and are not situated on or constructed of lithified earth materials, the probability of occurrence of seismic events that could damage the OSDF is slim. If they do occur, seismic events that could

## **UNCONTROLLED IF PRINTED**

potentially damage the OSDF would manifest themselves in numerous ways in the area, the most apparent of which are:

- Rupture of potable water supply lines.
- Rupture of natural gas supply lines.
- Rupture of natural gas transmission lines.

LM has issued a letter to the Ohio Earthquake Information Center requesting notification in the event of an earthquake in the vicinity of the site.

LM issued letters to and requested acknowledgement from the Hamilton County sheriff's department, the Butler County sheriff's department, and both Ross and Crosby Township police and fire officials to notify LM in the event of unauthorized human intrusion or unusual natural events. All of the above-mentioned agencies have been asked to contact LM should an event occur that might affect the control of known contaminants or the condition of the OSDF. LM will also monitor emergency weather notification system announcements.

### **10.4 Meteorological Events**

DOE has also requested that the National Weather Service (either the Wilmington, Ohio, or Cincinnati, Ohio, office) notify DOE whenever a flash-flood or tornado warning in Hamilton or Butler Counties has been issued.

## **11.0 Community Relations**

The public played an important role in the remediation process at the Fernald Preserve, and the stakeholders remain involved in legacy management. DOE holds regularly scheduled meetings with various groups and the general public to share information on the current site status and progress. The public and other key stakeholders will remain fully involved in the legacy management of the site, and DOE will continue to conduct public meetings as long as the public continues to show an active interest. Additional information on the history of the public's involvement is included in Section 5.2 of the IC Plan (Volume II of the LMICP) and in the Community Involvement Plan (Attachment E to the LMICP).

Another process involving the public is the CERCLA 5-year review. The CERCLA 5-year reviews will focus on the protectiveness of the remedies associated with each of the five OUs. Following the review, a report will be submitted to EPA. The public will also be able to review these reports and provide feedback. In addition, the data and documentation used for the report will be accessible, either electronically or in hard copy.

Reporting to the public and stakeholders will occur on a regular basis. These requirements are further defined in Section 4.4 of the Legacy Management Plan (Volume I of the LMICP), in Section 5.1.3 of the IC Plan (Volume II of the LMICP), and in the Community Involvement Plan (Attachment E to the LMICP).

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

**UNCONTROLLED IF PRINTED**

**12.0 References**

40 CFR 300. U.S. Environmental Protection Agency, "National Oil and Hazardous Substances Pollution Contingency Plan," *Code of Federal Regulations*, July 1, 2009.

ASPRS (American Society of Photogrammetry and Remote Sensing), 1980. *Manual of Photogrammetry*, Fourth Edition, Falls Church, Virginia.

DOE (U.S. Department of Energy), 1995a. *Final Record of Decision for Remedial Actions at Operable Unit 2*, 7021 U-004-501.3, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, May.

DOE (U.S. Department of Energy), 1995b. *Final Remedial Design Work Plan for Remedial Actions at Operable Unit 2*, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, December.

DOE (U.S. Department of Energy), 1995c. *Pre-design Investigation and Site Selection Report for the On-Site Disposal Facility*, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, July.

DOE (U.S. Department of Energy), 1996a. *Final Record of Decision for Remedial Actions at Operable Unit 5*, 7478 U-007-501.4, Final, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, January.

DOE (U.S. Department of Energy), 1996b. *Operable Unit 3 Record of Decision for Final Remedial Action* Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, August.

DOE (U.S. Department of Energy), 1998. *Permitting Plan and Substantive Requirements for the On-Site Disposal Facility*, 20100-PL-0001, Revision 0, PCN 1, Fernald Environmental Management Project, Fernald Area Office, Cincinnati, Ohio, June.

DOE (U.S. Department of Energy), 2001. *Systems Plan; Collection and Management of Leachate for the On-Site Disposal Facility*, 20111-PL-0001, Revision 0, Fluor Fernald, Fernald Area Office, Cincinnati, Ohio.

GeoSyntec, 1997. *Final Design Criteria Package; On-Site Disposal Facility*, Revision 0, Fernald Environmental Management Project, U.S. Department of Energy Fernald Area Office, Cincinnati, Ohio, May.

GeoSyntec, 2001a. *Construction Quality Assurance Plan; On-Site Disposal Facility*, 20100-PL-0006, Revision 1, Fluor Fernald, U.S. Department of Energy Fernald Area Office, Cincinnati, Ohio, May.

GeoSyntec, 2001b. *Surface Water Management and Erosion Control Plan; On-Site Disposal Facility*, 20100-PL-0004, Revision 1, Fluor Fernald, U.S. Department of Energy Fernald Area Office, Cincinnati, Ohio, August.

**UNCONTROLLED IF PRINTED**

GeoSyntec, 2005. *Impacted Materials Placement Plan; On-site Disposal Facility*, 20100-PL-007, Revision 4, PCN 2, prepared for Fernald Environmental Management Project, U.S. Department of Energy, Fernald Area Office, Cincinnati, Ohio, June.

GeoSyntec, 2006. *Work Plan for Removal and In-Place Abandonment of the OSDF Cell 1 Final Cover Monitoring System*, prepared for Fernald Closure Project, U.S. Department of Energy, Fernald Area Office, Cincinnati, Ohio, March.

O.A.C. 3745-27, "Ohio Solid Waste and Infectious Waste Regulations," *Ohio Administrative Code*, November 1, 2007.

O.A.C. 3745-54, "General Facility Standards-New Facilities," *Ohio Administrative Code* December 7, 2004.

O.A.C. 3745-66, "Closure and Post-Closure under Interim Standards," *Ohio Administrative Code* December 7, 2004.

O.A.C. 3745-68. "Landfills, Incinerators, Thermal Treatment, Miscellaneous Units," *Ohio Administrative Code* December 7, 2004.

ODNR (Ohio Department of Natural Resources), 1996. *Rainwater and Land Development: Ohio's Standards for Storm Water Management, Land Development, and Urban Stream Protection*, Second Edition, ODNR Division of Soil and Water Conservation, Columbus, Ohio.

**UNCONTROLLED IF PRINTED**

**Attachment C**

**Groundwater/Leak Detection and Leachate Monitoring Plan**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## Contents

Acronyms and Abbreviations .....	iii
1.0 Introduction .....	1-1
1.1 Overview of the OSDF .....	1-2
1.2 Program Overview .....	1-5
1.3 Plan Organization .....	1-6
1.4 Related Plans.....	1-6
2.0 OSDF Area Geology and Hydrogeology .....	2-1
2.1 Introduction.....	2-1
2.2 OSDF Area Geology.....	2-1
2.3 Hydrogeologic Conditions.....	2-3
2.4 Existing Contamination .....	2-5
3.0 Regulatory Analysis and Strategy .....	3-1
3.1 Regulatory Analysis Process and Results.....	3-1
3.2 OSDF Monitoring Regulatory Compliance Strategy.....	3-2
3.2.1 Leak Detection Monitoring Compliance Strategy .....	3-3
3.2.1.1 Alternate Well Placement .....	3-3
3.2.1.2 Alternate Statistical Analysis.....	3-4
3.2.1.3 Alternate Parameter Lists.....	3-4
3.2.1.4 Alternate Sampling Frequency .....	3-7
3.2.2 Leachate Monitoring Compliance Strategy.....	3-7
4.0 Leak Detection Monitoring Program .....	4-1
4.1 Introduction.....	4-1
4.2 Monitoring Objectives .....	4-3
4.3 Leak Detection Monitoring Program Elements .....	4-3
4.3.1 Overview .....	4-3
4.3.2 Monitoring the Engineered Layers within the OSDF .....	4-5
4.3.2.1 Leachate Collection System.....	4-5
4.3.2.2 Leak Detection System .....	4-5
4.3.3 Monitoring Perched Groundwater Beneath the Facility .....	4-6
4.3.4 Monitoring the GMA.....	4-6
4.3.4.1 Siting of the GMA Monitoring Wells.....	4-7
4.3.4.2 VAM3D Flow Model and SWIFT Transport Model Evaluation of Well Locations .....	4-7
4.4 Sample Collection.....	4-10
4.4.1 HTW and GMA Monitoring.....	4-10
4.4.1.1 Baseline Conditions in the Perched Groundwater and GMA	4-13
4.4.2 LCS/LDS Monitoring .....	4-13
4.4.2.1 Flow Monitoring in the LCS and LDS .....	4-13
4.4.2.2 Water Quality Monitoring in the LCS and LDS.....	4-14
4.5 Leak Detection Data Evaluation Process.....	4-15
5.0 Leachate Management Monitoring Program.....	5-1
5.1 Leachate Treatment and Discharge Management.....	5-1
6.0 Reporting .....	6-1
6.1 Routine Reporting.....	6-1
6.2 Notifications and Response Actions .....	6-1
7.0 References .....	7-1

## Figures

Figure 1-1. OSDF Liner System with HTW at the Drainage Corridor .....	1-4
Figure 4-1. OSDF Liner System with HTW at the Drainage Corridor .....	4-2
Figure 4-2. OSDF Well Locations .....	4-8
Figure 4-3. Post-Remediation Scenario .....	4-9
Figure 4-4. SWIFT Modeling with Uranium Loading—55 Years.....	4-11
Figure 4-5. SWIFT Modeling with Technetium-99 Loading—30 Years .....	4-12

## Tables

Table 1-1. Facility Performance Key Monitoring Parameters .....	1-2
Table 2-1. Mean Uranium Value <sup>1</sup> for Certification Units at or near the HTWs, Expected Groundwater Uranium Concentrations Based on the Reported Range for Uranium Leach Coefficients (K <sub>1</sub> ) in Low-Leachability Soil <sup>2</sup> , Maximum HTW Concentration <sup>3</sup> , and Measured Perched-water Concentration prior to OSDF Construction <sup>4</sup> .....	2-6
Table 6-1. Notification and Response Actions .....	6-2

## Appendixes

Appendix A	On-Site Disposal Facility Applicable or Relevant and Appropriate Requirements and Other Regulatory Requirements
Appendix B	Project-Specific Plan for the On-Site Disposal Facility Monitoring Program
Appendix C	Fernald Preserve Data Qualifier Objectives, Monitoring Program for the On-Site Disposal Facility
Appendix D	Leachate Management System for the On-Site Disposal Facility
Appendix E	Selection Process for Site-Specific Leak Detection Indicator Parameters

## Acronyms and Abbreviations

ANOVA	analysis of variance
ARARs	applicable or relevant and appropriate requirements
CAWWT	converted advanced wastewater treatment facility
CFR	<i>Code of Federal Regulations</i>
cm/s	centimeters per second
DOE	U.S. Department of Energy
EPA	U.S. Environmental Protection Agency
FRL	final remediation level
ft	foot/feet
GMA	Great Miami Aquifer
gpad	gallons per acre per day
gpm	gallons per minute
GWLMP	Groundwater/Leak Detection and Leachate Monitoring Plan
HDPE	high-density polyethylene
HTW	horizontal till well
IEMP	Integrated Environmental Monitoring Plan
$K_d$	distribution coefficient
LCS	leachate collection system
LDS	leak detection system
mg/L	milligrams per liter
NPDES	National Pollutant Discharge Elimination System
OAC	<i>Ohio Administrative Code</i>
OEPA	Ohio Environmental Protection Agency
OSDF	on-site disposal facility
OU	Operable Unit
PCBs	polychlorinated biphenyls
PLS	permanent lift station
RA	remedial action
RCRA	Resource Conservation and Recovery Act
RI	remedial investigation
RI/FS	remedial investigation/feasibility study
SWIFT	Sandia Waste Isolation Flow and Transport

**UNCONTROLLED IF PRINTED**

TDS total dissolved solids  
UMTRCA Uranium Mill Tailings Radiation Control Act  
VAM3D Variably Saturated Analysis Model in 3 Dimensions  
WAC Waste Acceptance Criteria

## **1.0 Introduction**

This document presents the Groundwater/Leak Detection and Leachate Monitoring Plan (GWMLP) for the on-site disposal facility (OSDF) at the U.S. Department of Energy's (DOE's) Fernald Preserve. This plan is a support plan for the OSDF, and it is required by the *Remedial Action (RA) Work Plan for the On-Site Disposal Facility* (DOE 1996d). Revision 0 of the GWMLP was issued in August 1997 (DOE 1997), Revision 1 was issued in April 2005 (DOE 2005b), and draft final Revision 2 was issued in January 2006 (DOE 2006a). The GWMLP is now integrated into the *Comprehensive Legacy Management and Institutional Controls Plan* and is no longer a stand-alone document with its own review and revision cycle. It will be reviewed and, if necessary, revised each September.

The monitoring program comprises two primary components: (1) a leak detection component, which provides information to verify the ongoing performance and integrity of the OSDF and its impact on groundwater, and (2) a leachate monitoring component, which satisfies regulatory requirements for leachate collection and management. Two groundwater zones are monitored beneath the facility: the Great Miami Aquifer (GMA) (a water table found at depths ranging from 40 to 90 feet [ft] below ground surface near the OSDF) and the perched groundwater in the glacial till overlying the GMA.

Monitoring for a leak from the OSDF using water-quality data alone is challenging in that:

- The low-permeability clay beneath the facility does not readily transmit water.
- Near the OSDF, contaminant concentrations exceed background levels in surface and subsurface soil, in perched groundwater in the glacial till, and in the GMA.
- Post-construction geochemistry and constituent concentrations in water beneath the OSDF have not reached steady-state conditions, and these fluctuations complicate data interpretations.
- There is evidence that at least one of the horizontal till wells (HTWs) is in hydraulic communication with a surface water drainage ditch on the west side of the OSDF.

The key to a plausible potential-leak determination is the presence of adequate hydraulic head within a cell of the OSDF (i.e., action leakage rate in the leak detection system [LDS]). A water quality change in either an HTW or GMA well can only be attributed to a potential leak from a cell in the OSDF if it is accompanied by a corresponding action flow rate in the LDS of that cell.

This OSDF monitoring plan has been developed to meet the regulatory requirements for the first tier of a three-tiered monitoring strategy required for engineered disposal facilities (i.e., [1] detection, [2] assessment, and [3] corrective action monitoring strategy). Consistent with this three-tiered requirement, follow-up groundwater quality assessment and corrective action monitoring plans will be developed and implemented as necessary.

The DOE Office of Legacy Management is responsible for OSDF monitoring, maintenance, and reporting. This plan will be revised, as necessary, to reflect approved updates to monitoring and reporting requirements and will continue to be used through the post-closure period. Table 1-1 provides a summary of key monitoring parameters.

**UNCONTROLLED IF PRINTED**

Table 1-1. Facility Performance Key Monitoring Parameters

Parameter Type	Parameter Description	Basis	Monitoring Frequency	Action Level	Action Level Units	Regulatory Status <sup>1</sup>
Flow Volume	LDS Flow Volume	Each Cell	Daily	20	gpad <sup>2</sup>	Approved
	LCS Flow Volume	Each Cell	Daily	N/A	N/A	Approved
	LCS Containment Pipe Monitoring	Each Cell	Weekly	2270	mL	Approved
	LDS Containment Pipe Monitoring	Each Cell	Weekly	2650	mL	Approved
	RLCS Containment Pipe Monitoring	Each Cell	Weekly	2650	mL	Approved
	LTS in each Valve House (PS-1 through 7)	Each Cell	Weekly	5300	mL	Approved
	LTS at Port V1007 (PS-9)		Weekly	18900	mL	Approved
	LTS at Port V1006 (PS-10)		Weekly	370	mL	Approved
Water Quality	LCS aqueous sample analysis for parameters listed in Table 1 of Appendix B.	Cells 1-3	Annual	N/A	N/A	Approved
	LCS, LDS, HTW, GMA aqueous sample analysis for parameters listed in Table 2 of Appendix B.	Each Cell	Quarterly	N/A	N/A	Approved
	LCS aqueous sample analysis for parameters listed in Table 3 of Appendix B.	Cells 4-8	Annual	N/A	N/A	Approved

<sup>1</sup>Regulatory status (regarding description, basis, frequency, and action level) as of the time the plan was submitted for EPA/Ohio EPA review (e.g., "proposed" or "approved")

<sup>2</sup>gpad (gallons per acre per day)

## 1.1 Overview of the OSDF

The OSDF is located along the northeast portion of the Fernald Preserve and, as required by the Operable Unit (OU) 2, OU3, and OU5 Records of Decision (RODs), is situated over the "best available geology" at the Fernald Preserve to take maximum advantage of the protective hydrogeologic features of the glacial till above the GMA. The OSDF footprint (including the capped area extending beyond the disposal area) occupies approximately 90 acres of the 1,050-acre Fernald Preserve. This area is dedicated to disposal and will remain under federal ownership and federal administrative control now that the Fernald Preserve's cleanup mission has been completed.

The OSDF provides on-site disposal capacity for approximately 2.96 million cubic yards of contaminated soil and debris generated by the Fernald Preserve's environmental restoration and building decontamination and demolition activities. The OSDF has a maximum height of approximately 65 ft. The facility was constructed in phases, with eight individual cells. Cells are approximately 700 ft by 400 ft, or 280,000 square ft (ft<sup>2</sup>) (6.4 acres). The dimensions of Cell 8 are larger than those of the other cells (approximately 9.4 acres). Each cell was constructed with a leachate collection system (LCS) that collected infiltrating rainwater and storm water runoff during waste placement and prevented it from entering the underlying environment. Other engineered features include a multilayer composite liner system, an LDS positioned beneath the primary liner, and a multilayer composite cover placed over each cell following the completion of waste-placement activities.

The LCS and LDS layers are designed to convey any leachate/fluid that enters the system through pipes (i.e., the LCS pipes and LDS pipes) to the west side of each cell to a liner-

## UNCONTROLLED IF PRINTED

penetration box. The liner penetration box is the point where the LCS and LDS pipes penetrate the liner system and therefore represents the lowest elevation of each cell and the most likely point for a leak to occur. From the liner penetration box, the LCS and LDS pipes drain to valve houses where the leachate and LDS fluid are collected in tanks, flow rates and volumes are monitored, and samples are collected. Fluid that collects in the LCS and LDS collection tanks located in each cell's valve house is pumped to the gravity drain portion of the leachate transmission system line, which drains all valve houses to the permanent lift station (PLS). The leachate collected in the PLS is periodically pumped to the Converted Advanced Wastewater Treatment facility (CAWWT) backwash basin or directly to CAWWT feed tanks. The Enhanced Permanent Leachate Transmission System consists of the valve houses and the equipment contained within them as well as the gravity drain portion of the leachate transmission line that runs from the valve house at Cell 1 to the PLS. Figure 1-1 depicts a cross section of the liner system.


During the development of this plan, the U.S. Environmental Protection Agency (EPA) and the Ohio Environmental Protection Agency (OEPA) identified the need to monitor the potential for leachate leakage from the OSDF at its first point of entry into the natural hydrogeologic environment (rather than relying on GMA groundwater monitoring alone). This led to the decision to install horizontal monitoring wells in the glacial till directly beneath the liner penetration boxes of the LCS and LDS layers in each cell. The subsurface area beneath the liner penetration boxes provides the best opportunity to monitor for an initial leak into the subsurface environment, should such a leak occur.

As a result of the low transmissive properties of the glacial till and the discontinuous nature of the perched groundwater system in the till, it may not always be possible to collect groundwater samples routinely from the horizontal wells. In view of this limitation, DOE, EPA, and OEPA concurred that the placement of the horizontal wells beneath the liner penetration boxes represents the most feasible site-specific approach to monitor for first entry leakage from the facility to the environment, and this approach provides adequate and appropriate early warning detection capabilities for this site-specific setting.

A design specification for the OSDF defines the amount of water that must flow from the facility in order to have conditions needed to produce a leak from the facility. This specification is called the action leakage rate. The OSDF has an action leakage rate of 200 gallons per acre per day (gpad) (DOE 1997). The action leakage rate is the maximum design flow rate that the LDS can remove without the fluid head on the bottom liner exceeding 1 ft (Title 40 *Code of Federal Regulations* Part 264.302 [40 CFR 264.302]). Stated in another way, it is the flow rate that corresponds to a hydraulic head within the facility capable of producing a leak through the compacted clay layer that is present at the base of the facility.

DOE will not wait until the action leakage rate is measured to investigate the possibility of a leak from the facility. To be conservative, an initial response leakage rate has been defined for the OSDF as 1/10 of the action leakage rate (i.e., 20 gpad). If the initial response leakage rate of 20 gpad is ever measured, DOE will begin the process of determining the cause of the increased flow and will evaluate the potential that a release has occurred.

UNCONTROLLED IF PRINTED

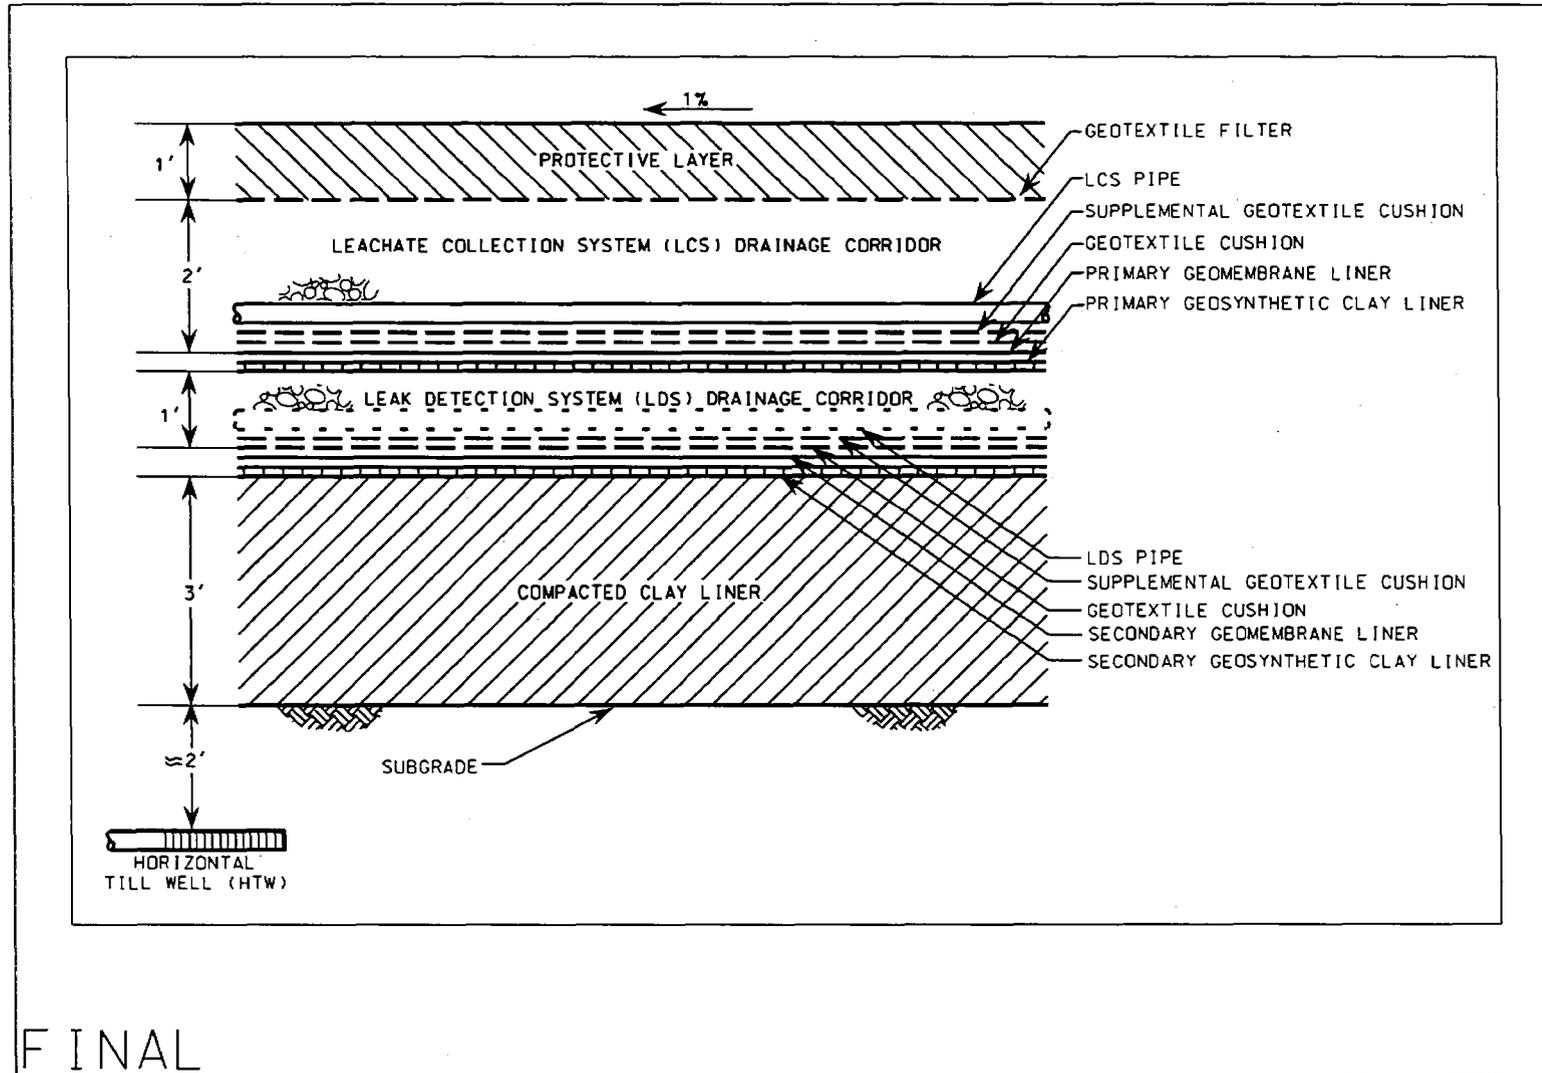

FINAL

V:\LTS\111\051\20\503556\50355600.DGN

Figure 1-1. OSDF Liner System with HTW at the Drainage Corridor

## **1.2 Program Overview**

The OSDF monitoring plan was developed by reviewing the pertinent regulatory requirements for detection monitoring and translating those requirements into site-specific monitoring elements (e.g., designation of monitoring zones, monitoring locations, sampling frequency, and establishment of analytical parameters).

The plan considers current hydrogeologic and contaminant conditions in the glacial till and GMA beneath the facility. Preexisting contamination in the perched groundwater system and the GMA, the variable nature of the geology and hydrogeology of the clay-rich glacial deposits, and the influence of aquifer restoration activities in the GMA add complexity to the development of a groundwater monitoring program. Contaminated portions of the GMA were undergoing restoration during the same time period that the OSDF was actively accepting waste for disposal, after the facility was capped and during post-closure. The aquifer restoration is a pump-and-treat operation. The closest pumping wells are approximately 2,000 ft upgradient of the OSDF footprint.

Available site-specific information generated from more than 15 years of detailed site characterization efforts, including geology and hydrogeology, results of detailed contaminant fate and transport modeling, OSDF construction activities, and monitoring results from the OSDF program and Attachment D (Integrated Environmental Monitoring Plan [IEMP]) were used to develop the monitoring strategy and to determine monitoring locations.

This plan focuses on the monitoring needs associated with detection monitoring during post-closure. Future amendments to the plan will be prepared to address program modifications, if changes to the monitoring program are necessary. An in-depth review of program needs is also envisioned at the completion of GMA restoration activities.

A brief description of the monitoring program is as follows:

- Flow volumes in the LDS are being tracked against the initial response leakage rate of 20 gpad. Flow reaching an initial response leakage rate will be considered evidence that hydraulic conditions are 1/10 of the level needed to achieve the hydraulic head required to produce a possible leak from the OSDF. If measurements indicate an initial response leakage rate of 20 gpad, DOE will begin the process of determining the cause of the increased flow and will evaluate the potential that a release from the facility has occurred.
- Water quality in the LCS, LDS, HTW, and GMA wells of each cell is being routinely monitored. Control charts will be prepared for those constituents in the HTW and GMA wells that pass statistical screening for the preparation of control charts. Plots of concentration versus time will be prepared for constituents in the HTW and GMA wells that do not pass statistical screening for the preparation of control charts. Bivariate plots for uranium-sodium will be prepared for each cell. A water quality change beneath the facility needs to be accompanied by a corresponding action leakage rate in the LDS in order for the change to be attributed to a potential leak from the facility. Unless a water quality change in an HTW or GMA well is accompanied by a corresponding action leakage rate in the LDS, the change will not be attributed to a potential leak from the facility.

## UNCONTROLLED IF PRINTED

The OSDF groundwater monitoring plan has been implemented as a project-specific plan (refer to Appendix B), with the results presented for EPA and OEPA review as part of the comprehensive IEMP reporting process (i.e., annual Site Environmental Reports). The IEMP provides a consolidated reporting mechanism for all of the environmental regulatory compliance monitoring activities, including the data and findings from the OSDF groundwater monitoring plan. Incorporating the OSDF data into the IEMP maintains the commitment to an effective remediation-focused environmental surveillance monitoring program. Once the environmental remediation requirements have been completed and the site is successfully removed from the Superfund National Priorities List, the monitoring activity for the OSDF (which will be the last remaining facility in place at the site) will continue in accordance with applicable regulatory monitoring and reporting requirements.

### 1.3 Plan Organization

The remainder of this plan is organized as follows:

- Section 2.0 presents a summary of the geology and hydrogeology in the immediate area of the OSDF.
- Section 3.0 presents a regulatory analysis and strategy for OSDF monitoring.
- Section 4.0 presents the OSDF leak detection monitoring program.
- Section 5.0 presents the OSDF leachate management monitoring program.
- Section 6.0 presents reporting requirements and notifications.
- Section 7.0 provides a list of references.

The appendixes that support this plan are:

- Appendix A—OSDF Applicable or Relevant and Appropriate Requirements (ARARs) and Other Regulatory Requirements.
- Appendix B—Project-Specific Plan for the On-Site Disposal Facility Monitoring Program.
- Appendix C—Fernald Site Data Quality Objectives, Monitoring Program for the On-Site Disposal Facility Program.
- Appendix D—Leachate Management Plan for the On-Site Disposal Facility.
- Appendix E—Selection Process for Site-Specific Leak Detection Indicator Parameters.

### 1.4 Related Plans

Several other RA plans have been prepared for the OSDF or for the Fernald Preserve as a whole, containing information relevant to this plan. They are listed below along with a brief statement of their relationship to this plan:

- *Pre-Design Investigation and Site Selection Report for the On-Site Disposal Facility* and addendum (DOE 1995c and DOE 1996a): Describe field activities used to assess potential sites for the OSDF, and present the information collected during addendum activities to the *Project-Specific Plan for Installation of the On-Site Disposal Facility Great Miami Aquifer Monitoring Wells* (DOE 2001d).

## UNCONTROLLED IF PRINTED

- OSDF Systems Plan (DOE 2001e): Describes the inspection and maintenance of the LCS and LDS.
- *Enhanced Permanent Leachate Transmission System Operation* (DOE 2005a): Is the operational procedure for management, inspection, and conveyance of leachate and fluid from the LCS and LDS. Operational procedures are included in the *Legacy Management Fernald Operating Procedures* (DOE 2006b).
- OSDF Design Packages (GeoSyntec 1996a, GeoSyntec 1996b, GeoSyntec 1997, DOE 2004c) and construction drawing packages: Provide the overall approved design for each cell of the OSDF.
- Post-Closure Care and Inspection Plan (Attachment B): Summarizes the inspection and maintenance activities (e.g., cap and runoff controls) to ensure continued proper performance of the OSDF and also summarizes at the conceptual level corrective actions/response actions.
- *Borrow Area Management and Restoration Plan, On-Site Disposal Facility* (GeoSyntec 2001a): Describes management of borrow soils used to construct the OSDF, and describes the planning for end state after soils have been excavated.
- *Surface Water Management and Erosion Control Plan, On-Site Disposal Facility* (GeoSyntec 2001b): Describes soil erosion control to minimize sediment loss.
- *Construction Quality Assurance Plan, On-Site Disposal Facility* (GeoSyntec 2002): Describes quality assurance methods and testing to certify the construction of the OSDF.
- *Impacted Materials Placement Plan, On-Site Disposal Facility* (GeoSyntec 2005): Describes the categories of material, prohibited items, and placement methods for impacted material placement in the cells.
- *Waste Acceptance Criteria Attainment Plan for the On-Site Disposal Facility* (DOE 1998b): Defines the OSDF requirements for materials generated by the Fernald Site's environmental restoration, and decontamination and demolition efforts.
- *Project-Specific Plan for Installation of the OSDF Great Miami Aquifer Wells* (DOE 2001d): Describes the installation of GMA wells.
- *Technical Memorandum for the OSDF Cells 1, 2, and 3 Baseline Groundwater Conditions* (DOE 2002): Describes baseline conditions for Cells 1, 2, and 3.
- IEMP (Attachment D).
- Additionally, annual Site Environmental Reports include OSDF reporting requirement updates.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 2.0 OSDF Area Geology and Hydrogeology

### 2.1 Introduction

The OU2, OU3, and OU5 RODs contain requirements that led to the OSDF being located in an area of the Fernald Preserve that takes maximum advantage of available geologic and hydrogeologic conditions to further reduce the potential for contaminant migration from the facility. To identify the preferred OSDF location, a detailed predesign geotechnical and hydrogeologic investigation was conducted as a supplement to the sitewide characterization efforts described in *Remedial Investigation for Operable Unit 5* (DOE 1995d). The detailed findings of the pre-design investigation are documented in the *Pre-Design Investigation and Site Selection Report for the On-Site Disposal Facility* (DOE 1995c). As documented in the site selection report, a final location along the eastern margin of the Fernald Preserve was selected to satisfy the RODs and other regulatory-based siting requirements.

The following sections summarize the principal geologic, hydrogeologic, and subsurface contaminant conditions in the OSDF area that have a direct bearing on the development of the leak detection and groundwater monitoring strategy for the facility. For more-detailed information, refer to the *Pre-Design Investigation and Site Selection Report for the On-Site Disposal Facility* (DOE 1995c) and *Remedial Investigation Report for Operable Unit 5* (DOE 1995d).

### 2.2 OSDF Area Geology

The OSDF, inclusive of its final cap configuration, occupies an area of approximately 90 acres in the northeastern corner of the Fernald Preserve. The facility is oriented in a north-south direction with dimensions of approximately 3,600 ft by 1,000 ft. The east edge of the facility (i.e., the toe of the cap system) is set back from the eastern property line by approximately 100 ft. The subsurface conditions in the immediate area of the OSDF were characterized through the following field and laboratory activities:

Test borings	Fifty-four borings were drilled in the immediate vicinity of the OSDF to obtain geotechnical soil samples and characterize underlying geology.
Monitoring wells	Fifty-one groundwater monitoring wells were installed in the general vicinity of the OSDF from which water level data, preexisting groundwater contaminant concentration data, and lithology data have been obtained.
Geotechnical tests	Key geotechnical tests (i.e., Atterberg limits, water content measurements, and permeability tests) were performed on subsurface geologic samples, including 116 sieve analyses to determine grain size.

## **UNCONTROLLED IF PRINTED**

Lysimeter installation	Eight lysimeters were installed in the OSDF site area to determine the nature and concentration of uranium in the vadose zone of the glacial till and the unsaturated GMA.
Slug tests	Twenty-four slug tests were performed to assess the hydraulic characteristics of the perched groundwater system.
Water level monitoring	Water levels obtained from the perched groundwater and the GMA wells were used to determine hydraulic gradients and flow directions.
Soil analyses	Soil samples collected during the remedial investigation (RI) and the Pre-Design Investigation were characterized for mineralogy and analyzed for uranium and other constituents of concern to determine preexisting contaminant levels in the soil beneath the OSDF.
Groundwater flowmeter study	Twenty-two flowmeter readings were obtained in the perched groundwater in the OSDF site area.
Distribution coefficient ( $K_d$ ) study	A $K_d$ study was performed to determine how uranium partitions between groundwater and soil in the OSDF site area.
Cone penetrometer tests	Eighty-eight cone penetrometer tests were conducted in the OSDF site area to aid in making subsurface lithologic interpretations.

The information obtained through these activities, coupled with the sitewide interpretations gained through the OU5 RI, formed the basis for the interpretations of subsurface conditions in the vicinity of the OSDF site.

In general, the OSDF is situated on glacial till underlain by sand and gravel deposits that comprise the GMA, which is designated as a sole-source aquifer under the Safe Drinking Water Act. The GMA is a high-yield aquifer (i.e., wells completed in some areas of the aquifer yield greater than 500 gallons per minute [gpm]), and it supplies a significant amount of potable and industrial water to Butler and Hamilton Counties.

The glacial till ranges in thickness from approximately 20 to 60 ft in the immediate vicinity of the OSDF and is composed of about equal portions of carbonate (calcite and dolomite) and silicate (quartz, feldspar, and clay minerals) grains. Based on the results of 116 sieve and hydrometer analyses, the glacial till can be characterized as dense, heterogeneous, sandy, lean clay, with occasional discontinuous interbedded sand and gravel lenses. The glacial till can be further divided into an upper brown clay layer and a lower gray clay layer. This division is made on color and physical properties because the mineralogy is similar in both layers. The brown clay layer is more weathered (i.e., it exhibits iron oxidation and contains a greater abundance of desiccation fractures compared with the underlying gray clay layer) and has a higher incidence of interbedded sand and gravel lenses. In the eastern portions of the Fernald Preserve, the gray

## UNCONTROLLED IF PRINTED

clay ranges in thickness from approximately 15 to 42 ft, and the brown clay ranges from approximately 8 to 15 ft. As indicated by the OU5 RI, the gray clay is the most uniform and least permeable and, therefore, the most protective geologic layer found above the GMA across the site.

As a follow-up to the OU5 RI, one of the primary objectives of the *Pre-Design Investigation and Site Selection Report for the On-Site Disposal Facility* (DOE 1995c) was to identify the location where the thickest, most laterally persistent gray clay layer is present that contains the least amount of interbedded coarse granular material, and that allows regulatory-based siting requirements (such as the property line and other geographic setbacks) to be met. The selected location for the OSDF has a minimum thickness of gray till of approximately 15 ft and an average thickness of approximately 30 ft. The percentage of interbedded sands and gravels in the gray till in this area is approximately 4 percent.

Beneath the glacial till layer, the sand and gravel deposits of the GMA are approximately 175 ft thick. For RI characterization and monitoring purposes, the GMA has been divided into three hydrologic zones: the uppermost zone, represented by the Fernald Preserve's Type 2 monitoring wells; the middle zone, represented by the Type 3 monitoring wells; and the lowermost zone, represented by the Type 4 monitoring wells. The sand and gravel deposits that constitute the aquifer are regionally extensive and occupy a land area of more than 970,000 acres.

Shale and limestone bedrock underlies the GMA deposits at a depth of approximately 200 ft beneath the OSDF. Regional studies by the Geological Survey of Ohio indicate the shale and limestone bedrock is approximately 330 ft thick in the Fernald Preserve area (Fenneman 1916).

### 2.3 Hydrogeologic Conditions

The Fernald Preserve has two distinct bodies of groundwater that have been extensively characterized through the remedial investigation/feasibility study (RI/FS) process and the Pre-Design Investigation: the GMA and the perched groundwater within the overlying glacial till. The discontinuous sand and sand and gravel lenses within the glacial till can provide water to a pumping well because the deposits are more permeable than the surrounding clay-rich glacial till. The entire section of glacial till is believed to be saturated or nearly saturated with groundwater. An unsaturated sand and gravel zone approximately 20 ft to 30 ft thick separates the base of the glacial till from the regional water table in the GMA. Depending on local weather patterns and rainfall, the water table in the GMA fluctuates approximately 6 ft annually within the unsaturated zone below the glacial till in the area of the OSDF.

The GMA is a classic example of an unconfined buried valley aquifer. The depth to water in the aquifer near the OSDF ranges from 40 to 90 ft below ground surface. Five years of water level measurements prior to the beginning of the pump-and-treat remedy (1988 through 1993) indicate that groundwater flows from west to east in this area (refer to OU5 RI report, Figure 3-50). Groundwater velocity in the area of the OSDF is approximately 451 ft per year, based on an average hydraulic gradient of approximately 0.0008 (refer to OU5 RI, page 3-61); an average hydraulic conductivity of approximately 463 ft per day (average of three pumping tests); and an effective porosity of 30 percent. Using the representative  $K_d$  for uranium of 1.78 liters per kilogram determined through the RI/FS process produces a retardation factor for uranium movement in the GMA of approximately 12. At a retardation factor of 12, uranium moves

## UNCONTROLLED IF PRINTED

approximately 1/12 as fast as the groundwater, or approximately 37.6 ft per year. More recent studies conducted by Sandia National Laboratories on uranium-contaminated sediment collected from the vadose zone indicate that the  $K_d$  ranges from 2.8 to 8.7 (SNL 2003, SNL 2004). The higher  $K_d$  values reported for the Sandia study reflect natural variability in the aquifer and stronger bonding of the adsorbed uranium as it ages on the mineral surface, which results in a higher retardation factor and indicates slower migration times.

Perched groundwater is present above the unsaturated zone of the GMA within the glacial till. Overall, the till exhibits 90 to 100 percent saturation (close to field capacity) and has the general properties of an aquitard. When the till reaches field capacity, it has the capability to release groundwater downward under a unit vertical hydraulic gradient into the underlying unsaturated zone of the GMA. Eventually, this downward-moving groundwater will enter the saturated portion of the GMA as recharge. Depths to perched groundwater in the till are generally 6 ft or less in the eastern portion of the Fernald Preserve in the area of the OSDF.

Although the till is generally saturated, there are no identified suitably thick or laterally continuous coarse-grained zones beneath the OSDF that can facilitate implementation of a comprehensive, interlinked (i.e., upgradient and downgradient monitoring points) perched groundwater monitoring system. The amount of saturation in the till is expected to be reduced even further over time since the cap and underlying liners of the OSDF are in place; they are serving as local hydraulic barriers to further reduce the volume of infiltrating moisture within the OSDF footprint.

Slug test data from 24 perched groundwater wells (Type 1 monitoring wells) indicate that the average horizontal hydraulic conductivity for wells screened across the brown and gray clay layer interface is  $6.30 \times 10^{-6}$  centimeters per second (cm/s). The gray clay layer beneath the brown clay is the least permeable layer above the GMA. Laboratory hydraulic conductivities conducted on samples collected from this layer indicate measured values ranging from  $9.53 \times 10^{-9}$  cm/s to  $5.83 \times 10^{-8}$  cm/s. Other laboratory and field measurements indicate the till has an effective porosity of 4 to 10 percent, and a representative bulk density of 1.85 grams per cubic centimeter. The discontinuous nature of the perched water in the glacial till does not facilitate the measurement of a continuous water table gradient in the OSDF site area.

Model calibration studies conducted during the OU5 RI/FS indicate average vertical groundwater flow rates through the glacial till (including the gray clay layer) to be approximately 6 inches per year. The time it takes a contaminant to move through the glacial till and break through into the GMA is controlled by the thickness of gray clay present in the till, the groundwater infiltration rate through the gray clay, and the retardation properties of the gray clay. In the OSDF area, modeled breakthrough travel times for uranium (the Fernald Preserve's predominant contaminant) range from approximately 210 years (to have a 20-micrograms-per-liter concentration in the aquifer) to 260 years (to have 1 percent of the source concentration). These breakthrough times were calculated using a retardation factor of 165 for the gray clay (refer to OU5 RI report, Appendix F [DOE 1995d]), not considering movement through the brown clay, and not including any retardation in the unsaturated GMA sand and gravel.

## **UNCONTROLLED IF PRINTED**

The modeled breakthrough travel time for 1 percent of a technetium source, the Fernald Preserve's most mobile contaminant, is approximately 3.6 years. This breakthrough time was calculated using a retardation factor of 2.29 for the gray clay (refer to OU5 RI report, Appendix F [DOE 1995d]), not considering movement through the brown clay, and not including any retardation in the unsaturated GMA sand and gravel. This modeling strategy was used in the OU5 Feasibility Study (DOE 1995a) to calculate waste acceptance criteria (WAC) for the OSDF.

The extensive presence of low-permeability, lean sandy clay throughout the till matrix and the discontinuous nature of the coarser-grained lenses are the dominant factors controlling the rate at which fluids can migrate through the more permeable portions of till, either vertically or laterally.

Unlike conditions in the GMA, the upgradient and downgradient directions of perched groundwater flow are difficult to assign at the local scale. Groundwater flowmeter readings from 22 wells taken during the Pre-Design Investigation indicate that the horizontal flow directions vary abruptly from well to well, with no discernable consistent patterns. Consequently, horizontal flow regimes are interpreted to be very localized (perhaps tens to hundreds of feet in length) and, because the interbedded coarse-grained lenses are discontinuous, are not laterally persistent. Collectively, the water levels obtained during the OU5 RI indicate that if an area gradient were present, it would range from 0.008 to 0.015.

Model calibration studies conducted during the OU5 RI/FS indicate that vertical flow tends to dominate in the glacial till because of several factors: (1) the steep vertical hydraulic gradients across the till—which are at or near unity—compared to the small localized lateral hydraulic gradients, which collectively indicate a gradient that is much less than unity (0.008 to 0.015); (2) the laterally discontinuous nature of the coarse-grained lenses in the till; and (3) the shorter overall flowpath distance in the vertical dimension for the Fernald Preserve (60 ft compared to hundreds or thousands of feet in the horizontal) before a potential discharge point for the glacial till groundwater is reached.

It can be generally interpreted from this information that if a leachate leak were able to exit through the OSDF liner system, it would be expected to migrate vertically toward the GMA (although some localized “stair step” lateral motion may also be expected to take place en route). The exact pathway that a hypothetical leachate leak from the facility would take is difficult to determine, but it is clear that an effective monitoring program needs to consider both the most likely point of entry of the leak into the subsurface environment beneath the facility (i.e., above the HTW) and the ultimate arrival of the leak at the GMA.

### **2.4 Existing Contamination**

In the immediate vicinity of the OSDF, contaminant concentrations are present above background levels in surface and subsurface soil, the perched groundwater in the glacial till, and GMA. The nature and extent of contamination in these media were documented in the OU5 RI report (DOE 1995d). Additional characterization of the perched groundwater in the glacial till in the OSDF footprint has been documented in the OSDF Pre-Design Report (DOE 1995c). FRLs for soil were established in the OU5 ROD (DOE 1996c), and residual contamination at concentrations below the soil FRLs interferes with the interpretation of water-quality data.

**UNCONTROLLED IF PRINTED**

Surface and subsurface soil within the OSDF footprint was contaminated above the soil FRLs, but certification reports (DOE 1998a; 1999; 2001c; 2004a) show that contaminant concentrations are now below FRLs. As an example, the background value of uranium is 4.56 milligrams per kilogram (mg/kg) (DOE 2001a), the FRL is 82 mg/kg (DOE 1996c), and the mean values for the 17 certification units that correspond to the locations of the HTWs range from 5.96 to 57.2 mg/kg (Table 2-1).

*Table 2-1. Mean Uranium Value<sup>1</sup> for Certification Units at or near the HTWs, Expected Groundwater Uranium Concentrations Based on the Reported Range for Uranium Leach Coefficients (K<sub>1</sub>) in Low-Leachability Soil<sup>2</sup>, Maximum HTW Concentration<sup>3</sup>, and Measured Perched-water Concentration prior to OSDF Construction<sup>4</sup>*

Certification Unit	Uranium (mg/kg)	Cell	Uranium (mg/L)			
			K <sub>1</sub> = 185	K <sub>1</sub> = 2700	HTW-max	Pre-const
P19	38.1	1	0.206	0.014	0.012	0.020
P18	38.9	1, 2 & 3	0.210	0.014	0.029	0.010
P18-11	18.6	3	0.101	0.007	0.029	0.003
P17-33	11.7	3 & 4	0.063	0.004	0.029	0.013
P17-31	25	4	0.135	0.009	0.008	0.013
A1P2-S2SP-01	24.3	5	0.131	0.009	0.021	0.005
A1P2-S2SP-02	32.5	5	0.176	0.012	0.021	0.005
A1P2-S2SB-04	10.9	6	0.059	0.004	0.024	0.007
A1P2-S2NI-02	21.5	6	0.116	0.008	0.024	0.007
A1P2-S2SB-02	6.64	6	0.036	0.002	0.024	0.007
A1P2-S2NI-07	8.64	6 & 7	0.047	0.003	0.024	0.007
A1P2-S2SB-01	5.96	7	0.032	0.002	0.004	0.021
A1P2-S2SP-04	17.7	7	0.096	0.007	0.004	0.021
A1P2-S2NI-08	57.2	7 & 8	0.309	0.021	0.006	0.021
A1P4-C1	28.8	8	0.156	0.011	0.006	0.019
A1P4-C2	14.7	8	0.079	0.005	0.006	0.019
A1P4-C3	16.6	8	0.090	0.006	0.006	0.019

<sup>1</sup>Data obtained from certification reports (DOE 1998a; 1999; 2001c; 2004a).

<sup>2</sup>Leach coefficients obtained from Table 2.2 of the OU5 K<sub>1</sub> study (DOE 1995a).

<sup>3</sup>HTW maximum concentrations taken from 2007 Site Environmental Report (DOE 2008b).

<sup>4</sup>Perched groundwater results taken from OSDF pre-construction study (DOE 1995c).

mg/L = milligrams per liter

DOE has been monitoring the concentration trend of refined baseline constituents in the HTWs, and some of these trends have been increasing. Given that residual contamination below the FRLs is present in the area of the HTWs, and installation of the facility changed recharge/infiltration conditions in the area, it is not unexpected that contaminant concentrations in perched groundwater would increase. The OU5 leaching coefficients for contaminated soil (DOE 1995a) can be used to calculate the range of expected groundwater uranium concentrations in below-FRL soil (Table 1-1), and uranium values in the HTWs (DOE 2008a) fall near or below the lower level of this range. The maximum measured concentration for perched groundwater (0.021 mg/L) prior to OSDF construction (DOE 1995d) is slightly lower than the measured maximum HTW value (Cell 3, 0.029 mg/L). However, this is expected, as the soil was disturbed during construction, and particle surfaces exposed to the atmosphere during construction may leach more readily than less-reactive surfaces in undisturbed soil. Based on the K<sub>1</sub> value of 185 in Table 1-1, the uranium concentration in the Cell 3 HTW could reach a maximum value near 0.2 milligram per liter (mg/L) without uranium contribution from the OSDF.

## UNCONTROLLED IF PRINTED

Pre-OSDF GMA contamination near the OSDF footprint was present in the Plant 6 area, which is approximately 300 ft west of the OSDF. During the RI, a uranium plume was detected in this area. Direct-push sampling conducted in 2000 and 2001, in support of the *Design for Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas* (DOE 2001c), indicated that the uranium plume in the Plant 6 area was no longer present. It is believed that the uranium plume dissipated to concentrations below the FRL as a result of the shutdown of plant operations in the late 1980s and the pumping of highly contaminated perched water as part of the Perched Water Removal Action #1 in the early 1990s. Because a total uranium plume with concentrations above the groundwater FRL was no longer present in the Plant 6 area at the time of the design, a restoration module for the Plant 6 area became unnecessary and was no longer planned.

Deep excavation work in the Plant 6 area was completed in 2004. As a follow-up to the excavation work, direct-push groundwater sampling was conducted in 2004 in the area to determine if any post-excavation groundwater FRL exceedances for uranium or technetium-99 were present in the GMA. The results of the direct-push groundwater sampling showed no uranium or technetium-99 FRL exceedances.

Since the decision not to install extraction wells in the Plant 6 Area was approved in 2001, uranium FRL exceedances have been measured at one well in the area, monitoring well 2389. The uranium FRL exceedances at well 2389 will continue to be monitored as part of the IEMP. Although a thin layer of contamination appears to be present in the upper 1 ft or so of the aquifer at monitoring well 2389, the contaminant mass is not sufficient to warrant installation of a groundwater recovery well. It is expected that the concentration of uranium at well 2389 will dissipate over time. The data will continue to be tracked as part of the IEMP sampling activities.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

### 3.0 Regulatory Analysis and Strategy

The OSDF groundwater/leak detection and leachate monitoring plan is designed to comply with all regulatory requirements associated with groundwater detection monitoring and leachate monitoring for disposal facilities. The sources of these regulatory requirements are the ARARs listed in the RODs for OU2, OU3, and OU5. This section summarizes the regulatory requirements by describing each ARAR and presents the regulatory strategy for compliance with the ARARs.

As indicated in Section 1.1, there is institutional knowledge regarding the various complexities associated with the regulatory strategy for the OSDF leak detection and data evaluation processes. This information should be considered during future post-closure evaluations.

#### 3.1 Regulatory Analysis Process and Results

The analysis of the regulatory drivers for groundwater monitoring for the OSDF was conducted by examining the suite of ARARs in the Fernald Preserve's approved OU RODs to identify a subset of specific groundwater monitoring requirements for the OSDF. Three RODs (OU2, OU3, and OU5) include requirements related to on-site disposal. The RODs for these three OUs were reviewed, and the ARARs relevant to the OSDF were identified. The results of this review are provided in Appendix A and are summarized below.

The following regulations were identified as being ARARs for the OSDF groundwater monitoring program:

- Ohio Solid Waste Disposal Facility Groundwater Monitoring Rules, *Ohio Administrative Code* (OAC) 3745-27-10, which specify groundwater monitoring program requirements for sanitary landfills (although the OSDF is not a sanitary landfill). These regulations describe a three-tiered program for detection, assessment, and corrective measures monitoring.
- Resource Conservation and Recovery Act (RCRA)/Ohio Hazardous Waste Groundwater Monitoring Requirements for Regulated Units, 40 CFR 264.90-99 (OAC 3745-54-90-99), which specify groundwater monitoring program requirements for surface impoundments, landfills, and land treatment units that manage hazardous wastes. Similar to the Ohio Solid Waste regulations, these regulations describe a three-tiered program of detection, compliance, and corrective action monitoring. Because the Ohio regulations mirror or are more stringent than the federal regulations, the Ohio regulations are the controlling requirements and are cited in this document.
- Uranium Mill Tailings Radiation Control Act (UMTRCA) regulations codified at 40 CFR 192 Subpart D, which specify standards for uranium byproduct materials in piles or impoundments. This regulation requires conformance with the RCRA groundwater monitoring performance standard in 40 CFR 264.92. Compliance with RCRA/Ohio Hazardous Waste regulations for groundwater monitoring will fulfill the substantive requirements for groundwater monitoring in the UMTRCA regulations.
- DOE M 435.1 1, *Environmental Monitoring*, which requires low-level radioactive waste disposal facilities to perform environmental monitoring for all media, including groundwater. Complying with RCRA/Ohio Hazardous Waste and Ohio Solid Waste

## **UNCONTROLLED IF PRINTED**

regulations for groundwater monitoring along with incorporating pertinent radiological parameters will fulfill the requirement for groundwater monitoring in this directive.

The following drivers necessitated an overall leak detection strategy:

- Ohio Municipal Solid Waste Rules, OAC 3745-27-06(C)(9a) and OAC 3745-27-10, which require that facilities prepare a groundwater monitoring plan that incorporates leachate monitoring and management to ensure compliance with OAC 3745-27-19(M)(4) and OAC 3745-27-19(M)(5).
- Ohio Municipal Solid Waste Rules—Operational Criteria for a Sanitary Landfill Facility, OAC 3745-27-19(M)(4) and (5), which require submittal of an annual operational report including:
  - A summary of the quantity of leachate collected for treatment and disposal on a monthly basis during the year, location of leachate treatment and/or disposal, and verification that the leachate management system is operating in accordance with the rule.
  - Results of analytical testing of an annual grab sample of leachate from the leachate management system.

### **3.2 OSDF Monitoring Regulatory Compliance Strategy**

Of the ARARs presented above, the Ohio Solid Waste and the Ohio Hazardous Waste regulations are the most prescriptive and, therefore, warrant further discussion on how compliance with these two regulatory requirements will be met. The leak detection monitoring requirements of these two sets of regulations are similar, and they dictate the development of detection monitoring plans capable of determining the facility's impact on the quality of water in the uppermost aquifer and any significant zones of saturation above the uppermost aquifer underlying the landfill.

Typically a detection monitoring program consists of the installation of upgradient and downgradient monitoring wells, routine sampling of the wells, and analysis for a prescribed list of parameters, followed by a comparison of water quality upgradient of the landfill to water quality downgradient of the landfill. The detection of a statistically significant difference in downgradient water quality suggests that a release from the landfill may have occurred.

As discussed in Section 2.0, low permeability in the glacial till and preexisting contamination within the glacial till and the GMA add complexity to the development of a groundwater detection monitoring program consistent with the standard approach of the Solid and Hazardous Waste regulations. Both sets of regulations accommodate such complexities by allowing alternate monitoring programs, which provide flexibility with respect to well placement, statistical evaluation of water quality, facility-specific analyte lists, and sampling frequency. The OSDF groundwater/leak detection monitoring program has required the use of an alternate monitoring program, in accordance with the criteria in the Ohio Solid and Hazardous Waste regulations. Compliance with the criteria is discussed below in Section 3.2.1.

The regulatory requirements for the leachate monitoring program are provided by the Ohio Solid Waste regulations. The compliance strategy for the leachate monitoring program is discussed below in Section 3.2.2.

### **3.2.1 Leak Detection Monitoring Compliance Strategy**

The groundwater/leak detection monitoring program for the OSDF includes routine sampling and analysis of water drawn from four zones within and beneath the disposal facility: the LCS, the LDS (within the facility), perched water in the glacial till (beneath the facility), and the GMA (beneath the facility). This monitoring approach takes the unique hydrogeologic and preexisting contaminant situation at the site into consideration. However, this approach differs from a typical leak detection monitoring program in several ways and requires a compliance strategy to ensure that the program meets or exceeds the substantive requirements of the Ohio Solid and Hazardous Waste regulations. Below is a detailed discussion of compliance with several elements of the program, including alternate well placement, statistical analysis, monitoring frequency, and parameter selection. The implementation of the OSDF groundwater/leak detection program is presented in Section 4.0 and Appendix B.

#### **3.2.1.1 Alternate Well Placement**

The Ohio Solid Waste regulations require that a groundwater monitoring system consist of a sufficient number of wells, installed at appropriate locations and depths, to yield groundwater samples from both the uppermost aquifer and any overlying significant zones of saturation (OAC 3745-27-10[B][1]). Groundwater samples are obtained through wells installed in the glacial till and the GMA.

The regulations also state that the wells must represent the quality of groundwater passing directly downgradient of the limits of solid waste placement (OAC 3745-27-10[B][1][b]). In lieu of installing vertical glacial till monitoring wells along the perimeter of the OSDF, horizontal wells were installed beneath the OSDF and screened beneath the liner penetration box of the LDS for each disposal cell where the greatest potential for leakage exists. Horizontal wells are preferred to vertical wells due to restrictions on well installation within 200 ft of waste placement so as to avoid interference with the disposal facility cap, and the absence of significant lateral flow within the till. As discussed in Section 2, the time required for contaminants to migrate laterally in the till toward wells located 200 ft from the limits of waste placement greatly exceeds the vertical travel time through the glacial till; therefore, the aquifer would be impacted by contaminants long before vertical wells in the glacial overburden located outside the restricted area could detect the release. Although the existence of the OSDF may result in dewatering of the glacial till such that samples cannot be regularly obtained, horizontal wells installed beneath the liner of the OSDF represent the highest potential for detecting releases to the till. Such an alternate placement for the till wells is allowed in the Ohio Solid Waste regulations.

The performance criteria in OAC 3745-27-10(B)(4) require that the number, spacing, and depth of the wells must be based on site-specific hydrogeologic information and must be capable of detecting a release from the facility to the groundwater at the closest practical location to the limits of solid-waste placement. The placement of till wells beneath the facility, as opposed to along its perimeter, meets or exceeds the requirement to be located adjacent to waste placement.

## **UNCONTROLLED IF PRINTED**

### 3.2.1.2 Alternate Statistical Analysis

A statistical analysis is required in both the Ohio Solid and Hazardous Waste regulations (OAC 3745-27-10[C][6] and OAC 3745-54-97[H]). The statistical analysis methods listed in the regulations are parametric analysis of variance (ANOVA), an ANOVA based on ranks, a tolerance or prediction interval procedure, a control chart approach, or another statistical test method. The control chart approach (combined Shewart CUSUM control charts) is being used, as it has been determined the most viable approach; however, problems with control charts exist. The method of evaluation for the OSDF groundwater/leak detection monitoring data is an intra-well trend analysis prior to the establishment of background (baseline) conditions in the perched water and GMA beneath the OSDF. Statistically significant evidence of an upward trend in some constituents negates the use of control charts for those constituents. Control charts are produced for those constituents in the HTW and GMA wells that are stable. Concentrations of the unstable constituents in the HTW and GMA wells are being monitored and trended over time. As soon as the constituents are stable, control charts will be prepared.

Although vertical monitoring wells are installed in the GMA upgradient and downgradient of the OSDF, an intra-well comparison is more appropriate than an upgradient versus downgradient comparison until aquifer restoration is complete. Transient flow conditions within the aquifer, as well as the existence and expected fluctuation of contaminant concentrations at levels below the FRLs, discourage the use of a statistical comparison of upgradient and downgradient water quality as a reliable indicator of a release from the OSDF.

To date, establishing baseline conditions with statistical analyses has proven to be difficult due mainly to existing trend issues. Steady-state conditions, which are a requirement of control charting, have not been reached for all constituents.

Recognizing that unstable concentration conditions complicate the data evaluation process in the perched system and GMA, DOE conducted a common-ion study. The study was a comprehensive geochemical and statistical evaluation of the concentrations of 50 aqueous ions in fluid samples from the LCS, LDS, and HTWs of each cell (DOE 2008a). The study concluded that:

- Only a limited number of ions can serve as indicator ions because few ions have concentrations in the source horizon that exceeded their concentration in the target horizon by at least a factor of four.
- Many of the indicator ions in the target horizons show concentration trends or serial correlation, which precludes the use of control charts because steady-state conditions have not been established in the fluid-solid system.
- Fluid volume is the key monitoring parameter to indicate the potential for leachate migration, and the sampling of and analysis for indicator ions are useful only if the hydraulic conditions permit leachate to migrate.

### 3.2.1.3 Alternate Parameter Lists

The process used to define an alternate parameter list, described in detail in Appendix E, used the extensive RI database and fate and transport modeling to evaluate potential indicator parameters. RIs have been completed for all Fernald Preserve source terms and contaminated

## **UNCONTROLLED IF PRINTED**

environmental media. The RIs included extensive sampling and analysis to characterize wastes and quantify environmental contamination so that health protective remedies, such as the construction of the OSDF, could be selected.

Extensive databases were also used to develop WAC, which consist of concentration and mass-based limitations on the waste entering the OSDF. The WACs for the OSDF were developed with consideration of the types, quantities, and concentration of wastes that would be placed into the OSDF; the leachability, mobility, persistence, and stability of the waste constituents in the environment; and the toxicity of the waste constituents. Of 93 constituents that were evaluated for waste acceptance, 18 were identified as having a relatively higher potential to impact the aquifer within the 1,000-year specified performance period. Maximum allowable concentration limits were established for wastes containing these constituents. These 18 constituents were chosen as the initial site-specific leak detection monitoring parameters (initial baseline constituents).

The factors used to establish WAC for the OSDF are similar to the consideration criteria for developing an alternate parameter list specified in the Ohio Solid and Hazardous Waste regulations (OAC 3745-27-10[D][2] and [3]; OAC 3745-54-93[B]; OAC 3745-54-98[A]); and OEPA policy and guidance (OEPA 1995, 1996, 1997) for a hazardous waste landfill. The process is to identify waste constituents that are expected to be derived from wastes placed in the OSDF. The methodology for developing an OSDF-specific leak detection monitoring parameter list used the WAC methodology and the Ohio Solid and Hazardous Waste regulatory criteria to identify waste constituents that are expected to be derived from wastes placed in the OSDF. This effort was not completely successful, as waste materials are nearly identical in composition to material outside of the OSDF.

Additionally, review of OSDF monitoring data for the 18 constituents that were chosen for the initial site-specific leak detection monitoring parameters indicated that the majority of the constituents were not detected. As a result, DOE, OEPA, and EPA agreed that the list of constituents monitored could be refined to those that were detected more than 25 percent of the time.

Twelve rounds of sampling for the initial site-specific leak detection monitoring parameters were completed at all eight cells in 2007. At the completion of the 12 rounds of sampling, five constituents/parameters were identified as having been detected at least 25 percent of the time. These five constituents/parameters (boron, sulfate, uranium, total organic compounds, and total organic halogens) make up the refined baseline for each cell.

In 2002 there were relatively high concentrations of sulfate in the Cells 4 and 5 LCS water prior to waste placement, indicating a sulfate source (possibly gypsum) in the gravel composing the LCS layer. Due to sulfate's high mobility and the presence of an ongoing source in the LDS/LCS layers, it was added to the leak detection sampling program in 2003. This is discussed further in Appendix E.

In summary, baseline monitoring has progressed in two steps:

- Initial baseline monitoring—based on 12 rounds of samples for the 18 initial site-specific leak detection monitoring parameters.

## UNCONTROLLED IF PRINTED

- Refined baseline monitoring—based on initial baseline parameters that are detected 25 percent or more of the time.

Establishing baseline water chemistry in the perched groundwater and GMA horizon under each cell is complicated by the construction process used to install the HTWs and the existence of past groundwater contamination in the till and GMA zones. The installation of the HTWs involved excavation of a trench, placement of a porous filter media composed of sand, and then backfill with the porous media and till material. During this installation, the subsurface chemical properties of the till were altered by the contact of the excavated till material with the atmosphere (oxygen-rich environment). Contact of the subsurface till with the atmosphere may have impacted (1) the oxidation state of metals on the surface of grains and in the pore water and (2) microbial species that mediate oxidation-reduction reactions in the subsurface. Additionally, historical contamination in perched groundwater and GMA horizons surrounding the cell may be migrating and diffusing into the HTW and GMA monitoring wells.

As discussed in the preceding section, to address some of these uncertainties, DOE conducted a common-ion study. Results of the study were presented in *Evaluation of Aqueous Ions in the Monitoring Systems of the On-Site Disposal Facility* (DOE 2008a). The report identified four additional constituents—iron, manganese, sodium, and lithium—that are potentially beneficial for monitoring for a leak from a cell in the OSDF. Beginning in 2009 these four additional constituents were monitored in each cell in all horizons (LCS, LDS, HTW, and the GMA). The common-ion report also identified a few constituents in the HTW that passed the statistical screening requirements for control charting. Preparation of control charts for constituents identified in the HTW and GMA wells will begin in 2009 and be presented in the 2009 Site Environmental Report.

In addition to sampling for the approved initial baseline constituents, refined baseline constituents, and the selected common-ion constituents, DOE continued to sample the LCS once a year for the full list of Appendix I (OAC 3745-27-10) and polychlorinated biphenyl (PCB) constituents. A statistical screening process was developed to evaluate the results of the continued sampling with the objective of determining if any constituent not already on the alternate monitoring list (initial baseline) might also be a useful monitoring constituent for deeper monitoring horizons. The screening process was presented in the 2007 Site Environmental Report. The screening process is conducted once a data set of eight samples is available for a cell. A data set of eight samples was available for Cells 1, 2, and 3 at the end of 2007, and the statistical screening was conducted. Results from Cells 1 through 3 were presented in the 2007 Site Environmental Report. The assessment process was based on showing statistically that the average LCS concentration is greater than either the pre-design or background average concentration. A constituent with a greater average LCS concentration than either pre-design or background is added to the monitoring lists for deeper horizons (LDS, HTW, GMA). Six constituents were identified for additional monitoring quarterly in deeper horizons in Cells 1 through 3 (arsenic, cobalt, nickel, selenium, zinc, and total dissolved solids [TDS]). A data set of eight samples will be available for analysis at Cells 4 and 5 at the end of 2009, in Cell 6 at the end of 2010, and in Cells 7 and 8 at the end of 2011. At the request of OEPA, DOE will also sample quarterly for arsenic, cobalt, nickel, selenium, zinc, and TDS in the LCS, LDS, HTW, and GMA wells of Cells 4 through 8.

## **UNCONTROLLED IF PRINTED**

The sampling lists that will be used in 2010 are provided in Appendix B and are summarized below.

- 15 parameters quarterly in the LCS, LDS, HTW, and GMA of Cells 1–8: arsenic, boron, cobalt, iron, lithium, manganese, nickel, selenium, sodium, sulfate, uranium, zinc, TDS, total organic carbon (TOC), and total organic halogens (TOX).
- 33 parameters annually in the LCS of Cells 1–3: ammonia, antimony, barium, beryllium, cadmium, calcium, chloride, chromium, copper, lead, magnesium, mercury, nitrate/nitrite, potassium, silver, thallium, vanadium, technetium-99, pH, specific conductance, temperature, total alkalinity, turbidity, bromodichloromethane, 1,1-dichloroethene, 1,2-dichloroethene (total), tetrachloroethene, trichloroethene, vinyl chloride, carbazole, 4-nitroaniline, bis(2-chloroisopropyl)ether, and alpha chlordane.
- 80 parameters annually in the LCS of Cells 4–8: The same 33 parameters monitored for annually in the LCS of Cells 1–3, and Appendix I (OAC 3745-27-10) volatile organic compounds and PCBs (47 additional parameters).

### **3.2.1.4 Alternate Sampling Frequency**

The Ohio Solid Waste regulations require that, for detection monitoring, at least four independent samples from each well will be taken during the first 180 days after implementation of the groundwater detection monitoring program and at least 8 independent samples in the first year to determine the background (i.e., baseline) water quality (OAC 3745-27-10[D][5][a][ii][a]). The requirement to collect eight independent samples is only applicable to wells installed after August 15, 2003, the date that the code became effective. The Ohio Hazardous Waste regulations do not specify a frequency for determining a background data set. The Ohio Hazardous Waste regulations do require a performance standard for establishing background; OAC 3745-54-97(G) states that the number and kinds of samples taken to establish background be appropriate for the statistical test employed.

Experience and technical knowledge gained from cell monitoring indicated that it was necessary to collect initial baseline samples quarterly. Sampling frequencies were based on the following: HTWs and GMA wells were sampled bimonthly after waste placement until 12 samples were collected for statistical evaluation. These frequencies were selected to develop an appropriate statistical procedure, to address OSDF construction schedules, and to compensate for the varying temporal conditions and seasonal fluctuations. After sufficient samples were collected for statistical analysis, samples were collected quarterly from the HTWs and GMA. The Ohio Solid Waste regulations allow for a semiannual sampling frequency for detection monitoring after the first year but also allow for the proposal of an alternate sampling program (OAC 3745-27-10[D][5][a][ii][b] and [b][ii][b], and 3745-27-10[D][6]). At the request of OEPA, sampling will remain quarterly through 2010.

### **3.2.2 Leachate Monitoring Compliance Strategy**

The Solid Waste regulations (OAC 3745-27-19[M][5]) require collection and analysis of leachate annually for Appendix I constituents and PCBs listed in OAC 3745-27-10. Ohio Solid Waste regulations OAC 3745-27-10(D)(2) and (3) allow for the selection of an alternate list of constituents to monitor in lieu of some or all of the constituents listed in Appendix I of

## UNCONTROLLED IF PRINTED

OAC 2745-27-10. As described in Appendix E, an alternate parameter list has been approved for the OSDF.

Through 2008, annual LCS samples from Cells 1 through 8 were analyzed for both the approved alternate parameters (initial baseline) and Appendix I and PCB parameters. DOE considered this additional sampling for Appendix I and PCB parameters as exceeding the requirements of Ohio Solid Waste regulations because an alternate parameter list had been approved for the facility.

A statistical screening process was developed to evaluate the results of the additional Appendix I and PCB sampling in the LCS for the purpose of determining the merit of monitoring any of the additional parameters in the deeper monitoring horizons (LDS, HTW, and GMA). The statistical screening process was presented in the 2007 Site Environmental Report. The process determines if the average LCS concentration is greater than the average concentration of either the pre-design or background data sets for the perched groundwater or GMA. The statistical screening process is initiated when an LCS data set reaches eight samples. The data set size of Cells 1–3 LCS reached eight samples in 2007. The statistical screening process was applied to the LCS data sets from Cells 1–3, and results were presented in the 2007 Site Environmental Report. The results showed that the average concentration in the LCS of Cells 1–3 for arsenic, cobalt, nickel, selenium, zinc, and TDS were greater than either the average concentration of the pre-design or background data sets. These parameters were therefore selected for continued monitoring in the deeper monitoring horizons (LDS, HTW, and GMA) at Cells 1–3. Once similar statistics are conducted for the Cells 4–8 LCS, it is anticipated that the target parameters identified for monitoring the LDS, HTW, and GMA of Cells 4–8 will be revised to reflect the results of the statistical screening conducted for those cells. At the request of OEPA, DOE will also sample quarterly for arsenic, cobalt, nickel, selenium, zinc, and TDS in the LCS, LDS, HTW, and GMA wells of Cells 4–8.

Although not specified in the OU RODs as an ARAR, the federal RCRA (Hazardous Waste) regulations include specific requirements in 40 CFR 264.303 for monitoring the volume of liquid collected from a disposal facility's LDS. Regulation 40 CFR 264.302 includes provisions for determining an action leakage rate that, if exceeded, would prompt specific response and notification actions. An action leakage rate of 200 gpad and an initial response leakage rate of 20 gpad were established during the design of the OSDF. The response and notification process for an exceedance of both the initial response leakage rate and the action leakage rate (40 CFR 264.304) is provided in Section 6.0.

The leachate monitoring strategy, as part of the groundwater monitoring plan and required by OAC 3745-27-06(C)(7), must include provisions for obtaining the monthly volume of leachate collected for subsequent treatment, provide the method of leachate treatment and/or disposal, and include verification that the leachate management system is operating properly (OAC 3745-27-19[M][4]). Monitoring to verify that the leachate management system is operating properly is identified in the OSDF *Enhanced Permanent Leachate Transmission System Operation* (DOE 2005a) procedure and in Appendix D of this document.

The monthly volume of leachate collected for treatment and subsequent disposal will be obtained based on the program in 40 CFR 264.303(c) to determine the flow rates of leachate collected in the LCS and water in the LDS. Monitoring the flow rates will provide data for determining the volume of leachate collected and will also provide data pertinent to the leak detection monitoring

**UNCONTROLLED IF PRINTED**

program. The flow rates are part of the leak detection monitoring program and are discussed further in Section 4.0. A separate leachate management monitoring strategy is provided as Section 5.0 to provide information on the method of leachate treatment and disposal, including analysis of parameters useful for leachate treatment.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **4.0 Leak Detection Monitoring Program**

This section presents the technical approach for leak detection monitoring at the OSDF, in light of the regulatory requirements for leak detection monitoring summarized in Section 3.0. This section includes a summary of the objectives of the program, a description of the major program elements, the selection process for analytical parameters (i.e., site-specific leak detection indicator parameters), and the strategy for evaluating the data to determine whether a leak has occurred. The subsections are as follows:

- Section 4.1: Introduction.
- Section 4.2: Monitoring Objectives.
- Section 4.3: Leak Detection Monitoring Program Elements.
- Section 4.4: Leak Detection Sample Collection.
- Section 4.5: Leak Detection Data Evaluation Process.

Additionally, Appendixes B and C provide the Project-Specific Plan and Data Quality Objectives for the OSDF Monitoring Program for each cell, with details on specific monitoring lists and frequencies. Appendix E describes the selection process for site-specific leak detection indicator parameters. Section 5.0 describes leachate management activities. Section 6.0 provides a summary of the notifications and potential follow-up response actions that accompany the monitoring program.


### **4.1 Introduction**

As discussed in Section 1.0, the OSDF leak detection monitoring program constitutes the first tier of a three-tiered detection, assessment, and corrective action monitoring strategy that is required for engineered disposal facilities. Consistent with this three-tiered approach, follow-up assessment and corrective action monitoring plans will be developed and implemented as necessary if it is deemed appropriate. Conversely, if the detection monitoring successfully demonstrates that leachate leaks have not occurred, then the monitoring program will remain in the first-tier “detection mode” indefinitely. The follow-up assessment and/or corrective action monitoring plans, if found to be necessary, would be prepared as new, independent plans that would supersede this first-tier detection program.

The key to a plausible potential-leak determination is the presence of an adequate hydraulic head (i.e., action leakage rate in LDS) with observed water-quality changes in either the HTW or GMA wells. However, due to preexisting background contaminant complications discussed in Section 2, the water quality of the monitored horizon is a secondary criterion that has merit if sufficient head exists to drive leachate through the liner. Unless a water quality change in an HTW or GMA well is accompanied by a corresponding action leakage flow rate in the LDS, the change will not be attributed to a potential leak from a cell in the OSDF.

The leak detection monitoring program monitors two horizons inside of each cell: the LCS and the LDS. A perched groundwater monitoring well is located and monitored beneath the secondary facility liner and 3-ft-thick compacted clay layer, directly below the LDS and LCS liner penetration boxes of each cell (Figure 4-1). A GMA groundwater monitoring well is situated on the east and west of each cell at depths ranging from 40 to 90 ft beneath the OSDF. The data collected from the four components are evaluated comparatively over time.

UNCONTROLLED IF PRINTED

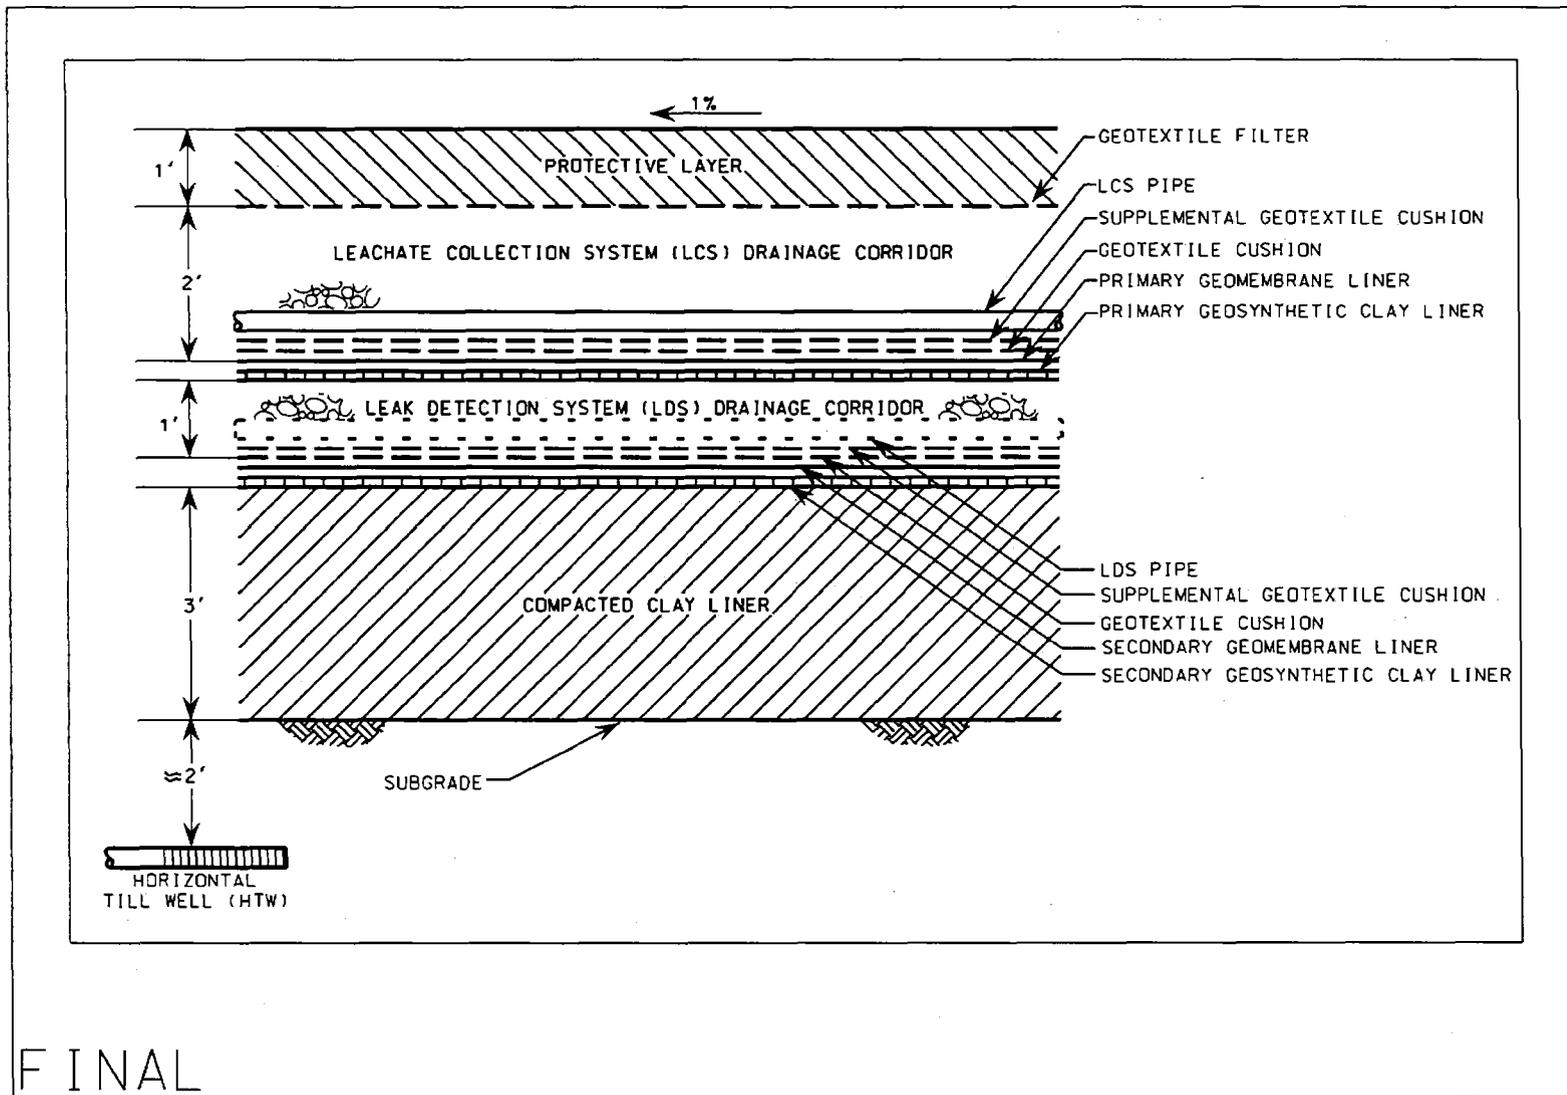

V:\LTS\111\051\20\503576\50355700.DGN

Figure 4-1. OSDF Liner System with HTW at the Drainage Corridor

## **UNCONTROLLED IF PRINTED**

The GMA is the prime resource of concern that could potentially be affected by the OSDF in the unlikely event that a leachate leak occurred. Therefore, it makes sense to monitor the aquifer at the immediate boundary of the OSDF. However, as discussed in Section 2.0, contaminant travel times to the aquifer through the glacial till beneath the OSDF are of such length that reliance on GMA monitoring alone would be insufficient to provide effective early warning of a leak from the facility. Therefore, perched groundwater monitoring wells are installed directly below the liner penetration box of each cell.

Additionally, as indicated in Sections 1.1 and 3.0, there is institutional knowledge regarding the various complexities associated with the regulatory strategy for the OSDF leak detection and data evaluation processes. This information has been considered in the monitoring strategy.

### **4.2 Monitoring Objectives**

The fundamental objective of the leak detection monitoring program is to provide the leachate flow and water quality data needed to determine if a leak may be occurring from the OSDF. Recognition of this fundamental objective allows the Fernald Preserve to move confidently into the next regulatory-based tiers of the program—assessment and corrective action monitoring—if required. This fundamental objective is the primary driver for all of the key site-specific elements (i.e., monitoring locations, frequencies, analytical parameters, and follow-up response actions) of the program.

In addition to this fundamental objective, several other objectives have been considered in the site-specific design of the leak detection program:

- The program should have the ability to distinguish an OSDF leak from the above-background preexisting levels of contamination that are found in the subsurface.
- All monitoring wells must be installed at locations and with construction methods that do not interfere with or compromise the integrity of the cap and liner system of the OSDF.
- The program needs to satisfy the site-specific regulatory requirements for leak detection monitoring summarized in Section 3.0.

The leak detection monitoring approach described below meets the intent of providing early detection of a release from the OSDF within the hydrogeologic regime at the Fernald Preserve, and is tailored to accommodate the additional program design objectives summarized above.

### **4.3 Leak Detection Monitoring Program Elements**

#### **4.3.1 Overview**

The leak detection monitoring program involves (1) tracking the quantity of liquid produced within the LCS and LDS over time to determine if enough hydraulic head is present in the facility to drive leachate through a liner breach, and (2) water quality monitoring of the leachate, the perched groundwater, and groundwater in the GMA. The success of the leak detection monitoring strategy for the OSDF is dependent upon understanding how a leak might occur from the facility, and understanding that preexisting contaminant concentrations in the perched groundwater and GMA complicate water quality data interpretations.

## **UNCONTROLLED IF PRINTED**

The approved design for the OSDF is presented in detail in the initial OSDF Design Package and subsequent approved follow-up design and construction drawing packages. The OSDF is a double-lined landfill consisting of eight individual cells that were constructed in phases. As shown in Figure 4-1, the liner for each cell is a composite liner system, assembled from the following layers (top to bottom): a soil cushion layer, geotextile fabric, LCS drainage layer, primary composite liner, high-density polyethylene (HDPE) (geotextile fabric, HDPE geomembrane, and geosynthetic clay liner), LDS drainage layer, and the underlying secondary composite liner (HDPE geomembrane, geosynthetic clay liner, and 3 ft of compacted clay). Both the LCS and LDS drainage corridors drain to the west within each cell. The base of each cell liner is sloped toward the center line of the cell, and the center line of the base is sloped toward the west. At the western edge of each cell liner, any liquid within the LCS and LDS is collected in pipes that pass through the liner penetration box and flow to the respective cell's valve house. As identified previously, the liner penetration box represents the area with the greatest leak potential for each cell and is considered the primary location where a leak would first enter the environment if a leak were to occur.

Each cell is also constructed with an engineered composite cover. The cover system consists of the following layers (top to bottom): a vegetation cover layer, a topsoil layer, a granular filter layer, a bio-intrusion barrier, a geotextile filter, a cover drainage layer, the primary composite cap (geotextile cushion, HDPE geomembrane, geosynthetic clay liner, and compacted clay), and an underlying contouring layer. The cover system was completed in 2006. Now that the cover system is in place and the cell contents are expected to reach equilibrium, leachate production is expected to diminish as a result of the moisture infiltration barrier properties of the cover system. During the time that the cell contents move toward equilibrium, leachate accumulation in the LCS drainage layer is expected to diminish over time.

A construction quality assurance/quality control program was executed for each cell of the OSDF. The synthetic liners and caps of each cell were inspected and tested for defects at the time of installation. Given the attention to quality assurance/quality control during installation of the OSDF liner system, it is doubtful that a breach in the liner would have gone unnoticed, but it is possible that a breach could develop. Such a breach would provide a potential pathway for leachate migration, but adequate hydraulic head is needed to drive leachate through the breach and from the facility.

The performance of each cell is monitored individually; each cell has its own engineered LCS and LDS drainage layers, perched groundwater monitoring component, and upgradient and downgradient GMA monitoring wells.

As described earlier, a secondary liner is present at the base of each cell beneath the LDS. In order for leachate to migrate from the OSDF, a defect or tear (breach) would need to exist in the secondary liner and enough hydraulic head would be needed to drive the leachate through the breach. Without adequate hydraulic head to drive leachate through a liner breach, leachate would follow the pathway of least resistance, which would be across the top of the liner through gravel in the LDS drainage corridor. The gravel has a much higher hydraulic conductivity relative to the underlying compacted clay in the liner, or the gray clay that is present beneath the facility.

For a leak to occur and be detected in an HTW (the first monitoring point beneath the facility), a liner breach needs to exist, and enough hydraulic head needs to be present in the facility to drive

## **UNCONTROLLED IF PRINTED**

leachate through the breach. The action leakage rate is the monitoring criterion used to assess the presence of hydraulic head in the cell of the facility. The action leakage rate is the maximum design flow rate that the LDS can remove without the fluid head on the bottom liner of the facility exceeding 1 ft (40 CFR 264.302). Stated in another way, it is the flow rate that corresponds to a hydraulic head within the facility capable of driving fluid through a liner breach. The OSDF has an action leakage rate of 200 gpad (DOE 1997).

Flow is monitored in the LDS of each cell and reported annually in the Site Environmental Report. To be conservative, DOE uses an initial response leakage rate of 1/10 of the action leakage rate (i.e., 20 gpad). Should the initial response leakage rate of 20 gpad ever be measured, DOE will begin the process of determining why the flow is increasing so that actions can be taken long before the actual action leakage rate is ever reached.

### **4.3.2 Monitoring the Engineered Layers within the OSDF**

Water quality samples were collected from individual LCS and LDS drainage layers within each cell during waste placement and after cell closure as described below and in Section 5.0. In addition to water quality monitoring, the quantity of leachate and fluid flowing through the LCS and LDS layers is recorded and reported.

#### **4.3.2.1 Leachate Collection System**

The LCS drainage layer collects infiltrating water and keeps it from entering the environment. As each cell was capped, the volume of leachate draining through the LCS has decreased. At some time in the future, decreased flow may limit the available sample volume and possibly affect the number of parameters that can be analyzed.

The LCS drains to the west through an exit point in the liner to the leachate transmission system on the west side of the OSDF. From there, the leachate collected is periodically pumped to the CAWWT backwash basin or directly to CAWWT feed tanks. Both flow (quantity/volume) and water quality information are collected from the LCS drainage layer according to Section 4.4 and Appendix B.

#### **4.3.2.2 Leak Detection System**

By design, the primary composite liner located underneath the LCS drainage layer should not leak. By design, leachate that accumulates in the LCS drainage layer above the primary liner is drained by gravity out of the cells to further reduce the potential for leakage by minimizing the level of fluid buildup in the primary liner. Notwithstanding this design, a second fluid collection layer, the LDS drainage layer, is positioned beneath the primary composite liner to provide a means to track the integrity and performance of the primary liner. If fluids collect within the LDS layer, by design the fluids gravity-drain to the west, out of the cells, where they are routed for treatment.

## **UNCONTROLLED IF PRINTED**

Similar to the LCS, fluid volumes in the LDS have decreased since the cells were capped. At some time in the future, decreased flow may limit the available sample volume and possibly affect the number of parameters that can be analyzed. Below the LDS drainage layer is a secondary composite liner that comprises an HDPE geomembrane, geosynthetic clay liner, and a 3-ft-thick layer of compacted clay. This secondary liner serves as the lowermost hydraulic barrier in the liner system and inhibits fluids from entering the environment before they are collected and removed through the LDS drainage corridor.

Like the LCS drainage corridor, both flow (quantity/volume) and water quality information are collected from the LDS drainage layer according to Section 4.4 and Appendix B.

### **4.3.3 Monitoring Perched Groundwater Beneath the Facility**

The perched groundwater monitoring component of the program is designed to monitor for the presence of leachate leakage from the OSDF at its first point of entry into the Fernald Preserve's natural hydrogeologic environment. As discussed in Section 1.0, a horizontally oriented glacial till monitoring well (i.e., HTW), positioned directly beneath the location of the LCS and LDS liner penetration box in each cell, represents the most feasible site-specific approach to monitor for first entry leakage from the OSDF into the Fernald Preserve's environment.

The HTWs were installed as part of the subgrade construction activities for each cell of the OSDF. They were installed prior to waste placement, therefore eliminating final positioning uncertainties that would be associated with post-construction horizontal drilling techniques. The vertical portion of each of the monitoring wells is located along the western side of the OSDF, while the sample collection interval is positioned beneath the bottom of the secondary composite liner in alignment with the location of the LCS and LDS liner penetration box.

Lithologic and hydraulic characterization of the till in the vicinity of the OSDF indicates that the clay-rich deposits of carbonate and silicate grains may not readily yield fluid to a well. The amount of saturation in the till is further reduced by the barrier properties of the composite cover and liner system of the OSDF, which operate to significantly reduce local infiltration beneath the facility. These conditions may make it difficult or impossible to obtain sufficient sample volume from the till wells to perform detailed water quality analyses. If sufficient sample volume cannot be obtained to perform the full list of required analyses, a priority list will be implemented as necessary as identified in Appendix B.

Water quality information is collected from the HTWs according to Section 4.4 and Appendix B.

### **4.3.4 Monitoring the GMA**

The subsections below describe the GMA component of the program, including a discussion of the influence of aquifer restoration activities on the program, the siting of the monitoring wells, and the use of the groundwater models (i.e., Variably Saturated Analysis Model in 3 Dimensions [VAM3D] and Sandia Waste Isolation Flow and Transport [SWIFT]) to evaluate the adequacy of the planned well locations.

## UNCONTROLLED IF PRINTED

### 4.3.4.1 Siting of the GMA Monitoring Wells

The GMA monitoring wells are located immediately adjacent to the OSDF, just outside the footprint of the final composite cap configuration, so as not to interfere with the integrity of the facility. Each cell has its own set of monitoring wells to assist with the evaluation of conditions associated with that cell. As each new cell was brought on line, its associated monitoring wells were installed before (or concurrently with) the construction of the cell liners so that the wells were available for the initiation of baseline sampling prior to waste placement. Thus, well installations have followed the north-to-south progression of OSDF cell construction. The OSDF is bordered by a network of 18 GMA monitoring wells that provide upgradient and downgradient monitoring points for each cell (Figure 4-2). All monitoring wells were constructed in accordance with the *Sitewide CERCLA Quality Assurance Project Plan* (DOE 2003) for Type 2 GMA wells.

The overall objective of the GMA component of the leak detection monitoring program is to provide long-term surveillance. Therefore, the current and future (post-remediation) aquifer flow conditions were used to select the 18 monitoring locations. As discussed in the next subsection, groundwater flow and particle tracking using both the VAM3D and the SWIFT groundwater modeling computer codes were used to help select the final monitoring locations identified in this plan.

### 4.3.4.2 VAM3D Flow Model and SWIFT Transport Model Evaluation of Well Locations

The VAM3D and SWIFT groundwater modeling codes were used to evaluate the adequacy of the density and locations of the monitoring wells planned for the GMA. The modeling effort examined the fate of a hypothetical release from each cell to the aquifer at a point directly beneath the liner penetration box of the LCS and LDS. The modeling predicted the most likely flow path and plume configuration for particles released from the liner penetration box area over time. The modeling was conducted for post-aquifer-remediation conditions (when groundwater flow directions would be from west to east). The original modeling was performed using the SWIFT computer code and has been updated subsequently using the VAM3D computer code. (**Note:** Modeling was performed on the assumption that there would be nine cells.)

Particle flow path modeling was conducted using the VAM3D flow model output from two model runs representing seasonal wet and dry conditions within the aquifer. Fifteen particles were seeded in a 125-ft radius around each of nine model nodes located nearest the nine cell liner penetration box locations. These particles were tracked for a 20-year period with no retardation. The velocity flow field data from the post-aquifer-remediation scenario shows the advective particle path results (Figure 4-3). The particle tracks are generally from west to east beneath the OSDF. As indicated in the figure, the tracks deviate slightly in the north-south direction with seasonal water level fluctuations in the aquifer. Downgradient monitoring wells were located in the area traced out by the modeled flowpaths for each OSDF cell in order to be in the most likely position to detect a leak based on anticipated groundwater flow. These flow model results are similar to the flow model results obtained previously with the SWIFT groundwater model, which was used prior to converting to the VAM3D modeling code. Monitoring wells for Cells 1 through 3 were placed based on the results from the SWIFT groundwater flow model, and monitoring wells from Cells 4 through 8 were placed based on the results from the VAM3D flow model (DOE 2000).

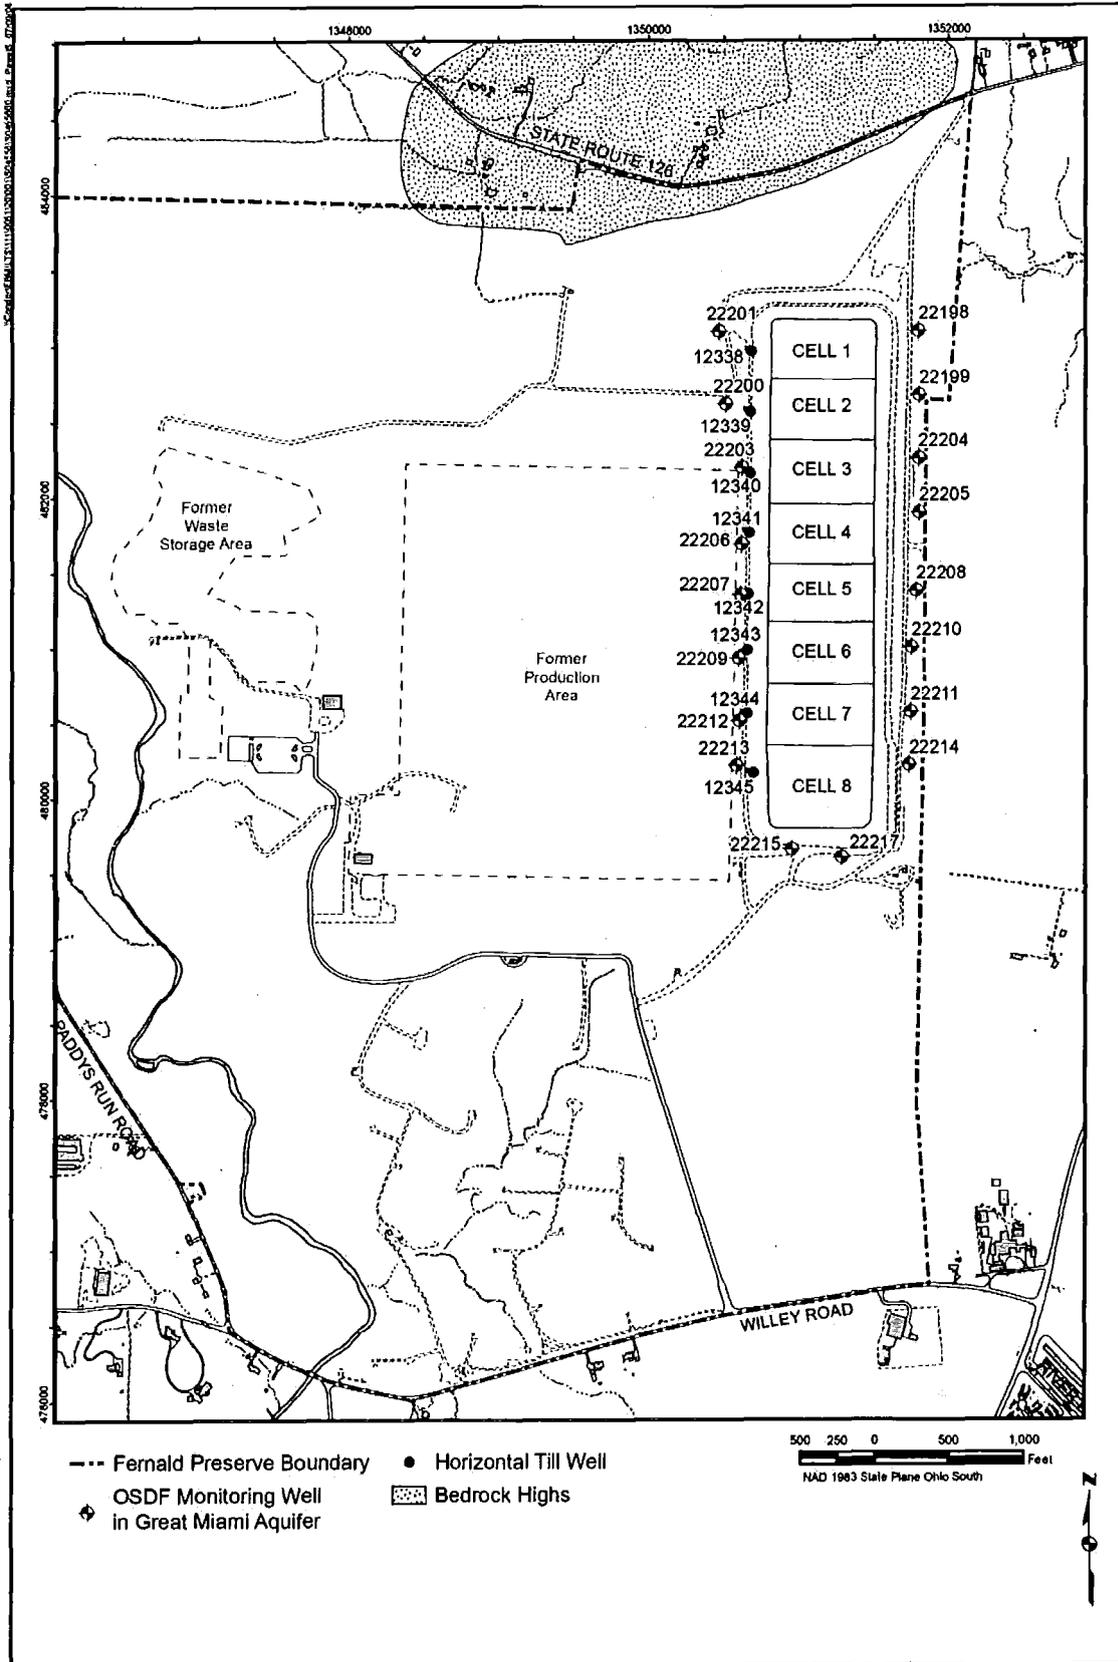


Figure 4-2. OSDF Well Locations

UNCONTROLLED IF PRINTED

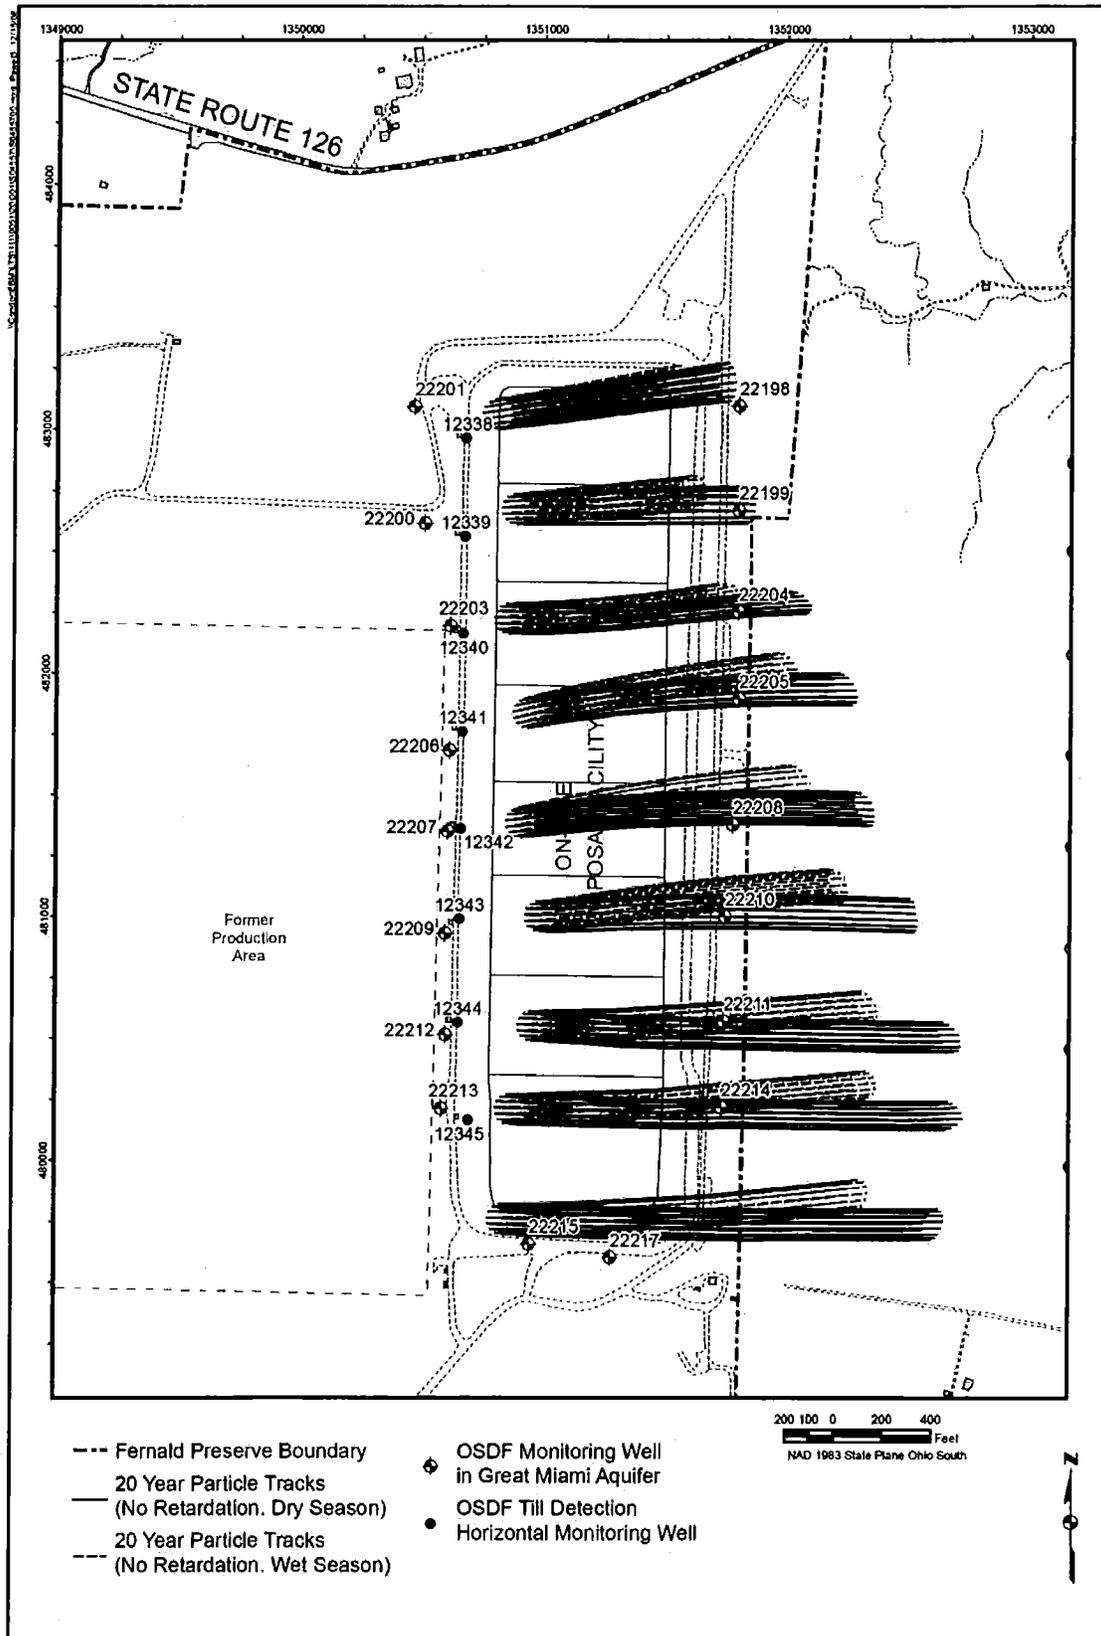


Figure 4-3. Post-Remediation Scenario

## **UNCONTROLLED IF PRINTED**

An earlier SWIFT model transport simulation was performed for Revision 0 of this plan to determine if the density of the downgradient GMA monitoring well network is adequate to detect the smallest contaminant plume resulting from a leak in the OSDF that would be of concern. Those SWIFT model results are included here for completeness. The SWIFT model was used to simulate a leak from the cell liner penetration box beneath Cell 3 under natural flow gradients with no on-site pumping. Model simulations for both uranium and technetium-99 were performed. Constant loading from the cell was simulated throughout the model run such that a plume of minimum areal extent (i.e., a plume with maximum concentration equal to the FRL) was maintained in the aquifer. Hypothetical plumes of 20 parts per billion uranium and 94 picocuries per liter technetium-99 were maintained. The plumes were loaded from two hypothetical locations. One location was approximated to be beneath the cell liner penetration box at the western edge of Cell 3 to represent the most likely leakage point from the cell. The other location was farther east, to provide a more conservative scenario where the plume would have less time to expand before the leading edge would reach the downgradient monitoring well network.

The modeling results for uranium at model year 55 (2051) and for technetium-99 at model year 30 (2026) are shown in Figures 4-4 and 4-5, respectively. (**Note:** Modeling was performed on the assumption that there would be nine cells.) The durations were determined from the modeling, and they represent the period of time under constant loading for the respective plumes to disperse to the width of the spacing distance between monitoring wells (approximately equal to the OSDF cell width). Modeling results indicate that the density of downgradient GMA monitoring wells is sufficient to detect this minimal plume given the lateral expansion and the plume width under this minimal constant loading.

The width of each plume from horizontal dispersion is approximately the width of an OSDF cell, indicating that one downgradient GMA monitoring well per cell is sufficient to ensure that a GMA contaminant plume would be detected. Therefore, the configuration of GMA wells (Figure 4-2) is sufficient both in terms of well density and location for the OSDF leak detection monitoring program.

### **4.4 Sample Collection**

The following subsections discuss the sample collection for the four components of the leak detection program: the LCS and the LDS drainage layers (flow and water quality), the HTWs in the glacial till (water quality), and the monitoring wells in the GMA (water quality).

#### **4.4.1 HTW and GMA Monitoring**

Sampling both the perched groundwater and the GMA groundwater during the same time frame is desired in order to enhance the comparability of the data; however, the overriding requirement is that the individual monitoring point has sufficient fluid to collect samples for a complete suite of analyses.

Prior to sample collection, the volume in the monitoring point is estimated to determine whether sufficient volume is present for the full suite of analytical parameters (refer to Appendix B for a discussion on setting priorities for low sample volume).

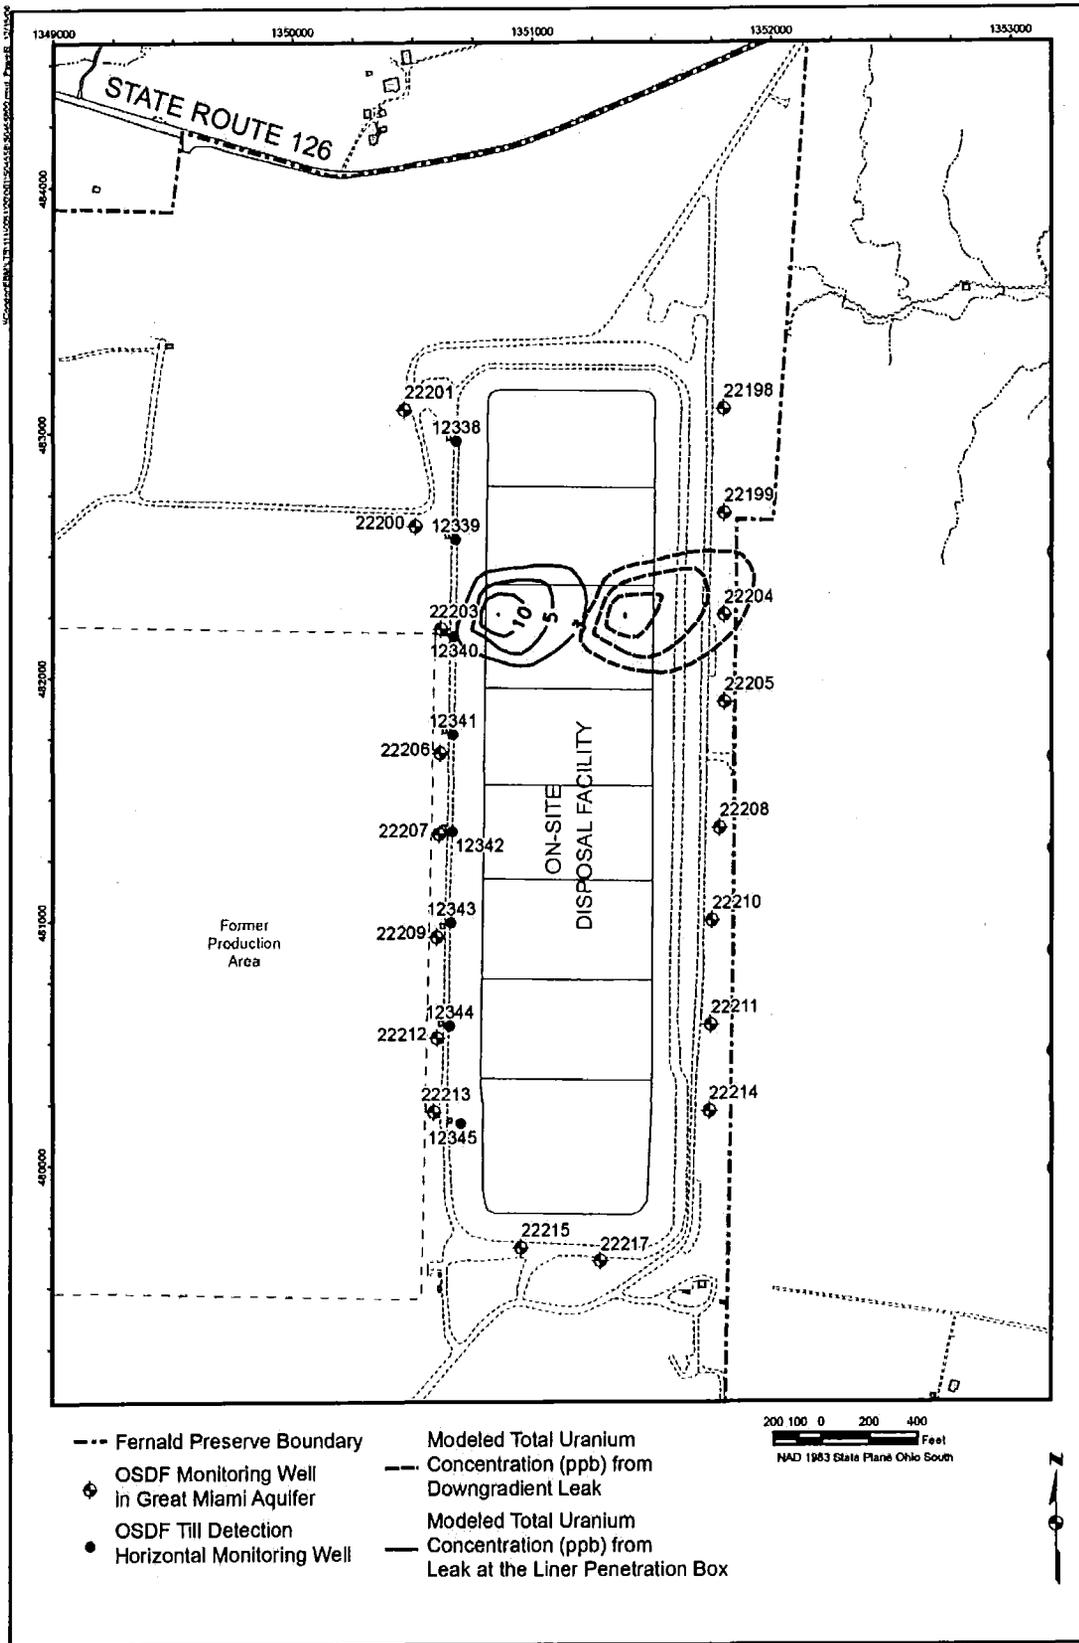


Figure 4-4. SWIFT Modeling with Uranium Loading—55 Years

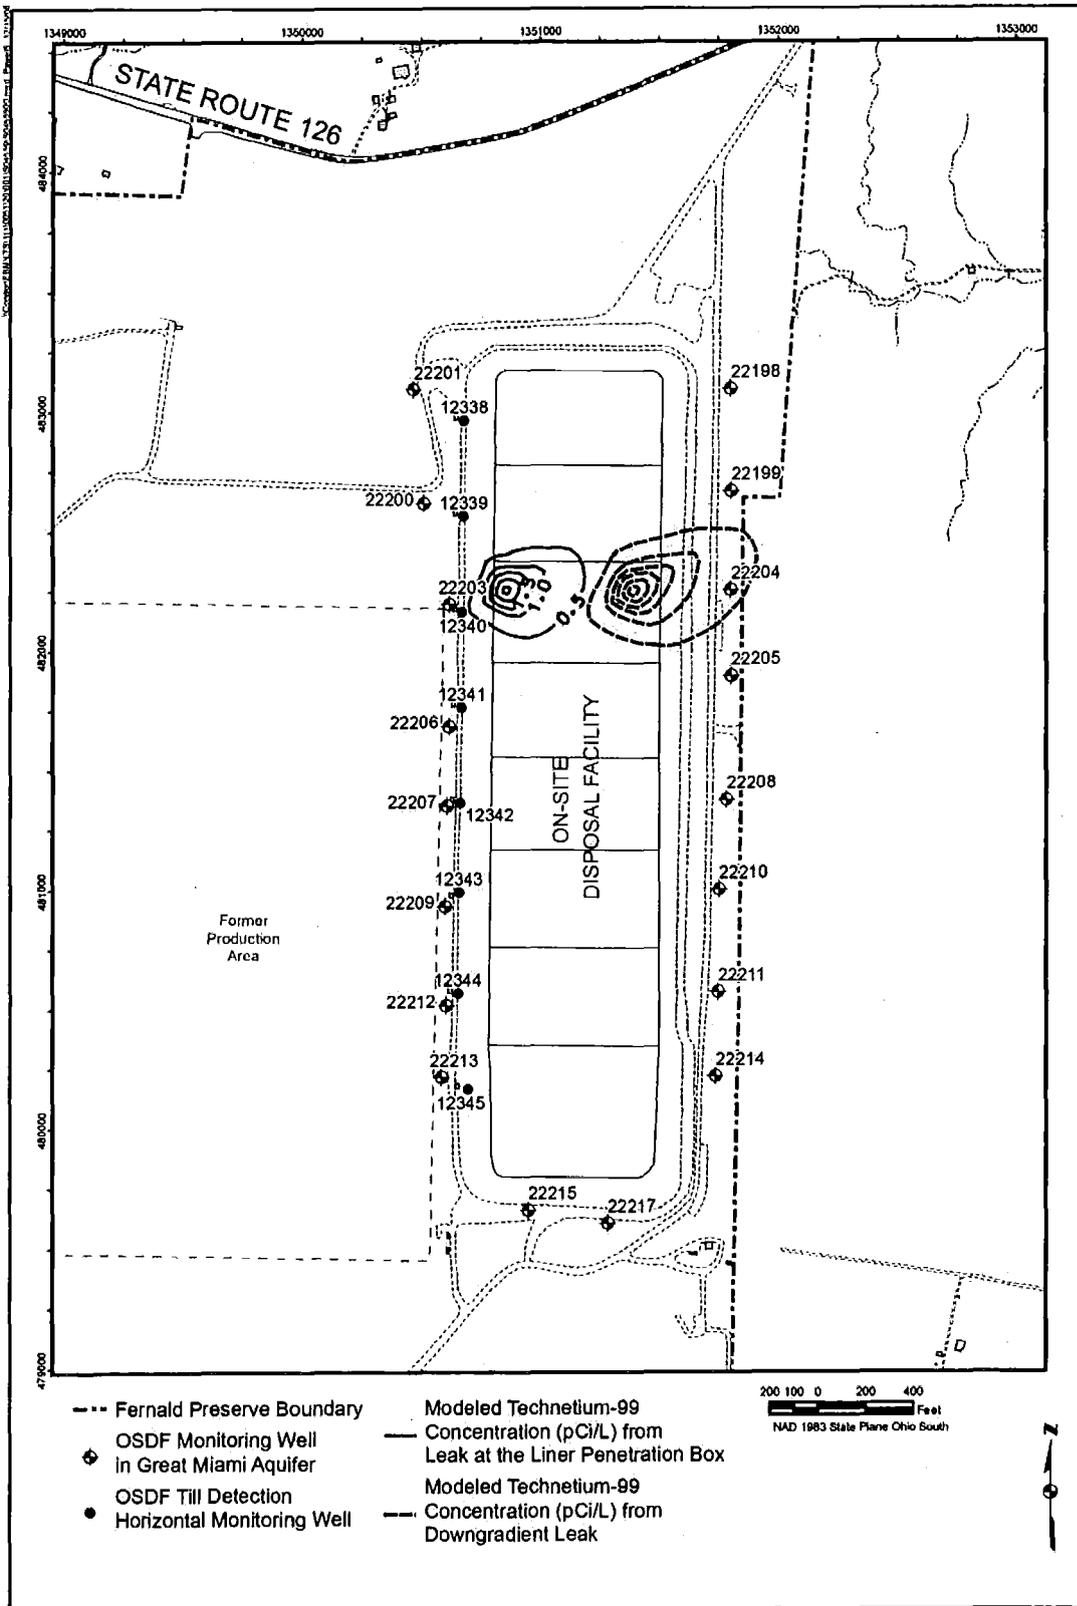


Figure 4-5. SWIFT Modeling with Technetium-99 Loading—30 Years

## **UNCONTROLLED IF PRINTED**

### **4.4.1.1 Baseline Conditions in the Perched Groundwater and GMA**

As discussed in Section 2.4, both the perched groundwater system and the GMA near the OSDF contain uranium and other Fernald Preserve-related constituents at levels above background. Monitoring data reported over the years indicate that many of the background constituent concentrations are not stable and exhibit concentration trends. The presence of trends complicates efforts to establish a baseline. The trends also complicate a determination that, on the basis of water quality data alone, a change in water quality in either the perched groundwater or GMA groundwater is due to a potential leak from the OSDF. The key to a plausible potential leak determination is the presence of an adequate hydraulic head (i.e., action leakage rate in the LDS) along with observed water-quality changes within and outside the facility.

DOE's common-ion report (discussed in Section 3.2.1.2) established that several of the ions in the HTW and GMA were stable enough that a control chart could be prepared, although others remained unstable. Control charts will be prepared for those constituents identified in the report in the HTW and GMA that meet the statistical requirements for control charting. Unstable constituent concentrations in the HTW and GMA will be evaluated by plotting the concentration trend over time. When an unstable constituent in the HTW or GMA meets the requirement for control charting, control charts for the constituent will be prepared.

### **4.4.2 LCS/LDS Monitoring**

#### **4.4.2.1 Flow Monitoring in the LCS and LDS**

Leachate collected by the LCS from each cell flows by gravity to tanks located in the valve houses where the fluid volume is measured. Flow in the LDS can be attributed to several sources (i.e., top liner leakage, construction water and compression water, consolidation water, and groundwater infiltration). If fluid is present in the LDS, it also flows by gravity to tanks located in the valve houses where its volume is measured. Fluid from the tanks is then pumped into the Enhanced Permanent Leachate Transmission System line, where it flows by gravity to the PLS then is pumped to the CAWWT for treatment.

Tank levels in each of the valve houses are monitored continuously, and valve houses are checked weekly. Continuous monitoring takes place through the Human-Machine Interface system located in the CAWWT building. Continuous monitoring of LCS/LDS flow volumes is above and beyond what is required by the OAC and CFR. Leachate pumps in the LCS/LDS tanks are set to automatically pump before the tanks are full. The set point for pump activation is approximately 80 percent of the tank capacity.

The volume of leachate pumped from the LCS/LDS tanks is recorded. Flow from each cell's LCS and LDS tanks is compiled daily and trended to provide an indication of changes in system performance. An average daily LDS flow rate (in gpad) is calculated from the monthly flow rate. Flow data are provided to EPA and OEPA in monthly reports and are reported annually in the Site Environmental Report.

The LDS flow rate is monitored to ensure that the maximum design flow rate is not exceeded. If the flow rate in the LDS exceeds the 200 gpad action leakage rate, DOE initiates notifications and response actions according to 40 CFR 264.304(b) and 40 CFR 264.304(c). Section 6.0 describes the required notifications and response actions. If the initial response leakage rate of

## UNCONTROLLED IF PRINTED

20 gpad is ever measured, DOE will begin the process of determining the cause of the increased flow and will evaluate the potential that a release has occurred.

### 4.4.2.2 Water Quality Monitoring in the LCS and LDS

Annual LCS sampling in Cells 1–3 has transitioned from the full list of regulatory default Appendix I and PCB parameters (listed in OAC 3745-27-10) to a composite list of constituents consisting of:

- Initial baseline parameters and sulfate.
- Appendix I metals and inorganics.

At the request of OEPA, annual LCS sampling in Cells 4–8 will continue to be for the full list of Appendix I constituents and PCBs until eight rounds of samples have been collected. In addition, the LCS of Cells 4–8 will also be sampled for initial baseline parameters and sulfate.

The LDS of Cells 1–8 will be sampled quarterly for:

- Refined baseline parameters (boron, uranium, sulfate, total organic carbon, total organic halogens).
- Useful common ions identified in the *Evaluation of Aqueous Ions in the Monitoring Systems of the On-Site Disposal Facility* (DOE 2008a) (iron, lithium, manganese, sodium).
- Additional Appendix I parameters (arsenic, cobalt, nickel, selenium, zinc, and TDS).

Details concerning the selection and approval of an alternate monitoring parameter list (initial baseline) for the OSDF are provided in Appendix E. Details concerning the selection of the common ion constituents can be found in the *Evaluation of Aqueous Ions in the Monitoring Systems of the On-Site Disposal Facility* (DOE 2008a), and details concerning the screening of additional Appendix I (of OAC 3745-27-10) and PCB parameters can be found in the 2007 Site Environmental Report. Appendix B provides a project-specific sampling plan that describes the current sampling program for each disposal cell.

Prior to sample collection, the volume contained in the LCS and LDS tanks or flowing through the individual LCS and LDS transfer lines is estimated in order to determine whether sufficient volume is present for the full suite of analyses (refer to the discussion in Appendix B for the setting of priorities). Although it is desirable that samples be collected from the LCS and LDS during the same time interval to enhance the comparability of the data, the overriding requirement is that the system has enough leachate/fluid volume for analysis of the full list of constituents.

An alternate list of monitoring parameters was approved for the OSDF because many of the constituents on the regulatory default list (OAC 3745-27-10) are not reasonably expected to be in or derived from the waste contained or deposited in the OSDF. Also, the chemical constituents listed in Appendix I (of OAC 3745-27-10) are typical contaminants found in sanitary landfills, and radionuclides are not included. Radionuclides are primary constituents of concern for the OSDF and need to be included in the monitoring program.

## **UNCONTROLLED IF PRINTED**

Monitoring in the LCS for Appendix I and PCB parameters continues after an alternate monitoring sampling list for the OSDF has been approved. DOE considers this continued annual sampling for Appendix I and PCB parameters, after approval of the alternate monitoring parameter list (initial baseline), as exceeding the requirements of Ohio Hazardous Waste and Solid Waste regulations.

A statistical analysis process was developed to evaluate the results of the continued Appendix I and PCB monitoring in the LCS. This statistical screening process was presented in the 2007 Site Environmental Report. Results from the application of this process for Cells 1 through 3 were also presented in the 2007 Site Environmental Report. The assessment process was based on showing statistically whether the average LCS concentration was greater than either the average pre-design or background concentration. If it is determined statistically that the average LCS concentration of an Appendix I or PCB constituent is greater than either the average pre-design or background concentrations, then the constituent is targeted for monitoring in deeper monitoring horizons (LDS, HTW, GMA). Results for Cells 1 through 3 identified the following additional constituents as being potentially useful for monitoring those cells: arsenic, cobalt, nickel, selenium, zinc, and TDS.

### **4.5 Leak Detection Data Evaluation Process**

Ohio Solid and Hazardous Waste regulations require that water quality be monitored for the purpose of determining if a leak is occurring from a disposal facility. Monitoring for a leak from the OSDF using only water quality data is challenging in that (1) the low-permeability clay beneath the facility does not readily transmit water, and (2) the presence of preexisting or background contamination and post-construction water quality changes (at below FRL levels) beneath the OSDF are still taking place, and these changes complicate the data interpretation process.

DOE has developed a strategy to meet the regulatory requirements, given the unique challenges presented by soil conditions beneath the OSDF. To evaluate the potential that a cell may be leaking, DOE will first review and compare flow rates from the LDS to the design action leakage rate to determine if sufficient hydraulic head is present in the cell to drive leachate through a liner breach. The key to a plausible potential leak determination is the presence of adequate hydraulic head (i.e., action leakage rate is present) coupled with observed water-quality changes in the LDS and HTW. DOE will evaluate the water quality of the HTW or GMA horizon in relation to the hydraulic head in the cells LDS. A water quality change in an HTW or GMA well accompanied by a corresponding action leakage flow rate in the LDS will indicate that a leak may have occurred.

Three water quality data interpretation techniques will be used to assess changing water quality conditions in HTW and GMA wells and to compare conditions in the HTW and GMA wells to conditions inside the facility in the LCS and LDS. Concentrations will be trended over time for constituents that have not reached steady-state conditions. Control charts will be prepared for constituents that are stable. Bivariate plots will be prepared for each cell to illustrate how the water quality signature of the LCS, LDS, and HTW of a cell compare.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 5.0 Leachate Management Monitoring Program

With closure of the OSDF in 2006, leachate management and monitoring is transitioning from a program that addressed an operating facility actively receiving waste to a monitoring program that now addresses a closed facility no longer receiving waste. The transition has resulted in changing from sampling the LCS in Cells 1–3 for the full list of default regulatory parameters (Appendix I of OAC 3745-27-10 and PCBs) to sampling for a composite list of constituents. The transition will eventually result in sampling the LCS in Cells 4–8 for a composite list of constituents.

Ohio Solid Waste Disposal regulations for an operating facility require an overall leak detection strategy to comply with the leachate management, monitoring, and reporting requirements in OAC 3745-27-19(M)(4) and OAC 3745-27-19(M)(5). To fulfill these requirements during the active life of the facility, the leachate management monitoring strategy needed to provide:

- A means to track the quantity of leachate collected for treatment and discharge, reported at least monthly.
- A means to verify that the engineering components of the leachate management system will operate in accordance with OAC 3745-27-19, “Operational Criteria for a Sanitary Landfill Facility.”
- A description of the site-specific leachate treatment and discharge elements to ensure that leachate collected from the facility is properly managed.
- Collection and analysis of an annual leachate grab sample for Appendix I and PCB parameters according to OAC 3745-27-10 and 19.

The first item of the strategy above is fulfilled by the flow monitoring component of the leak detection monitoring strategy. Flow measurements are taken at the frequency identified in Section 4.4.2.2. The second item of the strategy above is fulfilled by the *OSDF Enhanced Permanent Leachate Transmission System Operation* procedure (DOE 2005a), and Appendix D of this plan. The description in Section 5.1 fulfills the third item. The fourth item is fulfilled by sampling Cells 1–3 for an alternate parameter monitoring list; the default regulatory parameter list for Cells 4–8 will eventually transition to an alternate parameter list.

### 5.1 Leachate Treatment and Discharge Management

Leachate is treated in the CAWWT and discharged at the National Pollutant Discharge Elimination System (NPDES)–permitted outfall to the Great Miami River. The following is a description of the management approach for leachate treatment, along with a description of the treatment system and the leachate monitoring needs to ensure proper operation of the treatment facility and compliance with the NPDES permit.

Leachate is collected from both the LCS and LDS layers of each cell of the OSDF whenever such fluids are present. Fluid that collects in the LCS and LDS collection tanks located in each cell’s valve house is pumped to the gravity drain portion of the leachate transmission system line, which drains all valve houses to the PLS. The leachate collected in the PLS is periodically pumped to the CAWWT backwash basin or directly to CAWWT feed tanks.

**UNCONTROLLED IF PRINTED**

The CAWWT is a 1,800-gpm facility divided into a 1,200-gpm treatment train dedicated to groundwater and a 600-gpm treatment train formerly used for the treatment of storm water and remediation wastewater, including leachate. Since site storm water no longer requires treatment, the CAWWT 600-gpm treatment train treats primarily groundwater but also treats leachate and water from the backwash basin. All discharges from the CAWWT are through the NPDES Outfall PF 4001. OAC 3745-27-19, "Operational Criteria for a Sanitary Landfill Facility," requires treatment of leachate. Leachate is a minimal flow and will likely have no bearing on operational decisions. It is required, however, that leachate be treated through the CAWWT prior to discharge to the Great Miami River until the CAWWT is no longer needed.

Prior to the cessation of CAWWT operations, DOE will have proposed and negotiated the future management of leachate with EPA and OEPA. A passive treatment system for OSDF leachate was evaluated for potential post-closure use at the Fernald Preserve (DOE 2004b). This evaluation used leachate from the OSDF to test the uranium removal effectiveness of several media. Iron filings appeared to perform the best. The evaluation will be revisited to determine whether additional testing is warranted prior to selecting the alternative treatment system to be used once CAWWT is no longer available.

## **6.0 Reporting**

### **6.1 Routine Reporting**

Annual Site Environmental Reports will serve as the formal reporting mechanism for OSDF monitoring activities. Presenting data in one report facilitates a qualitative assessment of the impact of the OSDF on the aquifer, as well as the operational characteristics of OSDF caps and liners. Additionally, monitoring data will be made available electronically through the Geospatial Environmental Mapping System.

Reporting will include:

- LCS volumes.
- LDS accumulation rates and volumes.
- Apparent liner efficiencies.
- HTW water yields.
- LCS, LDS, HTW, and GMA water quality results.

Water quality data will be evaluated to:

- Identify any new detects in the LCS.
- Identify if any new detects in the LCS are detected twice in a row, which would trigger sampling for the detected parameter in the LDS.
- Verify that constituents being detected in the LCS at least 25 percent of the time are being sampled for in deeper monitoring horizons.
- Identify the parameters in the HTW and GMA that pass control-charting requirements and prepare control charts for them.
- Identify the parameters in the HTW and GMA that are not stable and prepare time versus concentration plots for them.
- Prepare bivariate plots for uranium-sodium for each cell.

### **6.2 Notifications and Response Actions**

If the flow rate into any LDS tank exceeds 20 gpad, which is 10 percent of the established OSDF action leakage rate of 200 gpad, monitoring frequency for the specific cell, including both LCS and LDS, will be increased to weekly as long as the high flow rate in the LDS remains. Leachate will be analyzed to determine concentrations of the indicator constituents. DOE will notify EPA and OEPA when this situation is identified during the routine monitoring. All the monitoring data collected during the subsequent increased monitoring frequency period will be forwarded to EPA and OEPA for review weekly or as it becomes available.

If the flow rate into any LDS tank exceeds 10 percent of the action leakage rate continuously in every weekly monitoring event for more than 3 months, an engineering evaluation of the integrity of the specific cell will be initiated. The cell cap and toe will be inspected for any potential problems. The perched groundwater levels in the surrounding area will also be

**UNCONTROLLED IF PRINTED**

evaluated. Any significant findings that indicate potential sources of liquid will be reported. Appropriate maintenance actions will be identified and implemented to address any identified problems following consultation with EPA and OEPA.

If the flow rate into any LDS tank exceeds the action leakage rate, the actions presented in Table 6-1 will be implemented. In following the steps required in Table 6-1, both flow volumes and concentration levels of indicator constituents in the leachate collected in the LDS will be evaluated on a cell-by-cell basis together with all the other monitoring data collected from the LCS, till monitoring wells, and GMA monitoring wells. Historical monitoring data and weather information will be compared with the current conditions to narrow the time frame of potential changes in the system performance.

*Table 6-1. Notification and Response Actions*

Step	Time frame	Action
1.	Within 7 days of the determination of an exceedance into any LDS at the action leakage rate of 200 gpad.	Notify both of the following in writing: <ul style="list-style-type: none"> <li>• EPA Region 5 Regional Administrator 77 West Jackson Boulevard, Chicago, Illinois 60604-3590</li> <li>• Director, Ohio Environmental Protection Agency 122 South Front Street, Columbus, Ohio 43215</li> </ul>
2.	Within 14 days of the determination of an exceedance into any LDS at the action leakage rate of 200 gpad.	Submit to both of the individuals identified in Step 1 a written preliminary assessment as to the: <ul style="list-style-type: none"> <li>• Amount of liquids.</li> <li>• Likely sources of liquids.</li> <li>• Possible location, size, and cause of any leaks.</li> <li>• Short-term actions taken and planned.</li> </ul>
3.	As practicable to meet Step 7.	Determine to the extent practicable the location, size, and cause of any leak.
4.	As practicable to meet Step 7.	Determine any other short- or long-term actions to take to stop or mitigate the leaks.
5.	As practicable to meet Step 7.	In order to conduct Steps 3 through 5: <ul style="list-style-type: none"> <li>• Assess the source of liquids, and amounts of liquids by source; and</li> <li>• In order to identify the source of liquids and the possible location of any leaks, and the hazard and mobility of the liquid, conduct a fingerprint, hazardous constituent, or other analyses of the liquids in the LDS; and</li> <li>• Assess the seriousness of any leaks in terms of potential for escaping into the environment.</li> </ul> <p style="text-align: center;">OR</p> <ul style="list-style-type: none"> <li>• Document why such assessments are not needed.</li> </ul>
6.	Within 30 days of the notification given in Step 1.	Submit to both of the individuals identified in Step 1 a written report of the: <ul style="list-style-type: none"> <li>• Results of the analyses and determinations made under Steps 3 through 6 (to the extent completed).</li> <li>• Results of action taken.</li> <li>• Actions ongoing (i.e., analyses and determinations under Steps 3 through 6 not yet completed) or planned (refer to Section 9.0 of the OSDF Post-Closure Care and Inspection Plan).</li> </ul>
7.	Monthly thereafter, as long as the flow rate in the LDS exceeds the action leakage rate.	Submit to both of the individuals identified in Step 1 a written report summarizing the: <ul style="list-style-type: none"> <li>• Results of actions taken.</li> <li>• Actions planned.</li> </ul>

Federal Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities, Subpart NC-Landfills, Response Actions, 40 CFR 264.304(b) and 265.303(b).

## **UNCONTROLLED IF PRINTED**

Preliminary field inspections of the cell caps, toes, run-on/runoff control channel, valve houses, and lift station will be conducted as soon as possible to meet the Step 7 schedule and to identify any visible signs of potential problems or sources of liquids. Pending field conditions, some mowing or snow removal may be required in order to conduct these inspections sufficiently. All necessary efforts will be made to allow sufficient visual inspections. EPA and OEPA will be notified prior to these inspections. Checklists similar to those prepared for the routine quarterly inspections will be submitted as a part of the written report specified in Step 7 to document these inspections.

The Engineer on Record for the OSDF (or other engineering consultants who specialize in landfill design and are acceptable to EPA and OEPA) will be requested to assist with the data evaluation, field inspections, and preparation of the report.

Preventive maintenance or any necessary repairs of selected OSDF caps or toes will be conducted based on results of routine visual inspections, engineering evaluation triggered by exceeding 10 percent of the action leakage rate continuously for three months, or the Table 6-1 process. If it is determined that both the cap and primary liner have failed following any of the inspections and/or engineering evaluations, then a more intensive OSDF response action will also be required. A response action might include initiating cap repair, investigating whether contamination has breached the compacted clay liner of the secondary composite liner system that lies beneath the LDS, increasing monitoring, or a combination of these actions.

Potential leakage through the clay liner below the secondary liner will be assessed by using the HTW installed beneath the liner penetration box area and secondary liner (along with the LCS and LDS flow volumes and water quality data). If it is determined that a leak has adversely impacted groundwater (till or GMA), then a groundwater quality assessment monitoring program will be developed and initiated to determine the nature, rate, and extent of contaminant migration. Groundwater monitoring might also be increased to determine if leakage from the OSDF has entered the GMA, although given the distances involved it would be unlikely that leakage from the OSDF would be able to migrate to the GMA in the short time interval between leak detection and response.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 7.0 References

40 CFR 192 Subpart D (§§ 192.30–192.34). U.S. Environmental Protection Agency, “Standards for the Management of Uranium Byproduct Materials Pursuant to Section 84 of the Atomic Energy Act of 1954, as Amended,” *Code of Federal Regulations*, July 1, 2008.

40 CFR 264 Subpart F (§§ 264.90–264.99). U.S. Environmental Protection Agency, “Release from Solid Waste Management Units,” *Code of Federal Regulations*, July 1, 2008.

40 CFR 264.91. U.S. Environmental Protection Agency, “Required Programs,” *Code of Federal Regulations*, July 1, 2008.

40 CFR 264.92. U.S. Environmental Protection Agency, “Ground Water Protection Standard,” *Code of Federal Regulations*, July 1, 2008.

40 CFR 264.302. U.S. Environmental Protection Agency, “Action Leakage Rate,” *Code of Federal Regulations*, July 1, 2008.

40 CFR 264.303. U.S. Environmental Protection Agency, “Monitoring and Inspection,” *Code of Federal Regulations*, July 1, 2008.

40 CFR 264.304. U.S. Environmental Protection Agency, “Response Actions,” *Code of Federal Regulations*, July 1, 2008.

DOE Manual 435.1-1 Chg 1, *Radioactive Waste Management Manual*, June 19, 2001.

DOE (U.S. Department of Energy), 1995a. *Feasibility Study Report for Operable Unit 5*, Fernald Environmental Management Project, Fernald, Ohio, June.

DOE (U.S. Department of Energy), 1995b. *Final Record of Decision for Remedial Actions at Operable Unit 2*, EPA/ROD/R05-95/289, Fernald Environmental Management Project, Cincinnati, Ohio, June 8.

DOE (U.S. Department of Energy), 1995c. *Pre-Design Investigation and Site Selection Report for the On-Site Disposal Facility*, Fernald Environmental Management Project, Fernald, Ohio, July.

DOE (U.S. Department of Energy), 1995d. *Remedial Investigation Report for Operable Unit 5*, Fernald Environmental Management Project, Fernald, Ohio, March.

DOE (U.S. Department of Energy), 1996a. *Addendum, Pre-design Investigation and Site Selection Report for the On-Site Disposal Facility*, Fernald Environmental Management Project, Fernald, Ohio, September.

DOE (U.S. Department of Energy), 1996b. *Operable Unit 3 Record of Decision for Final Remedial Action*, EPA/ROD/R05-96-311, Fernald Environmental Management Project, Cincinnati, Ohio, September 24.

**UNCONTROLLED IF PRINTED**

DOE (U.S. Department of Energy), 1996c. *Record of Decision for Remedial Actions at Operable Unit 5*, EPA/ROD/R05-96/312 (7478 U-007-501.4), Fernald Environmental Management Project, Cincinnati, Ohio, January 31.

DOE (U.S. Department of Energy), 1996d. *Remedial Action Work Plan for the On-Site Disposal Facility*, Fernald Environmental Management Project, Fernald, Ohio.

DOE (U.S. Department of Energy), 1996e. *Permitting Plan and Substantive Requirements for the On-Site Disposal Facility*, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1997. *Groundwater/Leak Detection and Leachate Monitoring Plan, On-Site Disposal Facility*, 20100-PL-0009, Revision 0, Final, Fernald Environmental Management Project, Fernald Ohio, August.

DOE (U.S. Department of Energy), 1998a. *Certification Report for Area 1 Phase I*, Fernald Area Office, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1998b. *Waste Acceptance Criteria Attainment Plan for the On-Site Disposal Facility*, 20100-PL-0014, Revision 0, PCN 1, Final, Fernald Environmental Management Project, Cincinnati, Ohio, June.

DOE (U.S. Department of Energy), 1999. *Certification Report for Area 1 Phase II, Sector 2B*, Fernald Area Office, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 2000. *Great Miami Aquifer VAM3D Flow Model Re-Calibration, Fernald Environmental Management Project*, Fluor Fernald, Cincinnati, Ohio, May.

DOE (U.S. Department of Energy), 2001a. *Addendum to the CERCLA/RCRA Background Soil Study*, DOE Fernald Area Office, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 2001b. *Certification Report for Area 1 Phase II*, Fernald Area Office, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 2001c. *Design for Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas*, Revision A, Draft Final, Fernald Environmental Management Project, Cincinnati, Ohio, April.

DOE (U.S. Department of Energy), 2001d. *Project-Specific Plan for Installation of the On-Site Disposal Facility Great Miami Aquifer Monitoring Wells*, 20100-PSP-0002, Revision 3, Final, Fluor Fernald, Cincinnati, Ohio, August.

DOE (U.S. Department of Energy), 2001e. *Systems Plan, Collection and Management of Leachate for the On-Site Disposal Facility*, 20111-PL-0001, Revision 0, Fluor Fernald, Cincinnati, Ohio, January 12.

## UNCONTROLLED IF PRINTED

DOE (U.S. Department of Energy), 2002. *Technical Memorandum for the On-Site Disposal Facility Cells 1, 2, and 3 Baseline Groundwater Conditions*, 20100-RP-0021, Final, Fluor Fernald, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 2003. *Sitewide CERCLA Quality Assurance Project Plan*, FD-1000, Revision 3, Final, Fernald Closure Project, Cincinnati, Ohio, November.

DOE (U.S. Department of Energy), 2004a. *Certification Report for Area 1 Phase 4, Part 1*, Fernald Area Office, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 2004b. *Field Scale Demonstration of Passive Adsorption for Long-Term Removal of Uranium in Leachate from the Fernald On-Site Disposal Facility*, Technical Assistance Project #13, Final Report, Fernald Closure Project, Cincinnati, Ohio, November.

DOE (U.S. Department of Energy), 2004c. *Revised Final Design Criteria Package, On-Site Disposal Facility*, 20100-DC-0001, Revision 1, Fernald Environmental Management Project, Cincinnati, Ohio, January.

DOE (U.S. Department of Energy), 2005a. *Enhanced Permanent Leachate Transmission System Operation*, 43-C-372, Revision 6, Fernald Closure Project, Cincinnati, Ohio, May 19.

DOE (U.S. Department of Energy), 2005b. *Groundwater/Leak Detection and Leachate Monitoring Plan, On-Site Disposal Facility*, 20100-PL-0009, Revision 1, Final, Fernald Closure Project, Cincinnati, Ohio, April.

DOE (U.S. Department of Energy), 2006a. *Groundwater/Leak Detection and Leachate Monitoring Plan, On-Site Disposal Facility*, 20100-PL-0009, Revision 2, Draft Final, Fernald Closure Project, Cincinnati, Ohio, January.

DOE (U.S. Department of Energy), 2006b. *Legacy Management Fernald Operating Procedures*, Revision 0, Office of Legacy Management, Grand Junction, Colorado.

DOE (U.S. Department of Energy), 2008a. *Evaluation of Aqueous Ions in the Monitoring systems of the On-Site Disposal Facility*, Fernald Environmental Management Project, Fernald, Ohio, March.

DOE (U.S. Department of Energy), 2008b. *Fernald Preserve 2007 Site Environmental Report*, DOE-LM/1607-2008, Rev. 0, Office of Legacy Management, Grand Junction, Colorado, May.

Fenneman, Nevin M., 1916. *Geology of Cincinnati and Vicinity*, Geological Survey of Ohio, Bulletin 19, Columbus, Ohio.

GeoSyntec Consultants, 1996a. *Final Design Package, On-Site Disposal Facility*, Atlanta, Georgia.

GeoSyntec Consultants, 1996b. *Intermediate Design Package, On-Site Disposal Facility*, Atlanta, Georgia.

**UNCONTROLLED IF PRINTED**

GeoSyntec Consultants, 1997. *Final Design Calculation Package, On-Site Disposal Facility*, Volume I, Revision 0, prepared for Fluor Fernald, Cincinnati, Ohio, May.

GeoSyntec Consultants, 2001a. *Borrow Area Management and Restoration Plan, On-Site Disposal Facility*, 20100-PL-0003, Revision 1, Fernald Environmental Management Project, Cincinnati, Ohio, August.

GeoSyntec Consultants, 2001b. *Surface Water Management and Erosion Control Plan, On-Site Disposal Facility*, 20100-PL-0004, Revision 1, Fernald Environmental Management Project, Cincinnati, Ohio, August.

GeoSyntec Consultants, 2002. *Construction Quality Assurance Plan, On-Site Disposal Facility*, 20100-PL-0006, Revision 2B, Fernald Environmental Management Project, Cincinnati, Ohio.

GeoSyntec Consultants, 2005. *Impacted Materials Placement Plan, On-Site Disposal Facility*, 20100-PL-0007, Revision 4, Fernald Closure Project, Cincinnati, Ohio, June.

OEPA (Ohio Environmental Protection Agency), 1995. *Solid Waste Guidance: Alternative Parameter List for Low-Yield Monitoring Wells Not Screened in the Uppermost Aquifer System*, Final, Columbus, Ohio, July 25.

OEPA (Ohio Environmental Protection Agency), 1996. *Solid Waste Policy: Deletion of Appendix I Constituents*, Proposed, Columbus, Ohio, June 30.

OEPA (Ohio Environmental Protection Agency), 1997. *Solid Waste Guidance: Replacement of Inorganic Appendix I Constituents*, Final, Columbus, Ohio, July 29.

SNL (Sandia National Laboratories), 2003. *Selective Sequential Extraction Analysis of Uranium in Great Miami Aquifer Sediment Samples, Fernald DOE Site, Ohio*, SAND2003-1029P, Carlsbad, New Mexico, April.

SNL (Sandia National Laboratories), 2004. *Results of Uranium Adsorption/Desorption Experiments and Microanalytical Studies Characterizing Sediment Samples from the Great Miami Aquifer, Fernald DOE Site, Ohio*, SAND2004-4085, Carlsbad, New Mexico, August.

**UNCONTROLLED IF PRINTED**

**Appendix A**

**On-Site Disposal Facility Applicable or Relevant and Appropriate  
Requirements and Other Regulatory Requirements**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Acronyms and Abbreviations**

ANOVA	analysis of variance
ARARs	applicable or relevant and appropriate requirements
CFR	<i>Code of Federal Regulations</i>
DOE	U.S. Department of Energy
EPA	U.S. Environmental Protection Agency
LDS	leak detection system
OAC	<i>Ohio Administrative Code</i>
OEPA	Ohio Environmental Protection Agency
OSDF	On-Site Disposal Facility

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

Applicable or relevant and appropriate requirements (ARARs) and to-be-considered criteria — for the On-Site Disposal Facility (OSDF) groundwater detection monitoring, the OSDF leachate monitoring, and the OSDF response action—that should be addressed by this plan are provided in Table A-1, as obtained from the *Final Record of Decision for Remedial Actions at Operable Unit 2* (DOE 1995b), the *Operable Unit 3 Record of Decision for Final Remedial Action* (DOE 1996b), the *Record of Decision for Remedial Actions at Operable Unit 5* (DOE 1996c), or the *Permitting Plan and Substantive Requirements for the On-Site Disposal Facility* (DOE 1996e). Additional regulatory requirements that are appropriate guidance for formulation of this plan have also been identified and included.

**UNCONTROLLED IF PRINTED**

**Table A-1. OSDF Groundwater/Leak Detection and Leachate Monitoring Plan Compliance Strategy  
ARARs and Other Regulatory Requirements**

Citation	Requirement
<b>PLANS</b>	
Ohio Municipal Solid Waste Rules—Sanitary Landfill Facility Permit to Install Application OAC 3745-27-06(C)(9)(a)	<ul style="list-style-type: none"> <li>• Prepare a “groundwater detection monitoring plan” as required by OAC 3745-27-10, and if applicable a “groundwater quality assessment plan” and/or “corrective measures plan” required by OAC 3745-27-10.</li> <li>• Prepare a “leachate monitoring plan” to ensure compliance with OAC 3745-27-19(M)(4) and (5).</li> </ul>
<b>GROUNDWATER/LEAK DETECTION MONITORING</b>	
Ohio Municipal Solid Waste Rules—Groundwater Monitoring Program for a Sanitary Landfill Facility OAC 3745-27-10(A)	<ol style="list-style-type: none"> <li>(1) The owner or operator of a sanitary landfill facility shall implement a “groundwater monitoring program” capable of determining the quality of groundwater occurring within the uppermost aquifer system and all significant zones of saturation above the uppermost aquifer system underlying the landfill facility, with the following elements:               <ol style="list-style-type: none"> <li>(a) A “groundwater detection monitoring program” which includes:                   <ol style="list-style-type: none"> <li>(i) a “groundwater detection monitoring plan” in accordance with OAC 3745-27-10(B) through (D);</li> <li>(ii) a monitoring system in accordance with OAC 3745-27-10(B);</li> <li>(iii) sampling and analysis procedures, including an appropriate statistical method, in accordance with OAC 3745-27-10(C); and</li> <li>(iv) detection monitoring procedures, including monitoring frequency and a parameter list, in accordance with OAC 3745-27-10(D).</li> </ol> </li> </ol> </li> <li>(2) Schedule for implementation of detection monitoring.</li> <li>(4) For purposes of this rule, the groundwater monitoring program is implemented upon commencement of sampling of groundwater wells.</li> </ol>
Ohio Municipal Solid Waste Rules—Groundwater Monitoring System OAC 3745-27-10(B)	<ol style="list-style-type: none"> <li>(1) The “groundwater detection monitoring program” shall consist of sufficient number of wells, installed at appropriate locations and depths, to yield groundwater samples from both the uppermost aquifer system and any significant zones of saturation that exist above the uppermost aquifer system that:               <ol style="list-style-type: none"> <li>(a) represent the quality of the background groundwater that has not been affected by past or present operations; and</li> <li>(b) represent the quality of the groundwater passing directly downgradient of the limits of solid waste placement.</li> </ol> </li> <li>(4) The number, spacing, and depth of groundwater monitoring wells shall be:               <ol style="list-style-type: none"> <li>(a) based on site-specific hydrogeologic information; and</li> <li>(b) capable of detecting a release from the facility to the groundwater at the closest practicable location to the limits of waste placement.</li> </ol> </li> </ol>
Ohio Municipal Solid Waste Rules—Groundwater Sampling, Analysis, and Statistical Methods OAC 3745-27-10(C)	<ol style="list-style-type: none"> <li>(1) The “groundwater monitoring program” shall include consistent sampling and analysis procedures and statistical methods that are protective of human health and the environment and that are designed to ensure monitoring results that provide an accurate presentation of groundwater quality at the background and downgradient well.               <ol style="list-style-type: none"> <li>(a) Sampling and analysis procedures employed must be documented in a written plan.</li> <li>(b) The statistical method selected by the owner or operator must be in accordance with OAC 3745-27-10(C)(6)&amp;(7).</li> </ol> </li> <li>(6) After completing collection of the background data, the owner or operator shall specify one of the following statistical methods to be used in evaluating groundwater quality; the statistical method chosen must be conducted separately for each of the parameters required to be statistically evaluated:               <ol style="list-style-type: none"> <li>(a) a parametric analysis of variance (ANOVA); or</li> <li>(b) an ANOVA based on ranks; or</li> <li>(c) a tolerance or prediction interval procedure; or</li> <li>(d) a control chart approach; or</li> <li>(e) another statistical method.</li> </ol> </li> </ol>

**UNCONTROLLED IF PRINTED**

Table A-1 (continued). OSDF Groundwater/Leak Detection and Leachate Monitoring Plan Compliance Strategy  
ARARs and Other Regulatory Requirements

GROUNDWATER/LEAK DETECTION MONITORING (cont)	
	<p>(7) Performance standards for statistical methods.</p> <p>(a) The statistical method used to evaluate groundwater monitoring data shall be appropriate for the distribution of chemical parameters or leachate and leachate-derived constituents. If shown to be inappropriate, then the data should be transformed or a distribution free theory test should be used. If the distributions for the constituents differ, more than one statistical method may be needed.</p> <p>(e) The statistical method shall account for data below the limit of detection with one or more statistical procedures that ensure protection of human health and the environment. Any practical quantitation limit used in the statistical method shall be the lowest concentration level that can be reliably achieved within the specified limits of precision and accuracy during routine laboratory operating conditions that are available to the facility.</p> <p>(f) If necessary, the statistical method shall include procedures to control or correct for seasonal and spatial variability as well as temporal correlation in the data.</p> <p>(9) The number of samples collected to establish groundwater quality data shall be consistent with the appropriate statistical procedures.</p>
Ohio Municipal Solid Waste Rules—Groundwater Detection Monitoring Program OAC 3745-27-10(D)	<p>(2) Alternate monitoring parameter list. The owner or operator of a sanitary landfill facility may propose to delete any of the Appendix I parameters of this rule. The alternative monitoring parameter list may be approved if the removed parameters are not reasonably expected to be in or derived from the waste contained or deposited in the landfill facility. The following factors should be considered:</p> <p>(a) which of the parameters in Appendix I shall be deleted;</p> <p>(b) types, quantities, and concentrations of constituents in wastes managed at the landfill facility;</p> <p>(c) the concentrations of Appendix I constituents in the leachate from the relevant unit(s) of the landfill facility;</p> <p>(d) any other relevant information.</p> <p>(3) Alternate inorganic parameter list. The owner or operator of a sanitary landfill facility may propose that an alternative list of inorganic indicator parameters to be used in lieu of some or all of the inorganic parameters listed in Appendix I of this rule. The alternative inorganic indicator parameters may be approved if the alternative list will provide a reliable indication of inorganic releases from the facility to the groundwater. The following factors should be considered:</p> <p>(a) the types, quantities, and concentrations of constituents in wastes managed at the facility;</p> <p>(b) the mobility, stability, and persistence of waste constituents or their reaction products in the unsaturated zone beneath the facility;</p> <p>(c) the detectability of the indicator parameters, waste constituents, and their reaction products in the ground water; and</p> <p>(d) the concentrations or values and coefficients of variation of monitoring parameters or constituents in the background groundwater quality.</p> <p>(5) Monitoring parameters, frequency, location. The owner or operator shall monitor the groundwater monitoring well system</p> <p>(a) and (b) during the active life of the facility (including final closure and the post-closure care period,</p> <p>(ii) at least semiannually by collecting:</p> <p>(a) during the initial one hundred and eighty days after implementing the groundwater detection monitoring program (the first semiannual sampling event), a minimum of four independent samples from each monitoring well. Collect and analyze a minimum of eight independent samples during the first year of sampling.</p> <p>(b) After the first year during subsequent semiannual sampling events, at least one sample for each monitoring well.</p> <p>(iii) beginning with receiving the results from the first monitoring event under (D)(5)(a)(ii)(b) of this rule and semiannually thereafter, by statistically analyzing the results.</p> <p>(6) Alternative sampling and statistical analysis frequency. The owner or operator of a sanitary landfill facility may propose an alternative frequency for groundwater sampling and/or statistical analysis. The alternative frequency may be approved provided it is not less than annual. The following factors should be considered:</p> <p>(a) lithology of the aquifer system and all stratigraphic units above the uppermost aquifer system;</p> <p>(b) hydraulic conductivity of the uppermost aquifer system and all stratigraphic units above the uppermost aquifer system;</p> <p>(c) groundwater flow rates for the uppermost aquifer system and all zones of saturation above the uppermost aquifer system;</p> <p>(d) minimum distance between the upgradient edge of the limits of waste placement of the landfill facility and the downgradient monitoring well system; and</p> <p>(e) resource value of the uppermost aquifer system.</p> <p>NOTE: Table B-3 on page B.3-25 of the <i>Record of Decision for Operable Unit 5</i> states, "an alternate list of monitoring parameters will be required."</p>

**UNCONTROLLED IF PRINTED**

Table A-1 (continued). OSDF Groundwater/Leak Detection and Leachate Monitoring Plan Compliance Strategy  
ARARs and Other Regulatory Requirements

GROUNDWATER/LEAK DETECTION MONITORING (Cont)	
Ohio Hazardous Waste General Facility Standard— New Facilities Rules—Required Programs OAC 3745-54-91; 40 CFR 264.91	Owners or operators subject to the groundwater protection rules must conduct a monitoring and response program as follows: (1) whenever hazardous constituents from a regulated unit are detected at the compliance point, the owner or operator must institute a compliance monitoring program. “Detected” is defined as statistically significant evidence of contamination. (2) whenever the groundwater protection standard is exceeded, the owner or operator must institute a corrective action program. “Exceeded” is defined as statistically significant evidence of increased contamination. (3) whenever hazardous constituents from a regulated unit exceed concentration limits in groundwater between the compliance point and the downgradient facility property boundary, the owner or operator must institute a corrective action program. (4) in all other cases, the owner or operator must institute a detection monitoring program.
Ohio Hazardous Waste General Facility Standards—New Facilities Rules—Groundwater Protection Standard OAC 3745-54-92; 40 CFR 264.92	The owner or operator must comply with conditions specified in the facility permit that are designed to ensure that hazardous constituents detected in the groundwater from a regulated unit do not exceed the specified concentration limits (specified in the permit) in the uppermost aquifer underlying the waste management area beyond the point of compliance. The groundwater protection standard will be established when hazardous constituents have been detected in the groundwater.
Ohio Hazardous Waste General Facility Standards—New Facilities Rules—Hazardous Constituents OAC 3745-54-93; 40 CFR 264.93	(A) The permit will specify the hazardous constituents to which the groundwater protection standard applies. Hazardous constituents are those that have been detected in the groundwater in the uppermost aquifer underlying a regulated unit and that are reasonably expected to be in or derived from waste contained in a regulated unit, unless excluded under paragraph B of this rule.  (B) A constituent will be excluded from the list of hazardous constituents specified in the facility permit if it is found that the constituent is not capable of posing a substantial present or potential hazard to human health or the environment. The following will be considered: (1) Potential adverse effects on groundwater quality, considering: (a) the physical and chemical characteristics of the waste in the regulated unit, included its potential for migration; (b) the hydrogeological characteristics of the facility and surrounding land; (c) the quantity of groundwater and the direction of groundwater flow; (d) the proximity and withdrawal rates of groundwater users; (e) the current and future use of groundwater in the area; (f) the existing quality of groundwater, including other sources of contamination and their cumulative impact on the groundwater quality; (g) the potential for health risks caused by human exposure to waste constituents; (h) the potential damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents; (i) the persistence and permanence of the potential adverse effects.
Ohio Hazardous Waste General Facility Standards—New Facilities Rules—General Groundwater Monitoring Requirements OAC 3745 54 97; 40 CFR 264.97	(G) In detection monitoring or where appropriate in compliance monitoring, data on each constituent specified in the permit [or in the monitoring plan] is to be collected from background wells and wells at compliance point(s). The number and kinds of samples collected to establish background shall be appropriate for the form of statistical test employed. The sample size should be as large as necessary to ensure with reasonable confidence that a contaminant release to the groundwater from a facility will be detected. The owner or operator will determine an appropriate sampling procedure and interval for each constituent.  (H) The owner or operator is to specify one of the following statistical methods to be used in evaluating groundwater monitoring data for each constituent to be specified. Use of any of the following statistical methods must be protective of human health and the environment: (1) a parametric ANOVA; (2) an ANOVA based on ranks; (3) a tolerance or prediction interval procedure; (4) a control chart approach; or (5) another statistical method.

**UNCONTROLLED IF PRINTED**

*Table A-1 (continued). OSDF Groundwater/Leak Detection and Leachate Monitoring Plan Compliance Strategy  
ARARs and Other Regulatory Requirements*

GROUNDWATER/LEAK DETECTION MONITORING (Cont.)	
Ohio Hazardous Waste General Facility Standards—New Facilities Rules—Detection Monitoring Program OAC 3745-54-98; 40 CFR 264.98	<p>(A) The owner or operator must monitor for indicator parameters (e.g., specific conductance, total organic carbon, or total organic halogens, waste constituents, or reaction products that provide a reliable indication of the presence of hazardous constituents in groundwater. The director (of the Ohio Environmental Protection Agency [OEPA]) will specify the parameters or constituents to be monitored in the facility permit, after considering the following factors:</p> <ol style="list-style-type: none"> <li>(1) types, quantities, and concentrations of constituents to be managed at the regulated unit;</li> <li>(2) mobility, stability, and persistence of the waste constituents or their reaction products in the unsaturated zone beneath the waste management area;</li> <li>(3) detectability of the indicator parameters, waste constituents, and their reaction products in the ground water; and</li> <li>(4) concentrations or values and coefficients of variation of proposed monitoring parameters or constituents in the ground water background.</li> </ol> <p>(D) The permit will specify the frequencies for collecting samples and conducting statistical tests to determine whether there is statistically significant evidence of contamination for any parameter or hazardous constituent specified in the permit.</p> <p>(F) The owner or operator must determine whether there is statistically significant evidence of contamination for any chemical parameter or hazardous constituent specified in the permit at the frequency specified in the permit.</p>
Federal Health and Environmental Protection Standards for Uranium and Thorium Mill Tailings: Subpart D—Standards for Management of Uranium Byproduct Material Pursuant to Section 84 of the Atomic Energy Act of 1954, as Amended 40 CFR 192.30 through 34	Uranium byproduct materials shall be managed to conform to the ground water protection standard in 40 CFR 264.92, which includes detection monitoring. Alternate concentration limits for uranium can be established, as described in 40 CFR 264.95 and 264.94(b).
Environmental Monitoring DOE M 435.1-1	<p>I.1.E.(7) Environmental Monitoring. Radioactive waste management facilities, operations, and activities shall meet the environmental monitoring requirements of DOE 5400.1, General Environmental Protection Program; and DOE 5400.5, Radiation Protection of the Public and the Environment.</p> <p>IV.R.(3)(a) The site-specific performance assessment and composite analysis shall be used to determine the media, locations, radionuclides, and other substances to be monitored.</p> <p>IV.R.(3) Disposal Facilities. (C) The environmental monitoring programs shall be capable of detecting changing trends in performance to allow application of any necessary corrective action prior to exceeding the performance objectives in this Chapter.</p>
LEACHATE MANAGEMENT AND MONITORING	
Ohio Municipal Solid Waste Rules—Operational Criteria for a Sanitary Landfill Facility OAC 3745-27-19(M)(4)&(5)	<p>The owner annually shall report:</p> <ul style="list-style-type: none"> <li>• a summary of the quantity of leachate collected for treatment and disposal on a monthly basis during the year; location of leachate treatment and/or disposal; and verification that the leachate management system is operating in accordance with this rule;</li> <li>• results of analytical testing of an annual grab sample of leachate.</li> </ul>
OTHER REQUIREMENTS	
Federal Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities, Subpart N—Landfills, Monitoring and Inspection 40 CFR 264.302	<p>Action Leakage Rate:</p> <ol style="list-style-type: none"> <li>(a) The action leakage rate is the maximum design flow rate that the leak detection system (LDS) can remove without the fluid head on the bottom liner exceeding 1 ft. The action leakage rate must include an adequate safety margin to allow for uncertainties in the design (e.g., slope, hydraulic conductivity, thickness of drainage material), construction, operation, and location of the LDS, waste and leachate characteristics, likelihood and amounts of other sources of liquids in the LDS, and proposed response actions (e.g., the action leakage rate must consider decreases in the flow capacity of the system over time resulting from siltation and clogging, rib layover and creep of synthetic components of the system overburden pressures, etc.).</li> <li>(b) To determine if the action leakage rate has been exceeded, the owner or operator must convert the weekly or monthly flow rate from the monitoring data obtained under 40 CFR 264.303(c), to an average daily flow rate (gallons per acre per day) for each sump (i.e., liner penetration box). Unless the U.S. Environmental Protection Agency (EPA) approves a different calculation, the average daily flow rate for each sump must be calculated weekly during the active life and closure period, and monthly during the post-closure care period when monthly monitoring is required under 40 CFR 264.303(c).</li> </ol>

**UNCONTROLLED IF PRINTED**

Table A-1 (continued). OSDF Groundwater/Leak Detection and Leachate Monitoring Plan Compliance Strategy  
ARARs and Other Regulatory Requirements

OTHER REQUIREMENTS (Cont.)	
<p>Federal Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities, Subpart N—Landfills, Monitoring and Inspection 40 CFR 264.303(c)</p>	<p>An owner or operator required to have a LDS must record the amount of liquids removed from each LDS sump as follows:</p> <ol style="list-style-type: none"> <li>(1) During the active life and closure period, at least once each week.</li> <li>(2) After the final cover is installed, in accordance with the following graded approach:                             <ul style="list-style-type: none"> <li>• at least monthly; or</li> <li>• if the liquid level in the sump stays below the pump operating level for two consecutive months, at least quarterly; or</li> <li>• if the liquid level in the sump stays below the pump operating level for two consecutive quarters, at least semiannually; but</li> <li>• if at any time during the post-closure care period the pump operating level is exceeded at units on quarterly or semiannual recording schedules, the owner or operator must return to monthly recording of amounts of liquids removed from each sump until the liquid level again stays below the pump operating level for two consecutive months.</li> </ul> </li> </ol> <p>NOTE: There are no requirements in Ohio hazardous waste or Ohio solid waste rules regarding LDS flow monitoring.</p>
<p>Federal Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities, Subpart N—Landfills, Response Actions 40 CFR 264.304</p>	<ol style="list-style-type: none"> <li>(a) The owner or operator of landfill units subject to 264.301(c) or (d) must have an approved response action plan before receipt of waste. The response action plan must set forth the action to be taken if the “action leakage rate” has been exceeded [in any LDS sump].</li> <li>(b) At a minimum, the response action plan [see entry 2 above] must describe the following actions to be taken:                             <ol style="list-style-type: none"> <li>(1) Notify the Regional Administrator in writing of the exceedance within 7 days of the determination;</li> <li>(2) Submit a preliminary written assessment to the Regional Administrator within 14 days of the determination, as to the amount of liquids, likely sources of liquids, possible location, size, and cause of any leaks, and short-term actions taken and planned;</li> <li>(3) Determine to the extent practicable the location, size, and cause of any leak;</li> <li>(4) Determine whether waste receipt should cease or be curtailed, whether any waste should be removed from the unit for inspection, repairs, or controls, and whether or not the unit should be closed;</li> <li>(5) Determine any other short-term or longer-term actions to be taken to mitigate or stop any leaks; and</li> <li>(6) Within 30 days of the notification that the action leakage rate has been exceeded, submit to the Regional Administrator the results of the analysis specified in (3), (4), and (5) [above], the results of action taken, and actions planned. Monthly thereafter, as long as the flow rate in the LDS exceeds the action leakage rate, the owner or operator must submit to the Regional Administrator a report summarizing the results of any RAs taken and actions planned.</li> </ol> </li> <li>(c) To make the leak and/or RA determinations in paragraphs (b)(3), (4) and (5) [above], the owner or operator must:                             <ul style="list-style-type: none"> <li>• Assess the source of liquids, and amount of liquids by source;</li> <li>• Conduct a fingerprint, hazardous constituent, or other analyses of the liquids in the LDS to identify the source of liquids and possible location of any leaks, and the hazard and mobility of the liquid; and</li> <li>• Assess the seriousness of any leaks in terms of potential for escape to the environment; or</li> <li>• Document why such assessments are not needed.</li> </ul> </li> </ol>

**UNCONTROLLED IF PRINTED**

**Appendix B**

**Project-Specific Plan for the  
On-Site Disposal Facility Monitoring Program**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Contents**

Acronyms and Abbreviations ..... iii

1.0 Introduction..... 1

    1.1 Purpose..... 1

    1.2 Scope..... 1

2.0 Sampling Program ..... 3

    2.1 Sampling at All Cells..... 3

    2.2 Additional Sampling Requirements..... 11

    2.3 LCS and LDS Sample Collection ..... 11

    2.4 HTW Sample Collection..... 11

    2.5 Great Miami Aquifer Sample Collection..... 11

3.0 Additional Sampling Program Requirements ..... 12

    3.1 Quality Assurance Requirements..... 12

    3.2 Changes to the Project-Specific Plan..... 12

    3.3 Quality Control Samples..... 12

    3.4 Equipment Decontamination ..... 13

    3.5 Disposal of Wastes..... 13

    3.6 Health and Safety..... 13

    3.7 Data Management..... 13

4.0 References..... 14

**Figure**

Figure 1. OSDF Well Locations ..... 2

**Tables**

Table 1. 2010 Annual LCS Monitoring List Requirements for Cells 1, 2, and 3 ..... 4

Table 2. 2010 Quarterly LCS, LDS, HTW, and GMA Monitoring List Requirements for  
Cells 1, 2, and 3..... 6

Table 3. 2010 Annual LCS Monitoring List Requirements for Cells 4, 5, 6, 7, and 8 ..... 7

Table 4. Summary of Sampling Requirements for the OSDF ..... 11

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

**UNCONTROLLED IF PRINTED**

## **Acronyms and Abbreviations**

CAWWT	Converted Advanced Wastewater Treatment facility
DOE	U.S. Department of Energy
EPA	U.S. Environmental Protection Agency
FPQAPP	<i>Fernald Preserve Quality Assurance Project Plan</i>
GMA	Great Miami Aquifer
GWLMP	Groundwater/Leak Detection and Leachate Monitoring Plan
HTW	horizontal till well
LCS	leachate collection system
LDS	leak detection system
LMICP	<i>Comprehensive Legacy Management and Institutional Controls Plan</i>
LMS	Legacy Management Support
mL	milliliter
OEPA	Ohio Environmental Protection Agency
OSDF	On-Site Disposal Facility
TDS	Total Dissolved Solids
TOC	Total Organic Carbon
TOX	Total Organic Halogens

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **1.0 Introduction**

### **1.1 Purpose**

The purpose of this plan is to provide detailed information for samplers to collect data to support the analytical and reporting requirements described in the On Site Disposal Facility (OSDF) Groundwater/Leak Detection and Leachate Monitoring Plan (GWLMP). The GWLMP divides the OSDF monitoring program into two primary elements: (1) a leak detection component, which will provide information to verify the OSDF's ongoing performance, its integrity, and its impact on groundwater; and (2) a leachate monitoring component, which will satisfy requirements for leachate collection and management. This plan discusses requirements for sampling the groundwater monitoring system (i.e., horizontal till wells [HTWs] and Great Miami Aquifer [GMA] wells), leachate collection system (LCS), and leak detection system (LDS). All sampling and analysis activities will be consistent with the data quality objective provided in Appendix C of the GWLMP.

### **1.2 Scope**

The leak detection monitoring strategy recognizes the various operating phases of the OSDF, including periods before, during, and after waste placement. The facility is currently in the post-closure phase. Each cell has been constructed with an LCS to collect infiltrating rainwater and an LDS to provide early detection of leakage within the individual cells. Additionally, groundwater within the glacial till is monitored using a series of HTWs constructed beneath each cell, and the GMA is monitored by conventional monitoring wells located upgradient and downgradient of each OSDF cell. Monitoring locations for the eight cells are identified in Figure 1.

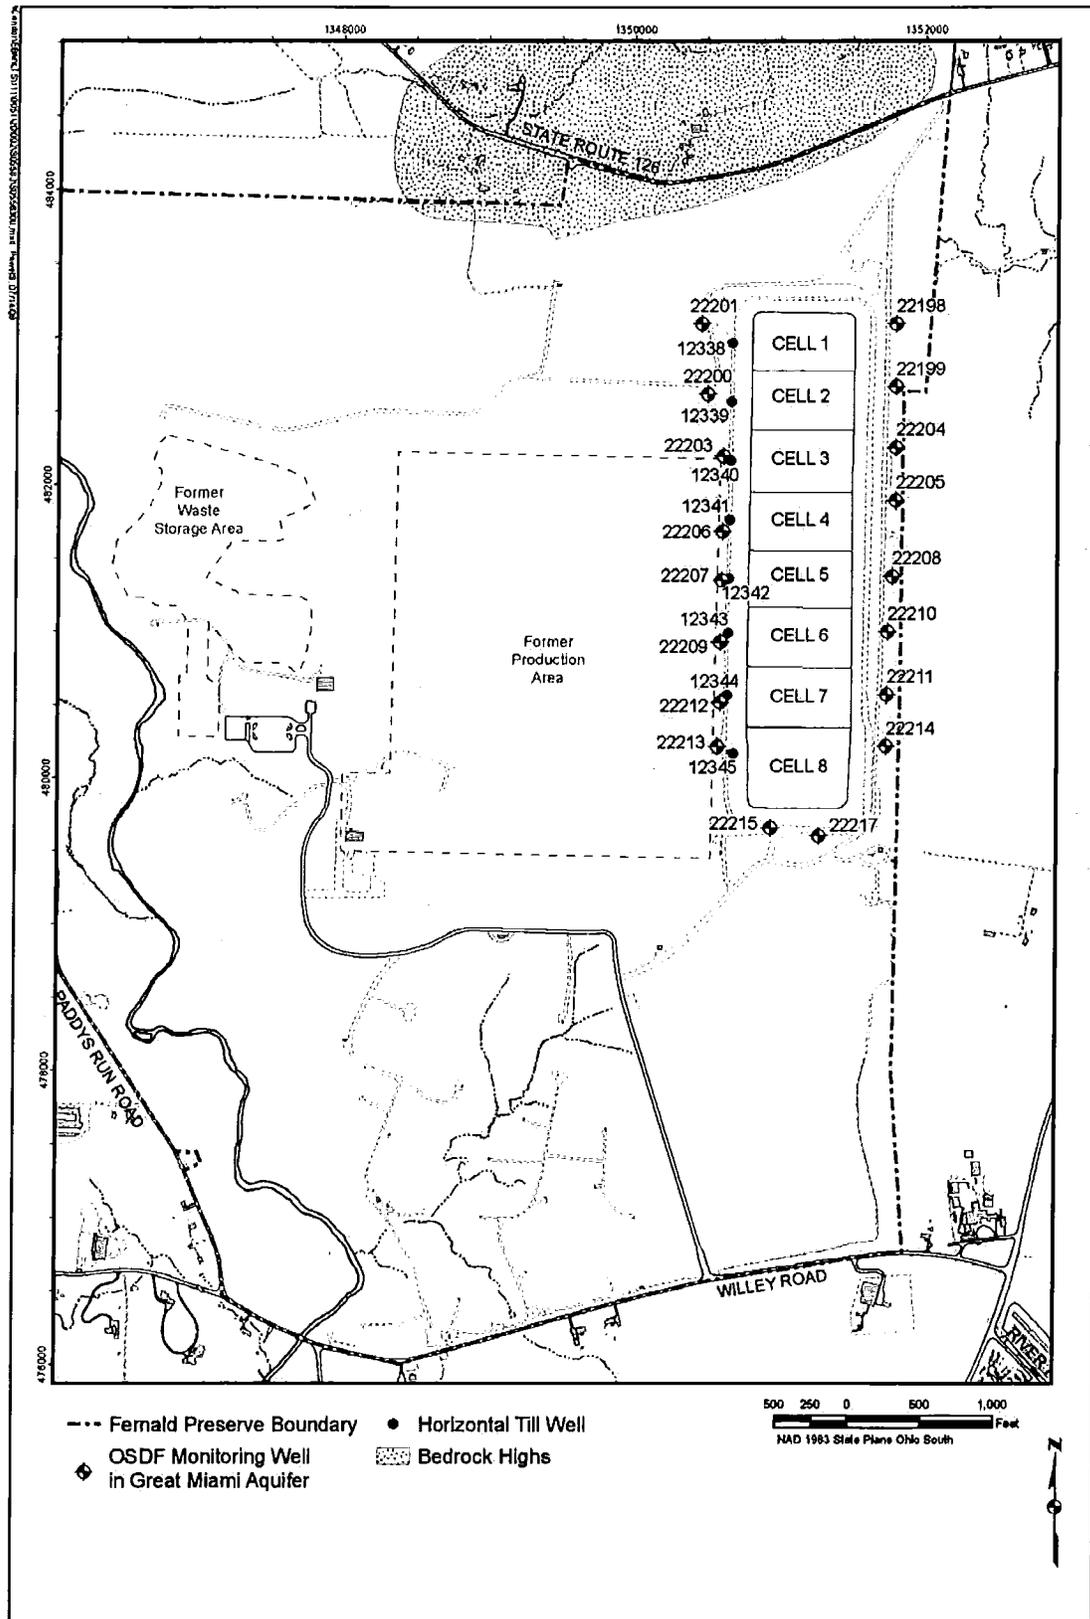


Figure 1. OSDF Well Locations

## **2.0 Sampling Program**

As noted in Section 3.0 of the GWLMP, the Ohio Solid Waste regulations require that, for detection monitoring, at least four independent samples from each well will be taken during the first 180 days after implementation of the groundwater detection monitoring program and at least eight independent samples in the first year to determine the background (baseline) water quality (*Ohio Administrative Code 3745-27-10[D][5][a][ii][a]*). The requirement to collect eight independent samples is only applicable to those wells installed after August 15, 2003, because that is the date that the code became effective. The HTWs and GMA wells were sampled bimonthly after waste placement until 12 samples were collected. This frequency was selected to address OSDF construction schedules while the OSDF was under construction, to develop an appropriate statistical procedure, and to compensate for varying temporal conditions and seasonal fluctuations. After a sufficient number of samples were collected for statistical analysis, samples were collected quarterly from the HTWs and the GMA.

Specific monitoring requirements for each cell are provided in Section 2.1, and the specific analytical parameters are listed in Tables 1 through 3. Analytical detection limits, at a minimum, will meet the applicable final remediation levels identified in the *Comprehensive Legacy Management and Institutional Controls Plan (LMICP)*, Attachment D, "Integrated Environmental Monitoring Plan." A summary of sampling requirements for each OSDF cell is presented in Table 4.

### **2.1 Sampling at All Cells**

Sampling will be as follows:

- Annual samples will be collected from the LCS of Cells 1–3 for the parameters listed in Table 1.
- Quarterly samples will be collected from the LCS, LDS, HTW, and GMA wells of Cells 1–8 for the parameters listed in Table 2.
- Annual samples will be collected from the LCS of Cells 4–8 for the parameters listed in Table 3.

If an analyte is detected in the annual sample from a cell's LCS, and the analyte is not being sampled for in the cell's LDS, then confirmatory sampling will be conducted for that constituent in the cell's LCS during the next sampling round. Two consecutive detects in a cell's LCS will trigger sampling in the cell's LDS during the next scheduled sampling event. Two consecutive detects in the cell's LDS will trigger sampling in the cells HTW and GMA wells. The requirements for this confirmatory sampling will be documented and approved through the established variance process.

**UNCONTROLLED IF PRINTED**

Table 1. 2010 Annual LCS Monitoring List Requirements for Cells 1, 2, and 3

Parameter	Method	Priority <sup>a</sup>	ASL	Holding Time	Preservation	Standard Volume	Minimum Volume	Container
<b>Radionuclides:</b>								
Technetium-99	Liquid Scint. <sup>b</sup>	2	D	6 months	HNO <sub>3</sub> to pH<2	1 L	500 mL	Plastic or glass
<b>Inorganics:</b>								
	SW-846 <sup>c</sup>	1	D	6 months	HNO <sub>3</sub> to pH<2	1 L	600 mL	Plastic or glass
Antimony								
Arsenic								
Barium								
Beryllium								
Boron								
Cadmium								
Calcium								
Chromium								
Cobalt								
Copper								
Iron								
Lead								
Lithium								
Magnesium								
Manganese								
Nickel								
Potassium								
Selenium								
Silver								
Sodium								
Thallium								
Uranium								
Vanadium								
Zinc								
Mercury				28 days				
<b>Volatile Organics:</b>								
Bromodichloromethane	SW-846 <sup>c</sup>	3	D	14 days	Cool to 4 °C; H <sub>2</sub> SO <sub>4</sub> , HCL, or solid NaHSO <sub>4</sub> to pH <2	4 × 40 mL	1 × 40 mL	Glass vial with Teflon-lined septum cap <sup>d</sup>
1,1-Dichloroethene								
1,2-Dichloroethene (Total)								
Tetrachloroethene								
Trichloroethene								
Vinyl Chloride								

**UNCONTROLLED IF PRINTED**

Parameter	Method	Priority <sup>a</sup>	ASL	Holding Time	Preservation	Standard Volume	Minimum Volume	Container
<b>Semivolatile Organics:</b> Carbazole 4-Nitroaniline Bis(2-chloroisopropyl)ether	SW-846 <sup>c</sup>	6	D	7 days to extraction/ 40 days from extraction to analysis	Cool to 4 °C	1 L	1L	Amber glass with Teflon-lined cap
<b>Pesticides:</b> alpha-Chlordane	SW-846 <sup>c</sup>	7	D	7 days to extraction/ 40 days from extraction to analysis	Cool to 4 °C	1 L	1 L	Amber glass with Teflon-lined cap
<b>General Chemistry:</b> Ammonia	350.1 <sup>f</sup> , 350.3 <sup>f</sup> , 4500C <sup>g</sup> , 4500F <sup>g</sup>	12	D	28 days	Cool to 4 °C, H <sub>2</sub> SO <sub>4</sub> to pH<2	500 mL	200 mL	Plastic
Total Organic Halogens (TOX)	9020B <sup>c</sup>	4	D	28 days	Cool to 4 °C, H <sub>2</sub> SO <sub>4</sub> to pH<2	500 mL	20 mL	Amber glass with Teflon-lined cap <sup>o</sup>
Total Organic Carbon (TOC)	9060 <sup>c</sup>	5	D	28 days	Cool to 4 °C, H <sub>2</sub> SO <sub>4</sub> to pH<2	250 mL	125 mL	Amber glass with Teflon-lined cap
Chloride	325.2 <sup>f</sup> , 300(all) <sup>f</sup>	10	D	28 days	Cool to 4 °C	250 mL	100 mL	Plastic
Nitrate/Nitrite	353.1 <sup>f</sup> , 353.2 <sup>f</sup> , 4500D <sup>g</sup> , 4500E <sup>g</sup>	8	D	28 days	Cool to 4 °C, H <sub>2</sub> SO <sub>4</sub> to pH<2	100 mL	20 mL	Plastic or Glass
Sulfate	375.2 <sup>f</sup> , 300.0 <sup>f</sup> , 4500E <sup>g</sup>	11	D	28 days	Cool to 4 °C	250 mL	100 mL	Plastic
Total Dissolved Solids (TDS)	160.1 <sup>f</sup> , 2540C <sup>g</sup>	9	D	7 days	Cool to 4 °C	500 mL	250 mL	Plastic or Glass
Total Alkalinity	310.1 <sup>f</sup> , 2320B <sup>g</sup>	13	D	14 days	Cool to 4 °C	500 mL	250 mL	Plastic

**Note:** Field parameters are performed at each sampling location prior to sample collection and include dissolved oxygen, oxidation-reduction potential, pH, specific conductance, temperature, and turbidity at ASL (Analytical Support Level) A, Priority 1.

<sup>a</sup>If sufficient volume is not available for collection of a full suite at standard volume, then the minimum volume and priority will be used to maximize the number of analytical groups collected.

<sup>b</sup>Radiological analyses do not have standard methods; however, the performance-based analytical specifications for these parameters are provided in the FP QAPP.

(Liquid Scint. = Liquid Scintillation)

<sup>c</sup>Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (EPA 1998).

<sup>d</sup>No head space.

<sup>e</sup>Minimal head space – as close to zero as possible.

<sup>f</sup>Methods for Chemical Analysis of Water and Wastes (EPA 1983).

<sup>g</sup>Standard Methods for Analysis of Water and Wastewater, 17th edition (APHA 1989).

**UNCONTROLLED IF PRINTED**

Table 2. 2010 Quarterly LCS, LDS, HTW, and GMA Monitoring List Requirements for Cells 1, 2, and 3

Parameter	Method	Priority <sup>a</sup>	ASL	Holding Time	Preservation	Standard Volume	Minimum Volume	Container
<b>Inorganics:</b>	SW-846 <sup>b</sup>	1	D	6 months	HNO <sub>3</sub> to pH<2	1 L	600 mL	Plastic or glass
Arsenic								
Boron								
Cobalt								
Iron								
Lithium								
Manganese								
Nickel								
Selenium								
Sodium								
Uranium								
Zinc								
<b>General Chemistry:</b>								
Total Organic Halogens (TOX)	9020B <sup>b</sup>	2	D	28 days	Cool to 4 °C, H <sub>2</sub> SO <sub>4</sub> to pH<2	500 mL	20 mL	Amber glass bottle with Teflon-lined cap <sup>c</sup>
Total Organic Carbon (TOC)	9060 <sup>b</sup>	3	D	28 days	Cool to 4 °C, H <sub>2</sub> SO <sub>4</sub> to pH<2	250 mL	125 mL	Amber glass bottle with Teflon-lined cap
Sulfate	375.2 <sup>d</sup> , 300.0 <sup>d</sup> , 4500E <sup>e</sup>	5	D	28 days	Cool to 4 °C	250 mL	100 mL	Plastic
Total Dissolved Solids (TDS)	160.1 <sup>d</sup> , 2540C <sup>e</sup>	4	D	7 days	Cool to 4 °C	500 mL	250 mL	Plastic or glass

Note: Field parameters are performed at each sampling location prior to sample collection and include dissolved oxygen, oxidation-reduction potential, pH, specific conductance, temperature, and turbidity at ASL A, Priority 1.

<sup>a</sup>If sufficient volume is not available for collection of a full suite at standard volume, then the minimum volume and priority will be used to maximize the number of analytical groups collected.

<sup>b</sup>Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (EPA 1998).

<sup>c</sup>Minimal head space—as close to zero as possible.

<sup>d</sup>Methods for Chemical Analysis of Water and Wastes (EPA 1983).

<sup>e</sup>Standard Methods for Analysis of Water and Wastewater, 17th edition (APHA 1989).

**UNCONTROLLED IF PRINTED**

Table 3. 2010 Annual LCS Monitoring List Requirements for Cells 4, 5, 6, 7, and 8

Parameter	Method	Priority <sup>a</sup>	ASL	Holding Time	Preservation	Standard Volume	Minimum Volume	Container
<b>Radionuclides:</b>								
Technetium-99	Liquid Scint. <sup>b</sup>	2	D	6 months	HNO <sub>3</sub> to pH<2	1 L	500 mL	Plastic or glass
<b>Inorganics:</b>								
	SW-846 <sup>c</sup>	1	D	6 months	HNO <sub>3</sub> to pH<2	1 L	600 mL	Plastic or glass
Antimony								
Arsenic								
Barium								
Beryllium								
Boron								
Cadmium								
Calcium								
Chromium								
Cobalt								
Copper								
Iron								
Lead								
Lithium								
Magnesium								
Manganese								
Nickel								
Potassium								
Selenium								
Silver								
Sodium								
Thallium								
Uranium								
Vanadium								
Zinc								
Mercury				28 days				
<b>Volatile Organics:</b>								
	SW-846 <sup>c</sup>	3	D	14 days	Cool to 4 °C With H <sub>2</sub> SO <sub>4</sub> , HCL, or solid NaHSO <sub>4</sub> to pH<2	4 × 40 mL	1 × 40 mL	Glass vial with Teflon-lined septum cap <sup>d</sup>
Acetone								
Acrylonitrile								
Benzene								
Bromochloromethane								
Bromodichloromethane								
Bromoform								
Bromomethane								
2-Butanone								

**UNCONTROLLED IF PRINTED**

Table 3 (continued). 2010 Annual LCS Monitoring List Requirements for Cells 4, 5, 6, 7, and 8

Parameter	Method	Priority <sup>a</sup>	ASL	Holding Time	Preservation	Standard Volume	Minimum Volume	Container
<b>Volatile Organics:</b>	SW-846 <sup>c</sup>	3	D	14 days	Cool to 4 °C With H <sub>2</sub> SO <sub>4</sub> , HCL, or solid NaHSO <sub>4</sub> to pH<2	4 × 40 mL	1 × 40 mL	Glass vial with Teflon-lined septum cap <sup>d</sup>
Carbon disulfide								
Carbon tetrachloride								
Chlorobenzene								
Chloroethane								
Chloroform								
Chloromethane								
Dibromochloromethane								
1,2-Dibromo-3-chloropropane								
Ethylene dibromide <sup>h</sup>								
1,2-Dichlorobenzene								
1,4-Dichlorobenzene								
<i>trans</i> -1,4-Dichloro-2-butene								
1,1-Dichloroethane								
1,2-Dichloroethane								
1,1-Dichloroethene								
1,2-Dichloroethene (Total)								
1,2-Dichloropropane								
<i>cis</i> -1,3-Dichloropropene								
<i>trans</i> -1,3-Dichloropropene								
Ethylbenzene								
2-Hexanone								
Methylene bromide								
Methylene chloride								
Methyl iodide								
4-Methyl-2-pentanone								
Styrene								
1,1,1,2-Tetrachloroethane								
1,1,1,2,2-Tetrachloroethane								
Tetrachloroethene								
Toluene								
1,1,1-Trichloroethane								
1,1,2-Trichloroethane								
Trichloroethene								
Trichlorofluoromethane								
1,2,3-Trichloropropane								
Vinyl acetate								
Vinyl chloride								
Xylenes (Total)								

**UNCONTROLLED IF PRINTED**

Table 3 (continued). 2010 Annual LCS Monitoring List Requirements for Cells 4, 5, 6, 7, and 8

Parameter	Method	Priority <sup>a</sup>	ASL	Holding Time	Preservation	Standard Volume	Minimum Volume	Container
<b>Semivolatile Organics:</b>	SW-846 <sup>c</sup>	6	D	7 days to extraction/ 40 days from extraction to analysis	Cool to 4 °C	1 L	1L	Amber glass bottle w/ Teflon-lined cap
Carbazole								
4-Nitroaniline								
Bis(2-chloroisopropyl)ether								
<b>Pesticides:</b>	SW-846 <sup>c</sup>	7	D	7 days to extraction/ 40 days from extraction to analysis	Cool to 4 °C	1 L	1 L	Amber glass bottle w/ Teflon-lined cap
alpha-Chlordane								
<b>PCBs:</b>	SW-846 <sup>c</sup>	8	D	7 days to extraction/ 40 days from extraction to analysis	Cool to 4 °C	1 L	1 L	Amber glass bottle w/ Teflon-lined cap
Aroclor 1016, 1221, 1232, 1242, 1248, 1254, and 1260								
<b>General Chemistry:</b>								
Ammonia	350.1 <sup>f</sup> , 350.3 <sup>f</sup> , 4500C <sup>g</sup> , 4500F <sup>g</sup>	13	D	28 days	Cool to 4 °C, H <sub>2</sub> SO <sub>4</sub> to pH<2	500 mL	200 mL	Plastic
Total Organic Halogens (TOX)	9020B <sup>c</sup>	4	D	28 days	Cool to 4 °C, H <sub>2</sub> SO <sub>4</sub> to pH<2	500 mL	20 mL	Amber glass bottle w/ Teflon-lined cap <sup>e</sup>
Total Organic Carbon (TOC)	9060 <sup>c</sup>	5	D	28 days	Cool to 4 °C, H <sub>2</sub> SO <sub>4</sub> to pH<2	250 mL	125 mL	Amber glass bottle w/ Teflon-lined cap
Chloride	325.2 <sup>f</sup> , 300(all) <sup>f</sup>	11	D	28 days	Cool to 4 °C	250 mL	100 mL	Plastic
Nitrate/Nitrite	353.1 <sup>f</sup> , 353.2 <sup>f</sup> , 4500D <sup>g</sup> , 4500E <sup>g</sup>	9	D	28 days	Cool to 4 vC, H <sub>2</sub> SO <sub>4</sub> to pH<2	100 mL	20 mL	Plastic or glass
Sulfate	375.2 <sup>f</sup> , 300.0 <sup>f</sup> , 4500E <sup>g</sup>	12	D	28 days	Cool to 4 °C	250 mL	100 mL	Plastic
Total Dissolved Solids (TDS)	160.1 <sup>f</sup> , 2540C <sup>g</sup>	10	D	7 days	Cool to 4 °C	500 mL	250 mL	Plastic or glass
Total Alkalinity	310.1 <sup>f</sup> , 2320B <sup>g</sup>	14	D	14 days	Cool to 4 °C	500 mL	250 mL	Plastic

~~UNCONTROLLED IF PRINTED~~  
 Table 3 (continued). 2010 Annual LCS Monitoring List Requirements for Cells 4, 5, 6, 7, and 8

Parameter	Method	Priority <sup>a</sup>	ASL	Holding Time	Preservation	Standard Volume	Minimum Volume	Container
<p><b>Note:</b> Field parameters are performed at each sampling location prior to sample collection and include dissolved oxygen, oxidation-reduction potential, pH, specific conductance, temperature, and turbidity at ASL A, Priority 1.</p> <p><sup>a</sup>If sufficient volume is not available for collection of a full suite at standard volume, then the minimum volume and priority will be used to maximize the number of analytical groups collected.</p> <p><sup>b</sup>Radiological analyses do not have standard methods; however, the performance-based analytical specifications for these parameters are provided in the FPQAPP. (Liquid Scint. = Liquid Scintillation)</p> <p><sup>c</sup>Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (EPA 1998).</p> <p><sup>d</sup>No head space.</p> <p><sup>e</sup>Minimal head space—as close to zero as possible.</p> <p><sup>f</sup>Methods for Chemical Analysis of Water and Wastes (EPA 1983).</p> <p><sup>g</sup>Standard Methods for Analysis of Water and Wastewater, 17th edition (APHA 1989).</p> <p><sup>h</sup>Also referred to as 1,2-dibromoethane.</p>								

## UNCONTROLLED IF PRINTED

Table 4. Summary of Sampling Requirements for the OSDF

Cells	Monitoring Horizons	Annually	Quarterly
1 through 3	LCS	Table 1	Table 2
	LDS, HTW, GMA	NA	Table 2
4 through 8	LCS	Table 3	Table 2
	LDS, HTW, GMA	NA	Table 2

LCS = leachate collection system

LDS = leak detection system

HTW = horizontal till well

GMA = Great Miami Aquifer

### 2.2 Additional Sampling Requirements

All horizons for a particular cell will be sampled during the same time frame to enhance the comparability of the data. If insufficient volume is available for collection of the entire analytical suite, the sample sets shall be collected in accordance with the priorities listed in Tables 1 through 3. Samples will be collected from the HTWs, GMA wells, LCS, and LDS in accordance with the *Fernald Preserve Quality Assurance Project Plan (FPQAPP)* (DOE 2009a) and the *Fernald Preserve Environmental Monitoring Procedures* (DOE 2009b).

### 2.3 LCS and LDS Sample Collection

Samples from the LCS and LDS shall be collected by entering the valve houses located on the western side of each cell. Samples will be collected directly from the sample ports on the bottom of the LCS and LDS as the lines enter the eastern side of the valve house. The LCS is located on the northern side of the valve house, and the LDS is located on the southern end of the valve house. No purging of the line is required prior to sample collection. If the discharge line is dry or does not yield enough water for the entire sample suite, the sample will be collected from the LCS and LDS tanks located within the valve house. The samples from the tanks will be collected using a dedicated Teflon bailer.

### 2.4 HTW Sample Collection

The glacial till is monitored under each cell using horizontal wells installed during construction of each cell. Prior to sample collection, each HTW shall be purged of three well volumes or purged to dry, whichever occurs first. Sample collection from the horizontal well shall be accomplished using a Teflon bailer.

### 2.5 Great Miami Aquifer Sample Collection

Each cell is monitored by two GMA wells, located east and west of each individual cell. Two additional GMA wells are located on the south side of Cell 8. These wells are sampled using dedicated sampling equipment.

Filtering of groundwater samples at monitoring wells may take place on a case-by-case basis if deemed appropriate. If filtering is conducted, the reasons for filtering will be presented to U.S. Environmental Protection Agency (EPA) and Ohio Environmental Protection Agency

## **UNCONTROLLED IF PRINTED**

(OEPA) as soon as possible through the monthly conference call update and annually through the Site Environmental Report.

### **3.0 Additional Sampling Program Requirements**

#### **3.1 Quality Assurance Requirements**

Quality assurance requirements are consistent with those identified in the FPQAPP. Self-assessment and independent assessments of work processes and operations will be conducted to ensure quality of performance. Self-assessments will evaluate sampling procedures and paperwork associated with the sampling effort. Independent assessments will be performed by a Quality Assurance representative by conducting surveillances. Surveillances will be performed at least once per year at any time during the project and will consist of monitoring/observing ongoing project activity and work areas to verify conformance to specified requirements.

#### **3.2 Changes to the Project-Specific Plan**

Changes to this plan will be at the discretion of the project team leader. Prior to implementation of field changes, the project team leader or designee shall be informed of the proposed changes and circumstances substantiating the changes. Any changes to the medium-specific plan must have written approval by the project team leader or designee, Quality Assurance representative, and the field manager prior to implementation. If a Variance/Field Change Notice is required, it will be completed in accordance with the FPQAPP. The Variance/Field Change Notice form shall be issued as a controlled distribution to team members and will be included in the field data package to become part of the project record. During revisions to the LMICP/GWLMP, Variance/Field Change Notices will be incorporated to update the plan.

If a change represents a significant change to the scope of the plan, approval would be requested through monthly conference calls with EPA and OEPA. Afterward, a Variance/Field Change Notice that documents the change and the justification for the change will be provided to EPA and OEPA.

#### **3.3 Quality Control Samples**

Quality control sample analyses are required as part of the GWLMP for the OSDF. A minimum of one set of field quality control samples is required for each sampling round. A "sampling round" refers to collection of samples from one or more locations for a specific project during a specified time period for a similar purpose. Duplicate and rinsate samples will be collected at a rate of one per sampling round or one per 20 samples, whichever is more frequent. Trip blanks will be collected one per day per team when samples are collected for volatile organic analysis. A rinsate sample will not be required for those locations with dedicated sample collection equipment. One matrix spike/matrix spike duplicate will be analyzed at a frequency of one per sampling event or one per 20 samples, whichever is more frequent. Quality control samples will be analyzed for the same analytes as the normal samples.

## **UNCONTROLLED IF PRINTED**

### **3.4 Equipment Decontamination**

All nondedicated sampling equipment shall be decontaminated according to the FPQAPP prior to sample collection at each sample location. Sampling equipment shall also be decontaminated upon completion of sampling activities, unless equipment has been dedicated to the sample location.

### **3.5 Disposal of Wastes**

During sampling activities, waste will be generated in various forms; disposal of all waste will be in accordance with site requirements and procedures. The various forms of waste expected to be encountered during this program are contact waste, purge water, and decontamination wastewater.

Contact waste will be minimized by limiting contact with the sample media and by using disposable materials whenever possible. Contact waste shall be placed into plastic garbage bags and disposed of in a dumpster on site. If contact waste is determined to be radiologically contaminated, the assigned radiological control technician/engineer shall survey, contain, label, and dispose of the waste according to radiological control requirements.

All decontamination wastewater and purge water will be containerized and disposed of through the Converted Advanced Wastewater Treatment facility (CAWWT) for treatment. The point of entry into the CAWWT will be either the CAWWT backwash basin or the OSDF permanent lift station.

### **3.6 Health and Safety**

Health and safety requirements for the Fernald Preserve are established in accordance with Title 10 *Code of Federal Regulations* Part 851, "Worker Safety and Health Program." This program establishes worker safety and health regulations to govern Legacy Management Support (LMS) contractor activities at U.S. Department of Energy (DOE) sites and establishes the framework for a worker protection program that will reduce or prevent occupational injuries, illness, and accidental losses by requiring DOE contractors to provide their employees with safe and healthful workplaces. These requirements are further defined in LMS contractor procedures, Fernald Preserve standard operating procedures, and job safety analyses.

### **3.7 Data Management**

Information collected as a part of this monitoring program will be managed according to the guidelines below to ensure availability of documentation for verification and reference and to ensure regulatory compliance.

Field documentation, as required by the FPQAPP for this sampling program (e.g., Chain of Custody forms), will be carefully maintained in the field. To ensure that appropriate documentation was completed during field activities and that documentation was completed correctly, required documentation shall be verified by Environmental Monitoring personnel. One hundred percent of the analytical data shall be validated in accordance to the Analytical Support Level (ASL) specified in Tables 1 and 2. Information is stored in the Site Environmental Evaluation for Projects (SEEPPro) database, and the hard-copy original field documentation

## UNCONTROLLED IF PRINTED

packages shall be stored in controlled file storage cabinets and eventually in a long-term archive environment. According to regulatory guidance, these records must be maintained for a minimum of 30 years.

### 4.0 References

**Note:** Tasks associated with this plan are performed under the most current revision of plans, procedures, and documents.

APHA (American Public Health Association), 1989. *Standard Methods for Analysis of Water and Wastewater*, 17th Edition.

DOE (U.S. Department of Energy), 2009a. *Fernald Preserve Quality Assurance Project Plan*, Revision 0, Office of Legacy Management, Grand Junction, Colorado.

DOE (U.S. Department of Energy), 2009b. *Fernald Preserve Environmental Monitoring Procedures*, Revision 0, Office of Legacy Management, Grand Junction, Colorado.

EPA (U.S. Environmental Protection Agency), 1983. *Methods for Chemical Analysis of Water and Wastes*, EPA600/4-79-020, Environmental Monitoring and Support Laboratory, Cincinnati, Ohio, March.

EPA (U.S. Environmental Protection Agency), 1998. *Test Methods for Evaluating Solid Waste, Physical/Chemical Methods*, SW-846, 3rd edition, Office of Solid Waste, Washington, DC, April.

*Fernald Project Safety Plan*, LMS/FER/S012018, continually updated, prepared by S.M. Stoller Corporation for the U.S. Department of Energy Office of Legacy Management, Grand Junction, Colorado.

**UNCONTROLLED IF PRINTED**

**Appendix C**

**Fernald Preserve Data Quality Objectives  
Monitoring Program for the On-Site Disposal Facility**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Contents**

Acronyms and Abbreviations ..... iii

1.0 Statement of Problem..... 1

2.0 Identify the Decision..... 2

3.0 Inputs That Affect the Decision..... 2

4.0 Define the Boundaries of the Study..... 3

5.0 Decision Rule..... 4

6.0 Limits on Uncertainty ..... 4

7.0 Optimize Design ..... 5

8.0 Data Quality Objectives..... 6

9.0 References..... 8

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

**UNCONTROLLED IF PRINTED**

**Acronyms and Abbreviations**

ASL	Analytical Support Level
BTX	benzene, toluene, and xylenes
CEC	cation exchange capacity
CFR	<i>Code of Federal Regulations</i>
DQO	data quality objective
FP EMP	<i>Fernald Preserve Environmental Monitoring Procedures</i>
FPQAPP	<i>Fernald Preserve Quality Assurance Project Plan</i>
FS	feasibility study
GMA	Great Miami Aquifer
GWLMP	Groundwater/Leak Detection and Leachate Monitoring Plan
HTW	horizontal till well
IEMP	Integrated Environmental Monitoring Plan
LCS	leachate collection system
LDS	leak detection system
OAC	<i>Ohio Administrative Code</i>
ORP	oxidation-reduction potential
OSDF	On-Site Disposal Facility
PCBs	polychlorinated biphenyls
PSP	<i>Project-Specific Plan for the On-Site Disposal Facility Monitoring Program</i>
QC	quality control
RA	remedial action
RI	remedial investigation
RD	remedial design
RvA	removal action
SVOC	semi-volatile organic compound
TDS	total dissolved solids
TCLP	Toxicity Characteristic Leaching Procedure
TOC	total organic carbon
TOX	total organic halogens
TPH	total petroleum hydrocarbons
TSD	treatment, storage, and disposal
VOA	volatile organics compounds

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## **1.0 Statement of Problem**

**Problem Statement:** Analytical data, obtained from a multi-component monitoring system, is necessary to support the leak detection element of the on-site disposal facility (OSDF) monitoring strategy.

Construction of the OSDF for long-term storage and containment of low-level radioactive waste was completed in phases with eight individual cells. Each cell is monitored individually for leak detection and possible environmental impact.

A major concern regarding the storage of waste at the Fernald Preserve is the prevention of any additional environmental impact to the Great Miami Aquifer (GMA). To address this concern, site-specific monitoring requirements that integrate state and federal regulatory requirements were developed to provide a comprehensive program for monitoring the ongoing performance and integrity of the OSDF.

In consideration of unique hydrogeologic conditions and preexisting contamination on site, a baseline data set (*Ohio Administrative Code* [OAC] 3745-27-10[D][5][a][ii][a], OAC 3745-27-10[A][2][b], and OAC 3745-54-97[G]) was established. In addition, an alternate sampling program (OAC 3745-2-10[D][5][a][ii][b] and [b][ii][b]; 3745-27-10[D][6]) was initiated to address site-specific complexities and provide an effective monitoring program for the OSDF that meets and exceeds federal and state regulations for treatment, storage, and disposal (TSD) facilities.

The OSDF monitoring program strategy uses OSDF system design in combination with a monitoring well network to provide data for a collective assessment of OSDF performance. Each OSDF cell is constructed with a leachate collection system (LCS) and a leak detection system (LDS); these systems are separate and contain sample collection points within the valve house. The LCS is designed to collect infiltrating rainwater (and storm water runoff during waste placement) and prevent it from entering the underlying environment; the leachate drainage layer drains to the west through an exit point in the liner to a leachate transmission system located on the west side of the OSDF and routed for treatment. The LDS is a drainage layer positioned beneath the primary composite liner; any collected fluids from that layer drain to the west where they are removed and routed for treatment as in the LCS. Flow monitoring of the LCS and LDS will be conducted on a scheduled basis. Monitoring the flow and sampling the LCS and LDS liquids will provide an assessment of migratory dynamics within each cell and determine primary liner performance.

The monitoring well network consists of two separate systems. A horizontal till well (HTW) is placed in the subsurface beneath the LCS and LDS liner penetration box within each cell. Each liner penetration box represents the lowest elevational area of each cell, by definition the most likely location for a potential leak to migrate. GMA monitoring wells are placed at the immediate boundaries of each cell, at upgradient and downgradient locations, to monitor the water quality of the aquifer and verify presence or absence of environmental impact.

## **2.0 Identify the Decision**

Flow and analytical data provided by a monitoring program will provide the information necessary for management of the OSDF. Information derived from flow volume assessment and sample analyses will constitute the first tier of a three-tier strategy: detection, assessment, and corrective action; if it is determined from detection monitoring that a leachate leak from the OSDF has occurred, additional groundwater quality assessment studies will be initiated, and corrective action monitoring plans will be developed and implemented as necessary. If the detection monitoring continues to successfully demonstrate that the OSDF is performing as designed, then the monitoring program will remain in the first-tier detection mode, and a follow-up groundwater quality assessment or corrective action monitoring plans will not be necessary.

The OSDF monitoring strategy includes the establishment of baseline conditions in the hydrogeological environment beneath each cell prior to waste placement. Both perched groundwater and the GMA contain uranium and other Fernald Preserve-related constituents at levels above background near the OSDF; therefore, it is necessary to establish preexisting conditions (constituent concentration levels and variability) for applicable OSDF monitoring parameters.

## **3.0 Inputs That Affect the Decision**

An extensive characterization of wastes to quantify environmental contamination in the area of the Fernald Preserve provided the information to develop the waste acceptance criteria for waste entering the OSDF. The leachability, mobility, persistence, toxicity, and stability of identified waste constituents were evaluated, and of 93 constituents, less than 20 constituents were identified as having the potential to impact the aquifer within a 1,000-year performance period. These site-specific leak detection indicator parameters chosen as monitoring parameters will be supplemented with additional water chemistry indicator parameters.

Additionally, waste TSD facilities must analyze collected leachate annually to fulfill a reporting requirement according to Ohio Solid Waste regulation OAC 3745-27-19(M)(5). Through 2008, OSDF monitoring was complying by collecting a grab sample yearly and performing analysis for the parameters listed in Appendix I of OAC 3745-27-10 and polychlorinated biphenyls (PCBs). Waste is no longer being placed in the OSDF, an alternate sampling constituent list has been approved for the OSDF, a common-ion study has been completed, and additional Appendix I parameters have been identified for Cells 1 through 3. Therefore, beginning in 2009, annual sampling in the LCS will instead focus on site-specific parameters that have been approved for the facility, common-ion parameters identified in the common-ion study as being beneficial monitoring parameters, and additional Appendix I parameters identified for Cells 1 through 3.

Monitoring of the liquid flow within the LCS and LDS drainage layers will be performed to provide a trend analysis that can be used as an indicator of containment system performance; changes in the trend of flow will initiate follow-up inspection and corrective action measures as necessary. A graded approach, patterned after federal hazardous waste landfill regulations in Title 40 *Code of Federal Regulations* (CFR) Part 264.303(c)(2) and Ohio solid waste rule OAC 3745-27-19(M)(4), will be used to provide a quantitative monitoring control for drainage within the OSDF.

## **4.0 Define the Boundaries of the Study**

Subsurface conditions in the immediate area of the OSDF consist of a glacial till underlain by sand and gravel deposits that constitute the GMA. The GMA is a high-yield aquifer and a designated sole-source aquifer under the Safe Drinking Water Act. It supplies a significant amount of potable water for private and industrial use in Butler and Hamilton Counties, Ohio; therefore, a leakage of contaminants from the OSDF could affect water quality for a large population.

Typically, a detection monitoring program consists of upgradient and downgradient monitoring wells with routine sampling for a prescribed list of parameters. Consequently, detection of a statistically significant difference in downgradient water quality indicates that a release from a facility may have occurred. However, at the Fernald Preserve, low permeability and preexisting contamination within the overburden, and implementation of a sitewide groundwater remedial action (RA) for the subsurface, add complexity to the development of a groundwater detection monitoring program that is consistent with the standard approach in solid and hazardous waste regulations. To accommodate such complexities, federal and state regulations allow alternative monitoring strategies, which provide flexibility with respect to well placement, statistical evaluation of data, parameter lists, and sampling frequency. The OSDF monitoring program incorporates an appropriate alternative monitoring strategy to ensure integrity and provide effective early warning of a leak from the facility. The program includes alternate well placement, statistical analysis, parameter lists, and sampling frequencies.

An OSDF leak would migrate vertically downward toward the GMA; therefore, a horizontally positioned well placed within the glacial till shall have its screened interval beneath the LCS and LDS liner penetration box of each cell as a site-specific approach to monitor a first-entry leakage from the OSDF. The GMA wells are installed immediately adjacent to the OSDF, just outside the boundary of the final composite cap. Each cell is monitored with a set of GMA monitoring wells, placed upgradient and downgradient of each cell. A network of GMA monitoring wells borders the OSDF and provides upgradient and downgradient monitoring points for the entire facility.

The parameters are limited to those indicated as having a potential to migrate from the OSDF and impact the GMA. The concentration levels of concern are those required to determine fluctuations in GMA concentrations and provide a sensitivity great enough to indicate potential impacts.

Sampling frequencies for the OSDF monitoring program meet federal and state requirements. The additional data will be used to develop an appropriate statistical procedure and to compensate for the varying temporal conditions in the groundwater flow direction and chemistry due to seasonal fluctuations.

## **5.0 Decision Rule**

To evaluate the potential that a cell may be leaking, the U.S. Department of Energy will first review and compare flow rates from the LDS to the design action leakage rate to determine if sufficient hydraulic head is present in a cell to drive leachate through a liner breach. The key to a plausible potential-leak determination is the presence of an adequate hydraulic head (i.e., action leakage rate is present) coupled with observed water quality changes in the LDS and HTW. The water quality of the monitored horizon is a secondary criterion that has merit only if sufficient hydraulic head exists to drive leachate through the secondary liner. Unless an upward concentration trend in an HTW or GMA well is accompanied by a corresponding action leakage flow rate in the LDS, any water quality increase will not be attributed to a potential leak from the OSDF.

Three water quality data interpretation techniques will be used to assess changing water quality conditions in HTW and GMA wells and compare conditions in the HTW and GMA wells to conditions inside the facility in the LCS and LDS. Concentrations will be trended over time for those constituents that have not reached steady-state conditions. Control charts will be prepared for those constituents that are stable. Bivariate plots will be prepared for each cell to illustrate how the water quality signature of the LCS, LDS, and HTW of a cell compare.

Data collected from the OSDF monitoring program will also be used to supplement the compilation of data for the Integrated Environmental Monitoring Plan (IEMP) reports (Attachment D). Groundwater data for those OSDF leak detection constituents that are also common to the IEMP groundwater remedy performance constituents will be used in the IEMP data interpretations as the data become available. Groundwater data collected for the unique OSDF leak detection constituents that are not being monitored by the IEMP groundwater monitoring program will be used only for the establishment of the OSDF baseline and subsequent leak detection monitoring. To provide an integrated approach to reporting OSDF monitoring data, the annual Site Environmental Report will serve as the mechanism by which LCS and LDS volumes and concentrations will be reported, along with groundwater monitoring results, trending results, and interpretation of the data. Presenting data in one report will facilitate a qualitative assessment of the impact of the OSDF on the aquifer, as well as the operational characteristics of OSDF caps and liners.

## **6.0 Limits on Uncertainty**

The sensitivity and precision must be sufficient to define the GMA concentrations of the parameters of concern such that fluctuations will be observable, and effects impacting the final remediation levels are observed. A false-positive error would indicate either that certain parameters are present when in fact they are not, or that baseline parameters are present at higher concentrations than are actually present in the GMA. This type of error would give a false indication that a leak may exist. A false-negative error would indicate that certain parameters are not present when in fact they are. This may lead to a mistaken indication that a leak is not occurring. It is necessary to define the concentrations of the parameters of concern such that fluctuations in concentration and effects impacting the GMA will be observable.

## **7.0 Optimize Design**

An aquifer simulation model (i.e., Sandia Waste Isolation Flow and Transport [SWIFT] and, more recently, Variably Saturated Analysis Model in 3 Dimensions [VAM3D]) was used to select monitoring well locations, typically one upgradient and one downgradient of each cell. These wells are used in the detection monitoring program, as well as for baseline establishment.

Standard statistical modeling studies indicate that data from a minimum of four independent sampling events are necessary to establish baseline values; however, for an improved comparative statistical analysis, more sampling events were chosen to ensure sufficient available data for baseline establishment for each GMA monitoring well location.

To ensure consistency of method and an auditable sampling process, each sample will be collected according to the following:

- *Fernald Preserve Environmental Monitoring Procedures (FP EMP) (DOE 2009a).*
- *Fernald Preserve Quality Assurance Project Plan (FPQAPP) (DOE 2009b).*
- *Project-Specific Plan for the On-Site Disposal Facility Monitoring Program (PSP) (Attachment C, Appendix B).*

Laboratory quality control (QC) requirements will be as specified in the FPQAPP and PSP. One hundred percent of the data will undergo field and laboratory validation.

All chemical sample analyses will be performed at Analytical Support Level (ASL) D, except field water quality analyses, which will always be performed at ASL A. Radiological constituents will be analyzed at ASL D.

All samples require field QC and will include trip blanks as specified in the FPQAPP. Duplicates will be collected for each sampling round (a "sampling round" is defined as one round of sample collection from various locations occurring within a short period of time [i.e., several days]). Equipment rinsate blanks will be collected when dedicated equipment is not available. One laboratory QC sample set shall be collected per each release of samples. Laboratory QC will include a method blank and a matrix spike for each analysis, as well as all other QC required according to the method and FPQAPP.

If a well does not recharge sufficiently to allow collection of specified volumes for all analytes, or the LCS/LDS systems do not contain sufficient volume for a full suite of samples, parameters will be collected in the order of priority stated in the PSP. Sampling parameter requirements and frequencies are defined in the PSP and meet applicable federal and state requirements.

## 8.0 Data Quality Objectives

### Baseline Establishment for GMA Groundwater Monitoring of the OSDF

1a. Task/Description. Baseline Establishment for GMA Groundwater Monitoring of the OSDF. This sampling program will determine a baseline characterization of the GMA in the immediate vicinity of the OSDF.

1b. Project Phase. Put an *X* in the appropriate box:

RI  FS  RD  RA  RvA  Other  Specify: Post-Closure \_\_\_\_\_

1c. DQO No.: GW-024 DQO Reference No.: not applicable

---

2. Media Characterization. Put an *X* in the appropriate box:

Air  Biological  Groundwater  Sediment  Soil   
Waste  Wastewater  Surface water  Other  Specify: Leachate

---

3. Data Use with ASLs A–E. Put an *X* in the appropriate ASL boxes beside each applicable data use:

Site Characterization  
A  B  C  D  E

Risk Assessment  
A  B  C  D  E

Evaluation of Alternatives  
A  B  C  D  E

Engineering Design  
A  B  C  D  E

Monitoring during remediation activities  
A  B  C  D  E

Other (specify): Post-Closure  
A  B  C  D  E

---

4a. Drivers. OSDF GWLMP, the OAC for the containment of solid and hazardous waste, and the CFR TSD Facility Standards.

4b. Objective. To provide information by which verification of the ongoing performance and integrity of the OSDF and its impact on groundwater can be evaluated.

5. Site Information (description). The OSDF will consist of eight individual cells, and each cell will be monitored on an individual basis. The monitoring system developed to detect any potential leaks originating from the cells consists of four components: an LDS, an LCS, a till monitoring system, and a Great Miami Aquifer monitoring system. This DQO addresses post-closure OSDF leak detection monitoring.

---

**UNCONTROLLED IF PRINTED**

6a. Data Types with Appropriate ASL. Put an X in the appropriate boxes for required analyses:

- |                      |                                     |                 |                                       |                            |                          |
|----------------------|-------------------------------------|-----------------|---------------------------------------|----------------------------|--------------------------|
| A. pH                | <input checked="" type="checkbox"/> | B. Uranium      | <input type="checkbox"/>              | C. BTX                     | <input type="checkbox"/> |
| Temperature          | <input checked="" type="checkbox"/> | Full Radiologic | <input checked="" type="checkbox"/> * | TPH                        | <input type="checkbox"/> |
| Specific Conductance | <input checked="" type="checkbox"/> | Metals          | <input checked="" type="checkbox"/> * | Oil/Grease                 | <input type="checkbox"/> |
| Dissolved Oxygen     | <input checked="" type="checkbox"/> | Cyanide         | <input type="checkbox"/>              |                            |                          |
| Turbidity            | <input checked="" type="checkbox"/> | Silica          | <input type="checkbox"/>              |                            |                          |
| D. Cations           | <input type="checkbox"/>            | E. VOC          | <input checked="" type="checkbox"/> * | F. Other (specify): Total  |                          |
| Anions               | <input type="checkbox"/>            | SVOC            | <input checked="" type="checkbox"/> * | Alkalinity, Ammonia,       |                          |
| TOC                  | <input checked="" type="checkbox"/> | Pesticides      | <input checked="" type="checkbox"/> * | Chloride, TDS, Sulfate,    |                          |
| TCLP                 | <input type="checkbox"/>            | PCB             | <input checked="" type="checkbox"/>   | Nitrate/Nitrite, Fluoride, |                          |
| CEC                  | <input type="checkbox"/>            | TOX             | <input checked="" type="checkbox"/>   | ORP                        |                          |
| COD                  | <input type="checkbox"/>            |                 |                                       |                            |                          |

\*See specific parameters listed in PSP.

7a. Sampling Methods. Put an X in the appropriate box:

- Biased  Composite  Environmental  Grab  Grid   
 Intrusive  Non-Intrusive  Phased  Source   
 Other (specify): \_\_\_\_\_ DQO Number: DQO #GW-024

7b. Sample Work Plan Reference. List the samples required and reference the work plan or sampling plan guiding the sampling activity, as appropriate. Baseline/background samples and routine monitoring samples: PSP for on-site disposal monitoring program.

7c. Sample Collection Reference. Provide a specific reference to the FPQAPP section and subsection guiding sampling collection procedures. A PSP will detail sampling methodology; unless otherwise indicated in the PSP, sampling will follow requirements outlined in the FPQAPP and FP EMP.

Sample Collection Reference: FPQAPP and FP EMP.

8. Quality Control Samples. Put an X in the appropriate box:

Field Quality Control Samples

- |                           |                                     |                                |                                     |
|---------------------------|-------------------------------------|--------------------------------|-------------------------------------|
| Trip Blanks               | <input checked="" type="checkbox"/> | Container Blanks               | <input type="checkbox"/>            |
| Field Blanks              | <input type="checkbox"/>            | Duplicate Samples              | <input checked="" type="checkbox"/> |
| Equipment Rinsate Samples | <input checked="" type="checkbox"/> | Split Samples                  | <input type="checkbox"/>            |
| Preservative Blanks       | <input type="checkbox"/>            | Performance Evaluation Samples | <input type="checkbox"/>            |

Other (specify): none required

Laboratory Quality Control Samples

- |              |                                     |                            |                                     |
|--------------|-------------------------------------|----------------------------|-------------------------------------|
| Method Blank | <input checked="" type="checkbox"/> | Matrix Duplicate/Replicate | <input checked="" type="checkbox"/> |
| Matrix Spike | <input checked="" type="checkbox"/> | Surrogate Spikes           | <input checked="" type="checkbox"/> |

Other (specify) none required

9. Other. Provide any other germane information that may impact the data quality or gathering of this particular objective, task, or data use.

## **9.0 References**

DOE (U.S. Department of Energy, 2009a. *Fernald Preserve Environmental Monitoring Procedures*, Revision 0, Office of Legacy Management, Grand Junction, Colorado.

DOE (U.S. Department of Energy, 2009b. *Fernald Preserve Quality Assurance Project Plan*, Revision 0, Office of Legacy Management, Grand Junction Colorado.

**UNCONTROLLED IF PRINTED**

**Appendix D**

**Leachate Management System for the On-Site Disposal Facility**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## Contents

Acronyms and Abbreviations .....	iii
1.0 Overview.....	1
2.0 Basic System Operation.....	1
2.1 LDS and LCS .....	2
3.0 Inspection and Maintenance Activities.....	3
3.1 LCS and LDS .....	3
3.2 EPLTS Inspection and Maintenance Activities .....	6
4.0 Leachate Management .....	7
5.0 Leachate Contingency Plan.....	7
6.0 References.....	10

## Figure

Figure 1. Leachate Management System .....	9
--	---

## Tables

Table 1. Post-Closure OSDF Leachate Management System Inspection and Maintenance Activities .....	4
Table 2. Determination of the Number of Days Required to Reach the 1-ft Level (8,623 Gallons) .....	8
Table 3. Action Levels for Containment Pipe Monitoring .....	10

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **Acronyms and Abbreviations**

CAWWT	Converted Advanced Wastewater Treatment Facility
CFR	<i>Code of Federal Regulations</i>
cm	centimeter
DOE	U.S. Department of Energy
EPA	U.S. Environmental Protection Agency
EPLTS	enhanced permanent leachate transmission system
ft	foot/feet
HDPE	high-density polyethylene
HMI	Human–Machine Interface
LCS	leachate collection system
LDS	leak detection system
LTS	leachate transmission system
OAC	<i>Ohio Administrative Code</i>
OEPA	Ohio Environmental Protection Agency
OSDF	on-site disposal facility
PLS	permanent lift station
PS	pipe segment
RLCS	redundant leachate collection system

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **1.0 Overview**

The double liner system of each on-site disposal facility (OSDF) cell contains a leachate collection system (LCS) and a leak detection system (LDS). These systems are designed to convey any leachate/fluid that enters the system through pipes (i.e., the LCS pipes and LDS pipes) to valve houses located outside each cell. After closure of the OSDF, fluids that enter the LCS have infiltrated through the emplaced impacted material. Fluid that collects in the LCS and LDS collection tanks located in the valve house for each cell will be pumped to the enhanced permanent leachate transmission system (EPLTS). The EPLTS conveys leachate from each of the valve houses, via gravity flow, to a permanent lift station (PLS). The location of the LCS, LDS, and EPLTS pipes and gravity lines are shown in the as-built construction drawings.

The *Systems Plan, On-site Disposal Facility* (DOE 2000), *Collection and Management of Leachate for the On-site Disposal Facility* procedure (DOE 2001a), and *Enhanced Permanent Leachate Transmission System Operation* procedure (DOE 2005) provide specifics on activities during post-closure monitoring. Note that operational procedures are included in the *Legacy Management Fernald Operating Procedures* (DOE 2006). Equipment will be maintained, operated, and serviced according to manufacturer instructions and Section 4 of the *Fernald Project Wastewater Treatment Outside Systems Procedure* (DOE 2008).

## **2.0 Basic System Operation**

What follows is a description of the basic operation of the OSDF leachate management system.

- The LCS and LDS pipes from the liner system to the valve houses for each cell consist of double-wall, high-density polyethylene (HDPE) pipes (i.e., inner carrier pipes and outer containment pipes). Each pipe drains by gravity from below the OSDF cell and terminates in a valve house for each cell.
- The LDS line in each valve house allows for direct discharge of flow from the LDS carrier pipe into a collection tank located inside the valve house. The lined valve house foundation wall serves as a secondary containment structure for the collection tank. The valve house has provisions to monitor liquid in the collection tank. The tank is equipped with a level-sensing element and a pump to discharge the contents of the tank. The tank level is monitored by the Converted Advanced Wastewater Treatment Facility (CAWWT) Human-Machine Interface (HMI), and the tank is pumped automatically when the level reaches 80 percent. The discharge pipe from the tank pump is connected to the EPLTS gravity line. The LDS containment pipe has a monitoring port and a fixed end seal within the valve house to verify the absence of fluid in the annular space between the carrier pipe and containment pipe.
- Each LDS line has a cleanout within the valve house for maintaining the LDS carrier pipe.
- The LCS allows direct discharge of flow from the LCS carrier pipe into the EPLTS gravity line that passes through each valve house. LCS flow has diminished to the point that flow from all eight cells is currently directed through the collection tanks in each valve house. The tank level is monitored by the CAWWT HMI, and the tank is pumped automatically when the level reaches 80 percent. The LCS carrier pipe in each valve house also has a sampling port for obtaining leachate samples. Each valve house has an inlet for a redundant LCS (RLCS) carrier pipe. The redundant carrier pipe has a valve (secured in a closed

## UNCONTROLLED IF PRINTED

position) and a monitoring port (for periodically confirming the absence of leachate in the pipe). The redundant carrier pipe valve is configured so that it can be opened to allow flow to the EPLTS gravity line in the event of a failure due to clogging of the primary LCS carrier pipe. Both the primary and RLCS containment pipes have monitoring ports and fixed end seals within the LCS to verify the absence of leachate in the annular space between the carrier pipe and the containment pipe.

- Each valve house is equipped with liquid-level alarms, consisting of a submersible liquid-level sensor (located in a small sump in the corner of each valve house) and alarm light. Alarm signals are transmitted to the permanent lift station, and a general alarm is subsequently sent to the CAWWT control room. The liquid-level sensor is calibrated so that the alarm is activated when the fluid level in the valve house sump reaches approximately 11 inches.
- The EPLTS gravity line consists of a double-wall HDPE pipe with a 6-inch (15.2-centimeter [cm])-diameter inner carrier pipe, and a 10-inch (25-cm)-diameter outer containment pipe.
- The EPLTS gravity line is equipped with a vent at its northern end. The purpose of the vent is to prevent pressure buildup in the systems. The EPLTS gravity line has cleanouts in each valve house that provide access to the EPLTS line in both directions for maintenance.
- The PLS has secondary containment designed so that it can be monitored for the presence of leakage.
- The PLS was designed to be capable of storing the anticipated quantity of leachate generated during a 1-week period using design assumptions simulating final closure of the OSDF.
- Prior to the discharge of fluid into the PLS, the fluid passes through a motor-operated inflow valve located in the control valve house just upstream of the PLS. This valve closes automatically in the event of a power failure, or if fluid levels in the lift station rise above the high-level alarm set point (or any level that would cause an electrical short or damage to equipment in the lift station). In the event of a power failure or high-level alarm, the motor-operated valve for the leachate transmission system (LTS) will close automatically. The lift station also has a means for manually closing the motor-operated inflow valve. Therefore, this valve can be closed if needed until appropriate maintenance activities can be implemented.
- The PLS is equipped with a pumping system to transfer liquids in the lift station to the CAWWT for treatment.

### 2.1 LDS and LCS

The LDS and LCS of each OSDF cell shall be operated in conformance with the requirements of Section 4 of the *Fernald Project Wastewater Treatment Outside Systems Procedure* (DOE 2008).

The valve on the RLCS carrier pipe shall be maintained closed at all times, unless it is determined that the LCS pipe is clogged.

In order to allow discharge to the EPLTS gravity line, the valve on the LCS carrier pipe shall be maintained open at all times during the post-closure period of the OSDF, except for those periods

## **UNCONTROLLED IF PRINTED**

when the valve needs to be closed for system maintenance and repair, or in the event of an operational emergency.

The LCS valve houses are designed as a closed system; leachate should not accumulate in these valve houses. If the alarms are activated, personnel shall respond to assess the problem and to take appropriate corrective actions. If the alarm occurs during day shift operations (6 a.m. to 4:30 p.m.), the response will be within 1 hour. If the alarm occurs during the night when operations personnel are not on site, the response will occur the next morning at the start of the day shift.

### **3.0 Inspection and Maintenance Activities**

The *Fernald Project Wastewater Treatment Outside Systems Procedure* (DOE 2008) provides the current details associated with inspection and maintenance activities for the leachate management system. The following subsection and Table 1 provide guidelines for the activities to continue during the post-closure period.

#### **3.1 LCS and LDS**

The LCS and LDS shall be inspected and maintained according to the schedule and activity requirements outlined in Table 1, or until leachate is no longer generated and an alternative activity schedule has been approved.

According to appropriate regulations—*Ohio Administrative Code* (OAC) 3745-27-19(k)(3)—the routine inspection of the pipe network shall be annual until final closure to ensure that clogging has not occurred. Clogging could occur from deposition of sediments or from biological growth inside the pipe. Since the facility closed in 2006, the annual inspection requirement is no longer applicable; however, the U.S. Department of Energy (DOE) will inspect the pipe network in 2010 and report the findings of this inspection in the site 5-year Comprehensive Environmental Response, Compensation, and Liability Act review. This pipe network shall be inspected between the valve house and the first 100 feet (ft) of the subdrain pipe inside the cell (at a minimum). The portion of the pipe beyond this point inside the cell is considered redundant because gradation for the LCS granular drainage material is designed to limit the level of leachate on the geomembrane liner to less than 1 ft (0.3 meter) without need for a subdrain pipe.

Access to the network pipes for inspection shall be through cleanouts located in each cell's valve house. Inspections shall be performed using a video camera, or any other appropriate inspection equipment. The inspection equipment shall have the ability to monitor its location (e.g., distance counter), be sized to fit within the LCS and LDS inner carrier pipes indicated on construction drawings, and be capable of being pushed the length to be inspected.

If an inspection indicates that a pipe in the pipe network is obstructed, the pipe shall be flushed by pumping water from a water truck through a hose inserted in the pipe cleanout. If flushing does not remove the obstruction, other methods shall be used to clean the pipe. These other methods may include blowing the obstruction out with air; vacuuming; jet rodding; or inserting a snake, fish tape, or other suitable device. If air or water pressure is used, the working pressure inside the pipe shall not exceed the rated pressure for the pipe.

**UNCONTROLLED IF PRINTED**

*Table 1. Post-Closure OSDF Leachate Management System Inspection and Maintenance Activities*

Component	Inspection Frequency	Conditions to Check	Remedy (and/or Actions)
Routine inspection and maintenance of LDS	Various	<ul style="list-style-type: none"> <li>• Check general condition of valve house for each cell annually.</li> <li>• Inspect the primary containment vessel for leakage quarterly.</li> <li>• Check for fluid in LDS containment pipe monthly.</li> </ul>	<ul style="list-style-type: none"> <li>• Check level transmitter operations (e.g., operating temperature range, accuracy), electrical connections, and alarm light.</li> <li>• Check for source of leak; if source identified, then take appropriate corrective measures (e.g., spot-seal vessel, replace vessel).</li> <li>• Keep monitoring port drained; if above the action level in the <i>Leachate Management Contingency Plan</i> (DOE 2001b), perform video inspection of pipe and attempt to identify source of leakage; develop plan to mitigate effects.</li> </ul>
Routine inspection and maintenance of LCS	Various	<ul style="list-style-type: none"> <li>• Check general condition of valve house for each cell annually.</li> <li>• Check condition of shutoff valve quarterly.</li> <li>• Check for leachate in LCS containment pipe monthly.</li> <li>• Check for leachate in RLCS carrier pipe annually.</li> </ul>	<ul style="list-style-type: none"> <li>• Check level transmitter operations (e.g., operating temperature range, accuracy), electrical connections, strobe light, and radio transmission.</li> <li>• Check valve operability; correct any deficiencies.</li> <li>• Keep monitoring port drained; if above the action level specified in the <i>Leachate Management Contingency Plan</i> (DOE 2001b), perform video inspection of pipe and attempt to identify source of leakage; develop plan to mitigate effects.</li> <li>• Drain pipe into EPLTS gravity line.</li> </ul>
Routine inspection and maintenance of pipe networks	Once every 5 years if needed. Note: Monitoring is anticipated to remain in effect until it is demonstrated that leachate no longer poses a threat to human health or the environment. Temporary suspension of leachate requirements may also be considered.	Video inspect for: <ul style="list-style-type: none"> <li>• Cracking/crushing of pipe.</li> <li>• Clogging of pipe.</li> </ul>	<ul style="list-style-type: none"> <li>• Flush clogged pipe with water or mechanically clean.</li> <li>• Insert small-diameter pipe in crushed pipe, if possible.</li> <li>• Replace cracked/crushed pipe if cracked/crushed portion is outside of the cell.</li> <li>• Use RLCS.</li> </ul>

**UNCONTROLLED IF PRINTED**

*Table 1 (continued). Post-Closure OSDF Leachate Management System Inspection and Maintenance Activities*

<b>Component</b>	<b>Inspection Frequency</b>	<b>Conditions to Check</b>	<b>Remedy (and/or Actions)</b>
OSDF cell valve houses	Annually	<ul style="list-style-type: none"> <li>• Confirm that all required signage is visible.</li> <li>• Check general structural condition of valve house components.</li> <li>• Check for odors, bacterial growth (containment vessel).</li> </ul>	<ul style="list-style-type: none"> <li>• Repair or replace as necessary.</li> <li>• Check for structural integrity; if problems are found, take appropriate measures (e.g., spot-seal vessel, replace vessel) and implement permanent solution.</li> <li>• Clean tanks when needed with Alconox or equivalent.</li> </ul>
EPLTS gravity line	Various	<ul style="list-style-type: none"> <li>• Check for fluid in EPLTS gravity line containment pipe monthly.</li> <li>• Inspect pipe for clogging or crushing once every 5 years if needed.</li> </ul>	<ul style="list-style-type: none"> <li>• Keep containment pipe drained; if above the action level specified in the <i>Leachate Management Contingency Plan</i> (DOE 2001b), perform video inspection of pipe and attempt to identify source of leakage; if leakage is minor, continue to operate; if leakage is significant, evaluate repair options.</li> <li>• Flush clogged pipe with water, or mechanically clean; repair as necessary.</li> </ul>
LCS and LDS tank-level transmitters	Once every 6 months	<ul style="list-style-type: none"> <li>• Calibration of transmitter</li> </ul>	<ul style="list-style-type: none"> <li>• Recalibrate or replace as necessary.</li> </ul>
Valve house sump alarms	Quarterly	<ul style="list-style-type: none"> <li>• Verify that the alarm switch is operational.</li> <li>• Verify that the alarm signal is sent to and acknowledged at the alarm panel.</li> </ul>	<ul style="list-style-type: none"> <li>• Repair or replace switch and/or panel relay as necessary.</li> </ul>

## **UNCONTROLLED IF PRINTED**

The specific pipe maintenance procedures (other than flushing) to be used to remove a pipe obstruction will be selected by DOE on a case-by-case basis.

If an LCS or LDS pipe obstruction cannot be dislodged, or in the very unlikely event that a pipe has undergone partial or total cracking, the following procedures will be considered:

- For the LCS, activate the RLCS pipe.
- For the LCS or LDS, insert a new small-diameter pipe within the obstructed/collapsed pipe or replace the broken piece, as necessary.
- For the LCS or LDS pipe, if the obstruction or collapse is outside of the disposal facility containment systems, replace the pipe.
- All equipment inserted into the LCS or LDS line for inspection and/or maintenance shall be decontaminated prior to its removal from the OSDF.

In addition to the aforementioned requirements, all mechanical and electrical equipment shall be calibrated, operated, maintained, and serviced according to the manufacturer's instructions and site procedures.

### **3.2 EPLTS Inspection and Maintenance Activities**

The EPLTS shall be inspected and maintained in accordance with the schedule and activity requirements outlined in Table 1, or until leachate is no longer generated and an alternative activity schedule has been approved.

The LTS, valves, connections, sampling ports, monitoring ports, pumps, and other components shall be routinely inspected and maintained to provide for proper OSDF operation. All mechanical and electrical equipment shall be calibrated, operated, maintained, and serviced according to the manufacturers' instructions and site procedures.

In addition, the inspection and maintenance activities for the EPLTS shall include the following:

- Confirm that appropriate warning signs are visible (e.g., for confined space).
- Check instruments and valves (e.g., note any sticking or jammed devices, corrosion, leaks, and misalignments).
- Note any temperature extremes that may exist inside the valve houses.
- Verify instrument systems status (e.g., elevation and location of automatic level switch in the lift station).
- Monitor flow for pulsating, over pressure, or under pressure.
- Check for the presence of fluids in all secondary containment systems.
- Confirm pump operation/priming.
- Check hoses for physical wear and poor connections prior to each use.

## **4.0 Leachate Management**

Treatment of fluids collected from the LCS and LDS will be through the CAWWT as long as it is operating. Long-term treatment of the fluids collected from the LCS and LDS will be evaluated prior to discontinuation of operations of the CAWWT. In accordance with Ohio solid waste rule OAC 3745-27-19(K)(5), some of those alternatives are expected to consist of the following:

- On-site pretreatment of collected fluids with off-site disposal.
- Off-site treatment and disposal of collected fluids.
- Various options that may exist for the off-site portion of either of these alternatives.

Off-site treatment and/or disposal would likely require collection of leachate in the sump or another accumulation tank while awaiting periodic removal. Any modification involving such accumulation in a tank would require an estimate of the quantity of leachate per time period, in order to specify the frequency of removal and how it will be disposed of or treated.

The processes presented above are expected to remain in effect until leachate is no longer detected (refer to federal hazardous waste regulation in Title 40 *Code of Federal Regulations* [CFR] Part 264.310[b][2]), or until it is demonstrated that leachate no longer poses a threat to human health or the environment. If leachate volumes decrease below anticipated levels and the leachate toxicity decreases, DOE may choose to petition the director of the Ohio Environmental Protection Agency (OEPA) to modify or temporarily suspend some of the leachate management requirements. OAC 3745-66-18(G) gives the director of OEPA authority to extend or reduce the post-closure care period based on cause. Eventually the leachate management system will be placed into its final, long-term configuration with the valve houses and contents being removed and replaced with straight lengths of pipes connecting the LDS and LCS to the EPLTS line. The decision regarding when the long-term configuration can be implemented will be made with concurrence of the U.S. Environmental Protection Agency (EPA) and OEPA. This decision will be based on criteria developed in consultation with EPA and OEPA. The criteria will include factors such as asymptotic leachate flows, a past history of no problems with plugging of the LCS or LDS lines, no recent activity to repair or revegetate the cap, and the absence of similar conditions that would argue for maintaining the ability to inspect and repair the LCS and LDS lines.

Information associated with leachate monitoring will be reported through the annual Site Environmental Reports as identified in the front sections of the OSDF Groundwater/Leak Detection and Leachate Monitoring Plan (Attachment C of the Legacy Management and Institutional Controls Plan).

## **5.0 Leachate Contingency Plan**

By the summer of 2006, the flows from the OSDF LCS and LDS had decreased significantly due to the filling and capping of cells. The previous *Leachate Management Contingency Plan for the On-Site Disposal Facility* (DOE 2001b) was written in January 2001 for failure of the LDS, LCS, or EPLTS lines. The plan contained detailed operating modes for each line failure, including failure of the line downstream of the PLS that required using a tanker to transport

**UNCONTROLLED IF PRINTED**

water from the PLS to the treatment system. A review of the plan indicated that most of the actions detailed in the plan are no longer applicable. For a failure of the EPLTS or the line downstream of the PLS, the preferred option is to close the valves from the LDS and LCS for each cell, allow the water to accumulate in the cells, and repair the line as necessary.

To determine if this option was feasible, calculations were performed for each cell to determine how much water could be allowed to accumulate in each cell without exceeding 1 ft of head on the primary liner (DOE 1997). Information from GeoSyntec indicated that the 1-ft level would be reached in each cell when 8,623 gallons had accumulated (GeoSyntec 2006). Daily flow from the cells was compared to that volume to determine the number of days required for each cell to accumulate 8,623 gallons. Table 2 shows the data used to determine the number of days. The table has been updated to reflect LCS flow data as of September 2007.


*Table 2. Determination of the Number of Days Required to Reach the 1-ft Level (8,623 Gallons)*

Tank	Dates	Water Volume (gallons)	Change in Time (days)	Gallons per Day	Gallons per Acre per Day	Days to Accumulate 8,623 Gallons
LCS 1	9/12–9/19	411	7.00	58.7	9.17	146
LCS 2	9/13–9/15	157.45	1.96	80.4	12.56	107
LCS 3	9/13–9/15	136.84	1.92	71.4	11.16	120
LCS 4	9/13–9/15	216.04	1.96	110.3	17.24	78
LCS 5	9/14–9/16	224.04	1.92	116.9	18.26	73
LCS 6	9/14–9/16	159.41	1.96	81.4	12.72	105
LCS 7	9/14–9/17	192.77	3.00	64.3	10.04	134
LCS 8	9/13–9/15	208.82	1.92	108.9	11.71	79

Since the minimum number of days required to reach the accumulation limit is 73, and the number of days will increase as the flow from the individual cells decreases, it was determined that transporting leachate water by tanker to the treatment system in the event of a line failure will not be necessary. If any of the lines in the leachate system fail, the valves from the affected cell's LDS and LCS will be closed, and water will be allowed to accumulate in the cells while repairs are performed. The new contingency leachate plan for the EPLTS or the line downstream of the PLS is to develop a repair plan and repair the line(s) before any of the affected cells accumulate 8,623 gallons. If repairs are anticipated to take longer than the time it would take to accumulate 1 ft of head on the primary liner, leachate would be transferred to the CAWWT via a rental tanker truck or other portable tank.

Monitoring of the LDS, LCS, RLCS, and LTS containment pipes will continue as specified in Table 1. Refer to Figure 1 for a schematic of the Leachate Management System. The actions levels listed in Table 3 were derived from the *Leachate Management Contingency Plan for the On-Site Disposal Facility* (DOE 2001b) and apply on a weekly basis. As the period between monitoring events is extended, the weekly action levels will be multiplied by the number of weeks between monitoring events to yield the applicable periodic action levels.

UNCONTROLLED IF PRINTED

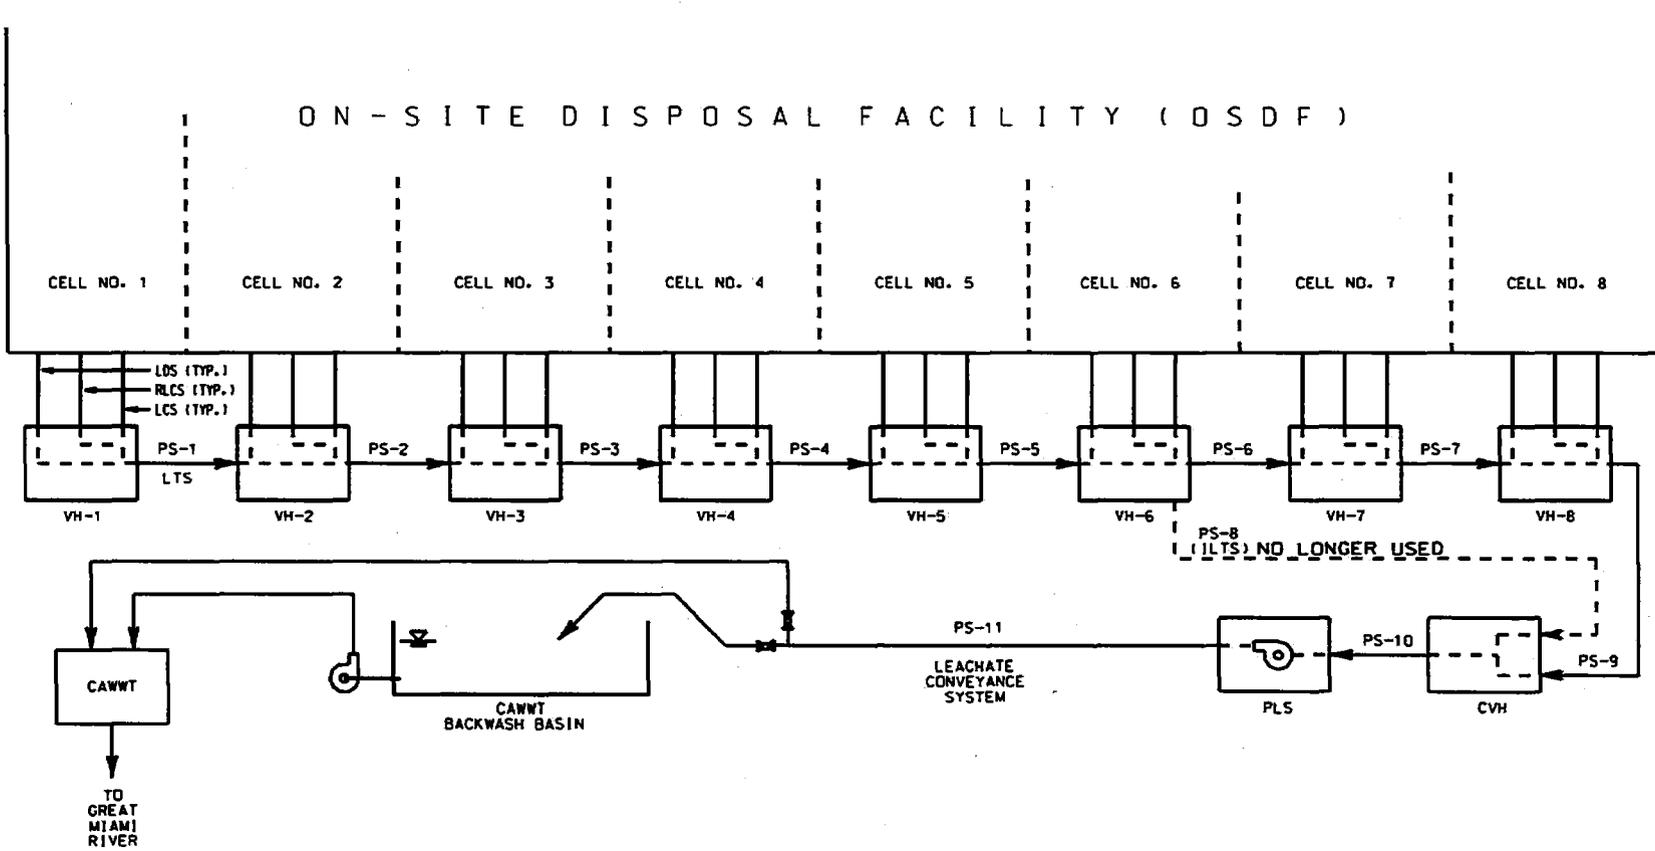

- LEGEND**
- VH VALVE HOUSE
  - PS LCS PIPELINE SEGMENT
  - CVH CONTROL VALVE HOUSE
  - LTS LEACHATE TRANSMISSION SYSTEM
  - PLS PERMANENT LIFT STATION
  - RLCS REDUNDANT LCS
  - ILTS INTERIM LTS
  - CAWWT CONVERTED ADVANCED WASTE WATER TREATMENT FACILITY
  - PUMP

Figure 1. Leachate Management System

## UNCONTROLLED IF PRINTED

Table 3. Action Levels for Containment Pipe Monitoring

	LDS	LCS	RLCS	LTS in Each Valve House (PS-1 through PS-7)	LTS at Port V1007 (PS-9)	LTS at Port V1006 (PS-10)	LTS at Port V1008 (PS-8)
Weekly Maximum (milliliters)	2,270	2,650	2,650	5,300	18,900	370	No Maximum

If the water collected from any monitoring port exceeds the action level for the period, the port will be checked again in 1 week. If the amount of water collected again exceeds the action level, an investigation of the pipe segment (PS) in question will be performed and corrective actions taken as needed. Note that PS-8 on Figure 1 is no longer monitored because the interim LTS is no longer used as a contingency pipeline.

## 6.0 References

40 CFR 264. U.S. Environmental Protection Agency, "Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities," Section 310, "Closure and Post-Closure Care," *Code of Federal Regulations*, July 1, 2008.

DOE (U.S. Department of Energy), 1997. *Final Design Calculation Package, On-Site Disposal Facility*, Prepared by GeoSyntec Consultants, Cincinnati, Ohio, May.

DOE (U.S. Department of Energy), 2000. *Systems Plan, On-Site Disposal Facility*, 20100-PL-0008, Revision 1, Fluor Daniel Fernald, Cincinnati, Ohio, January.

DOE (U.S. Department of Energy), 2001a. *Systems Plan, Collection and Management of Leachate for the On-Site Disposal Facility*, 20111-PL-0001, Revision 0, Fernald Closure Project, Cincinnati, Ohio, January.

DOE (U.S. Department of Energy), 2001b. *Leachate Management Contingency Plan for the On-Site Disposal Facility*, 20110-PL-0002, Draft Revision 2, Fernald Environmental Management Project, Cincinnati, Ohio, January 18.

DOE (U.S. Department of Energy), 2005b. *Enhanced Permanent Leachate Transmission System Operation*, 43-C-372, Revision 6, Fernald Closure Project, Cincinnati, Ohio, May 19.

DOE (U.S. Department of Energy), 2006. *Legacy Management Fernald Operating Procedures*, Revision 0, Office of Legacy Management, Grand Junction, Colorado.

DOE (U.S. Department of Energy), 2008. *Fernald Project, Wastewater Treatment Outside Systems Procedure*, Office of Legacy Management, Fernald Preserve, Cincinnati, Ohio, August.

GeoSyntec, 2006. E-mail from David Phillips (GeoSyntec Consultants Inc.) to Uday Kumthekar (Flour Fernald), "Volume of Leachate Storage at 1 Foot," dated August 11, 2006.

**UNCONTROLLED IF PRINTED**

**Appendix E**

**Selection Process for Site-Specific  
Leak Detection Indicator Parameters**

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## Contents

Acronyms and Abbreviations .....	iii
1.0 Introduction.....	1
2.0 Guidelines for Site-Specific Monitoring Parameter Selection.....	1
3.0 Initial Leak Detection Monitoring Parameter List.....	3
3.1 Primary Parameters.....	3
3.1.1 Groundwater Pathway COCs.....	4
3.1.2 RCRA Constituents.....	7
3.1.3 Selected Primary Parameters .....	9
3.2 Supplemental Indicator Parameters .....	10
4.0 Parameter Lists.....	10
4.1 Adding Monitoring Parameters to Sampling Lists .....	14
5.0 References.....	14

## Figures

Figure 1. Groundwater/Leak Detection Parameter Selection Process .....	5
Figure 2. OSDF Site-Specific Leachate Monitoring Parameter Selection Approach.....	12
Figure 3. OSDF Site-Specific Leachate Monitoring Parameter Selection Statistical Testing Approach.....	13

## Tables

Table 1. Regulatory Criteria for Alternate Parameter List .....	2
Table 2. WAC for Groundwater Pathway COCs.....	6
Table 3. Expected Maximum COC Concentrations in the OSDF .....	7
Table 4. WAC for Additional RCRA Constituents .....	8
Table 5. Proposed Primary Parameters List.....	9

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **Acronyms and Abbreviations**

COC	constituent of concern
DOE	U.S. Department of Energy
EPA	U.S. Environmental Protection Agency
FS	feasibility study
GMA	Great Miami Aquifer
HTW	horizontal till well
LCS	leachate collection system
LDS	leak detection system
mg/kg	milligrams per kilogram
OAC	<i>Ohio Administrative Code</i>
OEPA	Ohio Environmental Protection Agency
OSDF	on-site disposal facility
OU	Operable Unit
pCi/g	picocuries per gram
RCRA	Resource Conservation and Recovery Act
RI	remedial investigation
RI/FS	remedial investigation/feasibility study
TDS	total dissolved solids
TOC	total organic carbon
TOX	total organic halogens
WAC	waste acceptance criteria

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 1.0 Introduction

A successful leak detection monitoring program must focus on the best indicators of potential releases, as opposed to analyzing for every possible constituent that may be present in a disposal facility (which would add unnecessary complexity to the data analysis process). This section presents the criteria and process used to identify the site-specific indicator parameters for the on-site disposal facility (OSDF) groundwater leak detection monitoring program.

## 2.0 Guidelines for Site-Specific Monitoring Parameter Selection

At the Fernald Preserve, residual soil contamination may impact the aquifer at concentrations below the groundwater final remediation levels but statistically elevated above current background conditions. All of the inorganic constituents and all but nine organic constituents included in the regulatory default monitoring parameters list (i.e., Appendix I of *Ohio Administrative Code* [OAC] 3745-27-10) have been detected in perched groundwater samples collected at various locations under the Fernald Preserve. Such preexisting contamination in the environment beneath the site, along with aquifer remediation activities, add complexity to the development of a successful leak detection parameter list capable of indicating the presence of a leak from the OSDF. Therefore, a tailored leak detection parameter list has been developed that provides adequate leak detection and is in compliance with the standard requirements of the Ohio Solid Waste Rules and the Ohio Hazardous Waste Rules. As discussed in Section 3.0 of the Groundwater/Leak Detection and Leachate Monitoring Plan (Attachment C), both sets of rules allow the use of an alternate monitoring parameter list based on site-specific conditions.

Ohio Solid Waste regulations OAC 3745-27-10(D)(2) and (3) allow six considerations in proposing an alternate monitoring parameter list in lieu of some or all of the parameters listed in Appendix I of OAC 3745-27-10. Also, the Ohio Hazardous Waste regulations for new facilities, OAC 3745-54-98(A), recognize four considerations in formulating the facility-specific monitoring parameter list. Table 1 summarizes the important considerations and approval criteria related to monitoring parameter selection under the Ohio Solid Waste and Ohio Hazardous Waste regulations.

The chemical constituents listed in Appendix I of OAC 3745-27-10 are typical contaminants found in sanitary landfills. Appendix I does not include any radionuclides, which are the primary constituents of concern (COCs) at the Fernald Preserve. Therefore, any site-specific constituents that are not included in Appendix I of OAC 3745-27-10, but that are good indicators of potential leaks from the OSDF, also need to be evaluated in the parameter selection process. However, the general considerations summarized in Table 1 can apply to any constituent when selecting the leak detection indicator parameters.

**UNCONTROLLED IF PRINTED**

*Table 1. Regulatory Criteria for Alternate Parameter List*

<b>Ohio Solid Waste Regulation</b>	<b>Ohio Hazardous Waste Regulation</b>
<b>Requirements:</b>	
<ul style="list-style-type: none"> <li>For all parameters, the removed parameters are not reasonably expected to be in or derived from the waste contained or deposited in the landfill facility (OAC 3745-27-10 [D][2]); and</li> <li>For inorganic parameters, the approved alternative monitoring parameter list will provide a reliable indication of inorganic releases from the landfill facility to the groundwater (OAC 3745-27-10 [D][3]).</li> </ul>	—
	Indicator parameters (e.g., specific conductance, total organic carbon, or total organic halogen), waste constituents, or reaction products that provide a reliable indication of the presence of hazardous constituents in groundwater (OAC 3745-54-98 [A])
<b>Considerations:</b>	
<ul style="list-style-type: none"> <li>Types, quantities, and concentrations of constituents to be managed at the facility (OAC 3745-27-10 [D][2][b] and [D][3][a]);</li> <li>Mobility, stability, and persistence of the waste constituents or their reaction products in the unsaturated zone beneath the facility (OAC 3745-27-10 [D][3][b]);</li> </ul>	<ul style="list-style-type: none"> <li>Types, quantities, and concentrations of constituents to be managed at the regulated unit; (OAC 3745-54-98 [A][1])</li> <li>Mobility, stability, and persistence of the waste constituents or their reaction products in the unsaturated zone beneath the waste management area (OAC 3745-54-98 [A][2])</li> </ul>
Concentrations in the leachate from the relevant unit(s) of the facility (OAC 3745-27-10 [D][2][c]);	—
<ul style="list-style-type: none"> <li>Detectability of the parameters, waste constituents, and their reaction products in the groundwater (OAC 3745-27-10 [D][3][c]);</li> <li>Concentrations or values and coefficients of variation of monitoring parameters or constituents in the background [baseline] groundwater quality (OAC 3745-27-10 [D][3][d]); and</li> <li>Any other relevant information (OAC 3745-27-10 [D][2][d]).</li> </ul>	<ul style="list-style-type: none"> <li>Detectability of the indicator parameters, waste constituents, and their reaction products in the groundwater; (OAC 3745-54-98 [A][3]); and</li> <li>Concentrations or values and coefficients of variation of monitoring parameters or constituents in the background (baseline) groundwater quality [OAC 3745-54-98 (A)(4)].</li> </ul>
	—

Parameter selection focuses on establishing baseline conditions for the individual cells of the OSDF. Parameters selected for the baseline sampling and analysis approach of the OSDF groundwater monitoring program were selected using site-specific contamination data generated for the previous Operable Unit (OU) 5 Remedial Investigation (RI) Report (DOE 1995a) and the OU 5 Feasibility Study (FS) Report (DOE 1995b) in accordance with the regulatory considerations presented above.

The remainder of this section presents the site-specific monitoring parameters. These lists correspond to an alternate monitoring program parameters list as defined in the regulations. These indicator parameters will provide sufficient and reliable indication of potential releases from the OSDF.

### **3.0 Initial Leak Detection Monitoring Parameter List**

An alternate leak detection monitoring parameters list should include both primary parameters and supplemental indicator parameters. As suggested by the regulatory considerations summarized in Table 1, primary parameters should consist of selected site-specific chemical constituents that are expected to be of significant amounts in the monitored facility, and that are persistent, mobile, and differentiable from existing background conditions when released. The supplemental indicator parameters may include general groundwater quality parameters, which will have rapid and detectable changes in response to variations in chemical compositions in groundwater under the monitored facility, potentially as a result of a leak.

The Initial Leak Detection Monitoring Parameter list consisted of fourteen primary parameters and four supplemental indicator parameters (i.e., initial baseline monitoring). Samples collected in all four monitoring horizons of each cell were sampled for these 18 parameters. Twelve rounds of sampling were completed at each cell. Following is the rationale that was used for the selection of the primary and supplemental indicator parameters.

#### **3.1 Primary Parameters**

In general, organic constituents are more mobile but less persistent than most inorganic constituents and radionuclides. Because inorganic constituents and most radionuclides are present in natural soil, if the OSDF were constructed in a pristine site, organic constituents may be the preferred primary monitoring parameters for early leak detection purposes. However, because all three types of constituents have been detected in the media (i.e., perched groundwater and the Great Miami Aquifer [GMA]), and because a monitoring parameter must be differentiable from background conditions in case of a release, a good leak detection monitoring parameter must also be present in significant abundance or at relatively high source strengths in the OSDF.

Constituent-specific quantity, persistence, and mobility data were considered during the development of the waste acceptance criteria (WAC) for the OSDF. Therefore, information from the OSDF WAC development process was first reviewed to select the primary parameters for leak detection monitoring purposes. The WAC for the OSDF were developed for 42 constituents during the OU5 FS (DOE 1995b); 41 of the WAC are included in the final OU5 Record of Decision (DOE 1996). (As discussed later, one compound—magnesium—was eliminated following completion of the FS.) As discussed in this section, 18 of the 41 WAC are numerical limits and 23 are non-numerical limits that were established to satisfy regulatory screening criteria for constituents regulated under the Resource Conservation and Recovery Act (RCRA).

The maximum acceptable leachate concentrations for constituents that will be present in the OSDF were determined by contaminant fate and transport modeling. The constituent-specific leaching potential, solubility, mobility, and benefits of the engineering controls in the OSDF were considered in the modeling process. These maximum acceptable leachate concentrations were converted into solid-phase WAC at the end of the process. These solid-phase WAC represent the maximum concentrations for soil and debris that can be disposed of in the OSDF.

To assist in selecting the primary parameters, the actual soil concentrations for each of the 18 COCs for which numerical WAC were developed were also reviewed to provide a clear perspective regarding which COCs may approach their corresponding WAC concentrations and, therefore, are more likely to be detectable when released from the OSDF.

## **UNCONTROLLED IF PRINTED**

During the OU5 FS (DOE 1995b), two categories of COCs were evaluated in the WAC development process. The first category includes all site-specific groundwater pathway COCs that were identified in the OU5 RI (DOE1995a). As a result of the process, 12 numerical WAC were developed for the groundwater pathway COCs. The second category includes those Fernald Preserve constituents that need to be managed and accounted for under RCRA regulations. Six additional numerical WAC were developed for the RCRA-regulated constituents, bringing the total numerical WAC for the OSDF to 18. The following subsections summarize the WAC development process for these two categories of constituents, as derived from the sitewide WAC development process described in the OU5 FS (DOE 1995b). Figure 1 summarizes the process in a flowchart.

### **3.1.1 Groundwater Pathway COCs**

Initially, only the WAC for groundwater pathway COCs were developed. WAC were determined necessary for 15 groundwater pathway COCs selected from Table F.2-2 of Appendix F of the OU5 FS (DOE 1995b). Among all the detected soil and groundwater constituents at the Fernald Preserve, these 15 COCs have potential to reach and impact the GMA through the glacial till within 1,000 years under natural conditions (i.e., if they are not disposed of in the OSDF). Table F.2-2 of Appendix F of the OU5 FS also lists all the other constituents screened for potential cross-media impacts. Overall, 53 organics, 25 inorganics, and 15 radionuclides were evaluated in the groundwater COC selection process, including all the RCRA constituents that have been detected in soil and groundwater at the Fernald Preserve.

After consideration of the engineering controls provided by the OSDF in the modeling procedures, 12 of the original 15 groundwater pathway COCs were found to require numerical WAC. In a determination of which materials can be disposed of in the OSDF, compliance with the 12 numerical WAC will be required for the long-term protection of the GMA. Table 2 lists the 15 COCs considered and the WAC that were developed. The technical approach of fate and transport modeling conducted to develop the COC-specific WAC has been summarized in Section F.5 in the OU5 FS.

Upon further review of the initial WAC development process contained in the OU5 FS, the U.S. Environmental Protection Agency (EPA), the Ohio Environmental Protection Agency (OEPA), and the U.S. Department of Energy (DOE) concurred that magnesium does not present a significant threat to human health. Therefore, magnesium was eliminated from further consideration, and a WAC for magnesium was not presented in Table 9-6 of the OU5 Record of Decision (DOE 1996).

The numerical WAC for the 12 groundwater pathway COCs were the main controlling factors for the disposal of contaminated soil in the OSDF. The 12 groundwater pathway COCs, which have numerical WAC, have significantly higher mobility and persistence and, therefore, should be considered prime candidates when selecting the indicator parameters for the detection monitoring program for the OSDF.

The numerical WAC for the 12 groundwater pathway COCs in Table 2 only define the maximum allowable soil concentrations that can be safely disposed of in the OSDF; they do not indicate what level of soil concentrations will actually be encountered during soil remediation. In order to frame the relative significance of these 12 WAC, the maximum soil concentrations for the 12 constituents that are expected in the OSDF following soil placement are provided in Table 3.

**UNCONTROLLED IF PRINTED**

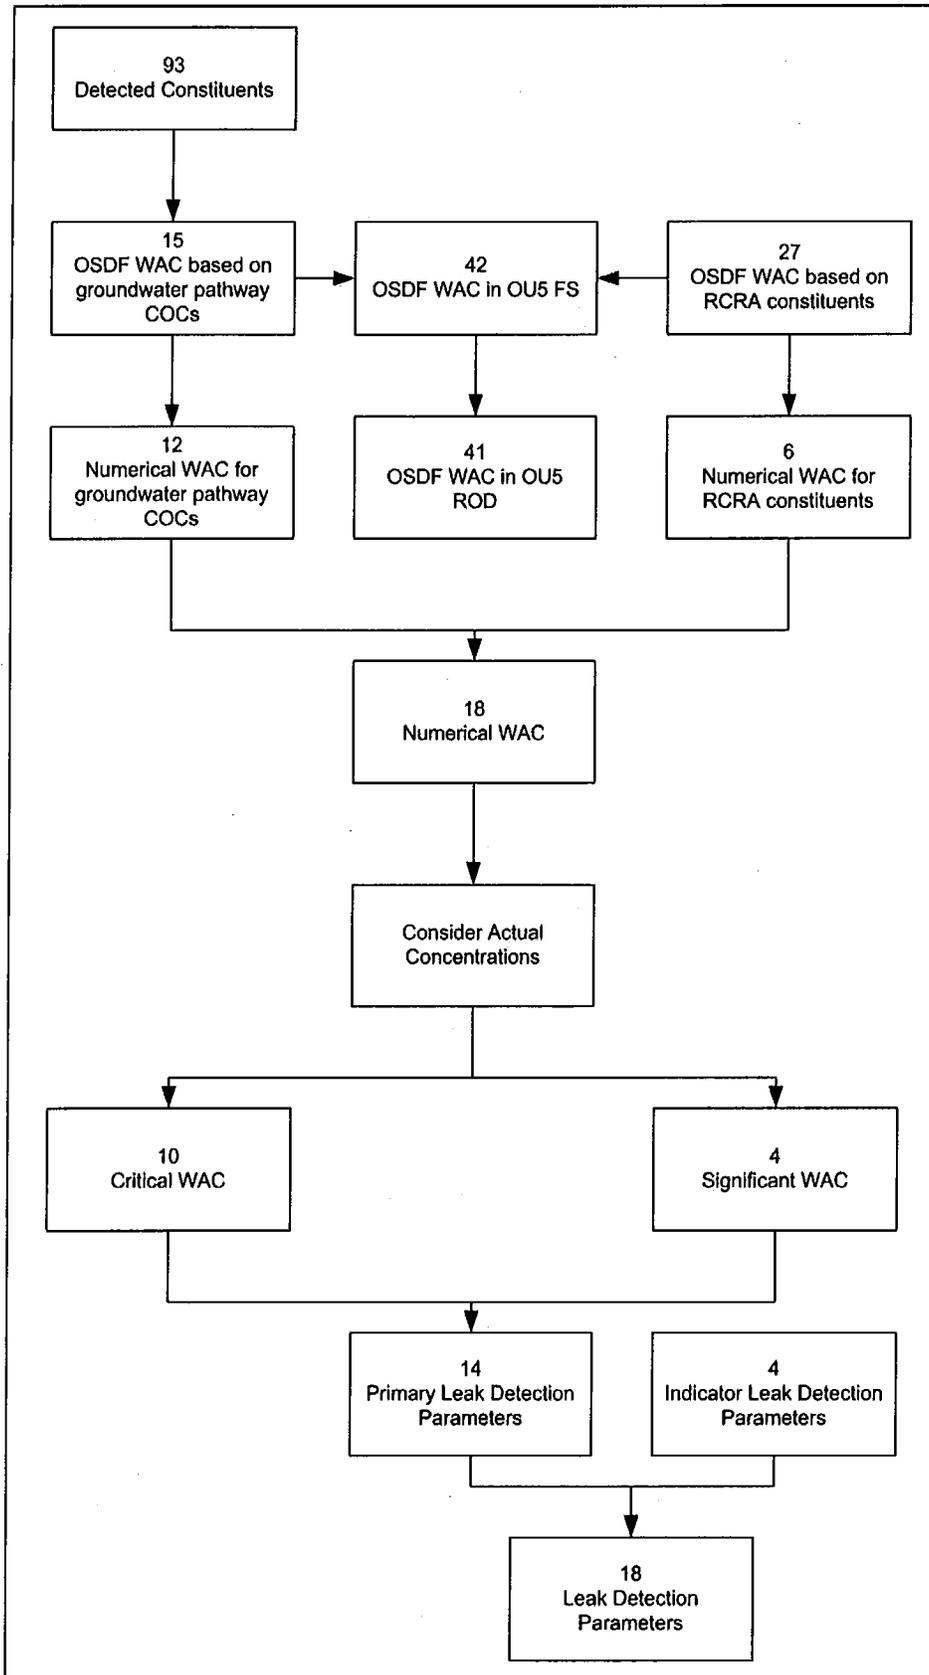


Figure 1. Groundwater/Leak Detection Parameter Selection Process

**UNCONTROLLED IF PRINTED**

Table 2. WAC for Groundwater Pathway COCs

COC	WAC
<b>Radionuclides (pCi/g):</b>	
Neptunium-237	$3.12 \times 10^9$
Strontium-90	$5.67 \times 10^{10}$
Technetium-99	$2.91 \times 10^1$
Total Uranium (mg/kg)	$1.03 \times 10^3$
<b>Organics (mg/kg):</b>	
alpha-Chlordane	$2.89 \times 10^0$
Bis(2-chloroisopropyl)ether	$2.44 \times 10^{-2}$
Bromodichloromethane	$9.03 \times 10^{-1}$
Carbazole	$7.27 \times 10^4$
1,2-Dichloroethane	*
4-Nitroaniline	$4.42 \times 10^{-2}$
Vinyl Chloride <sup>1</sup>	$1.51 \times 10^0$
<b>Inorganics (mg/kg):</b>	
Boron	$1.04 \times 10^3$
Chromium VI <sup>1</sup>	*
Magnesium	*
Mercury <sup>1</sup>	$5.66 \times 10^4$

pCi/g = picocuries per gram

mg/kg = milligrams per kilogram

\*Denotes constituents that will not exceed designated GMA action level within 1,000-year performance period, regardless of starting concentration in the disposal facility.

<sup>1</sup>RCRA constituent.

As shown in Table 3, the expected maximum soil concentrations in the OSDF reveal that only five of the 12 groundwater pathway COCs with numerical WAC (technetium-99, total uranium, vinyl chloride, bis[2-chloroisopropyl]ether, and 4-nitroaniline) are expected to approach their respective WAC concentrations. The other seven COCs will have maximum soil concentrations in the OSDF that are much less than the corresponding WAC. This information regarding overall abundance is also an important consideration for selecting indicator parameters for the leak detection monitoring program.

**UNCONTROLLED IF PRINTED**

Table 3. Expected Maximum COC Concentrations in the OSDF

COC	Maximum		
	Concentration <sup>1</sup>	WAC	MAX/WAC
<b>Radionuclides (pCi/g):</b>			
Neptunium-237	$2.63 \times 10^0$	$3.12 \times 10^9$	$8.43 \times 10^{-10}$
Strontium-90	$6.49 \times 10^0$	$5.67 \times 10^{10}$	$1.14 \times 10^{-10}$
Technetium-99	$2.91 \times 10^1$	$2.91 \times 10^1$	$1.00 \times 10^0$
Total Uranium (mg/kg)	$1.03 \times 10^3$	$1.03 \times 10^3$	$1.00 \times 10^0$
<b>Organics (mg/kg):</b>			
alpha-Chlordane	$5.10 \times 10^{-3}$	$2.89 \times 10^0$	$1.76 \times 10^{-3}$
Bis(2-chloroisopropyl)ether	$2.44 \times 10^{-2}$	$2.44 \times 10^{-2}$	$1.00 \times 10^0$
Bromodichloromethane	$7.00 \times 10^{-3}$	$9.03 \times 10^{-1}$	$7.75 \times 10^{-3}$
Carbazole	$2.50 \times 10^{-1}$	$7.27 \times 10^4$	$3.44 \times 10^{-6}$
4-Nitroaniline	$4.42 \times 10^{-2}$	$4.42 \times 10^{-2}$	$1.00 \times 10^0$
Vinyl Chloride <sup>2</sup>	$1.51 \times 10^0$	$1.51 \times 10^0$	$1.00 \times 10^0$
<b>Inorganics (mg/kg):</b>			
Boron	$1.43 \times 10^1$	$1.04 \times 10^3$	$1.38 \times 10^{-2}$
Mercury	$1.30 \times 10^0$	$5.66 \times 10^4$	$2.30 \times 10^{-4}$

<sup>1</sup>Lower value between the WAC and the maximum soil concentration presented in Table F.3.4-3 of OU5 RI (DOE 1995a)

<sup>2</sup>Also consider tetrachloroethene and trichloroethene in soil.

### 3.1.2 RCRA Constituents

After the WAC for the groundwater pathway COCs were developed, WAC for 27 additional RCRA-regulated constituents (termed the RCRA COCs) were evaluated. The development of WAC for these specific constituents was considered necessary from a regulatory standpoint to address a requirement that the RCRA COCs not be eliminated in any COC screening step during the RI/FS process. The intention was to demonstrate compliance with RCRA regulations by providing a mechanism for keeping track of the fate of materials contaminated with RCRA constituents during the remediation.

Most of the RCRA COCs are not groundwater pathway COCs; thus, the calculated WAC for the majority of these constituents are relatively high (i.e., essentially pure product concentration). Only six of the additional constituents were determined to need a numerical WAC. The details of the RCRA constituent WAC development process are provided in Attachment F.5.I of the OU5 FS (DOE 1995b). Table 4 summarizes the results.

**UNCONTROLLED IF PRINTED**

Table 4. WAC for Additional RCRA Constituents

RCRA Constituents	Detected and Previously Screened	WAC	OAC 3745-27-10 Appendix I
<b>Organics (mg/kg):</b>			
Acetone	Yes	*	Yes
Benzene	Yes	*	Yes
Carbon tetrachloride	Yes	*	Yes
Chloroethane	No	$3.92 \times 10^5$	Yes
Chloroform	Yes	*	Yes
Chloromethane	No	*	Yes
1,1-Dichloroethane	Yes	*	Yes
1,1-Dichloroethene	Yes	$1.14 \times 10^1$	Yes
1,2-Dichloroethene	No	$1.14 \times 10^1$	Yes
Endrin	No	*	No
Ethylbenzene	Yes	*	Yes
Heptachlor	No	*	No
Heptachlor epoxide	No	*	No
Hexachlorobutadiene	No	*	No
Methoxychlor	No	*	No
Methylene chloride	Yes	*	Yes
Methyl ethyl ketone	Yes	*	Yes
Methyl isobutyl ketone	No	*	Yes
Tetrachloroethene	Yes	$1.28 \times 10^2$	Yes
1,1,1-Trichloroethane	Yes	*	Yes
Trichloroethene	Yes	$1.28 \times 10^2$	Yes
Toluene	Yes	*	Yes
Toxaphene	No	$1.06 \times 10^5$	No
Xylenes	Yes	*	Yes
<b>Inorganics (mg/kg):</b>			
Barium	Yes	*	Yes
Lead	Yes	*	Yes
Silver	Yes	*	Yes

\*Denotes constituents that will not exceed designated GMA action level within 1,000-year performance period, regardless of starting concentration in the disposal facility.

The six additional numerical WAC in Table 4 are actually not expected to affect any disposal decisions for contaminated waste, soil, and debris from OU2, OU3, and OU5. As shown in Table 4, the WAC for chloroethane and toxaphene are close to pure product concentration (i.e.,  $1.00 \times 10^6$  milligrams per kilogram [mg/kg]). The WAC for tetrachloroethene, trichloroethene, 1,1-dichloroethene, and 1,2-dichloroethene are higher than the highest detected soil concentrations, which were used in the previous screening process summarized in Table F.2-2 of the OU5 FS (DOE 1995b). The maximum detected soil concentrations presented

**UNCONTROLLED IF PRINTED**

in Table F.3.4–3 of the OU5 RI (DOE 1995a) for tetrachloroethene, trichloroethene, 1,1-dichloroethene, and 1,2-dichloroethene are  $1.6 \times 10^0$ ,  $8.90 \times 10^1$ ,  $3.90 \times 10^{-2}$ , and  $3.4 \times 10^{-1}$  mg/kg, respectively.

In general, the 15 groundwater pathway COCs listed in Table 2 already include all the constituents detected in soil and groundwater at the Fernald Preserve that may have potential to impact the GMA and, therefore, are more likely to be detectable in the monitoring system in case of a leak from the OSDF.

### 3.1.3 Selected Primary Parameters

Based on information presented in Tables 2 through 4, 14 constituents are considered to be the initial primary parameters list for OSDF leak detection monitoring purposes. Table 5 summarizes these constituents and the rationale for their selection. Table 5 also indicates whether each of the 14 constituents is listed in OAC 3745-27-10 Appendix I as a regulatory default parameter.

*Table 5. Proposed Primary Parameters List*

Constituents of Concern	Rationale	Appendix I
<b>Radionuclides (pCi/g):</b>		
Technetium-99	likely detectable when released	No
Total uranium (mg/kg)	likely detectable when released	No
<b>Organics (mg/kg):</b>		
alpha-Chlordane	likely detectable when released	No
Bis(2-chloroisopropyl)ether	likely detectable when released	No
Bromodichloromethane	likely detectable when released	Yes
Carbazole	likely detectable when released	No
1,1-Dichloroethene	significant RCRA constituent	Yes
1,2-Dichloroethene	significant RCRA constituent	Yes
4-Nitroaniline	likely detectable when released	No
Tetrachloroethene	significant RCRA constituent	Yes
Trichloroethene	significant RCRA constituent	Yes
Vinyl Chloride	likely detectable when released and significant RCRA constituent	Yes
<b>Inorganics (mg/kg):</b>		
Boron	likely detectable when released	No
Mercury	likely detectable when released and significant RCRA constituent	No

Four of the 18 constituents that have numerical WAC listed in Tables 2 or 4 (chloroethane, toxaphene, neptunium-237, and strontium-90) were not selected because of their expected actual maximum concentrations in the OSDF and their comparatively high WAC values that indicate less likely potential impacts and detectability in case of a leak from the OSDF. However, four RCRA constituents that are not groundwater pathway COCs (tetrachloroethene, trichloroethene, 1,1-dichloroethene, and 1,2-dichloroethene) were selected because their expected maximum soil concentrations are reasonably close to the WAC.

## **UNCONTROLLED IF PRINTED**

The 14 constituents identified in Table 5 that were selected as the primary leak detection monitoring parameters have a potential to enter the environment in measurable quantities and are likely to be more differentiable from background conditions. These 14 constituents will provide a reliable indication of potential releases from the OSDF to the groundwater. A possible exception may be boron, because it is present in the crushed carbonate stone used for the leachate collection system (LCS), leak detection system (LDS), and cap drainage layers.

### **3.2 Supplemental Indicator Parameters**

In addition to the primary parameters discussed in the preceding subsection, four general groundwater contamination indicator parameters were also proposed to supplement the selected chemical constituents in the initial leak detection monitoring parameters list. These supplemental indicator parameters consist of the following:

- pH
- Specific Conductance
- Total Organic Halogens (TOX)
- Total Organic Carbon (TOC)

These general groundwater contamination indicator parameters are typically used to aid in the detection of releases from disposal facilities. However, given that the largest volume of material placed in the cell is contaminated glacial till (made up of approximately 50 percent carbonate grains by volume), the pH of leachate will not be appreciably different from the pH of perched water or groundwater in the GMA. Therefore, the remaining three supplemental indicator parameters provide an added means to detect contaminant migration and will be useful as indicators for general groundwater quality degradation.

Although the initial indicator parameters should provide indications of potential releases throughout the operational life of the OSDF, efficiency of the parameters list may still be improved based on the collected data obtained over the course of the program. Any proposed modifications based on the accumulated database will involve EPA and OEPA review and approval before adoption.

## **4.0 Parameter Lists**

The sections above identify the process that was used for selecting parameters for initial baseline sampling and analysis (i.e., site-specific leak detection indicator parameters, which are the proposed primary parameters in Table 5, and the supplemental indicator parameters listed in Section 3.2 of this appendix).

Twelve rounds of sampling for the initial site-specific leak detection monitoring parameters were completed at all eight cells in 2007. At the completion of the 12 rounds of sampling, five parameters were identified as having been detected at least 25 percent of the time. These five parameters (boron, sulfate, uranium, TOC, and TOX) make up the refined baseline for each cell.

In 2002 there were relatively high concentrations of sulfate in the Cells 4 and 5 LCS water prior to waste placement, indicating a sulfate source (possibly gypsum) in the gravel composing the

## UNCONTROLLED IF PRINTED

LCS layer. Due to sulfate's high mobility and the presence of an ongoing source in the LDS/LCS layers, it was added to the leak detection sampling program in 2003.

Establishing baseline water chemistry in the perched groundwater and GMA horizon under each cell is complicated by the construction process used to install the horizontal till wells (HTWs) and the presence of past groundwater contamination in the till and GMA zones. The installation of the HTWs involved excavation of a trench, placement of a porous filter media composed of sand, and then backfill with the porous media and till material. During this installation, the subsurface chemical properties of the till were altered by the contact of the excavated till material with the atmosphere (oxygen-rich environment). Contact of the subsurface till with the atmosphere may have impacted (1) the oxidation state of metals on the surface of grains and in the pore water and (2) microbial species that mediate oxidation-reduction reactions in the subsurface. Additionally, historical contamination in perched groundwater and GMA horizons surrounding the cell may be migrating and diffusing into the horizontal and GMA monitoring wells.

To address some of these uncertainties, DOE conducted a common-ion study. Results of the study were presented in a report titled *Evaluation of Aqueous Ions in the Monitoring Systems of the On-Site Disposal Facility* (DOE 2008a). The report identified four additional constituents (iron, manganese, sodium, and lithium) as potentially beneficial monitoring parameters. These four additional constituents are monitored for quarterly in all monitoring horizons of each cell in the OSDF.

DOE continues to sample the LCS of Cells 4–8 once a year for the full list of Appendix I and polychlorinated biphenyl constituents at the request of OEPA. A statistical screening process is used to evaluate the results of the continued sampling with the objective of determining if any constituent not already on the alternate monitoring list (initial baseline) might also be a useful monitoring constituent in lower monitoring horizons. The screening process was presented in the 2007 annual Site Environmental Report (DOE 2008b) and is illustrated in Figure 2 and Figure 3.

Results from the application of this screening process for Cells 1 through 3 were presented in the 2007 Site Environmental Report. The assessment is based on showing statistically that the measured average LCS concentration is greater than either the pre-design or background average concentration. A constituent with a greater average LCS concentration than either the pre-design or background average is added to the monitoring program for the deeper monitoring horizons and sampled quarterly. Six constituents (arsenic, cobalt, nickel, selenium, zinc, and total dissolved solids [TDS]) have been identified for Cells 1 through 3. These six constituents are sampled for quarterly in all monitoring horizons of Cells 1–3. The analysis will be conducted for Cells 4–8 when the data set of each cell reaches eight samples. For Cells 4 and 5 the data set will contain eight samples at the end of 2009. For Cell 6 the data set will contain eight samples at the end of 2010. For Cells 7 and 8 the data sets will contain eight samples at the end of 2011. At the request of OEPA, quarterly monitoring for the six constituents identified in Cells 1–3 will be conducted in Cells 4–8.

**UNCONTROLLED IF PRINTED**

Current monitoring lists are presented in Appendix B of Attachment C.

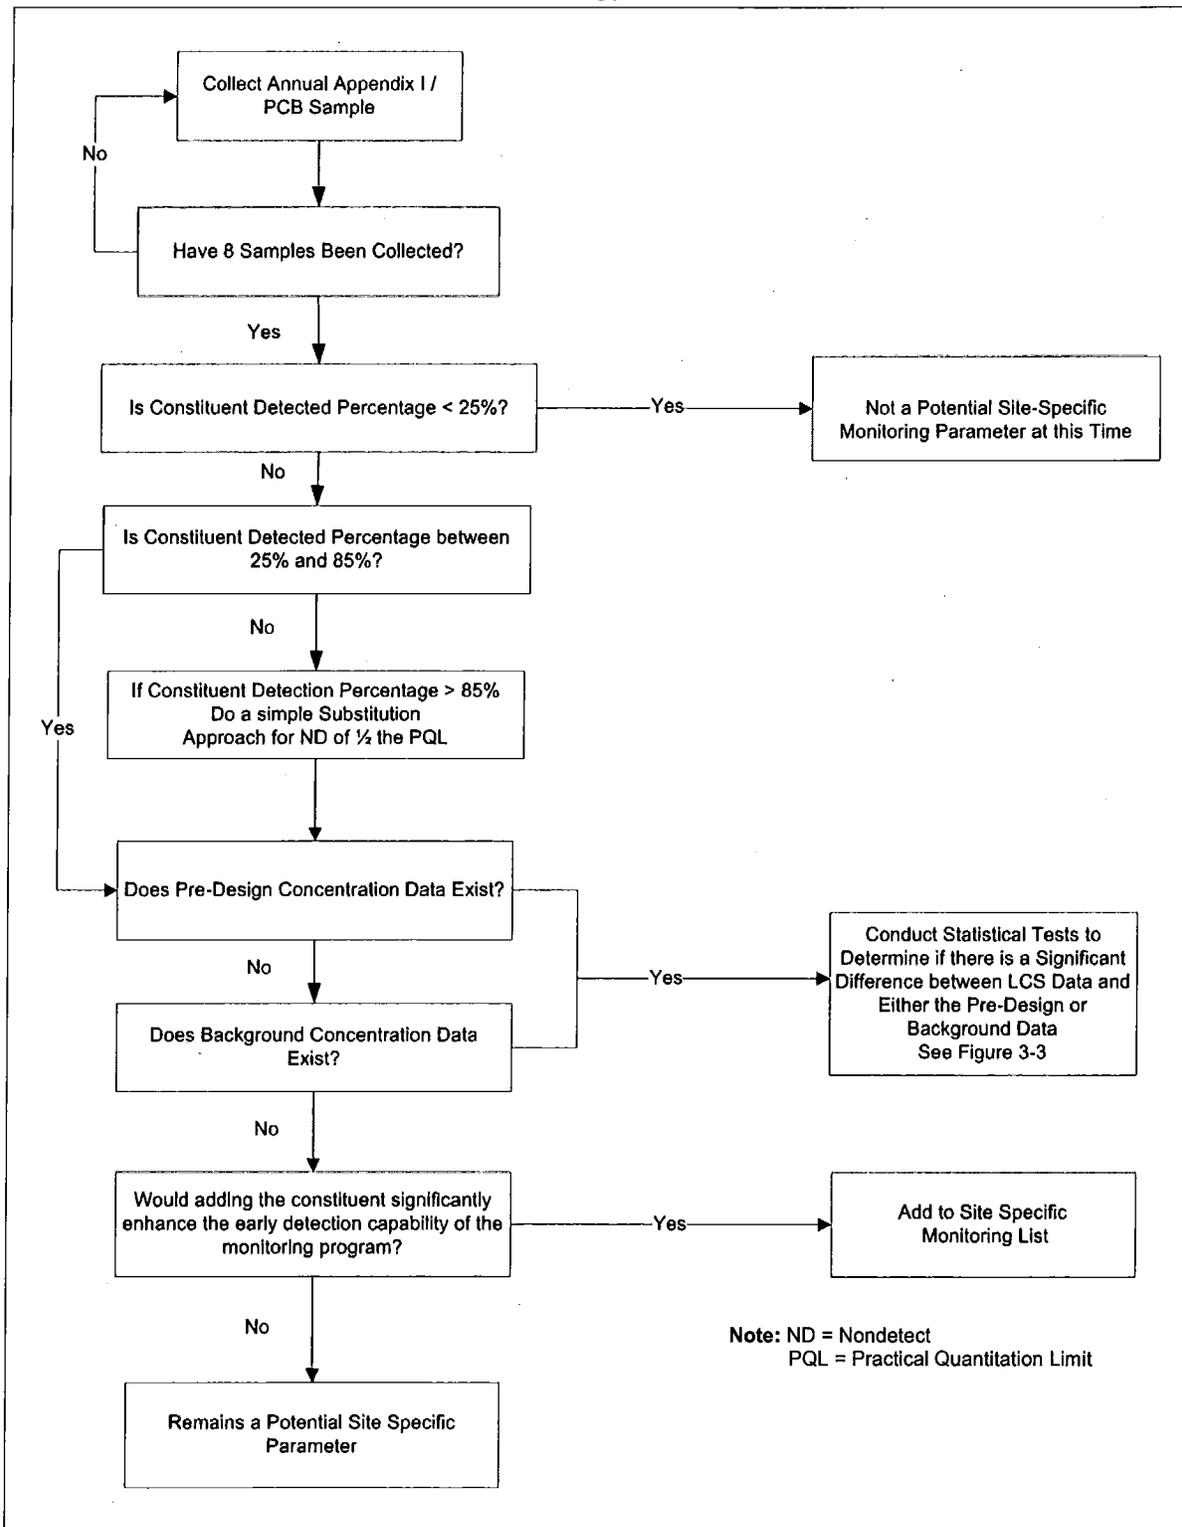


Figure 2. OSDF Site-Specific Leachate Monitoring Parameter Selection Approach

UNCONTROLLED IF PRINTED

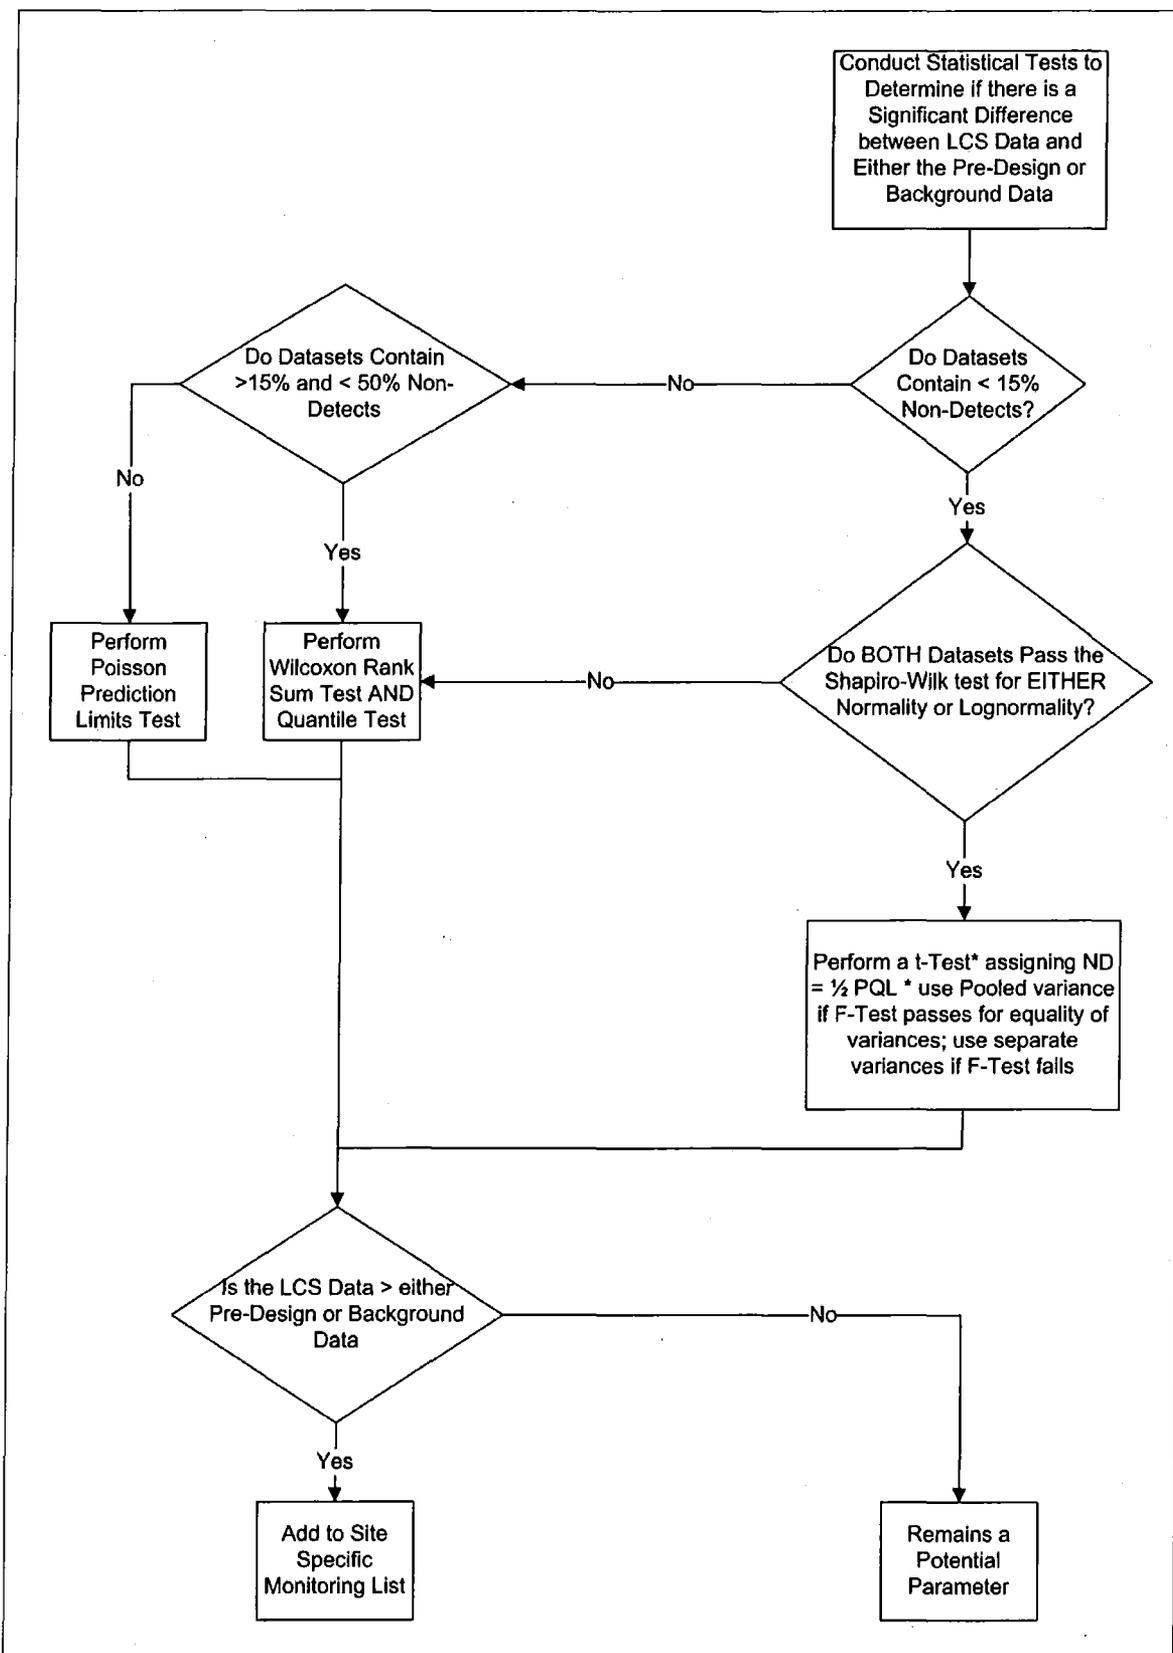


Figure 3. OSDF Site-Specific Leachate Monitoring Parameter Selection Statistical Testing Approach

#### **4.1 Adding Monitoring Parameters to Sampling Lists**

A review of the LCS water quality data will be conducted (and reported through the annual Site Environmental Reports) to determine if a constituent that is only sampled for in an LCS should also be sampled for in the cell's other monitoring horizons (i.e., LDS, HTW, GMA wells).

If a constituent that is only sampled for in the LCS is detected, the detection will be confirmed in the LCS during the next scheduled sampling round. Two consecutive detects in a cell's LCS will trigger sampling in the cell's LDS during the next scheduled sampling event. Two consecutive detects in a cell's LDS will trigger sampling in the cells HTW and GMA wells.

### **5.0 References**

DOE (U.S. Department of Energy), 1995a. *Remedial Investigation Report for Operable Unit 5*, Final, Fernald Environmental Management Project, Cincinnati, Ohio, March.

DOE (U.S. Department of Energy), 1995b. *Feasibility Study Report for Operable Unit 5*, Final, Fernald Environmental Management Project, Cincinnati, Ohio, June.

DOE (U.S. Department of Energy), 1996. *Record of Decision for Remedial Actions at Operable Unit 5*, 7478 U 007 501.4, Final, Fluor Fernald, Cincinnati, Ohio, January.

DOE (U.S. Department of Energy), 2008a. *Evaluation of Aqueous Ions in the Monitoring systems of the On-Site Disposal Facility*, Fernald Environmental Management Project, Fernald, Ohio, March.

DOE (U.S. Department of Energy), 2008b. *Fernald Preserve 2007 Site Environmental Report*, DOE-LM/1607-2008, Rev 0., Office of Legacy Management, Grand Junction, Colorado, May.

**UNCONTROLLED IF PRINTED**

**Attachment D**

**Integrated Environmental Monitoring Plan**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Contents**

Acronyms and Abbreviations ..... v

1.0 Introduction..... 1-1

    1.1 Background..... 1-1

    1.2 Program Objectives and Scope ..... 1-2

    1.3 Plan Organization..... 1-3

        1.3.1 Plan Implementation ..... 1-3

        1.3.2 Plan Change Control ..... 1-4

        1.3.3 Health and Safety Considerations ..... 1-4

        1.3.4 Data Management ..... 1-4

        1.3.5 Quality Assurance..... 1-5

    1.4 Role of the IEMP in Remedial Action Decision Making ..... 1-5

2.0 Fernald Preserve Post-Closure Strategy and Organization..... 2-1

    2.1 Post-Closure Strategy..... 2-1

    2.2 Post-Closure Organization ..... 2-1

    2.3 Post-Closure Status ..... 2-1

3.0 Groundwater Monitoring Program ..... 3-1

    3.1 Integration Objectives for Groundwater ..... 3-1

    3.2 Summary of Regulatory Drivers, DOE Policies, and Other Fernald Preserve-Specific Agreements ..... 3-4

        3.2.1 Approach..... 3-4

        3.2.2 Results..... 3-5

    3.3 Groundwater Monitoring Administrative Boundaries ..... 3-7

    3.4 Program Expectations and Design Considerations ..... 3-7

        3.4.1 Program Expectations ..... 3-7

        3.4.2 Design Considerations ..... 3-8

            3.4.2.1 Background..... 3-8

            3.4.2.2 The Modular Approach to Aquifer Restoration..... 3-12

            3.4.2.3 Well Selection Criteria..... 3-13

            3.4.2.4 Constituent Selection Criteria ..... 3-15

    3.5 Design of the IEMP Groundwater Monitoring Program ..... 3-20

    3.6 Medium-Specific Plan for Groundwater Monitoring ..... 3-26

        3.6.1 Groundwater Sampling Program ..... 3-26

            3.6.1.1 Total Uranium Monitoring Project ..... 3-26

            3.6.1.2 South Field Monitoring Project ..... 3-29

            3.6.1.3 Waste Storage Area Monitoring Project ..... 3-30

            3.6.1.4 Property/Plume Boundary Monitoring Project ..... 3-32

            3.6.1.5 Monitoring Non-Uranium Groundwater FRL Constituents without IEMP FRL Exceedances..... 3-34

            3.6.1.6 Routine Water Level Monitoring Project ..... 3-34

            3.6.1.7 Sampling Procedures ..... 3-35

            3.6.1.8 Quality Control Sampling Requirements..... 3-40

            3.6.1.9 Decontamination ..... 3-40

            3.6.1.10 Waste Disposition ..... 3-40

            3.6.1.11 Monitoring Well Maintenance..... 3-41

    3.7 IEMP Groundwater Monitoring Data Evaluation and Reporting ..... 3-43

        3.7.1 Data Evaluation..... 3-43

**UNCONTROLLED IF PRINTED**

	3.7.2 Reporting.....	3-49
4.0	Surface Water, Treated Effluent, and Sediment Monitoring Program .....	4-1
	4.1 Integration Objectives for Surface Water, Treated Effluent, and Sediment .....	4-1
	4.2 Analysis of Regulatory Drivers, DOE Policies, and Other Fernald Preserve Site-Specific Agreements.....	4-1
	4.2.1 Approach.....	4-1
	4.2.2 Results.....	4-2
	4.3 Program Expectations and Design Considerations .....	4-2
	4.3.1 Program Expectations .....	4-2
	4.3.2 Design Considerations .....	4-3
	4.3.2.1 Constituents of Concern.....	4-3
	4.3.2.2 Surface Water Cross-Medium Impact .....	4-7
	4.3.2.3 Sporadic Exceedances of FRLs .....	4-7
	4.3.2.4 Impacts to Surface Water due to Storm Water Runoff.....	4-14
	4.3.2.5 Ongoing Background Evaluation.....	4-14
	4.3.2.6 Fulfill NPDES Requirements.....	4-16
	4.3.2.7 Fulfill Federal Facilities Compliance Agreement and OU5 ROD Requirements .....	4-16
	4.3.2.8 Fulfill DOE Order 450.1A Requirements.....	4-16
	4.3.2.9 Address Concerns of the Community .....	4-16
	4.4 Medium-Specific Plan for Surface Water, Treated Effluent, and Sediment Sampling .....	4-16
	4.4.1 Sampling .....	4-17
	4.4.1.1 Sampling Procedures .....	4-17
	4.4.1.2 Quality Control Sampling Requirements.....	4-22
	4.4.1.3 Decontamination.....	4-22
	4.4.1.4 Waste Disposition .....	4-23
	4.5 IEMP Surface Water, Treated Effluent, and Sediment Monitoring Data Evaluation and Reporting .....	4-23
	4.5.1 Data Evaluation.....	4-23
	4.5.2 Reporting.....	4-25
5.0	Dose Assessment Program.....	5-1
	5.1 Integration Objectives for the Dose Assessment Program .....	5-1
	5.2 Background, Regulatory Drivers, and Requirements .....	5-1
	5.3 Analysis of Regulatory Drivers, DOE Policies, and Other Fernald Preserve Site-Specific Agreements.....	5-1
	5.3.1 Approach.....	5-2
	5.3.2 Air Requirements .....	5-2
	5.3.3 Dose Requirements .....	5-2
	5.4 Program Expectations and Design Considerations .....	5-5
	5.4.1 Program Expectations .....	5-5
	5.4.2 Design Considerations .....	5-6
	5.5 Plan for External-Radiation Monitoring .....	5-6
	5.5.1 Sampling Program .....	5-8
	5.5.1.1 Sampling Procedures .....	5-8
	5.5.1.2 Quality Control Sampling Requirements.....	5-8
	5.6 Data Evaluation.....	5-8
	5.7 General Technical Approach .....	5-9
	5.7.1 Exposure Pathways .....	5-9

**UNCONTROLLED IF PRINTED**

5.7.2 Potential Receptors ..... 5-9  
5.7.3 Routine Surveillance of Pathways ..... 5-10  
5.8 Dose Assessment Approach..... 5-10  
5.8.1 External Radiation ..... 5-10  
5.8.2 Air Pathway ..... 5-10  
5.8.3 Surface-Water Pathway ..... 5-10  
5.9 Frequency of Analysis and Analytical Results ..... 5-10  
5.9.1 OSL Dosimeters and Surface-Water Samples ..... 5-10  
5.9.2 Consideration of Decay-Chain Daughter Products..... 5-11  
5.9.3 Managing Analytical Results..... 5-11  
5.10 All-Pathway Dose Calculations ..... 5-11  
5.11 Reporting..... 5-12  
6.0 Program Reporting..... 6-1  
6.1 Introduction..... 6-1  
6.2 IEMP Monitoring Summary ..... 6-1  
6.3 Reporting..... 6-2  
7.0 References..... 7-1

**Figures**

Figure 2-1. Uncertified Areas and Subgrade Utility Corridors ..... 2-3  
Figure 2-2. Fernald Preserve Site Configuration ..... 2-5  
Figure 3-1. Location of Aquifer Restoration Modules..... 3-2  
Figure 3-2. Monitoring Well Data and Maximum Total Uranium Plume Through the  
Second Half of 2008 ..... 3-9  
Figure 3-3. Extraction Well Locations..... 3-11  
Figure 3-4. Groundwater Aquifer Zones and Design Remediation Footprint ..... 3-14  
Figure 3-5. Locations for Semiannual Monitoring for Property/Plume Boundary, South  
Field, and Waste Storage Area..... 3-19  
Figure 3-6. Locations for Semiannual Total Uranium Monitoring Only ..... 3-28  
Figure 3-7. Direct Push Sampling Locations ..... 3-31  
Figure 3-8. Groundwater Elevation Monitoring Wells ..... 3-37  
Figure 3-9. Groundwater Certification Process and Stages ..... 3-48  
Figure 4-1. Area where Glacial Overburden Has Been Removed ..... 4-8  
Figure 4-2. IEMP Surface Water, NPDES, and Treated Effluent Sample Locations ..... 4-9  
Figure 4-3. Comparison of Average Total Uranium Concentrations in Paddys Run at  
Willey Road Sample Location SWP-03 ..... 4-15  
Figure 4-4. Sediment Sample Locations ..... 4-18  
Figure 4-5. IEMP Surface Water and Sediment Data Evaluation and Associated Actions ..... 4-24  
Figure 5-1. OSL Dosimeter Locations ..... 5-7

**UNCONTROLLED IF PRINTED**

**Tables**

Table 2-1. OU5 Remedy Overview..... 2-2

Table 3-1. Fernald Preserve Groundwater Monitoring Regulatory Drivers and Responsibilities ..... 3-6

Table 3-2. Groundwater FRL Exceedances Based on Samples and Locations Since IEMP Inception (from August 1997 through 2007) ..... 3-16

Table 3-3. IEMP Constituents with FRL Exceedances, Location of Exceedances, and Revised Monitoring Program..... 3-21

Table 3-4. List of IEMP Groundwater Monitoring Wells..... 3-21

Table 3-5. IEMP Monitoring Requirements<sup>a</sup> ..... 3-25

Table 3-6. List of Groundwater Wells to Be Sampled for Total Uranium Only..... 3-27

Table 3-7. List of Groundwater Elevation Monitoring Wells..... 3-36

Table 3-8. Analytical Requirements for the Groundwater Monitoring Program ..... 3-39

Table 4-1. Fernald Preserve Surface Water, Treated Effluent, and Sediment Monitoring Program Regulatory Drivers and Actions..... 4-2

Table 4-2. Surface Water Selection Criteria Summary..... 4-4

Table 4-3. Summary of Surface Water, Treated Effluent, and Sediment Sampling Requirements by Location ..... 4-11

Table 4-4. Surface Water Analytical Requirements for Constituents at Sample Locations SWD-02, SWD-03, SWD-04, SWD-05, SWD-06, SWD-07, SWD-08, SWD-09, SWD-10, SWD-11, SWD-12, SWD-13, SWP-01, SWP-02, SWP-03, and SWR-01..... 4-19

Table 4-5. Surface Water, Treated Effluent, and Sediment Analytical Requirements for Constituents at Sample Locations PF 4001, STRM 4003, STRM 4004, STRM 4005, STRM 4006, SWR-4801, SWR-4902, G2, and G10 ..... 4-20

Table 5-1. Air Monitoring Regulatory Drivers, Required Actions, and Results ..... 5-3

Table 5-2. Sitewide Dose Tracking and Annual Assessment Tasks ..... 5-5

Table 5-3. Analytical Summary for Direct Radiation ..... 5-6

Table 6-1. IEMP Reporting Schedule for 2010..... 6-3

**Appendix**

Appendix A Natural Resource Monitoring Plan

**UNCONTROLLED IF PRINTED**

**Acronyms and Abbreviations**

ALARA	as low as reasonably achievable
ARARs	applicable or relevant and appropriate requirements
ASL	analytical support level
BCG	biota concentration guide
CAWWT	Converted Advanced Wastewater Treatment Facility
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CFR	<i>Code of Federal Regulations</i>
CMT	continuous multichannel tubing
COC	contaminant of concern
DCG	derived concentration guideline
DOE	U.S. Department of Energy
LM	U.S. Department of Energy Office of Legacy Management
DOECAP	U.S. Department of Energy Consolidated Audit Program
EPA	U.S. Environmental Protection Agency
FEMP	Fernald Environmental Management Project
FFCA	Federal Facility Compliance Agreement
FMPC	Feed Material Production Center
FPQAPP	Fernald Preserve Quality Assurance Project Plan
FRL	final remediation level(s)
GEMS	Geospatial Environmental Mapping System
gpm	gallons per minute
GWLMP	Groundwater/Leak Detection and Leachate Monitoring Plan
IEMP	Integrated Environmental Monitoring Plan
LMICP	Comprehensive Legacy Management and Institutional Controls Plan
MDC	minimum detectable concentration
mrem	millirem
m <sup>3</sup> /min	cubic meters per minute
µg/L	micrograms per liter
µm	micrometer
MS/MSD	matrix spike/matrix spike duplicate
NEPA	National Environmental Policy Act
NESHAP	National Emissions Standards for Hazardous Air Pollutants
NPDES	National Pollutant Discharge Elimination System

**UNCONTROLLED IF PRINTED**

**Acronyms and Abbreviations (continued)**

NTU	nephelometric turbidity unit
OEPA	Ohio Environmental Protection Agency
OMMP	Operations and Maintenance Master Plan for the Aquifer Restoration and Wastewater Project
OSL	optically stimulated luminescence
OSDF	On-Site Disposal Facility
OU	Operable Unit
pCi/kg	picocuries per kilogram
pCi/L	picocuries per liter
pCi/m <sup>3</sup>	picocuries per cubic meter
PRG	preliminary remediation goal
PRRS	Paddys Run Road Site
RCRA	Resource Conservation and Recovery Act
ROD	Record of Decision
SER	Site Environmental Report
SSOD	Storm Sewer Outfall Ditch
TLD	thermoluminescent dosimeter
VAM3D	Variability Saturated Analysis Model in 3 Dimensions

## **1.0 Introduction**

The Integrated Environmental Monitoring Plan (IEMP) is the mechanism to assess the continued protectiveness of the remedial actions and comply with applicable DOE orders and environmental regulations. The IEMP will specify the type and frequency of environmental monitoring activities to be conducted during remedy implementation and, ultimately, following the cessation of remedial operations. The IEMP will delineate the Fernald Preserve's responsibilities for sitewide monitoring of surface water and sediment over the life of the remedy and ensure that final remediation levels (FRLs) are achieved at project completion. The IEMP will also serve as the primary vehicle for determining (to the satisfaction of the U.S. Environmental Protection Agency [EPA] and Ohio Environmental Protection Agency [OEPA]) that remedial action objectives for the Great Miami Aquifer are being attained.

### **1.1 Background**

The U.S. Department of Energy (DOE) Office of Legacy Management (LM) Fernald Preserve completed its remedial investigation/feasibility study obligations, and the final records of decision (RODs) for all five Fernald Preserve operable units (OUs) are in place. In 1997, in recognition of the increased focus on remedy implementation, DOE developed an integrated environmental monitoring strategy tailored to these cleanup actions. Between 1997 and 2006, the site's focus was on the safe and efficient execution of site remediation, including facility decontamination and dismantling, the design and construction of waste processing and disposal facilities, waste excavation and shipping, and the continuation of groundwater remediation.

Near the end of 2006, Declaration of Physical Completion (i.e., closure) was achieved. The on-site disposal facility (OSDF) was closed, the final cap was installed, and all site cleanup activities were completed, with the exception of the ongoing remediation of the Great Miami Aquifer. Even though the site met the closure criteria, the integrated environmental monitoring strategy will continue to ensure that environmental monitoring and reporting for all site media, including remedy performance monitoring, is a coordinated effort.

The basis for the current understanding of environmental conditions at the Fernald Preserve is the extensive site environmental data that have been collected. The data were collected over a 10-year period through the remedial investigation process required under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA), as amended, combined with 12 years of subsequent routine environmental monitoring data collected through the IEMP. Analysis of the remedial investigation data resulted in the selection of a final remedy for the Fernald Preserve's environmental media, with the issuance of the *Record of Decision for Remedial Actions at Operable Unit 5* (OU5 ROD) (DOE 1996a) in January of 1996. OU5 includes all environmental media, contaminant transport pathways, and environmental receptors (soil, groundwater, surface water, sediment, air, and biota) at and around the Fernald Preserve that have been affected by past uranium production operations. The remedy for OU5 defines final sitewide cleanup levels and establishes the general areal extent of on- and off-property actions necessary to mitigate the environmental effects of site production activities.

The IEMP is a formal remedial design deliverable required to fulfill Task 9 of the *Remedial Design Work Plan for Remedial Actions at Operable Unit 5* (DOE 1996b) and is an enforceable portion of the LMICP. The revision to the IEMP provides an update to the original IEMP

## UNCONTROLLED IF PRINTED

(approved in August of 1997) as required by the *Remedial Design Work Plan and DOE Order 450.1A* (DOE 2008a).

### 1.2 Program Objectives and Scope

As post-closure and continued cleanup activities are conducted, the need for accurate, accessible, and manageable environmental monitoring information continues to be essential. The IEMP has been formulated to meet this need and will serve several comprehensive functions for the site by:

- Maintaining the commitment to a remediation-focused environmental surveillance monitoring program that is consistent with DOE Orders 450.1A, *Environmental Protection Program*, and 5400.5, *Radiation Protection of the Public and the Environment*, and that continues to address stakeholder concerns. Both orders are listed as “to be considered” criteria in the OU5 ROD and are, therefore, key drivers for the scope of the monitoring program.
- Fulfilling additional sitewide monitoring and reporting requirements activated by the CERCLA applicable or relevant and appropriate requirements (ARARs) for the OU5 ROD, including determining when environmental restoration activities are complete and cleanup standards have been achieved.
- Providing the mechanism for assessing the performance of the Great Miami Aquifer groundwater remedy, including determining when restoration activities are complete.
- Providing a reporting mechanism for many environmental regulatory compliance monitoring activities. These may include OSDF groundwater monitoring, Federal Facility Compliance Agreement (FFCA), and elements of the National Pollutant Discharge Elimination System (NPDES) discharge reporting.
- Providing a reporting interface for project-specific monitoring (i.e., OSDF), which is conducted under a separate attachment to the LMICP (Attachment C, “On-Site Disposal Facility Groundwater/Leak Detection and Leachate Monitoring Plan [GWLMP]”).

Under the IEMP, data showing the environmental conditions at the Fernald Preserve are collected, maintained, and evaluated. Performance monitoring results associated with the Fernald Preserve are also evaluated and compared against established thresholds. DOE fulfills its obligation to document environmental monitoring information under the umbrella of the annual Site Environmental Report (SER).

The boundary conditions defined in the IEMP are as follows:

- The administrative boundary lies between remedial actions for groundwater south of the Fernald Preserve and those potential remedial actions associated with the Paddys Run Road Site (PRRS) plume. This boundary is shown in the *Feasibility Study Report for Operable Unit 5* (DOE 1995a) and the *Final Operable Unit 5 Proposed Plan* (DOE 1995b).
- The programmatic boundary refers to the differentiation between the scope and responsibility associated with the design, implementation, and documentation. OSDF monitoring activities are designated as project-specific monitoring. The designation is based on an evaluation of the pertinent regulatory drivers and DOE policies that have monitoring implications.

## **UNCONTROLLED IF PRINTED**

The IEMP monitoring programs measure the collective environmental impacts resulting from continued Fernald Preserve cleanup and monitoring activities.

### **1.3 Plan Organization**

The IEMP is composed of six sections and one appendix. The remaining sections and their contents are as follows:

- Section 2.0—Post-Closure Strategy and Organization: Provides an overview of the post-closure monitoring strategy and a description of the post-closure organization.
- Section 3.0—Groundwater Monitoring Program: Provides a description of the monitoring activities necessary to track the progress of the restoration of the Great Miami Aquifer; discusses the groundwater monitoring activities necessary to maintain compliance with Resource Conservation and Recovery Act (RCRA) requirements as specified in the OEPA Director's Findings and Orders dated September 2000; and provides a description of the integration with the groundwater monitoring for the OSDF.
- Section 4.0—Surface Water, Treated Effluent, and Sediment Monitoring Program: Provides a description of the routine sitewide surface water monitoring required to maintain compliance with surface water and treated effluent discharge requirements. Additionally, this section provides a description of the sediment monitoring activities to independently verify the overall effectiveness of the sediment controls.
- Section 5.0—Air Monitoring and Dose Assessment Program: Provides a description of the sitewide air monitoring, external-radiation monitoring, and dose calculations required to maintain compliance with DOE Order 5400.5.
- Section 6.0—Program Reporting: Provides a detailed accounting of the reporting elements included within the IEMP reporting framework.
- Appendix A—Natural Resource Monitoring Plan: Provides the regulatory requirements and strategy for the monitoring of ecological impacts to wetlands, threatened and endangered species, and terrestrial and aquatic habitats.

The IEMP is organized according to the principal environmental media and contaminant migration pathways routinely examined under the program. For each of the media constituting the program, evaluations of the regulatory drivers and pertinent DOE policies that govern environmental monitoring were conducted. The details and results of this evaluation are presented in Sections 3.0 through 5.0.

#### **1.3.1 Plan Implementation**

A multidiscipline organization has been established to effectively implement and manage planning, sample collection and analysis, and data management activities directed in each medium-specific section. The key positions and associated responsibilities required for successful implementation are as follows:

- The environmental team leader will have full responsibility and authority for the implementation of the medium-specific plan in compliance with all regulatory specifications and sitewide programmatic requirements. Integration and coordination of all medium-specific plan activities defined in this IEMP with other project groups is also a key

## UNCONTROLLED IF PRINTED

responsibility. All changes to project activities must be approved by the project team leader or designee.

- Health and safety are the responsibility of all individuals working on this project scope. Qualified Health and Safety personnel shall participate on the project team to assist in preparing and obtaining all applicable permits. In addition, safety specialists shall periodically review and update the specific health and safety documents and operating procedures, conduct pertinent safety briefings, and assist in evaluating and resolving all safety concerns. All activities will be conducted according to the *Fernald Project Health and Safety Plan* (DOE 2006b).
- Quality Assurance personnel will participate on the project team, as necessary, to review project procedures and activities ensuring consistency with the requirements of the *Fernald Preserve Quality Assurance Project Plan* (DOE 2009a) (FPQAPP) or other referenced standard and assist in evaluating and resolving all quality-related concerns.

### 1.3.2 Plan Change Control

Changes to the medium-specific plan will be at the discretion of the project team leader. Prior to implementation of field changes, the project team leader or designee shall be informed of the proposed changes and circumstances substantiating the changes. Any changes to the medium-specific plan must have written approval by the project team leader or designee, Quality Assurance representative, and the field manager prior to implementation. If a variance is required, it will be completed in accordance with the FPQAPP. The variance form shall be issued as controlled distribution to team members and will be included in the field data package to become part of the project record. During revisions to the IEMP, variances will be incorporated in the medium-specific sections.

If a change significantly affects the scope of the plan, approval would be requested through monthly conference calls with EPA and OEPA. Afterward, a variance that documents the change and the justification for the change will be provided to EPA and OEPA.

### 1.3.3 Health and Safety Considerations

The Fernald Preserve's Health and Safety personnel are responsible for the development and implementation of health and safety requirements for all medium-specific plans. Hazards (physical, radiological, chemical, and biological) typically encountered by personnel when performing the specified fieldwork will be addressed during team briefings. All involved personnel will receive adequate training in the health and safety requirements prior to implementation of the fieldwork required by this medium-specific plan. Health and safety requirements are addressed in the *Fernald Project Health and Safety Plan* (DOE 2006b) and job safety analyses.

### 1.3.4 Data Management

Specific requirements for field and laboratory data documentation and validation are established to meet the IEMP data reporting and quality objectives and comply with the FPQAPP and the data validation procedure found in the *Environmental Procedures Catalog* (DOE 2009).

## **UNCONTROLLED IF PRINTED**

Data documentation and validation requirements for data collected for the IEMP fall into two categories depending upon whether the data are field- or laboratory-generated. Field documentation review will consist of verifying medium-specific plan compliance and appropriate documentation of field activities. Laboratory data validation will consist of verifying that data generated are in compliance with medium-specific, plan-specified analytical support levels (ASLs).

Four ASLs (ASL A through ASL D) are defined for use at the Fernald Preserve. For groundwater, sediment, surface water, and air, field data documentation will be at ASL A, and laboratory data documentation will be at ASL D. Laboratory data validation will consist of verifying that data generated are in compliance with specified ASL D. ASL D provides quantitative data with some quality assurance/quality control checks.

Data will be entered into a controlled database using a double key or verification method to ensure accuracy. The hard-copy data will be managed in the project file in accordance with LM record-keeping requirements and DOE orders.

### **1.3.5 Quality Assurance**

Assessments of work processes shall be conducted to verify quality of performance and may include audits, surveillances, inspections, tests, data verification, field validation, and peer reviews. Assessments shall include performance-based evaluation of compliance with technical and procedural requirements and corrective action effectiveness necessary to prevent defects in data quality. Assessments may be conducted at any point in the life of the project. Assessment documentation shall verify that work was conducted in accordance with IEMP and FPQAPP requirements.

Recommended semiannual quality assurance assessments or surveillances shall be performed on tasks specified in the medium-specific plan. These assessments may be in the form of independent assessments or self-assessments, with at least one independent assessment conducted annually. Independent assessments are the responsibility of Quality Assurance personnel. The project team leader and Quality Assurance personnel will coordinate assessment activities and comply with the FPQAPP. The project or Quality Assurance personnel shall have "stop work" authority if significant adverse effects to quality conditions are identified or work conditions are unsafe.

### **1.4 Role of the IEMP in Remedial Action Decision Making**

The IEMP is the mechanism to assess the continued protectiveness of the remedial actions. The IEMP will specify the type and frequency of environmental monitoring activities to be conducted during remedy implementation and, ultimately, following the cessation of remedial operations. The IEMP will delineate the Fernald Preserve's responsibilities for sitewide monitoring of surface water and sediment over the life of the remedy and ensure that FRLs are achieved at project completion. The IEMP will also serve as the primary vehicle for determining (with concurrence from EPA and OEPA) that remedial action objectives for the Great Miami Aquifer are being attained.

## **UNCONTROLLED IF PRINTED**

Subject matter experts are responsible for the ongoing review of media-specific monitoring data and the identification of any related environmental compliance issues. If the potential for an unacceptable future situation is identified, then options for addressing the problem will be identified. The options will be assessed with respect to their implications, and the results of the evaluations will be communicated as necessary to the Fernald Preserve's stakeholders, EPA, and OEPA.

The medium-specific sections of this plan (Sections 3.0 through 5.0) identify monitoring requirements and ARARs for each environmental medium with the applicable compliance locations. Additionally, the medium-specific sections define the criteria to be used to identify trends in the data that could indicate an imminent unacceptable situation. Each of the medium-specific sections specifies the frequency of the data evaluations to satisfy the Fernald Preserve's overall planning and decision-making requirements. DOE will evaluate the data accordingly and will report the results according to the approach summarized below.

Each medium section of this IEMP presents medium-specific reporting components, and Section 6.0 summarizes the overall reporting strategy for the IEMP. LM information is available on the LM website (<http://www.lm.doe.gov/>). The Fernald Preserve data will be made available to the regulatory agencies on an ongoing basis in the form of electronic data files at <http://www.lm.doe.gov/fernald/Sites.aspx>.

The annual SERs will be furnished to EPA and OEPA in accordance with the provisions summarized in Section 6.0. The SERs will also be available for review by the Fernald Preserve's stakeholders at the Visitors Center and the Public Environmental Information Center and to selected stakeholders via mail.

## **2.0 Fernald Preserve Post-Closure Strategy and Organization**

This section presents a description of the Fernald Preserve's post-closure strategy and organizational structure associated with post-closure activities, which includes the continuing OU5 (i.e., environmental media) remediation and monitoring efforts.

### **2.1 Post-Closure Strategy**

The Fernald Preserve's post-closure strategy reflects the completion of the majority of CERCLA activities at the site. There have been extensive site characterization activities to determine the nature and extent of contamination, baseline risk assessments, and detailed evaluation and screening of remedial alternatives leading to a final remedy selection as documented in the ROD for each OU. The majority of all OU remediation activities were completed in 2006. In 2010, the remaining OU with continuing remediation efforts is OU5. Table 2-1 provides a summary of the OU5 remedy overview.

Active remediation of the Great Miami Aquifer will continue during the post-closure period. Additionally, surface water surveillance monitoring (including NPDES monitoring), sediment surveillance monitoring, and natural resources restoration activities will also continue. The sources associated with air monitoring requirements were removed in 2006; however, limited monitoring for air particulates occurred through 2009 to ensure that all requirements were met and levels were acceptable from a closure standpoint. With regulatory agency approval of the LMICP, air monitoring will cease with this revision of the LMICP.

### **2.2 Post-Closure Organization**

The post-closure organizational structure is less complex than previous Fernald organizations. Adequate staff will remain at the site to continue to meet regulatory and OU5 commitments.

### **2.3 Post-Closure Status**

In 2006, the contaminant sources that were at the Fernald Preserve were removed. Soil and on-property sediments were certified, with the exception of those areas indicated in Figure 2-1. Great Miami Aquifer restoration activities continue after closure as do surveillance monitoring for surface water and sediment. Natural resource restoration activities also continue after closure. Monitoring associated with the IEMP is mainly associated with these activities. Figure 2-2 shows the post-closure site configuration.

**UNCONTROLLED IF PRINTED**

*Table 2-1. OU5 Remedy Overview*

<b>OU</b>	<b>Description</b>	<b>Remedy Overview</b>
OU5	<p>Environmental Media</p> <ul style="list-style-type: none"> <li>• Groundwater</li> <li>• Surface water and sediments (on-property sediment cleanup completed)</li> <li>• Soil not included in the definitions of OU1 through OU4 (cleanup completed with the exception of those areas identified in Figure 2-1)</li> <li>• Flora and fauna</li> </ul>	<p>ROD Approved: January 1996</p> <p>An Explanation of Significant Differences document was approved in November 2001, formally adopting EPA's Safe Drinking Water Act maximum contaminant level for uranium of 30 micrograms per liter as both the FRL for groundwater remediation and the monthly average uranium effluent discharge limit to the Great Miami River.</p> <p>Continued extraction of contaminated groundwater from the Great Miami Aquifer to meet FRLs at all affected areas of the aquifer. Treatment of contaminated groundwater, storm water, and wastewater to attain concentration and mass-based discharge limits and FRLs in the Great Miami River.</p> <p>Continued site restoration maintenance, institutional controls, and post-remediation maintenance.</p> <p>Completion of excavation of contaminated soil and sediment to meet FRLs. Excavation of contaminated soil containing perched water that presents an unacceptable threat, through contaminant migration, to the underlying aquifer.</p> <p>Completion of on-site disposal of contaminated soil and sediment that met the OSDF waste acceptance criteria. Soil and sediment that exceeded the waste acceptance criteria for the OSDF were treated, when possible, to meet the OSDF waste acceptance criteria or were disposed of at an off-site facility.</p>

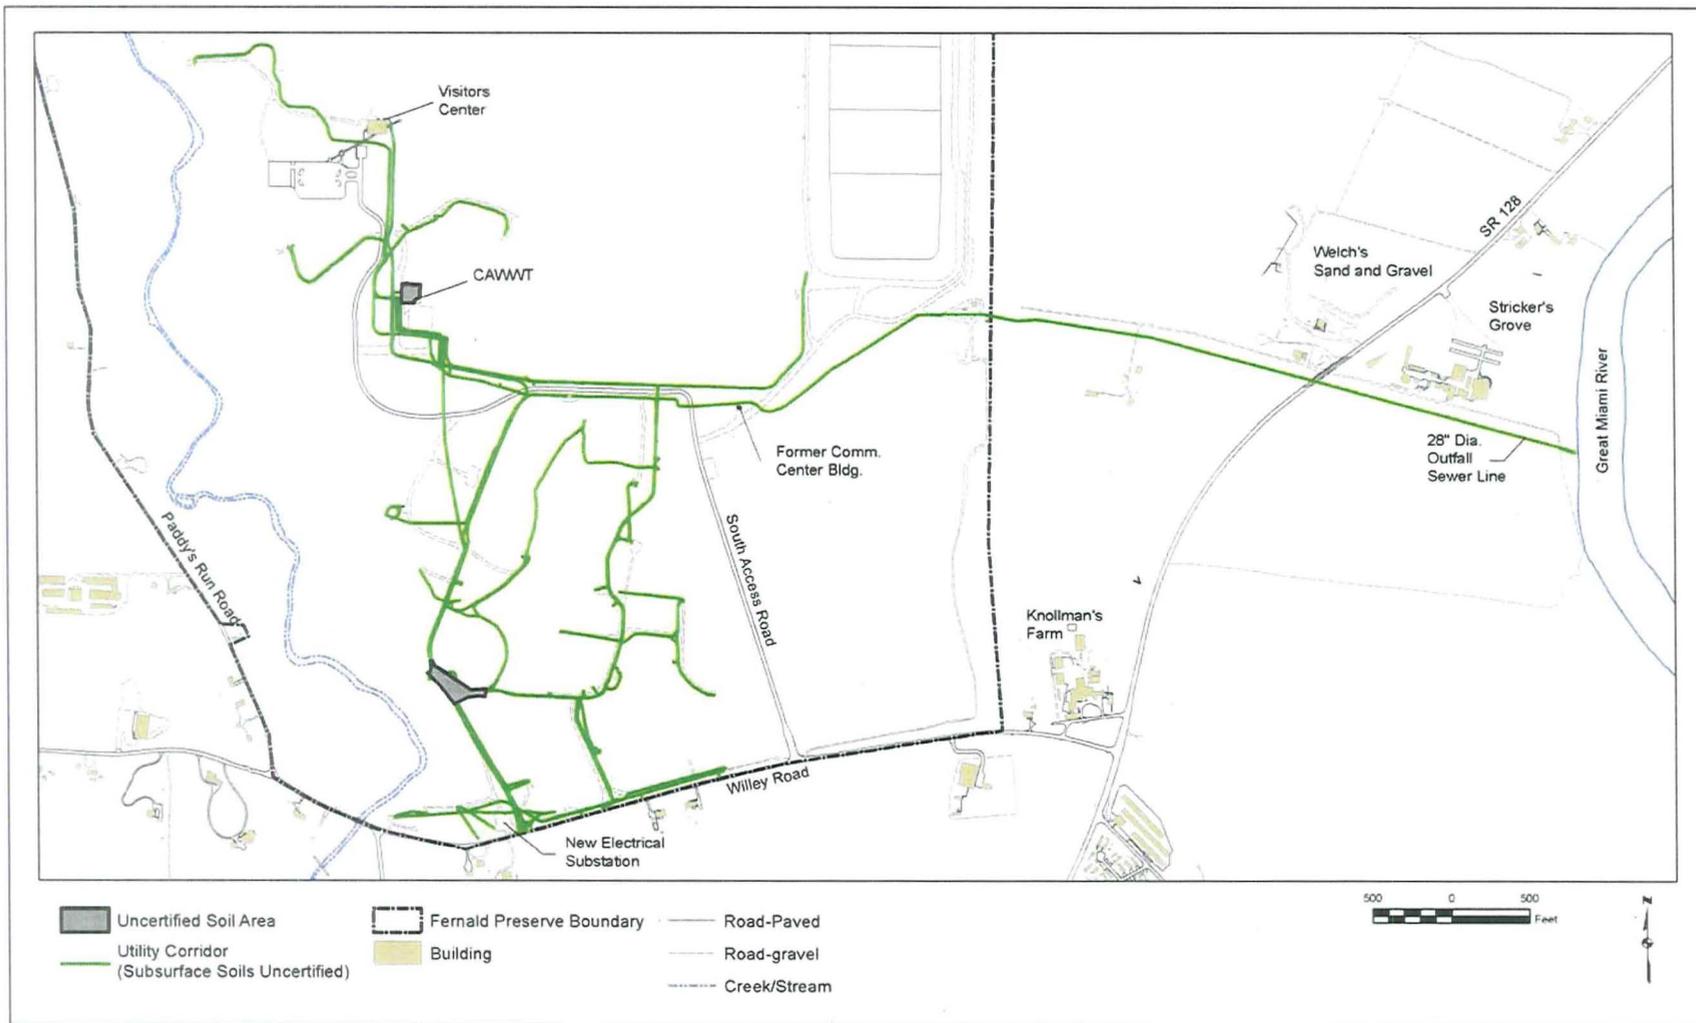


Figure 2-1. Uncertified Areas and Subgrade Utility Corridors

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

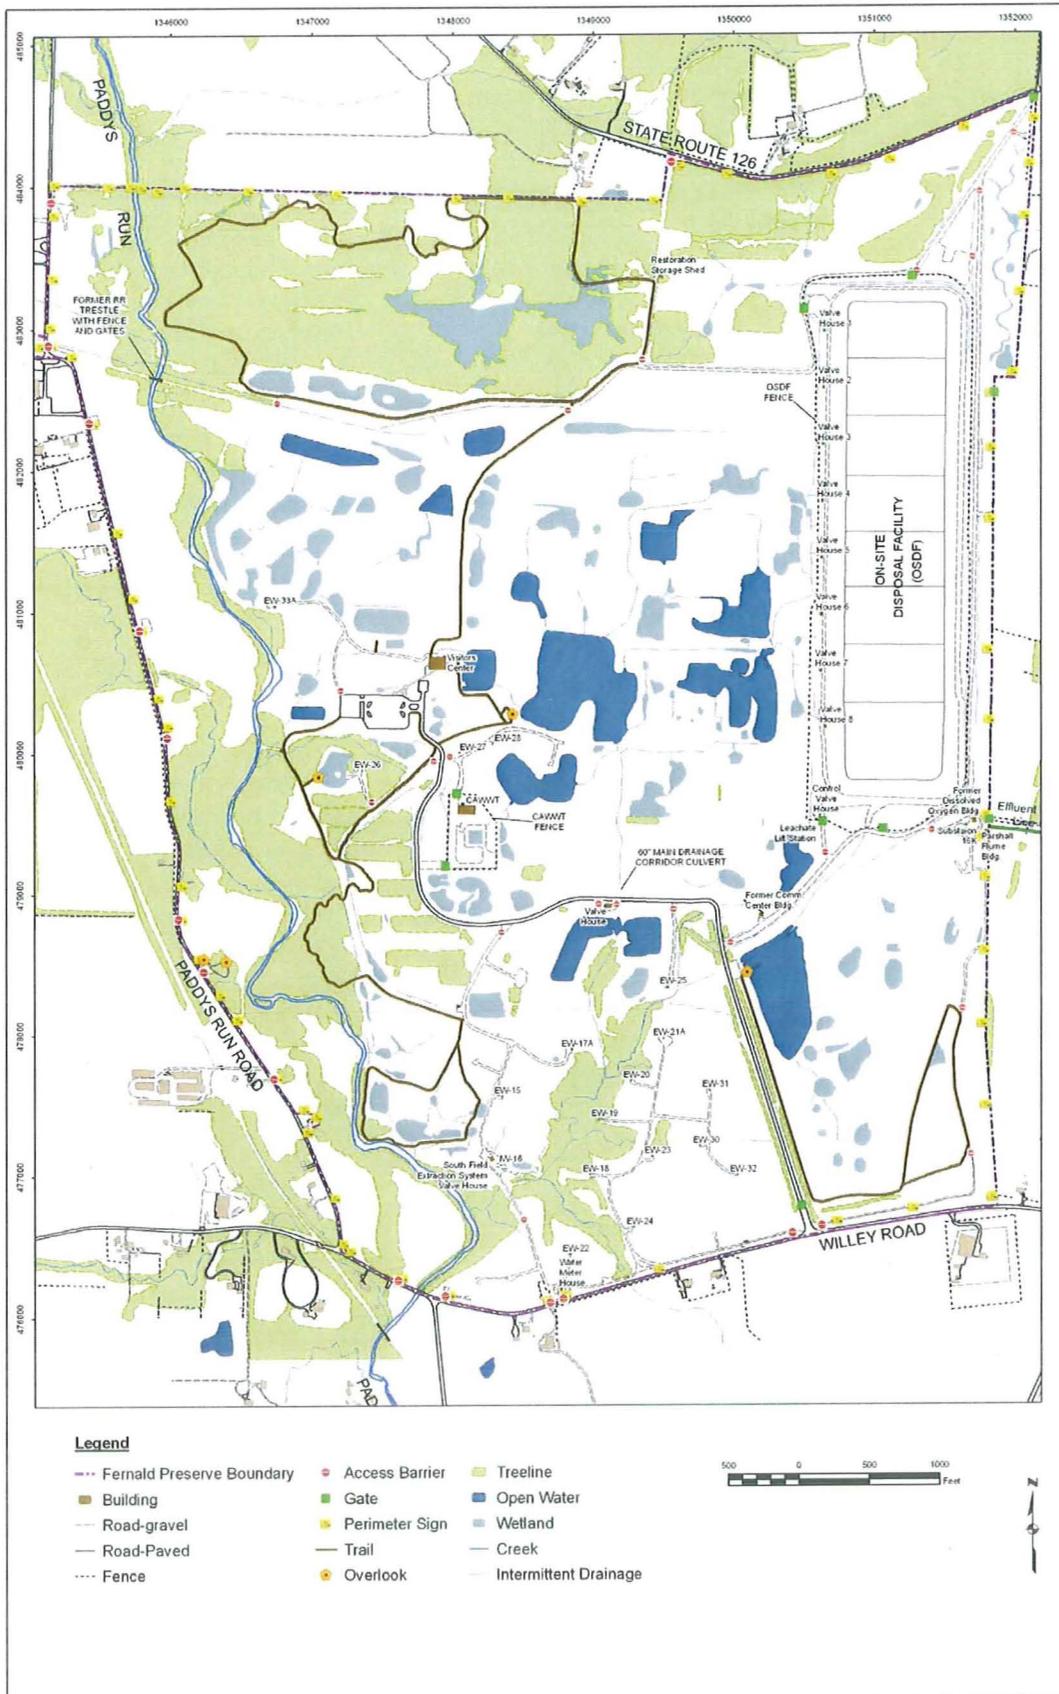


Figure 2-2. Fernald Preserve Site Configuration

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

### 3.0 Groundwater Monitoring Program

Section 3.0 presents the monitoring strategy for tracking the progress of the restoration of the Great Miami Aquifer and satisfying the site-specific commitments related to groundwater monitoring. A medium-specific plan for conducting all groundwater monitoring activities is provided. Program expectations are outlined in Section 3.4, and the program design is presented in Section 3.5.

#### 3.1 Integration Objectives for Groundwater

The *Fernald Groundwater Certification Plan* (DOE 2006a) defines a programmatic strategy for certifying the completion of the aquifer remedy. Remediation of the Great Miami Aquifer is being conducted using pump-and-treat technology, and it is progressing toward certification through a six-stage process:

Stage I: Pump-and-Treat Operations

Stage II: Post-Pump-and-Treat Operations/Hydraulic Equilibrium State

Stage III: Certification/Attainment Monitoring

Stage IV: Declaration and Transition Monitoring

Stage V: Demobilization

Stage VI: Long-Term Monitoring

The groundwater sampling specified in the IEMP tracks the performance of the Great Miami Aquifer groundwater restoration remedy. The IEMP is the controlling document for groundwater remedy performance monitoring and is currently focused on groundwater monitoring needed to support Stage I (Pump-and-Treat Operations). Groundwater monitoring requirements for Stages II through VI of the groundwater certification process will be defined in future revisions of the IEMP. The following is a brief description of the stages listed above.

##### Stage I—Pump-and-Treat Operations

The aquifer remedy is currently in Stage I. The principal contaminant of concern is uranium. Groundwater is being pumped from contaminated portions of the aquifer and treated for uranium.

Remediation of the aquifer is organized around three groundwater restoration modules:

- The South Plume Module
- The South Field Module
- The Waste Storage Area Module

Figure 3–1 identifies the locations of these aquifer restoration modules.

UNCONTROLLED IF PRINTED

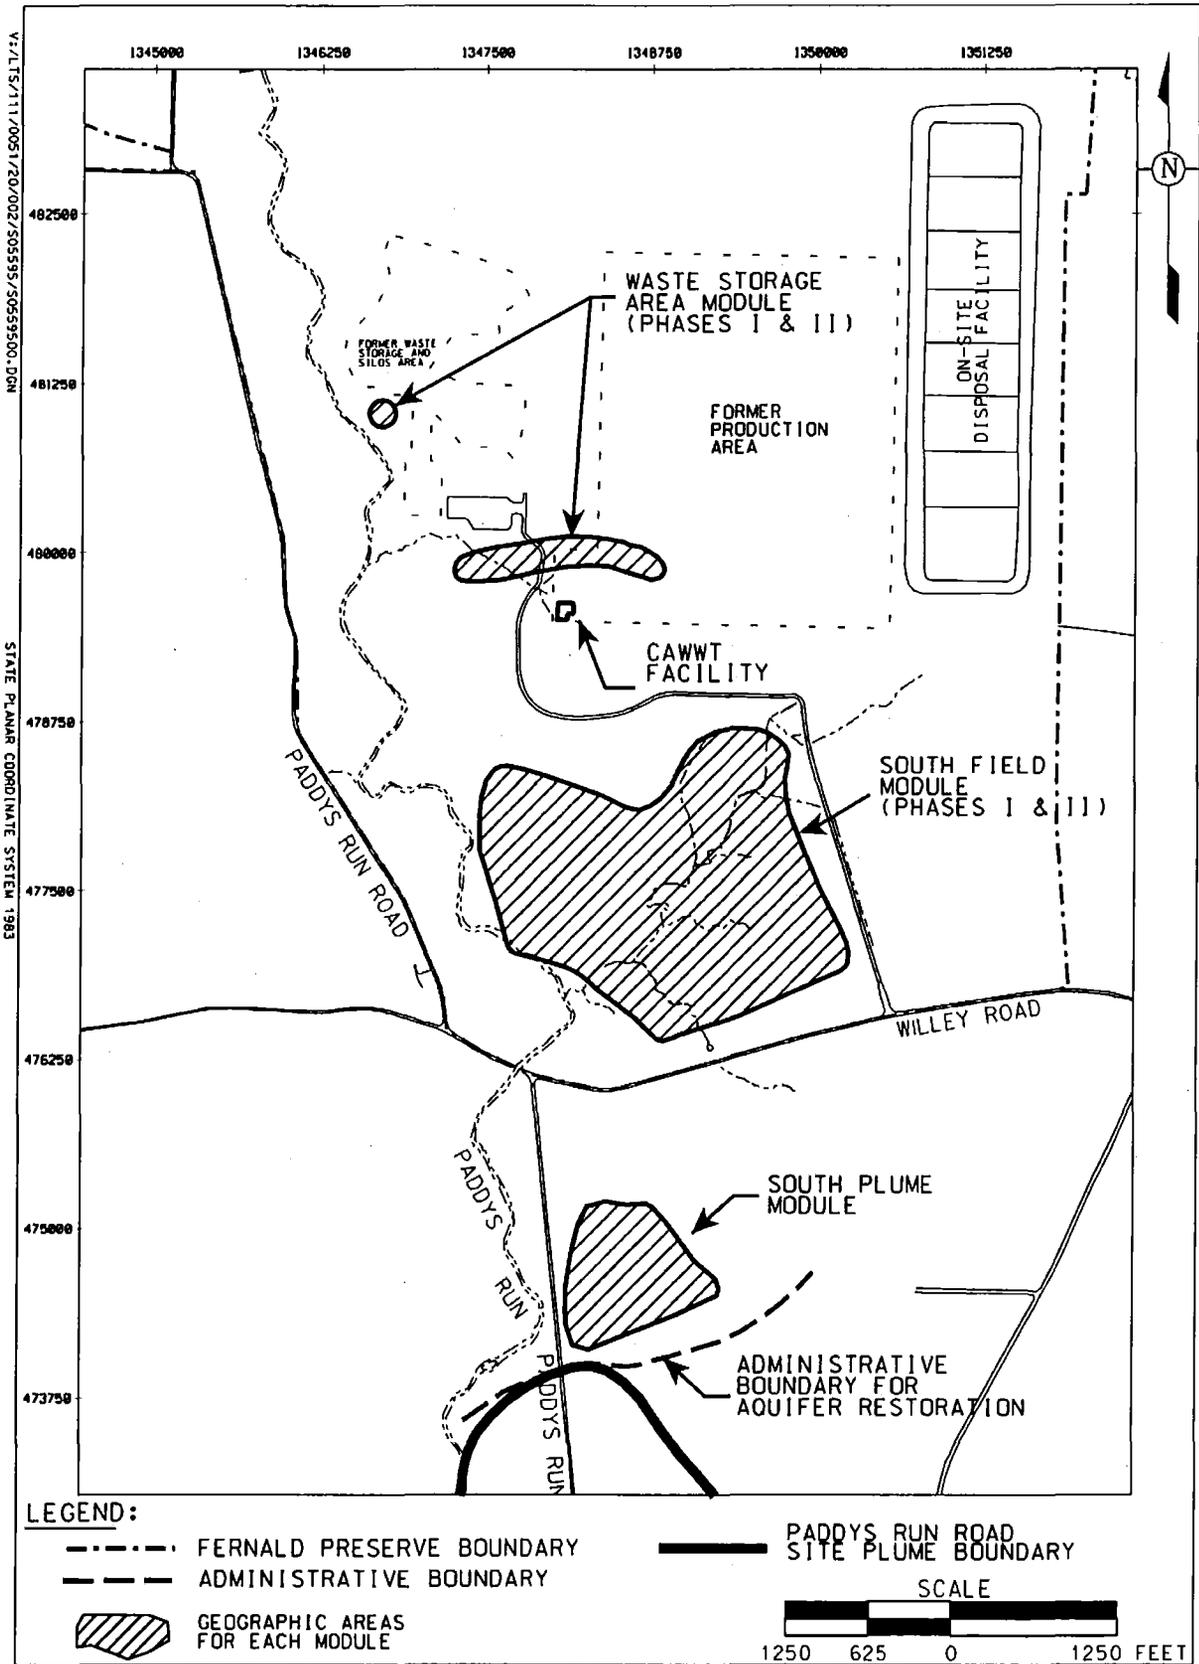


Figure 3-1. Location of Aquifer Restoration Modules

## **UNCONTROLLED IF PRINTED**

Pump-and-treat operations will continue for each groundwater module until FRLs in the aquifer have been achieved or until the mass removal efficiency of the extraction system has decreased such that it is apparent that groundwater FRLs will not be achieved. The controlling document for the operation of the pump-and-treat system is the "Operations and Maintenance Master Plan for Aquifer Restoration and Wastewater Treatment" (OMMP) (Attachment A). Ultimately, the IEMP will be used to document the approach to determine when the various modules complete pump-and-treat operations. Monitoring requirements needed to support later stages of the certification strategy will be incorporated into future revisions of the IEMP when deemed appropriate.

The design of the groundwater monitoring program was developed in recognition of:

- Operation of the South Field (Phases I and II) Module.
- Operation of the South Plume Module.
- Operation of the Waste Storage Area (Phases I and II) Module.

Along with this performance-based responsibility, the IEMP serves to integrate several former compliance-based groundwater monitoring or protection programs:

- OEPA Director's Findings and Orders (OEPA 2000) for property boundary groundwater monitoring to satisfy RCRA facility groundwater monitoring requirements.
- Private well sampling.
- Groundwater protection management program plan.

As discussed in Section 3.7, these activities were brought together under a single reporting structure to facilitate regulatory agency review of the progress of the OU5 groundwater remedy.

### Stage II—Post-Pump-and-Treat Operations/Hydraulic Equilibrium State

Stage II monitoring will begin on a module-specific basis when pump-and-treat operations have stopped. The objective will be to document that the aquifer has readjusted to steady-state nonpumping conditions prior to proceeding to Stage III (Attainment Monitoring). During Stage II, groundwater levels will be routinely measured to document that steady-state water level conditions have been achieved. Concentrations of groundwater FRL constituents will also be routinely measured. If uranium concentrations rebound to levels above the groundwater FRL during the steady-state assessment, then pumping operations would resume. If uranium concentrations remain below the groundwater FRL during the steady-state assessment and do not appear to be trending up toward the groundwater FRL, then the certification process will proceed to Stage III (Certification/Attainment Monitoring). Stage II monitoring is estimated to take approximately 3 months.

### Stage III—Certification/Attainment Monitoring

Certification/attainment monitoring will also be module specific. Data collected during Stage III will be used to document that remediation goals have been met and that the goals will continue to be maintained in the future. Statistical tests will be used to predict the long-term ability to stay below FRLs.

## **UNCONTROLLED IF PRINTED**

### Stage IV—Declaration and Transition Monitoring

Because certification is being approached on a module-specific basis, efforts need to be taken to ensure that upgradient plumes do not migrate into and re-contaminate downgradient areas where remediation goals have been achieved. A few monitoring wells will be positioned at the upgradient edge of the clean areas and will be monitored to document that the upgradient plume is not impacting the clean area. It is estimated that Stage IV monitoring could be conducted for as long as 10 years, essentially the time when the groundwater model predicts that cleanup goals will be achieved in the South Plume Module versus the Waste Storage Area Module.

### Stage V—Demobilization

Stage V identifies that all structures, trailers, liners, pipes (except the outfall line), and utilities dedicated for aquifer restoration and wastewater treatment will need to be properly decontaminated and dismantled in order to be protective of the environment. With the exception of the water treatment facility, the decontamination and dismantling of infrastructure will not take place until the entire aquifer has been certified clean. This will provide the means to reinstate pumping in any area of the aquifer that may require additional pumping prior to achieving final certification.

### Stage VI—Long-Term Monitoring

Long-term monitoring will be conducted in former source areas after the last groundwater module is certified clean. If the water table rises to an elevation that exceeds what was previously recorded for a former source area, then groundwater monitoring beneath the former source area will be initiated to determine if any new sources have dissolved into the groundwater.

## **3.2 Summary of Regulatory Drivers, DOE Policies, and Other Fernald Preserve-Specific Agreements**

This section presents a summary evaluation of the regulatory-based requirements and policies governing the monitoring of the Great Miami Aquifer. The intent of the section is to identify the pertinent regulatory drivers, including ARARs and to-be-considered requirements, for the scope and design of the Great Miami Aquifer groundwater monitoring system. These requirements are used to confirm that the program design satisfies the regulatory obligations for monitoring that have been activated by the OU5 ROD and to achieve the intentions of other pertinent criteria, such as DOE orders and the Fernald Preserve's existing agreements that have a bearing on the scope of groundwater monitoring.

### **3.2.1 Approach**

The analysis of the regulatory drivers and policies for groundwater monitoring was conducted by examining the suite of ARARs and to-be-considered requirements in the five approved CERCLA OU RODs to identify the subset with specific groundwater monitoring requirements. The Fernald Preserve's existing compliance agreements issued outside the CERCLA process were also reviewed.

## UNCONTROLLED IF PRINTED

### 3.2.2 Results

The following regulatory drivers, compliance agreements, and DOE policies were found to govern the monitoring scope and reporting requirements for remedy performance monitoring and general surveillance of the protectiveness of the Great Miami Aquifer groundwater remedy.

- The CERCLA ROD for remedial actions at OU5 requires the extraction and treatment of Great Miami Aquifer groundwater above FRLs until the full, beneficial use potential of the aquifer is achieved, including use as a drinking water source. The FRLs are established by considering chemical-specific ARARs, hazard indices, and background and detection limits for each contaminant. Many Great Miami Aquifer FRLs are based on established or proposed Safe Drinking Water Act maximum contaminant levels, which are ARARs for groundwater remediation. For Fernald Preserve-related contaminants that do not have an established maximum contaminant level under the Safe Drinking Water Act, a concentration equivalent to an incremental lifetime cancer risk of  $10^{-5}$  for carcinogens or a hazard quotient of 1 for noncarcinogens was used as the FRL, unless background concentrations or detection limits are such that health-based limits could not be attained. In these cases the background or detection limit became the FRL. The FRLs will be tracked throughout all affected areas of the aquifer and will be the basis for determining when the Great Miami Aquifer restoration objectives have been met. By definition, the OU5 ROD incorporates the requirements of the Fernald Preserve's existing CERCLA South Plume Removal Action, which was the regulatory driver for the former *South Plume Groundwater Recovery System Design, Monitoring, and Evaluation Program Plan* (DOE 1993).
- According to the *CERCLA Remedial Design Work Plan* (DOE 1996c) for remedial actions at OU5, monitoring will be conducted following the completion of cleanup as required to assess the continued protectiveness of the remedial actions. The IEMP will specify the type and frequency of environmental monitoring activities to be conducted during remedy implementation and, ultimately, following the cessation of remedial operations. The IEMP will delineate the Fernald Preserve's responsibilities for sitewide monitoring over the life of the remedy and ensure that FRLs are achieved at project completion. The IEMP will also serve as the primary vehicle for determining to EPA and OEPA's satisfaction that remedial action objectives for the Great Miami Aquifer have been attained.
- The September 10, 1993, OEPA Director's Final Findings and Orders required groundwater monitoring at the Fernald Preserve's property boundary to satisfy RCRA facility groundwater monitoring requirements (OEPA 1993). The 1993 Final Findings and Orders were superseded by the September 7, 2000 Director's Final Findings and Orders (OEPA 2000). The September 7, 2000, order specifies that the site's groundwater monitoring activities will be implemented in accordance with the IEMP. The revised language allows modification of the groundwater monitoring program as necessary via the IEMP revision process without issuance of a new order.
- DOE Order 450.1A, *Environmental Protection Program*, establishes the requirement for a groundwater protection management program plan for DOE facilities. The required informational elements of the plan are fulfilled by the *Remedial Investigation Report for Operable Unit 5* (DOE 1995c) and the *Feasibility Study Report for Operable Unit 5* (DOE 1995a). The groundwater monitoring program requirement is being fulfilled by the IEMP. This also satisfies provisions in DOE Manual 435.1, *Radioactive Waste Management Manual*, which refers to DOE Order 5400.5.

**UNCONTROLLED IF PRINTED**

- DOE Order 5400.5, *Radiation Protection of the Public and the Environment*, establishes radiological dose limits and guidelines for the protection of the public and environment. Demonstration of compliance with these limits and guidelines for radiological dose is based on calculations that make use of information obtained from the Fernald Preserve's monitoring and surveillance program. This program is based on guidance in the *Environmental Regulatory Guide for Radiological Effluent Monitoring and Environmental Surveillance* (DOE 1991). The Fernald Preserve's private well sampling program for the Great Miami Aquifer (which was previously in the *Fernald Site Environmental Monitoring Plan* [DOE 1995d]) is conducted to satisfy the intention of this DOE order with respect to groundwater. While most private well water users in the affected area are now provided with a public water supply, a limited private well sampling activity will be maintained to supplement the groundwater monitoring network provided by monitoring wells. Because a public water supply is now available, a dose assessment is no longer required.
- The 1986 Federal Facilities Compliance Agreement requires that the Fernald Preserve maintain a sampling program for daily flow and uranium concentration of discharges to the Great Miami River and report the results quarterly to the EPA, OEPA, and Ohio Department of Health. The sampling program conducted to address this requirement has been modified over the years and is currently governed by an agreement reached with EPA and OEPA in early 1996 with modifications documented in IEMP revisions. For groundwater, this agreement is specifically related to the South Plume well field to quantify the amount of uranium removed and total volume of groundwater extracted.

The groundwater monitoring plan provided in this IEMP has been developed with full consideration of the regulatory drivers described above. Each of these drivers, and the associated monitoring conducted to comply with these drivers, is listed in Table 3-1. Sections 3.7 and 6.0 outline the current and long-range plan for complying with the reporting requirements contained in the IEMP drivers.

*Table 3-1. Fernald Preserve Groundwater Monitoring Regulatory Drivers and Responsibilities*

	<b>Driver</b>	<b>Action</b>
<b>IEMP</b>	CERCLA ROD for OU5	The IEMP describes routine monitoring to ensure remedy performance and to evaluate impacts of remediation activities to the Great Miami Aquifer. The IEMP will be modified toward completion of the remedial action to include a sampling plan to certify achievement of the FRLs.
	OEPA Director's Final Findings and Orders; RCRA/Hazardous Waste Facility Groundwater Monitoring	The IEMP describes routine monitoring at wells located at the property boundary to ensure remedy performance and to evaluate impacts of remediation activities to the Great Miami Aquifer.
	DOE Order 450.1A, <i>Environmental Protection Program</i> . Also satisfies DOE Manual 435.1, which refers to DOE Order 5400.5	The IEMP describes routine monitoring to ensure remedy performance of the Great Miami Aquifer.
	Federal Facilities Compliance Agreement, Radiological Monitoring	The IEMP describes the routine sampling and reporting of the South Plume well field in terms of the total volume extracted and the amount of uranium removed.

### **3.3 Groundwater Monitoring Administrative Boundaries**

#### Administrative Boundary between the IEMP and Paddys Run Road Site Contaminant Plumes

As described in the remedial investigation report for OU5 (refer to Section 4.8.2), the PRRS consists of two facilities: PCS Purified Phosphates (formerly Albright and Wilson Americas Inc.) and Rutgers-Nease Chemical Company Inc. PCS Purified Phosphates occupies the northern portion of the site and manufactures phosphate compounds. Rutgers-Nease manufactures aromatic sulfonated compounds and occupies the southern portion of the site.

The PRRS Remedial Investigation Report released in September 1992 documented releases to the Great Miami Aquifer of inorganic constituents, volatile organic compounds, and semivolatile organic compounds. The *Proposed Plan for OU5* (DOE 1995e) acknowledged that DOE's role and involvement, if any, in OEPA's ongoing assessment and cleanup of the PRRS plume would be defined separately as part of the PRRS response obligations and in accordance with the PRRS project schedule. Groundwater monitoring will continue south of the Administrative Boundary until certification of the off-property South Plume is complete. This monitoring will assess the nature of the 30 microgram per liter ( $\mu\text{g/L}$ )-total uranium plume south of the Administrative Boundary and the impact that pumping of the South Plume extraction wells has on the PRRS plume.

### **3.4 Program Expectations and Design Considerations**

#### **3.4.1 Program Expectations**

The IEMP groundwater monitoring program is designed to provide a comprehensive monitoring network that will track remedial well-field operations and assess aquifer conditions. The expectations of the monitoring program are to:

- Provide groundwater data to assess the capture and restoration of the 30- $\mu\text{g/L}$  total uranium plume.
- Provide groundwater data to assess the capture and restoration of non-uranium FRL constituents.
- Provide groundwater data to assess groundwater quality at the downgradient Fernald Preserve property boundary and off site at the leading edge of the 30- $\mu\text{g/L}$  total uranium plume.
- Provide groundwater data that are sufficient to assess how reasonable model predictions are over the long term.
- Provide groundwater data to assess the impact that the aquifer restoration is having on the PRRS plume.
- Continue to fulfill DOE Order 450.1A requirements to maintain an environmental monitoring plan for groundwater.
- Continue to address concerns of the community regarding the progress of the aquifer restoration.

### 3.4.2 Design Considerations

#### 3.4.2.1 Background

The Great Miami Aquifer is contaminated with uranium and other constituents from the Fernald Preserve. An evaluation of the nature and extent of contamination in the Great Miami Aquifer can be found in the Remedial Investigation Report for Operable Unit 5. Uranium is the principal constituent of concern (COC).

Figure 3–2 shows the maximum total uranium plume map (30 µg/L uranium or higher) as of the second half of 2007. These maps represent a compilation of several different monitoring depths within the aquifer, and they illustrate the maximum lateral extent of the plume at all depths. The majority of the top of the plume is situated at the water table. In some regions of the aquifer, however, the top of the plume is situated below the water table. More detailed presentations of the geometry of the uranium plume can be found in Appendix G of the *Baseline Remedial Strategy Report, Remedial Design for Aquifer Restoration (Task 1)* (DOE 1997a); the *Conceptual Design for Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas* (DOE 2000); the *Design for Remediation of the Great Miami Aquifer, South Field (Phase II) Module* (DOE 2002b), and the *Waste Storage Area (Phase II) Design Report* (DOE 2005c).

The primary sources of contamination at the Fernald Preserve that contributed to the present geometry of the uranium plume include (1) the former waste pits that were present in the waste storage area, (2) the former inactive fly ash pile that was present in the South Field area, (3) former production activities, and (4) the previously uncontrolled surface water runoff from the former production area that had direct access to the aquifer through a former drainage originating near the former Plant 1 pad and flowing west through the former waste storage area and the Pilot Plant drainage ditch.

A groundwater remediation strategy that relies on pump-and-treat technology is being used to conduct a concentration-based cleanup of the Great Miami Aquifer. The restoration strategy focuses primarily on the removal of uranium, but it has also been designed to limit the further expansion of the plume, remove targeted contaminants to concentrations below designated FRLs, and prevent undesirable drawdown impacts beyond the Fernald Preserve.

The OU5 ROD establishes that “areas of the Great Miami Aquifer exceeding FRLs will be restored through extraction methods.” The aquifer’s “target certification footprint” is a term used to define those areas of the aquifer targeted for remediation.

The target certification footprint is conservatively defined as the areas contained within a composite of all previous 20-µg/L maximum uranium plume interpretations through 2000, and 30-µg/L maximum uranium plume interpretations subsequent to 2000, located north of the Administrative Boundary for aquifer restoration. The target certification footprint of the aquifer (updated through 2007) is shown in Figure 3–3. The interpretation will be updated each year in the SER as new data are collected.

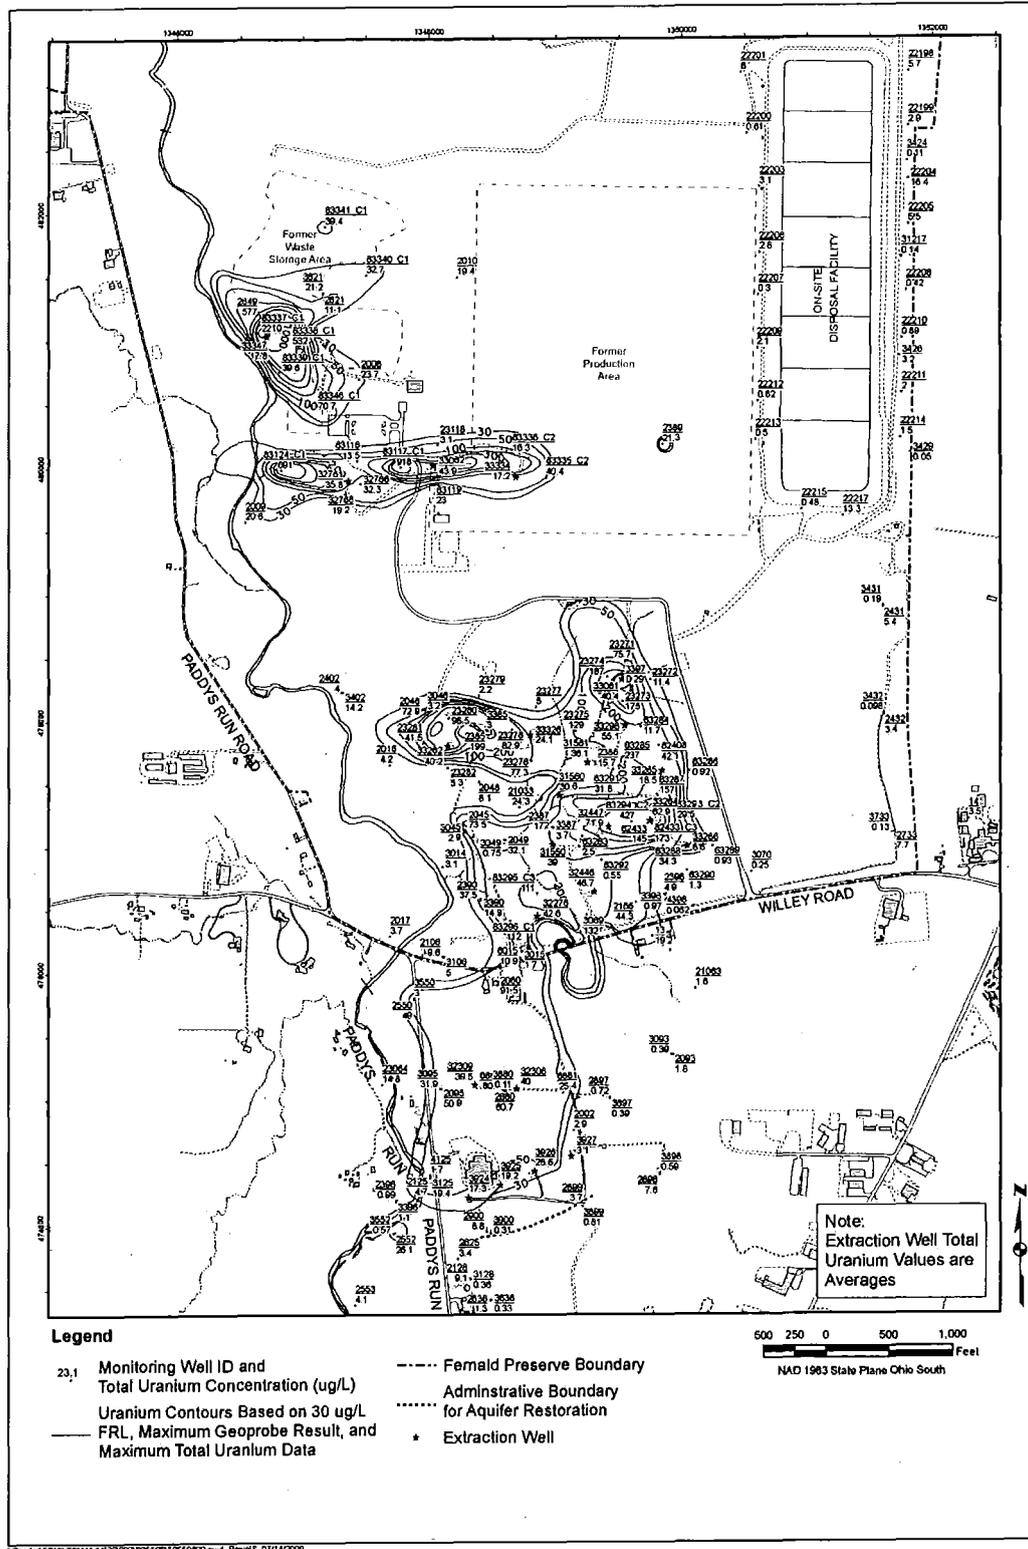


Figure 3-2. Monitoring Well Data and Maximum Total Uranium Plume Through the Second Half of 2008

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

UNCONTROLLED IF PRINTED

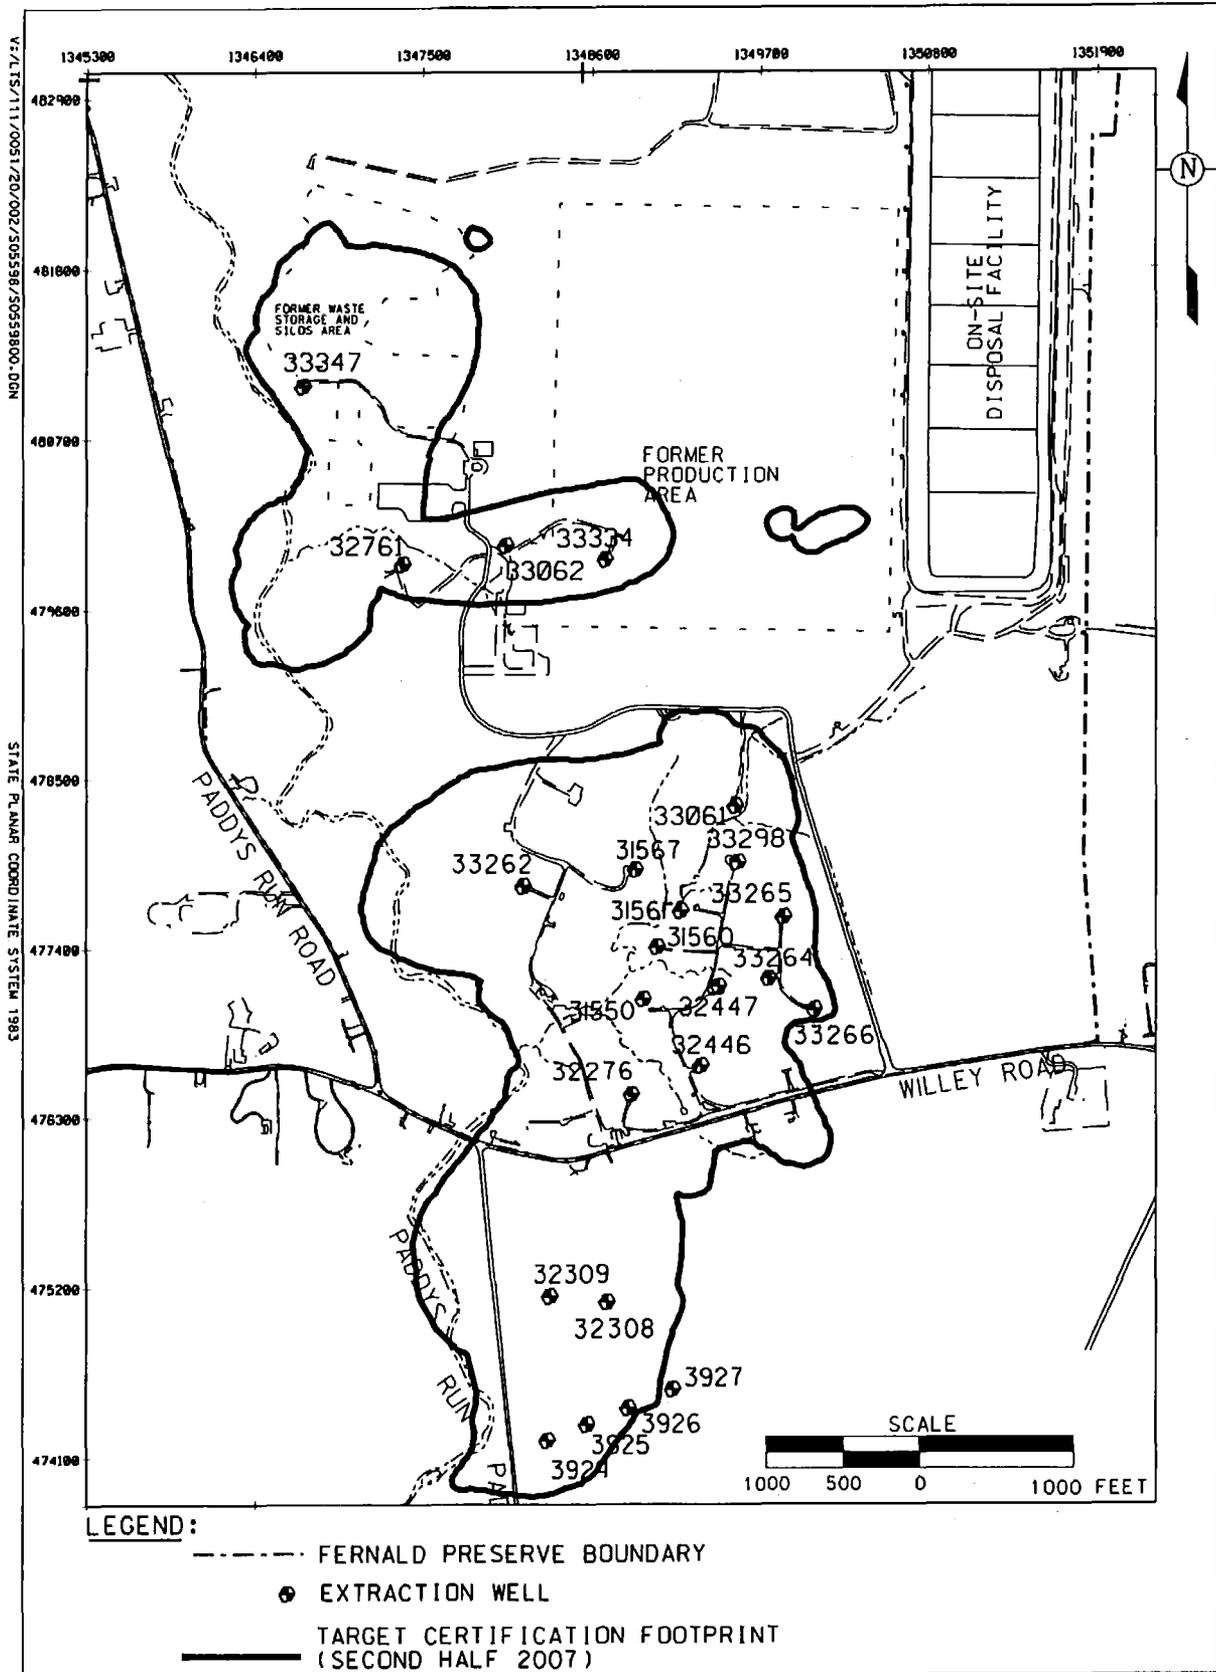


Figure 3-3. Extraction Well Locations

## UNCONTROLLED IF PRINTED

Pumping groundwater from the aquifer prior to the start of the actual groundwater remediation began in August 1993 with the startup of five extraction wells in the South Plume. The wells were installed and operated as part of a removal action to prevent further southern migration of the uranium plume while the remedial investigation of the plume was being completed and a remediation system was being designed.

The design of the aquifer remediation system has evolved via the issuance of several different design documents:

- *Feasibility Study Report for Operable Unit 5* (DOE 1995a).
- *Baseline Remedial Strategy Report, Remedial Design for Aquifer Restoration (Task 1)* (DOE 1997a).
- *Conceptual Design for Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas* (DOE 2000).
- *Design for Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas* (DOE 2001).
- *Design for Remediation of the Great Miami Aquifer, South Field (Phase II) Module* (DOE 2002b).
- *Waste Storage Area Phase II Design Report* (DOE 2005c) and the *Addendum to the Waste Storage Area (Phase II) Design Report* (2005a).

Summaries of how the aquifer remediation system has evolved through the issuance of each of these design documents can be found in previous years' IEMPs.

A test was conducted in 2005 to gauge seasonal flow of water in the storm sewer outfall ditch (SSOD) and to determine if recharge to the Great Miami Aquifer through the SSOD at a rate of 500 gallons per minute (gpm) was feasible (DOE 2005c). As reported in the *Groundwater Remedy Evaluation and Field Verification Plan* (DOE 2004), infiltration through the SSOD at a rate of 500 gpm was predicted to decrease the cleanup time by 1 year. The study concluded, though, that the operation would not be cost effective. Subsequent discussions with EPA and OEPA in 2006 led to an agreement to proceed with a scaled-down version of the operation. Clean groundwater is being pumped into the SSOD to supplement natural storm water runoff in an attempt to accelerate remediation of the South Plume. Three existing wells on the east side of the site are being utilized to deliver as much clean groundwater as is needed to maintain a flow of approximately 500 gpm into the SSOD. This supplemental pumping will continue until the existing wells, pumps, or motors are no longer serviceable. At that time, the operation will be suspended, pending a determination that the remedy is benefiting from the operation.

### 3.4.2.2 The Modular Approach to Aquifer Restoration

Restoration of the Great Miami Aquifer is being accomplished by operating 23 extraction wells in three area-specific groundwater restoration modules (South Plume Module, South Field Module, and Waste Storage Area Module) and a centralized water treatment facility (Figure 3-1). Figure 3-3 shows the locations of the extraction wells that these modules comprise.

## **UNCONTROLLED IF PRINTED**

### South Plume Module

Six extraction wells (3924, 3925, 3926, 3927, 32308, and 32309).

### South Field Module

Thirteen extraction wells (31550, 31560, 31561, 32276, 32446, 32447, 33061, 33262, 33264, 33265, 33266, 33298, and 33326).

### Waste Storage Area Module

Four extraction wells (32761, 33062, 33334, and 33347).

For monitoring purposes, the aquifer is divided into five zones referred to as “aquifer zones” (see Figure 3–4). These aquifer zones are used to evaluate the predicted performance (both individually and collectively) at the aquifer restoration modules. Aquifer Zones 1, 2, and 4 contain aquifer remediation modules. Aquifer Zone 0 (the fifth zone) is the area outside the other four aquifer zones.

The locations of the extraction wells that constitute the restoration modules are as follows:

- The South Plume Module is located in Aquifer Zone 4.
- The South Field Module (Phases I and II) is located in Aquifer Zone 2.
- The Waste Storage Area Module (Phases I and II) is located in Aquifer Zone 1.

Reverse particle-path modeling predicts a hydraulic capture zone that is larger than the actual dimension of the 30- $\mu\text{g/L}$  total uranium plume. The time-of-travel remediation footprint presented in this plan (see Figure 3–4) is based on the waste storage area (Phase II) design (2007 through 2023). This design remediation footprint was constructed using reverse, nonretarded, particle-path interpretations from the VAM3D Groundwater Model. The limits of most of the particle tracks are truncated because the particles reached the edge of the Zoom groundwater model domain.

#### 3.4.2.3 Well Selection Criteria

Geologic and hydrogeologic properties, predicted and actual groundwater flow, and contaminant distribution within the Great Miami Aquifer (before and during remediation) serve as input to the design and modification of the IEMP groundwater monitoring network. Field measurements and computer simulations were conducted to support initial design efforts.

All available information is reviewed to select appropriate monitoring well locations. The monitoring well locations for the IEMP are selected according to the following:

- Monitor within the projected capture zone of the groundwater restoration operation unless an operational concern (e.g., the proximity of the South Plume extraction wells to the PRRS plume) requires a monitoring location to be outside of the capture zone. **Note:** Pumping rates may change to optimize the operation through time; therefore, the capture zone may also change.
- Use existing monitoring wells in the remediation footprint of the aquifer and avoid installing new monitoring wells unless determined necessary based on operational knowledge, which will be used to help select new locations.

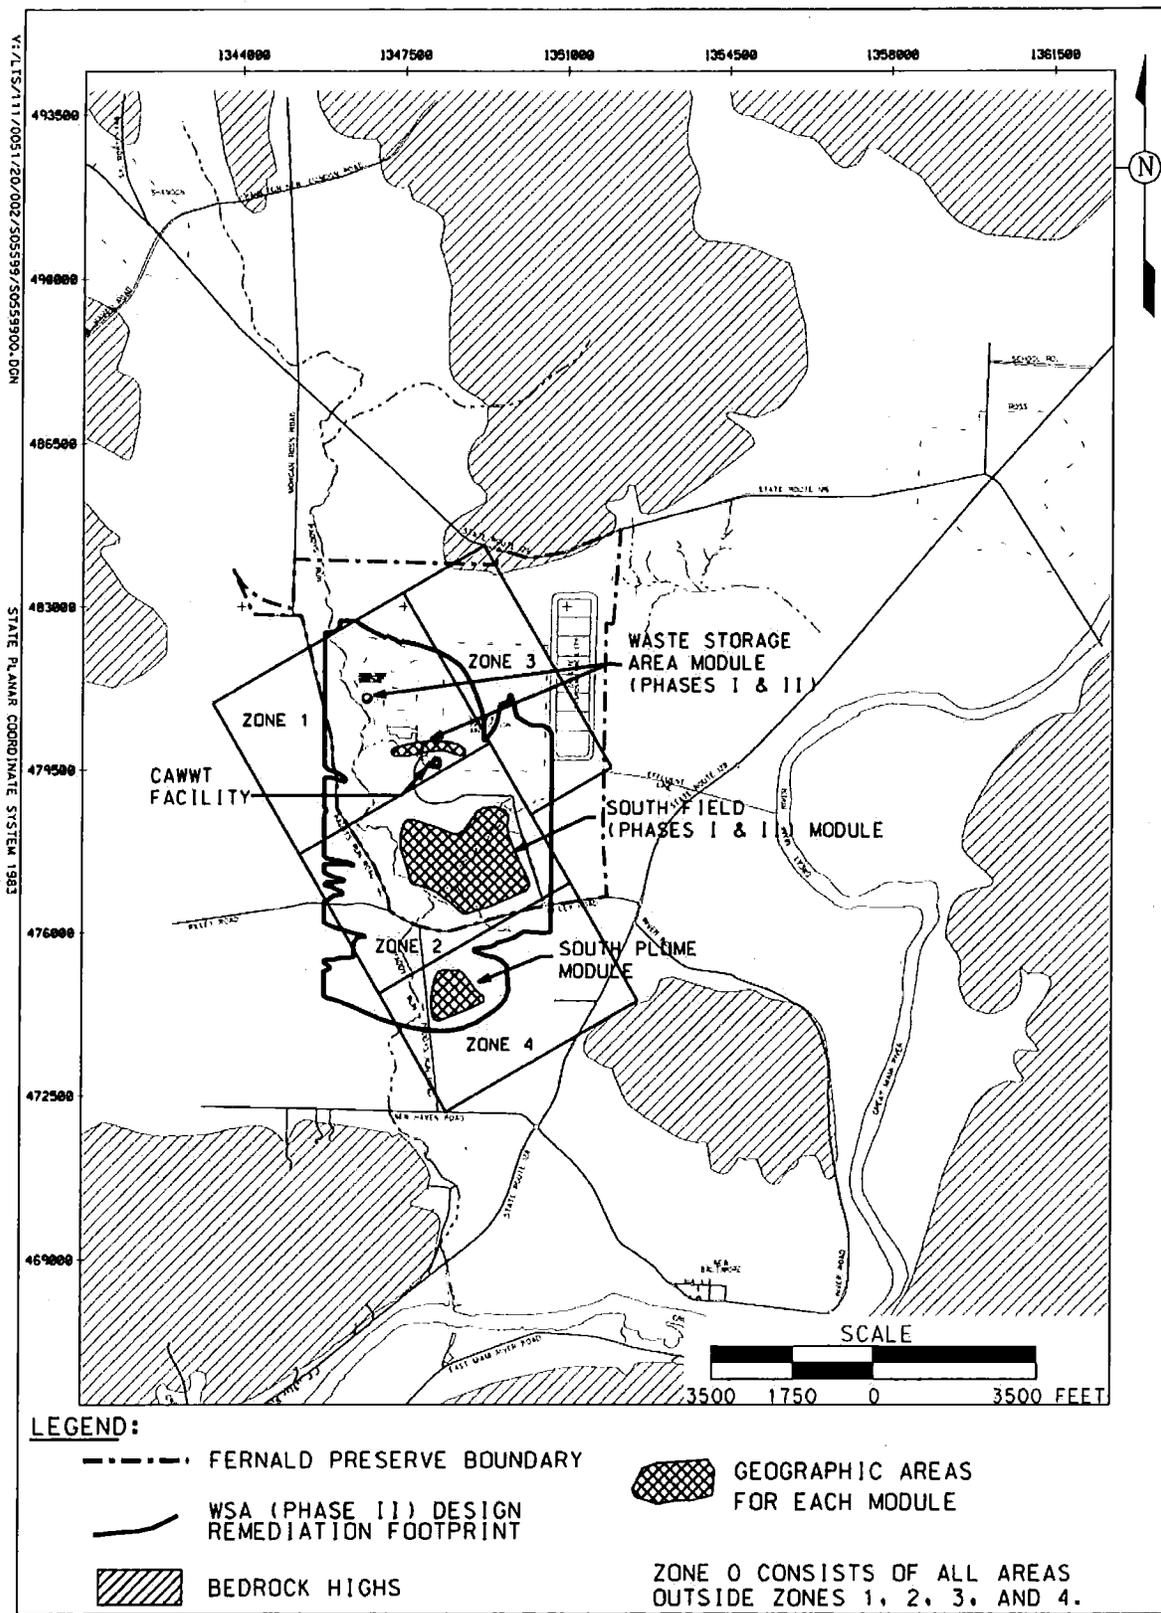


Figure 3-4. Groundwater Aquifer Zones and Design Remediation Footprint

## **UNCONTROLLED IF PRINTED**

- Provide adequate areal coverage across each remediation module area.
- Include monitoring wells that are needed to meet site-specific monitoring commitments.
- Select monitoring well locations that will provide data needed to determine how reasonable model predictions are over the long term.
- Select monitoring well locations in consideration of landowner concerns. In the off-property portion of the South Plume, landowner access concerns have, and will continue to have, a bearing on the location and number of monitoring wells in that area. Generally, location of monitoring wells is limited to peripheral areas along the edges of the farm fields. This monitoring well limitation is being addressed through supplemental use of direct-push sampling that can be conducted during the times of the year when the fields are not being used for crops.

Approximately 140 wells at the Fernald Preserve are being sampled as identified in the following subsections.

### 3.4.2.4 Constituent Selection Criteria

The groundwater sampling constituent selection criteria are based on evaluation of the groundwater data that have been collected since the inception of the IEMP. Rationale and information concerning constituent selection have been presented in previous versions of the IEMP. Following is an overview.

Restoration of the aquifer will be verified against FRLs. The FRLs for the aquifer have been established in the OU5 ROD for 50 COCs. Groundwater monitoring focuses on these 50 FRL constituents to assess the progress of the aquifer remedy.

A short list of constituents has been established for monitoring purposes and is based on where and whether constituents have had FRL exceedances in the aquifer since the inception of the IEMP. Constituents on the short list are monitored semiannually. Monitoring of constituents not on the short list will be addressed during Stage III (Certification/Attainment Monitoring), as necessary.

Table 3–2 summarizes groundwater sampling results since the inception of the IEMP program and contains the following information:

- Column 1 lists the 50 constituents for which FRLs were established in the OU5 ROD.
- Column 2 lists the FRL for each of the constituents.
- Column 3 identifies the basis for each FRL constituent (i.e., risk, ARAR, background, or detection limit) as defined in the OU5 Feasibility Study Report.
- Column 4 documents the number of samples that have been analyzed for each constituent since the start of IEMP sampling.
- Column 5 notes the number of samples that have had a concentration greater than the FRL for each constituent.

**UNCONTROLLED IF PRINTED**

*Table 3-2. Groundwater FRL Exceedances Based on Samples and Locations Since IEMP Inception (from August 1997 through 2007)*

(1) Constituent	(2) Groundwater FRL <sup>a</sup>	(3) Basis for FRL <sup>b</sup>	(4) No. of Samples <sup>c</sup>	(5) No. of Samples >FRL <sup>c,d</sup>	(6) Percent of Samples >FRL	(7) Zones with FRL Exceedances (No. of Wells with exceedances in each aquifer zone) <sup>c,d,e</sup>	(8) Range above FRL <sup>c,d,e</sup>
Uranium, Total	30 µg/L	A	4986	1286	25.79%	1(19) 2(38) 3(3) 4(16)	30.13 J/1620 J
Zinc	0.021 mg/L	B	1337	82	6.13%	0(10) 1(5) 2(14) 3(5) 4(2)	0.0212 NV/13.6 -
Manganese	0.90 mg/L	B	1585	110	6.94%	0(6) 1(11) 2(10) 3(5) 4(4)	0.916 -/105 J
Nickel	0.10 mg/L	A	1407	20	1.42%	0(1) 1(1) 2(7) 3(1)	0.101 -/1.54 -
Technetium-99	94 pCi/L	R*	1587	45	2.84%	1(5)	101.08 -/1352.266 J
Nitrate <sup>f</sup>	11 mg/L	B	1959	51	2.60%	1(8) 2(1) <sup>g</sup>	11.4 -/331 NV
Lead	0.015 mg/L	A	1346	13	0.97%	0(2) 1(2) 2(4) 3(2)	0.0157 -/0.201 -
Arsenic	0.050 mg/L	A	1564	14	0.90%	0(1) 1(1) 2(1) 4(4)	0.051 -/0.125 -
Molybdenum	0.10 mg/L	A	871	14	1.61%	1(1)	0.207 -/0.69 -
Boron	0.33 mg/L	R	2142	15	0.70%	2(2)	0.331 -/1.16 -
Antimony	0.0060 mg/L	A	1347	19	1.41%	0(9) 1(1) 2(6) 4(2)	0.00601 -/0.0196 J
Trichloroethene	0.0050 mg/L	A	1418	16	1.13%	0(1) 1(3) 4(1)	0.0207 -/0.120 -
Carbon disulfide	0.0055 mg/L	A	1029	6	0.58%	0(1) <sup>h</sup> 1(3) 2(1) <sup>h</sup>	0.006 -/0.014 -
Fluoride	4 mg/L	A	1567	4	0.26%	0(2) 1(1) 3(1)	5.3 -/12.3 -
Vanadium	0.038 mg/L	R	951	1	0.11%	0(1)	0.0664 J <sup>i</sup>
1,1-Dichloroethane	0.28 mg/L	A	86	0	0%	NA	NA
1,1-Dichloroethene	0.0070 mg/L	A	584	0	0%	NA	NA
1,2-Dichloroethane	0.0050 mg/L	A	704	0	0%	NA	NA
2,3,7,8-Tetrachlorodibenzo- <i>p</i> - dioxin	0.000010 mg/L	D	19	0	0%	NA	NA
4-Methylphenol	0.029 mg/L	R	86	0	0%	NA	NA
4-Nitrophenol	0.32 mg/L	R	86	0	0%	NA	NA
alpha-Chlordane	0.0020 mg/L	A	791	0	0%	NA	NA
Aroclor-1254	0.00020 mg/L	D	86	0	0%	NA	NA
Barium	2.0 mg/L	A	194	0	0%	NA	NA
Benzene	0.0050 mg/L	A	967	0	0%	NA	NA
Beryllium	0.0040 mg/L	A	877	0	0%	NA	NA
Bis(2-chloroisopropyl) ether	0.0050 mg/L	D	478	0	0%	NA	NA
Bis(2-ethylhexyl) phthalate	0.0060 mg/L	A	86	0 <sup>j</sup>	0%	NA <sup>j</sup>	NA
Bromodichloromethane	0.10 mg/L	A	790	0	0%	NA	NA
Bromomethane	0.0021 mg/L	R	86	0	0%	NA	NA
Cadmium	0.014 mg/L	B	994	0	0%	NA	NA

**UNCONTROLLED IF PRINTED**

Table 3-2 (continued). Groundwater FRL Exceedances Based on Samples and Locations Since IEMP Inception (from August 1997 through 2007)

(1) Constituents	(2) Groundwater FRL <sup>a</sup>	(3) Basis for FRL <sup>b</sup>	(4) No. of Samples <sup>c</sup>	(5) No. of Samples >FRL <sup>c,d</sup>	(6) Percent of Samples >FRL	(7) Zones with FRL Exceedances (No. of Wells with exceedances in each aquifer zone) <sup>c,d,e</sup>	(8) Range above FRL <sup>c,d,e</sup>
Carbazole	0.011 mg/L	R	459	0	0%	NA	NA
Chloroethane	0.0010 mg/L	D	86	0	0%	NA	NA
Chloroform	0.10 mg/L	A	86	0	0%	NA	NA
Chromium VI	0.022 mg/L	R	16	0	0%	NA	NA
Cobalt	0.17 mg/L	R	878	0	0%	NA	NA
Copper	1.3 mg/L	A	86	0	0%	NA	NA
Mercury	0.0020 mg/L	A	2131	0 <sup>k</sup>	0%	NA	NA
Methylene chloride	0.0050 mg/L	A	84	0	0%	NA	NA
Neptunium-237	1.0 pCi/L	R*	1606	0	0%	NA	NA
Octachlorodibenzo- <i>p</i> -dioxin	1.0E-7 mg/L	D	19	0	0%	NA	NA
Radium-226	20 pCi/L	A	194	0	0%	NA	NA
Radium-228	20 pCi/L	A	86	0	0%	NA	NA
Selenium	0.050 mg/L	A	991	0	0%	NA	NA
Silver	0.050 mg/L	A	856	0	0%	NA	NA
Strontium-90	8.0 pCi/L	A	1394	0	0%	NA	NA
Thorium-228	4.0 pCi/L	R*	992	0	0%	NA	NA
Thorium-230	15 pCi/L	R*	86	0	0%	NA	NA
Thorium-232	1.2 pCi/L	R*	902	0	0%	NA	NA
Vinyl chloride	0.0020 mg/L	A	790	0	0%	NA	NA

<sup>a</sup>From OU5 ROD, Table 9-4.

<sup>b</sup>From OU5 Feasibility Study, Table 2-16:

A = ARAR-based

B = Based on 95th percentile background concentrations

D = Based on lowest achievable detection limit

R = Risk-Based Preliminary Remediation Goal (PRG)

R\* = Risk-Based Preliminary Remediation Level includes the radionuclide risk-based PRG plus its 95th percentile background concentration.

<sup>c</sup>Based on filtered and unfiltered samples from the August 1997 through 2007 IEMP groundwater data.

<sup>d</sup>Sample results having a -, J, or NV qualifier were used:

-\ = result is confident as reported

J = result is quantitatively estimated

NV = result is not validated

<sup>e</sup>NA = not applicable

<sup>f</sup>Nitrate/nitrite results are evaluated with respect to the nitrate FRL.

<sup>g</sup>Since the IEMP inception, there has been only one nitrate/nitrite exceedance at well 2017 (in 1998) (refer to Figure A-12).

<sup>h</sup>Since the IEMP inception, there has been one isolated exceedance for carbon disulfide at two locations (refer to Figure A-5).

<sup>i</sup>Since the IEMP inception, there has been only one vanadium exceedance at well 2426 (in 1998) (refer to Figure A-16).

<sup>j</sup>Of the 86 samples analyzed for bis(2-ethylhexyl)phthalate, a common laboratory contamination, five had results above the FRL. The above-FRL results are all considered suspect due to laboratory analysis issues, laboratory blank and field blank contamination, or field duplicate results being nondetected. The five exceedances are as follows: 0.014J mg/L, well 2398 and 0.010J mg/L, well 3390 in Aquifer Zone 2; 0.016J mg/L, well 2109 in Aquifer Zone 3; and 0.008J mg/L, well 2125 and 0.13J mg/L, well 3095 in Aquifer Zone 4.

<sup>k</sup>The mercury exceedance is suspect, due to negative matrix spike/matrix spike duplicate (MS/MSD) recoveries. In fact, the MS/MSD (i.e., spiked samples) results were both much less than the original sample result.

## **UNCONTROLLED IF PRINTED**

- Column 6 notes the percent of the samples for each constituent that have had a concentration greater than the FRL.
- Column 7 identifies the zones where FRL exceedances have been observed and the number of wells in each zone that had exceedances.
- Column 8 shows the above-FRL concentration range for each constituent that had FRL exceedances.

As shown in Table 3-2, 35 of the 50 groundwater FRL constituents have not had an FRL exceedance. Excluding uranium, the groundwater FRL constituents that did have recorded exceedances were from a limited number of wells. The spatial distribution of these wells indicates that many of the non-uranium FRL exceedances are not associated with a plume.

Groundwater monitoring focuses on the short list of 15 groundwater FRL constituents. The following monitoring will be conducted:

1. Uranium, which is the primary COC and has the greatest number of wells with exceedances, will be monitored semiannually.
2. Constituents that have FRL exceedances in multiple zones (i.e., antimony, arsenic, fluoride, lead, manganese, nickel, and zinc) will be monitored semiannually as follows:
  - At a minimum, all constituents will be monitored at downgradient wells including existing property boundary/OSDF wells along the eastern perimeter of the site and those wells along the eastern/southern boundary of the South Plume. The area identified as Property/Plume Boundary on Figure 3-5 shows the configuration of this monitoring network, which lies in Zones 0, 2, 3, and 4, and for the most part outside of the restoration footprint. Monitoring at these locations will document that above-FRL contaminants are not migrating beyond the expected capture zone.

**Note:** Carbon disulfide and nitrate/nitrite are considered to have legitimate exceedances in only one zone (Zone 1) and are discussed below (refer to item 3).
  - In addition to being monitored in Zones 0, 2, 3, and 4, constituents that have exceedances in multiple zones were evaluated with respect to Zone 1 to determine if monitoring is conducted to address consistent/recent exceedances in this area. Monitoring will be addressed in this zone, in addition to the monitoring at the Property/Plume Boundary, to ensure that the constituents exhibiting consistent/recent exceedances are being monitored near potential sources. Manganese in Zone 1 appears to have consistent/recent exceedances. Therefore, it will be monitored in this zone at wells that have exceedances. In addition to manganese, nickel had an exceedance in 2002. Nickel will also be monitored in Zone 1. Refer to the area identified as Former Waste Storage Area on Figure 3-5 for the locations to be monitored in Zone 1.
3. Constituents that have FRL exceedances in only one zone will be monitored semiannually solely in that zone. The monitoring will consist of the following: carbon disulfide, molybdenum, nitrate/nitrite, technetium-99, and trichloroethene in Zone 1 (waste storage area), and boron in Zone 2 (South Field). Specific monitoring locations will be based on the wells that have exceedances.



## **UNCONTROLLED IF PRINTED**

**Note:** Carbon disulfide has exceedances primarily in Zone 1. The two wells that have exceedances outside Zone 1 were Property Boundary wells 2432 and 3069. These wells were sampled quarterly, and exceedances were slightly above the FRL (6 µg/L with respect to the 5.5 µg/L FRL). For well 2432, there have been no additional exceedances since the occurrence during first quarter 1999. With regard to the one exceedance for well 3069 that occurred during fourth quarter 2001, a duplicate result during the sampling event was below the FRL. No additional exceedances for carbon disulfide have occurred at well 3069 since 2001.

Nitrate/nitrite has exceedances primarily in Zone 1. One well (2017), which is located in Zone 2, had a one-time exceedance in 1998.

4. Vanadium has had a one-time exceedance in 1998 during quarterly sampling at one well (2426). This constituent will be monitored less than semiannually due to the lack of exceedances. Monitoring for this constituent is addressed in Section A.3.2. Vanadium will be addressed during Stage III (Certification/Attainment Monitoring).

Based on the above four criteria, 13 non-uranium groundwater FRL constituents are on the short list and are monitored semiannually (Table 3-3).

### **3.5 Design of the IEMP Groundwater Monitoring Program**

Monitoring focuses on IEMP data and specifically calls for semiannual monitoring of groundwater FRL constituents with exceedances. A list of IEMP groundwater monitoring wells is provided in Table 3-4. Table 3-5 provides a list of the monitoring requirements.

The monitoring strategy and technical approach will be revised as necessary in subsequent revisions to the IEMP to encompass operational changes over the life of the remedy. A startup monitoring, project-specific plan, or variance to an existing plan will be developed to supplement the IEMP each time a new extraction well begins to operate for the first time.

#### Annual Well Field Shutdown

A 1- to 2-week shutdown of all extraction wells (with the exception of the four leading-edge South Plume recovery wells) will be conducted each year when water levels in the aquifer are seasonally high. Water levels in the aquifer are seasonally at their highest in late spring/early summer. Shutting down the extraction wells during this time period will allow water levels in the aquifer to rise as high as possible, resulting in the saturation of as much of the aquifer sediments as possible. The well field shutdown period will also be utilized to conduct well field and water treatment system maintenance.

Uranium concentrations will be measured at six monitoring wells (2045, 2046, 23274, 83124, 83294, and 83337) to support the shutdown activity. First-half 2008 total uranium measurements will serve as pre-shutdown concentrations for the six wells. The six wells will be sampled just prior to restarting the extraction wells in early May. Type 8 wells will be sampled in both Channel 1 and Channel 2.

## UNCONTROLLED IF PRINTED

*Table 3–3. IEMP Constituents with FRL Exceedances, Location of Exceedances, and Revised Monitoring Program*

<b>Parameter</b>	<b>Aquifer Zones with Exceedances</b>	<b>Monitoring Program</b>
Antimony	Multiple Zones	Property/Plume Boundary
Arsenic	Multiple Zones	Property/Plume Boundary
Boron	Aquifer Zone 2 (South Field)	South Field
Carbon disulfide	Aquifer Zone 1 (Waste Storage Area)	Waste Storage Area
Fluoride	Multiple Zones	Property/Plume Boundary
Lead	Multiple Zones	Property/Plume Boundary
Manganese	Multiple Zones <sup>a</sup>	Property/Plume Boundary, Waste Storage Area
Molybdenum	Aquifer Zone 1 (Waste Storage Area)	Waste Storage Area
Nickel	Multiple Zones	Property/Plume Boundary, Waste Storage Area
Nitrate/Nitrite	Aquifer Zone 1 (Waste Storage Area)	Waste Storage Area
Technetium-99	Aquifer Zone 1 (Waste Storage Area)	Waste Storage Area
Trichloroethene	Aquifer Zone 1 (Waste Storage Area)	Waste Storage Area
Zinc	Multiple Zones	Property/Plume Boundary

<sup>a</sup>Manganese has consistent/recent exceedances in Zone 1; therefore, this constituent will be monitored in the waste storage area and along the Property/Plume Boundary.

*Table 3–4. List of IEMP Groundwater Monitoring Wells*

<b>Number<sup>a</sup></b>	<b>Total Uranium Monitoring</b>	<b>Property/Plume Boundary Monitoring</b>			<b>Waste Storage Area Monitoring: FRL Exceedances</b>	<b>South Field Monitoring: FRL Exceedances</b>
		<b>Monitor FRL Exceedances</b>	<b>Monitor OSDF Constituents<sup>b</sup></b>	<b>Monitor PRRS Constituents<sup>c</sup></b>		
1	13					
2	14					
3	2002					
4	2008					
5	2009					
6	2010				2010	
7	2014					
8	2016					
9	2017					
10	2045					2045
11	2046					
12	2048					
13	2049					2049
14	2060 (12)					
15	2093	2093				
16	2095					
17	2106					
18	2125					
19	2128	2128		2128		
20	2166					
21	2385					
22	2386					
23	2387					

**UNCONTROLLED IF PRINTED**

Table 3-4 (continued). List of IEMP Groundwater Monitoring Wells

Number <sup>a</sup>	Total Uranium Monitoring	Property/Plume Boundary Monitoring			Waste Storage Area Monitoring: FRL Exceedances	South Field Monitoring: FRL Exceedances
		Monitor FRL Exceedances	Monitor OSDF Constituents <sup>b</sup>	Monitor PRRS Constituents <sup>c</sup>		
24	2389					
25	2390					
26	2396					
27	2397					
28	2398	2398				
29	2402					
30	2431	2431				
31	2432	2432				
32	2550					
33	2552					
34	2553					
35	2625	2625		2625		
36	2636	2636		2636		
37	2649				2649	
38	2733	2733				
39	2821				2821	
401	2880					
41	2897					
42	2898	2898		2898		
43	2899	2899		2899		
44	2900	2900		2900		
45	3014					
46	3015					
47	3045					
48	3046					
49	3049					
50	3069					
51	3070	3070				
52	3093	3093				
53	3095					
54	3106					
55	3125					
56	3128	3128		3128		
57	3385					
58	3387					
59	3390					
60	3396					
61	3397					
62	3398	3398				
63	3402					
64	3424	3424				
65	3426	3426				
66	3429	3429				
67	3431	3431				
689	3432	3432				
69	3550					
70	3552					

**UNCONTROLLED IF PRINTED**

Table 3-4 (continued). List of IEMP Groundwater Monitoring Wells

Number <sup>a</sup>	Total Uranium Monitoring	Property/Plume Boundary Monitoring			Waste Storage Area Monitoring: FRL Exceedances	South Field Monitoring: FRL Exceedances
		Monitor FRL Exceedances	Monitor OSDF Constituents <sup>b</sup>	Monitor PRRS Constituents <sup>c</sup>		
71	3636	3636		3636		
72	3733	3733				
73	3821				3821	
74	3880					
75	3897					
76	3898	3898		3898		
77	3899	3899		3899		
789	3900	3900		3900		
79	4125					
80	4398	4398				
81	6015					
82	6880					
83	6881					
84	21033					
85	21063	21063				
86	21192					
87	22198	22198	22198			
88	22199	22199	22199			
89	22204	22204	22204			
90	22205	22205	22205			
91	22208	22208	22208			
92	22210	22210	22210			
93	22211	22211	22211			
94	22214	22214	22214			
95	23064					
96	23118					
97	23271					
98	23272					
99	23273					
100	23274					
101	23275					
102	23276					
103	23277					
104	23278					
105	23279					
106	23280					
107	23281					
108	23282					
109	31217	31217				
110	32766					
111	32768					
112	62408					
113	62433					
114	63116					
115	63119					
116	63283					
117	63284					

**UNCONTROLLED IF PRINTED**

Table 3-4 (continued). List of IEMP Groundwater Monitoring Wells

Number <sup>a</sup>	Total Uranium Monitoring	Property/Plume Boundary Monitoring			Waste Storage Area Monitoring: FRL Exceedances	South Field Monitoring: FRL Exceedances
		Monitor FRL Exceedances	Monitor OSDF Constituents <sup>b</sup>	Monitor PRRS Constituents <sup>c</sup>		
118	63285					
1190	63286					
120	63287					
121	63288					
122	63289					
123	63290					
124	63291					
125	63292					
126	82433					
127	83117					
128	83124					
129	83293					
130	83294					
131	83295					
132	83296					
133	83335					
134	83336					
135	83337				83337 <sup>d</sup>	
136	83338				83338 <sup>d</sup>	
137	83339				83339 <sup>d</sup>	
138	83340				83340 <sup>d</sup>	
139	83341				83341 <sup>d</sup>	
140	83346				83346 <sup>d</sup>	

<sup>a</sup>The number in column 1 is used to identify the number of wells in the program. The individual monitoring well identification numbers are provided in columns 2-7 as appropriate.

<sup>b</sup>List of total uranium monitoring wells and Property/Plume Boundary monitoring wells that overlap with OSDF monitoring wells.

<sup>c</sup>List of total uranium monitoring wells and Property/Plume Boundary monitoring wells that overlap with PRRS monitoring wells.

<sup>d</sup>Volatile organic compounds are not sampled in Type 8 wells.

**UNCONTROLLED IF PRINTED**

Table 3-5. IEMP Monitoring Requirements<sup>a</sup>

**1. Total Uranium**

**2. Waste Storage Area**

General Chemistry	Inorganic	Radionuclides and Uranium	Organic
Nitrate/Nitrite	Manganese Molybdenum Nickel	Technetium-99 Total Uranium <sup>b</sup>	Carbon Disulfide Trichloroethene

**3. South Field**

General Chemistry	Inorganic	Radionuclides and Uranium	Organic
NA <sup>c</sup>	Boron	Total Uranium <sup>b</sup>	NA <sup>c</sup>

**4. Property/Plume Boundary for FRL Exceedances**

General Chemistry	Inorganic	Radionuclides and Uranium	Organic
Fluoride	Antimony Arsenic Lead Manganese Nickel Zinc	Total Uranium <sup>b</sup>	NA <sup>c</sup>

**5. Property/Plume Boundary for PRRS**

(These wells are also monitored for Property/Plume Boundary for FRL exceedances constituents)

General Chemistry	Inorganic	Radionuclides and Uranium	Organic
Phosphorous	Arsenic <sup>d</sup> Potassium Sodium	NA <sup>c</sup>	Benzene Ethylbenzene Isopropylbenzene Toluene Total xylenes

<sup>a</sup>Monitoring will be conducted semiannually.

<sup>b</sup>Total uranium is monitored as part of the sitewide uranium monitoring.

<sup>c</sup>NA = not applicable

<sup>d</sup>Arsenic is also monitored with respect to FRL exceedances as part of the Property/Plume Boundary.

The extraction wells will be sampled just prior to shutdown, and once a week during the shutdown. Wells will be operated for approximately 10 minutes prior to the collection of a groundwater sample. The extraction wells will be sampled daily for approximately 4 days following restart of the extraction wells.

During the annual shutdowns, water level measurements will be recorded at selected locations using downhole pressure transducers. The transducers will be set to record a water level every hour on the top of the hour. Selected locations will be identified in the annual SER along with the collected data.

### **3.6 Medium-Specific Plan for Groundwater Monitoring**

This section serves as the medium-specific plan for implementation of the sampling, analysis, and data-management activities associated with the sitewide groundwater remedy performance monitoring program. The program expectations and design presented in Section 3.4 were used as the framework for developing the monitoring approach presented in this section. The activities described in this medium-specific plan have been designed to provide groundwater data of sufficient quality to meet the program expectations as defined in Section 3.4.1. All sampling procedures and analytical protocols described or referenced in this IEMP are consistent with the requirements of the FPQAPP as the primary document that describes procedures and protocols for monitoring the Fernald Preserve.

Subsequent sections of this medium-specific plan define the following:

- Project organization and associated responsibilities
- Sampling program
- Change control
- Health and safety
- Data management
- Project quality assurance

#### **3.6.1 Groundwater Sampling Program**

The information derived from the groundwater monitoring program should produce a clear understanding of groundwater quality in the Great Miami Aquifer. The groundwater sampling process will be controlled so that collected samples are representative of groundwater quality. All procedures for monitoring well development, sample collection, and shipment will be performed in accordance with the FPQAPP.

##### **3.6.1.1 Total Uranium Monitoring Project**

Approximately 140 monitoring wells will be sampled semiannually for total uranium. Approximately 50 of these wells will be sampled for additional constituents as described in Sections 3.6.2.2 through 3.6.2.4. A list of the wells to be sampled for only total uranium is provided in Table 3-6 and shown in Figure 3-6. The wells extend across all aquifer zones and provide monitoring coverage in all restoration module areas. Figure 3-6 shows the locations of the monitoring wells.

## UNCONTROLLED IF PRINTED

Table 3-6. List of Groundwater Wells to Be Sampled for Total Uranium Only

---

13	3046	23278
14	3049	23279
2002	3069	23280
2008	3095	23281
2009	3106	23282
2014	3125	32766
2016	3385	32768
2017	3387	62408
2046	3390	62433
2048	3396	63116
2060 (12)	3397	63119
2095	3402	63283
2106	3550	63284
2125	3552	63285
2166	3880	63286
2385	3897	63287
2386	4125	63288
2387	6015	63289
2389	6880	63290
2390	6881	63291
2396	21033	63292
2397	21192	82433
2402	23064	83117
2550	23118	83124
2552	23271	83293
2553	23272	83294
2880	23273	83295
2897	23274	83296
3014	23275	83335
3015	23276	83336
3045	23277	

---

**Note:** Six of the seven available channels in a Type 8 well (also known as a continuous multichannel tubing [CMT] well) are available for water quality sampling. The channel completed in the plume interval with the highest measured uranium concentration will be sampled every 6 months. The other five channels will be sampled once a year to document any changes in the plume concentration profile.



**UNCONTROLLED IF PRINTED**

This semiannual total uranium sampling activity will address the following remediation sampling needs:

- The need to interpret changes to the total uranium plume over time due to remediation activities.
- The need to interpret the extent of capture in relation to the total uranium plume.
- The need to interpret the effectiveness of the aquifer remedy in maintaining a hydraulic barrier that limits further southern migration of the total uranium plume, and the need to document the area of uranium contamination (above 30 µg/L) south of the Administrative Boundary.
- Continued tracking of uranium concentrations at three off-property private monitoring wells.

Up to 27 locations will also be sampled each year for total uranium using a direct-push sampling tool. Direct-push sampling will provide vertical profile concentration data. The vertical profile data will be used to supplement the fixed monitoring well data in order to produce more robust plume interpretations. Exact locations for the direct-push sampling will be selected each year and identified in the SER. The selection process is based on monitoring well data, modeling needs, and data-interpretation needs.

Three private wells (2060 [12], 13, and 14) will also be sampled for total uranium. Figure 3–6 shows the location of these three wells (private well 12 is also identified as monitoring well 2060). Continuing to add to the historical database at these three private-well locations is beneficial for facilitating discussions with area stakeholders on the progress of the aquifer restoration. The three locations are immediately downgradient of the Fernald Preserve property boundary.

### 3.6.1.2 South Field Monitoring Project

The South Field area is located in Aquifer Zone 2 (refer to Figure 3–4). Thirteen extraction wells (South Field [Phases I and II] Module) are operating in the South Field.

In addition to the monitoring wells being sampled in the South Field for total uranium only (refer to Section 3.6.2.1), two monitoring wells (2045 and 2049) will be sampled semiannually for boron as well as total uranium. The rationale for the selection of these wells and this additional constituent is presented in Section 3.4. Figure 3–5 shows the locations of these two wells. Following is the monitoring table:

**South Field Monitoring Project Table  
Semiannual Sampling Frequency**

<b>General Chemistry</b>	<b>Inorganic</b>	<b>Radionuclides and Uranium</b>	<b>Organic</b>
NA	Boron	Total Uranium	NA

**UNCONTROLLED IF PRINTED**

Direct-push sampling will be conducted annually at five locations (12368, 12369, 12370, 12372, and 12373) along and south of Willey Road. These 5 locations are included in the 27 locations sampled yearly using direct-push technology. Figure 3-7 shows these locations. This annual direct-push sampling will be used to help track remediation progress. At each direct-push location, a groundwater sample will be collected at 10-foot intervals beneath the water table and analyzed for only uranium until it can be verified that the entire thickness of the 30- $\mu\text{g/L}$  total uranium plume has been sampled.

**3.6.1.3 Waste Storage Area Monitoring Project**

The waste storage area is located in Aquifer Zone 1 (refer to Figure 3-4). Four extraction wells (32761, 33062, 33347, and 33334) are operating in the waste storage area. Figure 3-3 shows the locations of these four wells.

In addition to the monitoring wells being sampled in the waste storage area for total uranium only (refer to Section 3.6.2.1), the 10 wells listed below will be sampled semiannually (refer to Figure 3-5 for the locations of these 10 wells).

**Monitoring Wells to Be Monitored Semiannually  
In the Waste Storage Area**

2010	2649	2821	3821	83337
83338	83339	83340	83341	83346

The four Type 2 and Type 3 wells will be sampled semiannually for the constituents listed in the table below. The rationale for the selection of these wells and these constituents is presented in Section 3.4. The six Type 8 wells will also be sampled for the constituents listed in the table below, with the exception of the organics. Type 8 wells will not be used to sample for organics. The six Type 8 wells listed above for the waste storage area are three-channel CMT wells. All three channels will be sampled semiannually.

**Waste Storage Area Monitoring Project Table  
Semiannual Sampling Frequency**

<b>General Chemistry</b>	<b>Inorganic</b>	<b>Radionuclides and Uranium</b>	<b>Organic</b>
Nitrate/Nitrite	Manganese Molybdenum Nickel	Technetium-99 Total Uranium	Carbon Disulfide Trichloroethene

As explained in Section 3.6.2.7, filtering of groundwater samples at monitoring wells may take place on a case-by-case basis if deemed appropriate. Filtering of groundwater samples using a 0.45-micrometer ( $\mu\text{m}$ ) filter is deemed appropriate for monitoring well 2010 because the well has shown evidence of being biofouled in the past. A discussion of the biofouling problem at monitoring well 2010 is presented in the *Addendum to the Waste Storage Area (Phase II) Design Report* (DOE 2005a). An unfiltered sample will be collected for general chemical constituents, organic constituents, and total uranium. A second sample will be collected after filtering with a 0.45- $\mu\text{m}$  filter and analyzed for metals and radiological constituents, including total uranium.

UNCONTROLLED IF PRINTED

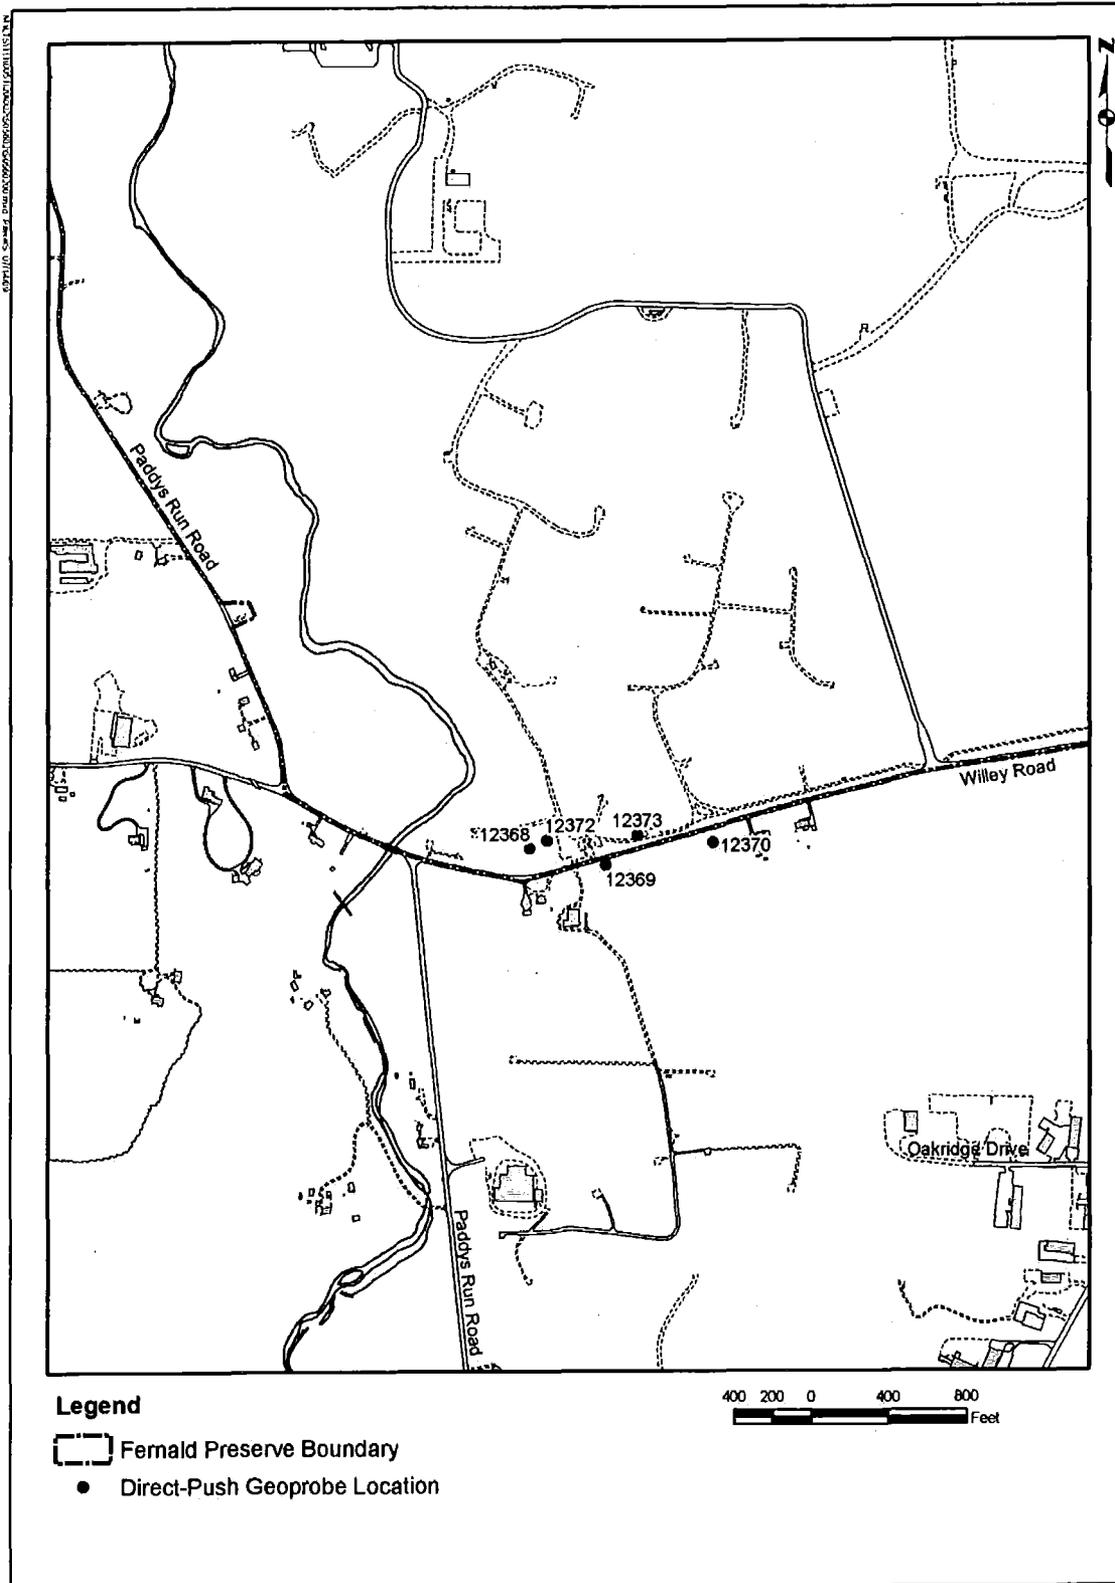


Figure 3-7. Direct Push Sampling Locations

## UNCONTROLLED IF PRINTED

Locations may also be sampled in the waste storage area, using a direct-push sampling tool. Direct-push sampling will provide vertical profile concentration data. The vertical profile data will be used to supplement the fixed monitoring well data to produce more robust plume interpretations. Direct-push locations in the waste storage area will be sampled for the waste storage area monitoring semiannual constituents listed below, excluding the organic constituents. Location numbers and collected data will be provided in each annual SER.

A direct-push sample will be collected prior to any filtering and will be analyzed for nitrate/nitrite. The remainder of the samples (manganese, molybdenum, nickel, total uranium, and technetium-99) will, at a minimum, be filtered through a 5- $\mu\text{m}$  filter.

If the turbidity of the 5- $\mu\text{m}$  filter direct-push sample is below 5 nephelometric turbidity units (NTUs), the remaining five constituents will be sampled. If the turbidity of the 5- $\mu\text{m}$  filtered direct-push sample is above 5 NTUs, the sample will be further filtered through a 0.45- $\mu\text{m}$  filter. Both the 5- $\mu\text{m}$  and the 0.45- $\mu\text{m}$  filtered sample will be analyzed for total uranium, and the four remaining constituents will be analyzed from the 0.45- $\mu\text{m}$  filtered sample only.

### 3.6.1.4 Property/Plume Boundary Monitoring Project

The focus of the Property/Plume Boundary Groundwater Monitoring project is to detect and assess potential changes in groundwater conditions along the eastern property boundary and downgradient of the leading edge of the 30- $\mu\text{g/L}$  total uranium plume south of the Fernald Preserve property.

Monitoring will be conducted along the property boundary and downgradient uranium plume boundary for FRL exceedances; the influence (or lack of influence) that pumping is having on the PRRS plume will be documented. Monitoring will also reduce redundancy with OSDF monitoring prescribed in the GWLMP.

#### Property/Plume Boundary Monitoring for FRL Exceedances

Twenty-five monitoring wells along the eastern property boundary and the leading edge of the off-site total uranium plume will be sampled semiannually (refer to the table that follows). Figure 3-5 shows the locations of the wells.

The 25 monitoring wells will be sampled semiannually for the constituents listed below. All of these constituents have had FRL exceedances. The rationale for the selection of these constituents and the monitoring schedule are presented in Section 3.4.

Eight of the 25 monitoring wells (22204, 22205, 22208, 22198, 22211, 22214, 22210, and 22199) are also sampled for OSDF constituents listed in the GWLMP.

**UNCONTROLLED IF PRINTED**

**Property/Plume Boundary Monitoring Wells  
to be Monitored for FRL Exceedances Only**

2093	3426	22204
2398	3429	22205
2431	3431	22208
2432	3432	22211
2733	3733	22214
3070	4398	22210
3093	21063	31217
3398	22198	
3424	22199	

**Property Plume Boundary Monitoring Table  
for FRL Exceedances, Semiannual Sampling Frequency**

<b>General Chemistry</b>	<b>Inorganic</b>	<b>Radionuclides and Uranium</b>	<b>Organic</b>
Fluoride	Antimony Arsenic Lead Manganese Nickel Zinc	Total Uranium	NA

**Property/Plume Boundary Monitoring for Paddys Run Road Site Constituents**

Groundwater is being pumped from the aquifer immediately north of the PRRS (extraction wells 3924, 3925, 3926, and 3927); it remains important to document the influence (of lack of influence) that the pumping has on the PRRS plume. Groundwater samples will be collected semiannually from 11 monitoring wells (refer to Figure 3-5).

The 11 wells are:

2128	2899	3898
2625	2900	3899
2636	3128	3900
2898	3636	

## UNCONTROLLED IF PRINTED

These 11 wells will be analyzed for PRRS constituents as well as for IEMP FRL exceedance constituents. The PRRS constituents listed below are the constituents to be monitored:

### Property Plume Boundary Monitoring Table for FRL Exceedances and Paddys Run Road Site Constituents Semiannual Sampling Frequency

General Chemistry	Inorganic	Radionuclides and Uranium	Organic
Fluoride Phosphorous	Antimony Arsenic Lead Manganese Nickel Potassium Sodium Zinc	Total Uranium	Benzene Ethylbenzene Isopropylbenzene Toluene Total Xylenes

If pumping rates of wells in the South Plume Module are increased above rates established in 1998 (maximum pumping rates listed in Table 5-1 of the OMMP under the objective of minimizing the impact to the PRRS plume), then arsenic sampling will be conducted weekly in monitoring wells 2128, 2625, 2636, and 2900, and in extraction wells 3924 and 3925. The arsenic sampling will be used to determine if the increased pumping rates have adversely impacted the PRRS plume. The weekly sampling will be done for a minimum of 3 weeks after a pumping rate increase; if no changes in arsenic concentration trends are observed, the increased arsenic sampling will be discontinued. Figure 3-5 identifies the locations of these monitoring wells.

#### 3.6.1.5 Monitoring Non-Uranium Groundwater FRL Constituents without IEMP FRL Exceedances

Monitoring for non-uranium groundwater FRL constituents that have not had an FRL exceedance since the inception of the IEMP will be addressed during Stage III (Certification/Attainment Monitoring), as necessary.

#### 3.6.1.6 Routine Water Level Monitoring Project

The water table in the Great Miami Aquifer and its response to seasonal fluctuations has been well characterized in the Remedial Investigation Report for OU5. Water level data have been routinely collected at the Fernald Preserve since 1988. Water level data are used to evaluate seasonal variations and interpret groundwater flow directions. This is accomplished by preparing hydrographs and maps of the water table in the Great Miami Aquifer. Water levels will be monitored across the site to assess the effects of extraction operations on the water table and flow conditions within the Great Miami Aquifer.

The Great Miami Aquifer is an unconfined aquifer and responds rapidly to recharge events. Data collected at the Fernald Preserve and reported in the OU5 Remedial Investigation Report document that no strong vertical gradients exist in the area of the Fernald Preserve. Water level monitoring will rely mostly on data from Type 2 wells, which will be supplemented as necessary with data from Type 3, Type 6, and Type 8 wells. Type 8 wells will have water level

## UNCONTROLLED IF PRINTED

measurements taken in the top and bottom channels. If the top channel is dry, a measurement will be collected from the next deeper channel that is not dry.

178 monitoring wells were selected for water level monitoring; they are shown in Figure 3-8 and are listed in Table 3-7. Groundwater elevation monitoring locations were selected to provide areal coverage across the Fernald Preserve with an increasing density of wells in areas surrounding active aquifer restoration wells. Groundwater elevations will be measured quarterly in these wells to provide data for construction of water table elevation maps. These maps will be used to interpret the location of flow divides, capture zones, and stagnation zones created by the operation of remediation wells. Additional monitoring wells and more frequent measurement intervals may be used if sensitive capture zones or stagnation zones are identified, or if unpredicted fluctuations in contaminant concentrations are observed.

### 3.6.1.7 Sampling Procedures

Sample analysis will be performed either on site or at off-site contract laboratories, depending on specific analyses required, laboratory capacity, turnaround time, and performance of the laboratory. The laboratories used for analytical testing have been audited to ensure that Department of Energy Consolidated Audit Program (DOECAP) or equivalent process requirements have been met as specified in the FPQAPP. These criteria include meeting the requirements for performance evaluation samples, pre-acceptance audits, performance audits, and an internal quality assurance program.

All monitoring wells will be purged and sampled using the requirements specified in the FPQAPP, which have been incorporated into the *Fernald Preserve Environmental Monitoring Procedures* (DOE 2009b).

Table 3-8 summarizes the field sampling information by analytical constituent groups and includes the analytical support level (ASL), holding times, preservatives, container requirements, and analytical methods. Groundwater samples collected at monitoring wells are not routinely filtered.

Not filtering groundwater samples collected at monitoring wells is a conservative (and EPA-recommended) approach to determining the true mobility of metals and uranium in groundwater. Filtering of groundwater samples at monitoring wells may take place on a case-by-case basis if deemed appropriate.

If filtering is conducted, the reasons for filtering will be provided to the EPA and OEPA as soon as possible through a conference call update and will be documented annually in the SER.

**UNCONTROLLED IF PRINTED**

*Table 3-7. List of Groundwater Elevation Monitoring Wells*

---

80	2389	3017	22203	32306
81	2390	3045	22204	32307
2002	2394	3046	22205	32766
2009	2396	3049	22206	32768
2010	2397	3065	22207	41217
2014	2398	3069	22208	62408
2016	2399	3070	22209	62433
2017	2402	3095	22210	63116
2043	2424	3106	22211	63119
2044	2431	3125	22212	63283
2045	2432	3385	22213	63284
2046	2434	3387	22214	63285
2048	2436	3390	22215	63286
2049	2446	3396	22217	63287
2051	2544	3398	22299	63288
2052	2545	3402	22300	63289
2065	2546	3550	22301	63290
2071	2550	3552	22302	63291
2091	2552	3821	22303	63292
2092	2553	3880	23064	82433
2093	2625	3881	23118	83117
2095	2636	3900	23271	83124
2096	2649	4424	23272	83293
2106	2679	4426	23273	83294
2107	2702	4432	23274	83295
2108	2733	6015	23275	83296
2119	2821	21033	23276	83335
2125	2880	21063	23277	83336
2126	2881	21064	23278	83337
2128	2897	21065	23279	83338
2166	2898	21192	23280	83339
2383	2899	21194	23281	83340
2384	2900	22198	23282	83341
2385	3011	22199	31217	83346
2386	3014	22200	32304	
2387	3015	22201	32305	

---

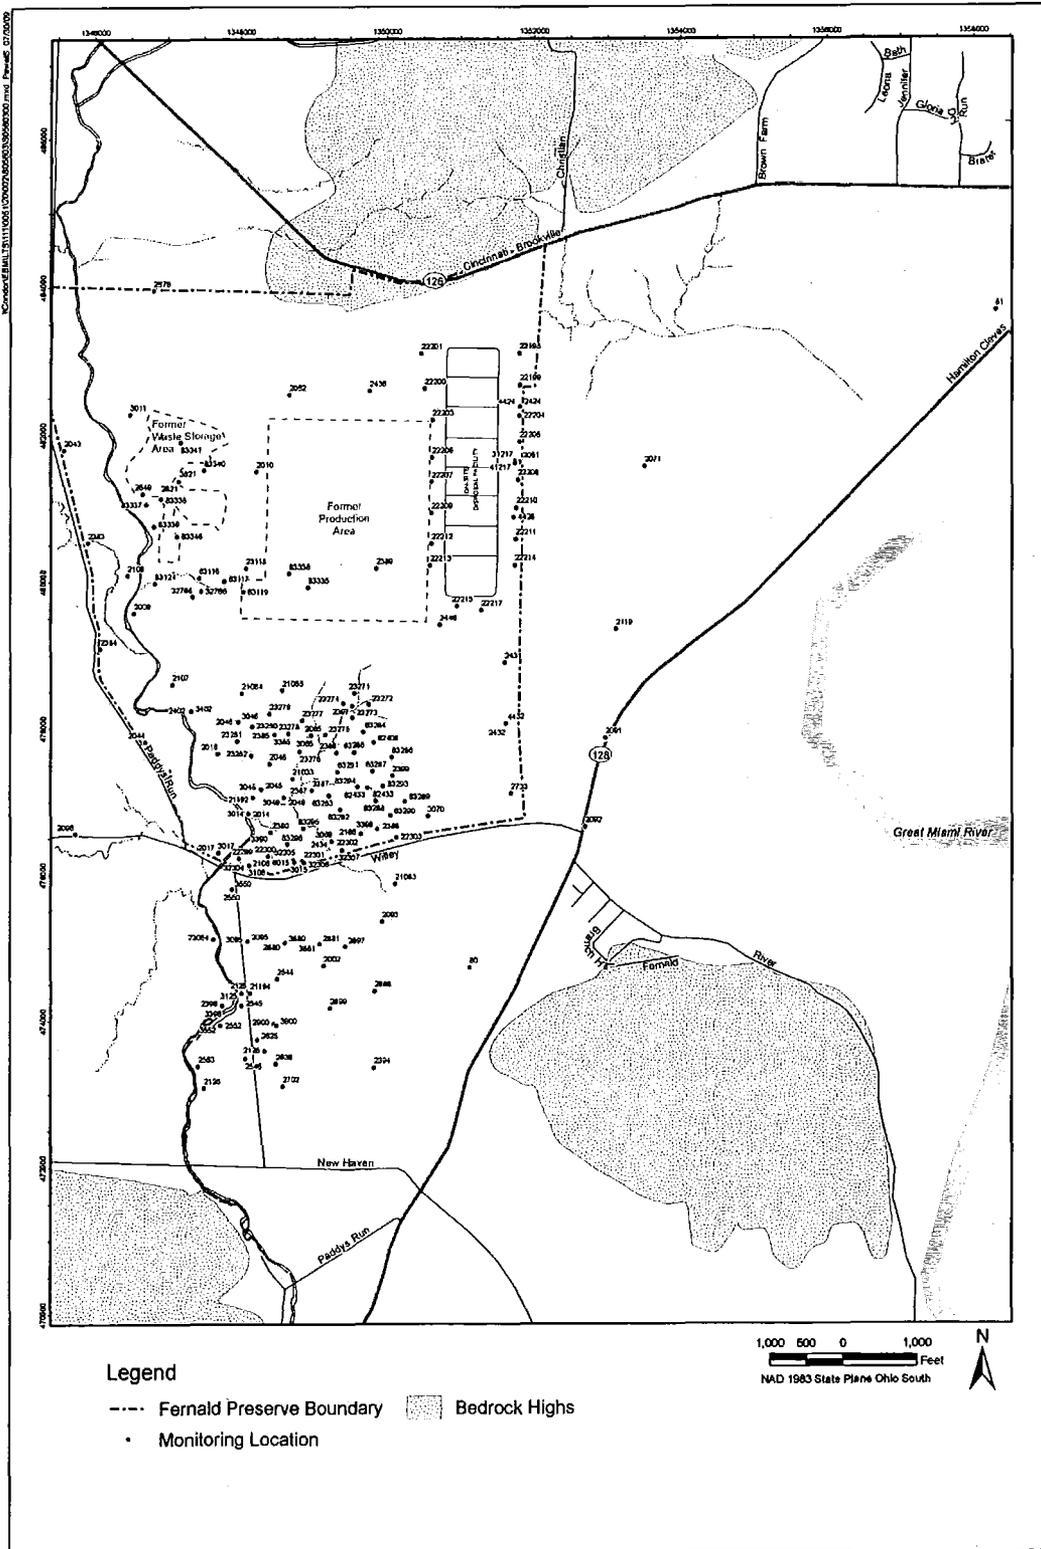


Figure 3-8. Groundwater Elevation Monitoring Wells

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

Table 3-8. Analytical Requirements for the Groundwater Monitoring Program

Constituent	Analytical Method	Sample		Holding Time <sup>a</sup>	Preservative <sup>a</sup>	Container <sup>a,b</sup>
		Type	ASL			
<b>General Chemistry:</b>						
Fluoride	300.0 <sup>c</sup> , 340.2 <sup>c</sup> , 4500C <sup>d</sup> , or 9056 <sup>e</sup>	Grab	D	28 days	None	Plastic
Nitrate/Nitrite	353.1 <sup>c</sup> , 353.2 <sup>c</sup> , or 4500D,E,H <sup>e</sup>	Grab	D	28 days	Cool to 4°C, H <sub>2</sub> SO <sub>4</sub> to pH <2	Plastic or glass
Phosphorus	365.(all) <sup>c</sup> or 4500E <sup>d</sup>	Grab	D	28 days	Cool to 4°C, H <sub>2</sub> SO <sub>4</sub> to pH <2	Plastic or glass
<b>Inorganics:</b>						
Metals	6020 <sup>e</sup> , 7000A <sup>e</sup> , or 6010B <sup>e</sup>	Grab	D	6 months	HNO <sub>3</sub> to pH <2	Plastic or glass
<b>Radionuclides and Uranium:</b>						
Technetium-99	DOE-EML HASL 300 <sup>f</sup>	Grab	D	6 months or 5 × half-life, whichever is less	HNO <sub>3</sub> to pH <2	Plastic or glass
Total Uranium	6020 <sup>e</sup>	Grab	D	6 months	HNO <sub>3</sub> to pH <2	Plastic or glass
<b>Volatile Organics<sup>h</sup>:</b>						
	8260B <sup>e</sup>	Grab	D	NA <sup>i</sup>	Cool to 4°C	NA <sup>i</sup>
		Grab	D	14 days	Cool to 4°C H <sub>2</sub> SO <sub>4</sub> , HCl, or solid NaHSO <sub>4</sub> to pH <2	Glass vial with Teflon-lined septum cap
<b>Field Parameters<sup>g</sup>:</b>						
	FPQAPP <sup>h</sup>	Grab	A	NA <sup>i</sup>	NA <sup>i</sup>	NA <sup>i</sup>

Note: The analytical site-specific contract identifies the specific method.

<sup>a</sup> Appropriate preservative, holding time, and container will be used for the corresponding method.

<sup>b</sup> Container size is left to the discretion of the individual laboratory.

<sup>c</sup> *Methods for Chemical Analysis of Water and Wastes* (EPA 1983).

<sup>d</sup> *Standard Methods for the Examination of Water and Wastewater* (APHA 1989).

<sup>e</sup> *Test Methods for Evaluating Solid Waste, Physical/Chemical Methods* (EPA 1998).

<sup>f</sup> *Procedures Manual of the Environmental Measurements Laboratory* (DOE 1997b).

<sup>g</sup> Field parameters are dissolved oxygen, pH, oxidation-reduction potential, specific conductance, temperature, and turbidity.

<sup>h</sup> The FPQAPP provides field analytical methods.

<sup>i</sup> NA = not applicable.

## **UNCONTROLLED IF PRINTED**

Due to the temporary nature of direct-push sampling locations and the smaller amount of development that takes place compared to a monitoring well, direct-push samples are often turbid. Therefore, direct-push groundwater samples are routinely filtered through a 5- $\mu\text{m}$  filter. Past experience has shown that measured uranium concentrations in direct-push samples are consistently similar regardless of whether the sample was filtered using a 5- $\mu\text{m}$  filter or a 0.45- $\mu\text{m}$  filter. Therefore, direct-push samples for uranium analysis are routinely filtered through a 5- $\mu\text{m}$  filter only. Exceptions to this filtering procedure include the collection of waste storage area parameters as discussed in Section 3.6.2.3.

### **3.6.1.8 Quality Control Sampling Requirements**

Field quality control samples will be collected to assess the accuracy and precision of field and laboratory methods as outlined in the FPQAPP. These samples will be collected and analyzed to evaluate the possibility that some controllable practice, such as equipment decontamination, sampling technique, or analytical method, may be responsible for introducing bias in the analytical results. The following types of quality control samples will be collected: sampling equipment rinsate blanks, trip blanks, and duplicate samples. Each quality control sample is preserved using the same method as groundwater samples.

The quality control sample frequencies will be tracked to ensure that proper frequency requirements are met as follows:

- Trip blanks will be prepared for each sampling team on each day of sampling when organic compounds are included in the respective analytical program. They will be prepared before the sampling containers enter the field and will be taken into the field and handled along with the collected samples. Trip blanks will not be opened in the field.
- Equipment rinsate blanks will be collected for every 20 groundwater samples that are collected using reusable sampling equipment. If a specific sampling activity consists of less than 20 groundwater samples, then a rinsate sample will still be required. Rinsate blanks are not required when dedicated well equipment or disposable sampling equipment is used.
- Field duplicates will be collected for every 20 or fewer groundwater samples if the specific sampling program consists of fewer than 20 samples.

The groundwater samples associated with each quality control sample also will be tracked to ensure traceability if contaminants are detected in the quality control samples.

### **3.6.1.9 Decontamination**

In general, decontamination of equipment is minimized by limited use of reusable equipment during sample collection. However, if decontamination is required, then sampling equipment will be cleaned between sample locations. The decontamination requirements are identified in the FPQAPP.

### **3.6.1.10 Waste Disposition**

Wastes that will be generated during sampling activities are purge water, decontamination solutions, and contact wastes. The following subsections provide the disposal method for each type of waste generated.

## **UNCONTROLLED IF PRINTED**

Purge Water and Decontamination Solutions: All decontamination wastewater and purge water will be containerized and disposed of through the Converted Advanced Wastewater Treatment Facility (CAWWT) for treatment. The point of entry into the CAWWT will be either the CAWWT backwash basin or the OSDF permanent lift station.

Contact Wastes: Contact wastes, such as personal protective equipment, paper towels, and other solid waste is typically not contaminated with radiological constituents and is placed in plastic bags and disposed of through the normal sanitary waste stream.

### 3.6.1.11 Monitoring Well Maintenance

Monitoring wells at the Fernald Preserve will be maintained to keep them in a condition that is protective of the subsurface environment and to ensure that representative groundwater samples can be obtained. Two types of activities are recognized: well maintenance inspections and well evaluations.

#### Well Maintenance Inspections

Routine inspections of Great Miami Aquifer groundwater monitoring wells will be conducted during sampling or collection of water levels (at a minimum of once a year if the well is not being routinely sampled) to determine if the well is protective of the environment based on the inspection criteria below. All assessment and maintenance activities will be recorded on applicable field data forms. The inspections include, but are not limited to, the following:

- Ensuring that the well identification number is painted or welded on the top of the lid.
- Inspecting the ground surrounding the well for depressions and channels that allow surface water to collect and flow toward the wellhead.
- Ensuring visibility and accessibility to the well.
- Inspecting locking lids and padlocks to check for rust and ease of operation.
- Inspecting the exposed (protective) well casing to ensure that it is free of cracks and signs of corrosion; it is reasonably plumb with the ground surface; it is painted bright orange; the drain hole is clear; it is free of debris; and the well casing has no sharp edges.
- Removing and inspecting the well cap to ensure that it is free of debris, fits securely, and the vent hole is clear; and if equipped with a ground-flush cap, ensuring that it is water-tight to prevent surface water from entering the well.
- Inspecting concrete surface seals for settling and cracking.
- Periodically inspecting the exterior guards for visibility and damage, and repainting if necessary.

#### Well Evaluation

A monitoring well evaluation will be initiated if there is an indication that the monitoring well may no longer be yielding a representative groundwater sample. A monitoring well may no longer be yielding a representative groundwater sample for several reasons. The well's integrity may be compromised, as determined through the well maintenance inspections discussed above. The downhole integrity of the monitoring well may be compromised, as evidenced through an increase in the turbidity of the collected sample or the amount of sediment measured in the bottom of the well. The bioaccumulation of metals around the well screen may be occurring as

## **UNCONTROLLED IF PRINTED**

evidenced by the cloudiness or coloration of the collected water sample or the odor of the collected sample. If a problem is suspected, then the following work may be performed to evaluate the cause:

- Review existing well installation documentation.
- Review well history and historical water quality data to identify whether it produces consistently clear or turbid samples.
- Review groundwater sampling field records.
- Conduct a downhole camera survey to inspect the integrity of the screen and casing.

At least once a year, an assessment will be made of wells that are sampled as to whether the well is yielding a representative sample. This assessment includes, but is not limited to, the following:

- Determining how much sediment has entered the well screen and accumulated in the well, and review historical depth records. This will be done by measuring the depths of wells that do not have dedicated packers.
- Determining if any foreign material is present in the well (e.g., bentonite grout).
- Determining if the groundwater color has changed over time (e.g., due to iron bacteria).
- Evaluating turbidity within the sample.
- Noting if an odor that could be associated with biofouling (i.e., rotten-egg or fish odor) is present.

### Well Maintenance Corrective Actions

Corrective actions to address problems identified in the well maintenance inspections will be conducted as soon as feasible. Corrective maintenance to address excessive turbidity will include removal of sediment from the well through redevelopment of the well.

It is possible that minerals can precipitate on well screens or that metals can bioaccumulate around well screens. If it is determined that minerals have precipitated in the well or on the well screen, or that metals have bioaccumulated around the well screen, and the representativeness of the groundwater sample is being impacted, then the limited use of chemicals (e.g., chlorine, hydrochloric acid) to remove the mineral build-up or alleviate the biofouling may be considered. CMT wells could probably not be rehabilitated due to the small diameters of the sampling channels. Chemicals have a very limited application in the rehabilitation of monitoring wells because the chemicals can cause changes such that the well will no longer yield a representative sample (EPA 1991). Changes resulting from the use of chemicals could last for a short time or could be permanent. Therefore, if chemical rehabilitation is attempted, it will only be attempted as a last resort. Water quality parameters (such as Eh [oxidation-reduction potential], pH, temperature, and conductivity) will be measured prior to the application of the chemicals and following the use of the chemicals. These measurements will serve as values for comparison of water quality before and after well maintenance.

If a groundwater monitoring well has been damaged in such a way that it is no longer protective of the subsurface environment and it cannot be repaired, then the well will be plugged and abandoned. If it is determined that the well is not yielding a representative groundwater sample, and rehabilitation efforts are not effective in correcting the condition, then the well will be considered for plugging and abandonment. If the well is still protective of the subsurface

## **UNCONTROLLED IF PRINTED**

environment, then it might be used for the collection of water level data even though it does not yield representative groundwater samples. Wells designated for plugging and abandonment may be sampled one last time for a subset of water quality parameters listed in Table 3-5.

The exact parameter list selected for the sampling will be based on the location of the well. CMT wells being plugged and abandoned may have each available channel sampled for total uranium (or any groundwater FRL constituent) prior to being plugged and abandoned, as deemed appropriate. A replacement monitoring well will only be installed if the monitoring well that was plugged and abandoned was being actively monitored for either water quality or water levels. Any preliminary decision not to replace a monitoring well will be discussed with the EPA and OEPA prior to finalizing the decision.

### **3.7 IEMP Groundwater Monitoring Data Evaluation and Reporting**

This section provides the methods to be used in analyzing the data generated by the IEMP groundwater sampling program. It summarizes the data evaluation process and actions associated with various monitoring results. The planned reporting structure for IEMP-generated groundwater data, including specific information to be reported in the annual SER, is also provided.

#### **3.7.1 Data Evaluation**

Data resulting from the IEMP groundwater program will be evaluated to meet the program expectations identified in Section 3.4.1. Data evaluation will look at both the operational efficiency and the operational effectiveness of the groundwater remediation system (EPA 1992). Operational efficiency refers to implementing the most efficient remedy possible. The objectives are to minimize downtimes, conduct stable operations, meet planned performance goals, and operate a cost-effective system. Operational efficiency will be assessed by tracking the following:

- Pumping rates for individual wells and modules.
- Gallons of water pumped.
- Extraction well total hours of operation during the year.
- The volume of treated water.
- Planned versus actual gallons of water pumped.

Operational effectiveness refers to the evaluation of the degree of contamination cleanup achieved. Operational effectiveness will be assessed by tracking the following:

- Planned versus actual pounds of uranium removed from the Great Miami Aquifer.
- Pounds of uranium removed per million gallons of water pumped (uranium removal index).
- Running cumulative pounds of uranium removed from the Great Miami Aquifer versus predicted running cumulative pounds of uranium removed from the Great Miami Aquifer.
- Total uranium concentration data collected from extraction wells.
- Total uranium concentration data collected from monitoring wells.
- Water level data collected from monitoring wells.

## **UNCONTROLLED IF PRINTED**

- Interpretations of capture zones.
- Regression curves of uranium concentration data at extraction wells.
- Regression curves of uranium concentration data at groundwater monitoring wells every 5 years. Regression curves of uranium concentration data at groundwater monitoring wells will be prepared every 5 years because only two data points a year will be added to the database used to generate the curves.

Most of the data will be tabulated, presented in graphs, or presented in maps and evaluated in the following manner:

- Concentration versus time plots for specific constituents.
- Tables identifying wells with constituents above FRL concentrations.
- Mann-Kendall trend analyses for specific constituents.
- Concentration contour maps.

Large quantities of data will be collected and evaluated each year. In order to evaluate the sampling results, the data collected for the IEMP will be presented and evaluated using the formats above. The findings of data evaluations will be shared with project personnel. EPA and OEPA have indicated that this is a successful method of evaluating and presenting the data. Groundwater monitoring program data will be evaluated to:

- Assess progress in capturing and restoring the area containing the >30- $\mu\text{g/L}$  total uranium plume.
- Assess progress in capturing and restoring the areas affected by non-uranium FRL exceedances.
- Assess water quality at the downgradient Fernald Preserve property boundary.
- Assess model predictions.
- Assess the impact that the aquifer restoration is having on the PRRS plume.
- Meet other monitoring commitments.
- Address community concerns.

The aquifer restoration system is designed to reduce the concentration of uranium and non-uranium FRL constituents in the aquifer to concentrations that are at or below their FRLs. Because uranium is the principal COC, the aquifer restoration system has been designed to capture the 30- $\mu\text{g/L}$  total uranium plume, with the understanding that the system may need to be modified in the future to capture and remediate non-uranium FRL constituents.

Extraction wells have been positioned within each restoration module to capture the uranium plume. Operational decisions and pumping changes will focus on the capture of the uranium plume. Operational changes to meet non-uranium FRLs are considered to be a secondary objective. However, evaluation of the need for an operational change to address non-uranium FRL constituents will be ongoing throughout the aquifer remediation period and is expected to gain in importance as the achievement of the uranium objective approaches.

## **UNCONTROLLED IF PRINTED**

Following is a discussion of how each of the groundwater program expectations is intended to be met through evaluation of IEMP groundwater data.

### Capturing and Restoring the Area Containing the >30- $\mu$ g/L Total Uranium Plume

Capture and restoration of the area containing the >30- $\mu$ g/L total uranium plume will be evaluated using groundwater elevation data and the most current maximum total uranium plume interpretation. Groundwater elevation maps with capture zone and flow divide interpretations will be prepared to evaluate the extent of capture.

Remediation of the 30- $\mu$ g/L total uranium plume will be assessed by monitoring total uranium concentrations over time. The 30- $\mu$ g/L maximum total uranium plume will be mapped and compared to previous maps to determine how the plume has changed in response to remediation. Direct-push sampling data will be used throughout the remedy to supplement fixed monitoring well location data by providing vertical profile concentration data.

If a new total uranium FRL exceedance is detected in the aquifer, then an attempt will be made to determine the cause of the exceedance. Considerations will include:

- Movement of known total uranium contamination in response to pumping or natural migration.
- Previously undetected uranium contamination that has now moved into a monitoring zone as a result of pumping or natural migration.

When a new extraction well begins operating, water levels will be collected more frequently until conditions have stabilized. Once conditions have stabilized, monitoring will fall back to the regular IEMP monitoring schedule. Individual startup plans will provide specifics on the frequency of water level and water quality data collection during the startup time period.

### Capturing and Restoring the Areas Affected by Non-uranium FRL Exceedances

The OU5 ROD identifies 49 FRL constituents, other than total uranium, that also need to be tracked as part of the aquifer restoration. These 49 constituents are collectively referred to as the non-uranium FRL constituents. During the aquifer restoration, groundwater monitoring will take place for the non-uranium FRL constituents. Constituents that have been detected in the aquifer above their respective FRLs will be monitored semiannually.

Non-uranium FRL constituent concentration trends in the Great Miami Aquifer will be assessed through trend analysis when sufficient data have been obtained. The Mann-Kendall statistical test for trend will be used to facilitate the trending interpretation. Concentration versus time plots may be used to illustrate how the concentrations are trending.

If a new non-uranium FRL exceedance is detected in the aquifer, then an attempt will be made to determine the cause of the exceedance. Considerations will include:

- Movement of known contamination in response to pumping or natural migration.
- Previously undetected contamination that has now moved into a monitoring zone as a result of pumping or natural migration.

## **UNCONTROLLED IF PRINTED**

Any FRL exceedance detected at a property boundary/plume boundary well location will be evaluated using the same data evaluation protocol that was approved for the *Restoration Area Verification Sampling Program, Project-Specific Plan* (DOE 1997c) to determine if additional action is required. The constituent concentration data over time will be graphed. If two or more sampling events following an FRL exceedance indicate that the concentrations are below the FRL, then the location will not be considered for remediation or further monitoring beyond what is already prescribed by the IEMP. If sampling following the initial FRL exceedance indicates that the exceedance was not just a one-time occurrence, and the exceedance is judged to be the result of Fernald Preserve activities (either historical or current), then action will be taken to address the exceedance.

### Meeting Other Monitoring Commitments

Other groundwater monitoring commitments that need to be addressed are private well sampling, property boundary monitoring, and fulfillment of DOE Order 450.1A requirements to maintain an environmental monitoring program for groundwater.

Total uranium data collected at private wells will be graphed to illustrate changes and will be used in the preparation of total uranium contour maps. Data collected from the Fernald Preserve property/plume boundary monitoring system will be compared to FRLs. This will facilitate the detection and monitoring of FRL exceedances and will determine if interim actions are warranted, in addition to implementing the sitewide aquifer restoration. Lastly, this groundwater monitoring program presented in the IEMP, along with the groundwater data reporting in IEMP annual integrated SERs, fulfills DOE Order 231.1 requirements.

### Groundwater Modeling

Groundwater uranium concentration data and water level data obtained through the life of the remedy will be compared against model-predicted concentrations and water levels to evaluate how reasonable the predictions are over the long term. Individual well residuals (model-predicted concentration versus actual measured concentrations) will be determined without running the model. A mean residual calculation for each monitoring event will also be determined. Monitoring wells in the remediation footprint of the aquifer will be included in the residuals exercise. Results of the first assessment were provided in the 2005 SER. A brief summary of background information on the groundwater model can be found in previous versions of the IEMP.

### Assess the Impact that the Aquifer Restoration Has on the Paddys Run Road Site Plume

As was done since 1997, concentration data collected for key PRRS constituents will be evaluated using trend analysis. Water level maps will be produced to determine where capture is occurring due to pumping in the South Plume Module.

### Adequately Address Community Concerns

The IEMP fulfills the informational needs of the Fernald community by preparing groundwater environmental results in the annual SER. DOE makes these reports available to the public. Comments received over the life of the IEMP program regarding the IEMP groundwater program will be considered for future revisions to the IEMP.

### Groundwater Certification Process and Stages

A Groundwater Certification Plan has been prepared for the groundwater remedy. The objective of the Certification Plan is to document the process that will be followed to certify that aquifer

## **UNCONTROLLED IF PRINTED**

remedy objectives have been met. As explained below, pump-and-treat operations are currently in progress at the Fernald Preserve. The IEMP is the controlling document for remedy performance monitoring during the pump-and-treat operational period. The IEMP will continue to be the controlling document for all groundwater monitoring needed to support the certification process following completion of pump-and-treat operations.

Figure 3–9 illustrates the groundwater certification process. Six stages have been identified for the certification process:

- Stage I: Pump-and-Treat Operations
- Stage II: Post Pump-and-Treat Operations/Hydraulic Equilibrium State
- Stage III: Certification/Attainment Monitoring
- Stage IV: Declaration and Transition Monitoring
- Stage V: Demobilization
- Stage VI: Long-Term Monitoring

Remedy performance monitoring is currently supporting pump-and-treat operations. As illustrated in Figure 3–9, remedy performance monitoring is conducted to assess the efficiency of mass removal and to gauge performance in meeting FRL objectives. If it is determined that high mass removal is not being maintained, or FRL goals are not being achieved, then the need for operational adjustment will be evaluated and implemented if deemed appropriate. A change to the operation of the aquifer restoration system would be implemented through the OMMP. A groundwater monitoring change, if found to be necessary, would be implemented through the IEMP. If additional characterization data are needed beyond the current scope of the IEMP, then a separate sampling plan will be prepared. Additional sampling activities may use other sampling techniques, such as a direct-push sampling tool, which has been successfully used at the Fernald Preserve to obtain groundwater samples without the use of a permanent monitoring well.

The IEMP will be used to document the approach for determining when various modules can be removed from service and groundwater monitoring can focus on subsequent stages of the groundwater certification process.

**UNCONTROLLED IF PRINTED**

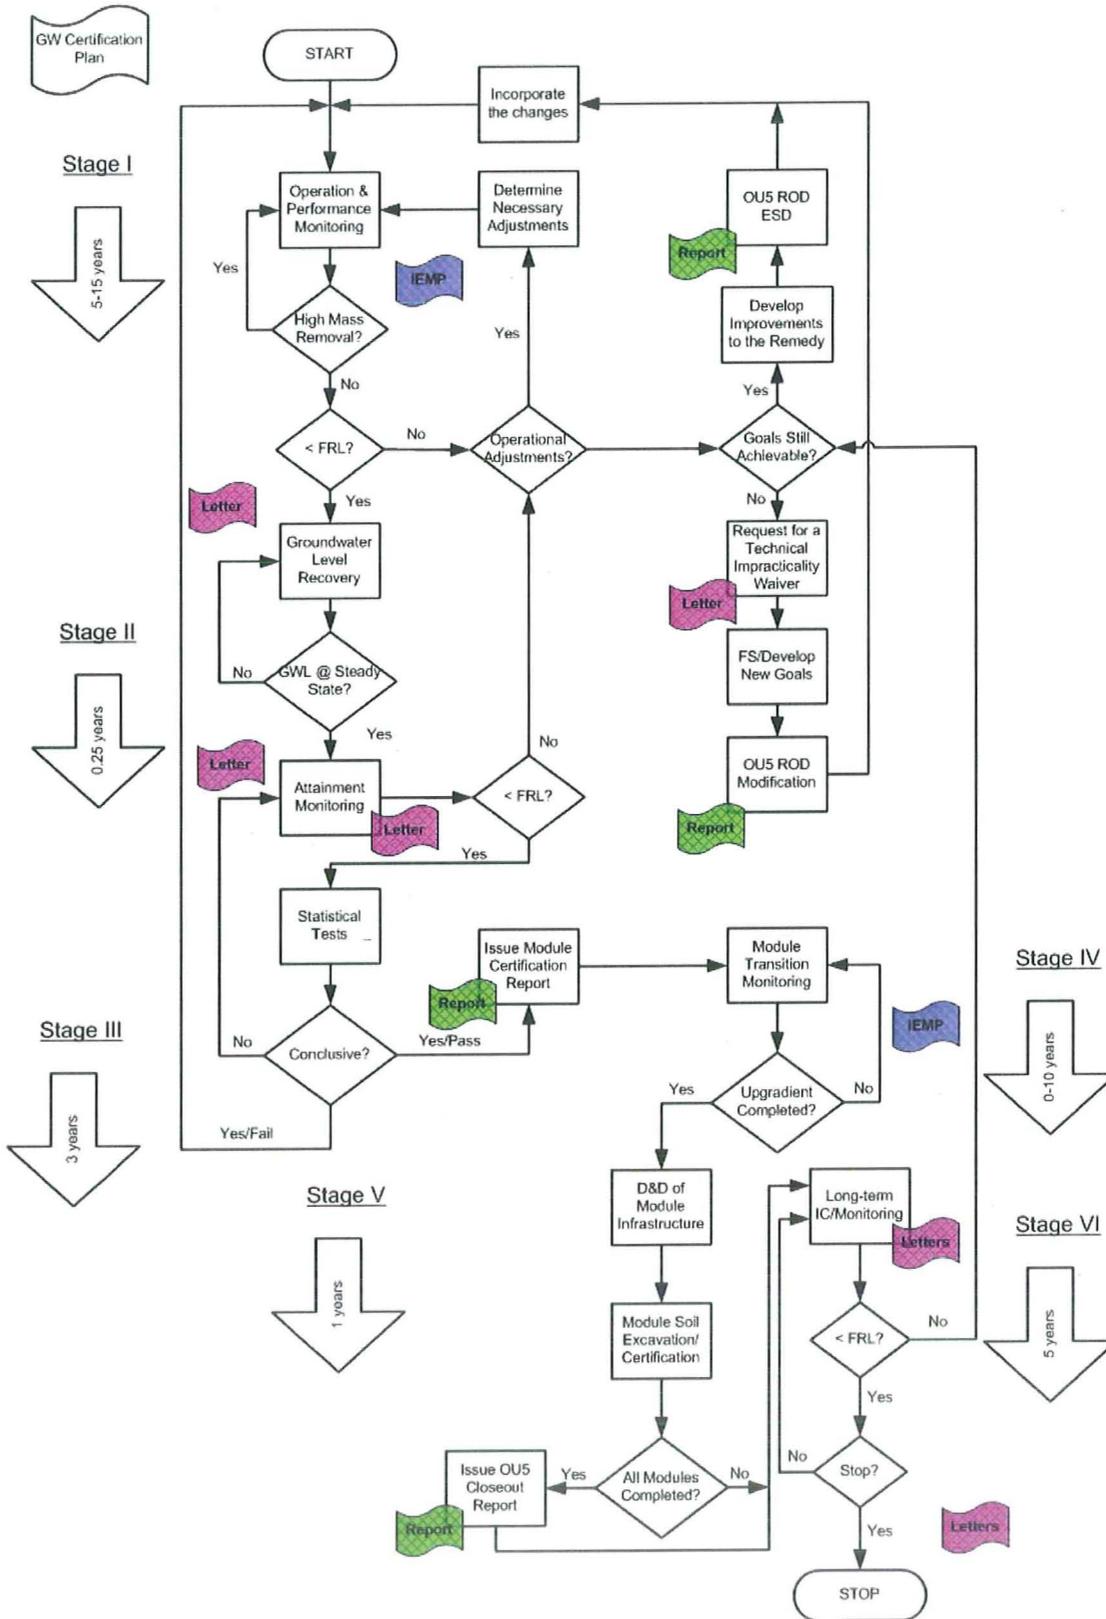


Figure 3-9. Groundwater Certification Process and Stages

## **UNCONTROLLED IF PRINTED**

### **3.7.2 Reporting**

The IEMP groundwater program data will be reported in the annual SER and on the LM website at <http://www.lm.doe.gov/fernald/Sites.aspx>. Data on the website will be in the format of searchable data sets and downloadable data files. Additional information on IEMP data reporting is provided in Section 6.0.

The annual SER will be issued each June for the previous calendar year. This comprehensive report discusses a year of IEMP data previously reported on the LM website. The report includes the following:

#### Operational Assessment

- The set-point pumping rates for each extraction well during the year.
- The uranium removal rate of individual wells.
- Extraction well total hours of operation during the year.
- The volume of treated groundwater.
- Extraction well operating time expressed as a percentage of total available operating time.
- The volume of water pumped from each extraction well during the year.
- Planned versus actual gallons of water pumped.
- The net water balance.
- Total pounds of uranium removed during the year.
- Total pounds of uranium removed from the aquifer since the start of remediation.
- Planned versus actual pounds of uranium removed from the Great Miami Aquifer.
- Running cumulative pounds of uranium removed from the Great Miami aquifer versus predicted running cumulative pounds of uranium removed from the Great Miami Aquifer.
- Total uranium concentration data collected from extraction wells.
- Total uranium concentration data collected from monitoring wells.
- Water level data collected from monitoring wells.
- The maximum, minimum, and average uranium concentration sent to treatment during the last year.
- The monthly average uranium concentration in water discharged to the Great Miami River during the year.
- Pumping rate figures for each extraction well.
- Regression curves of uranium concentration data at extraction wells.
- Regression curves of uranium concentration data at groundwater monitoring wells (every 5 years).

## **UNCONTROLLED IF PRINTED**

### Aquifer Conditions

- The area of capture during the year.
- A description of the geometry of the total uranium plume during the year.
- The effect that pumping had on the PRRS plume during the year.
- The status of non-uranium FRL exceedances, including any newly detected FRL exceedances.
- Identification of any new areas of FRL exceedances.
- A comparison of groundwater restoration performance with respect to model predictions established in the *Baseline Remedial Strategy Report* (DOE 1997a).
- Any changes that may have been made to the operation or design.

### Data that Support the OSDF Groundwater/Leak Detection and Leachate Monitoring Plan

- Status information pertaining to the OSDF wells along with baseline data summaries.
- Leachate volumes and concentrations from the leachate collection system and from the leak detection system for the OSDF.
- Results of quarterly groundwater sampling initiated after waste is placed in a cell of the OSDF.

In addition, the annual SER will include trend analysis of the data collected from the OSDF.

The annual review cycle provides the mechanism for identifying and initiating any groundwater program modifications (e.g., changes in constituents, locations, or frequencies) that are necessary to align the IEMP with the current activities. Any program modifications that may be warranted prior to the annual review would be communicated to EPA and OEPA.

## **4.0 Surface Water, Treated Effluent, and Sediment Monitoring Program**

Section 4.0 discusses the monitoring strategy for assessing sitewide surface water, treated effluent, and sediment. The strategy includes compliance-based monitoring and reporting obligations, a medium-specific plan, sampling design, and data evaluation.

### **4.1 Integration Objectives for Surface Water, Treated Effluent, and Sediment**

The IEMP is the designated mechanism for conducting the sitewide surface water, treated effluent, and sediment surveillance and compliance monitoring. In this role, the IEMP serves to integrate several compliance-based monitoring and reporting programs currently in existence for the Fernald Preserve:

- The discharge monitoring and reporting program related to the site's NPDES permit.
- The radiological monitoring of and reporting for the treated effluent mandated by the OU5 ROD.
- The IEMP Characterization Program, which combines portions of the former Environmental Monitoring Program that has been ongoing at the Fernald Preserve since the 1950s and was updated in Revision 0 of the IEMP (DOE 1997d), to accommodate surface water monitoring during the post-closure period.
- The radiological monitoring of and reporting for off-property sediment mandated by the OU5 ROD.

### **4.2 Analysis of Regulatory Drivers, DOE Policies, and Other Fernald Preserve Site-Specific Agreements**

This section presents a summary evaluation of the regulatory drivers governing the monitoring of the Fernald Preserve's point-source and non-point-source discharges to Paddys Run and the Great Miami River and also includes post-closure sediment monitoring. The intent of this section is to identify the pertinent regulatory requirements for the scope and design of the surface water, treated effluent, and sediment monitoring program. These requirements will be used to confirm that the program satisfies the regulatory obligations for monitoring that have been activated by the RODs and will achieve the intentions of other pertinent criteria, such as DOE orders and the Fernald Preserve's existing agreements and permits, as appropriate, that have a bearing on the scope of surface water, treated effluent, and sediment monitoring.

#### **4.2.1 Approach**

The analysis of the regulatory drivers and policies for surface water, treated effluent, and sediment monitoring was conducted by examining the ARARs and CERCLA RODs to identify subsets with specific environmental monitoring requirements. The Fernald Preserve's existing compliance agreements issued outside the CERCLA process were also reviewed.

## UNCONTROLLED IF PRINTED

### 4.2.2 Results

The surface water, treated effluent, and sediment monitoring program described in this IEMP has been developed with full consideration of the regulatory drivers and policies. Table 4-1 lists each of these IEMP drivers and the associated actions conducted to comply with them. A brief summary of regulatory drivers and policies has been provided in previous IEMPs. Sections 4.5 and 6.0 provide the Fernald Preserve's current and long-range plan for complying with the reporting requirements invoked by these drivers.

Table 4-1. Fernald Preserve Surface Water, Treated Effluent, and Sediment Monitoring Program Regulatory Drivers and Actions

	Driver	Action
IEMP	DOE Order 450.1A, environmental monitoring plan for all media	The IEMP describes treated effluent and surveillance monitoring as required by DOE Order 450.1A.
	DOE Order 5400.5, <i>Radiation Protection of Public and Environment</i>	The IEMP includes a description for routine sampling of Paddys Run and on-site drainage ditches for radiological constituents.
	CERCLA Remedial Design Work Plan (DOE 1996c)	The IEMP describes treated effluent and surveillance monitoring as required by DOE Order 450.1A.
	OU5 ROD	The IEMP will be modified toward completion of the remedial action to include surface water sampling to certify FRL achievement. The IEMP includes monitoring for performance-based uranium discharge limits.
	OU5 Feasibility Study/OU5 ROD	The IEMP will be modified toward completion of the remedial actions to include sediment sampling to verify FRL achievement.
	NPDES Permit	The IEMP describes routine sampling of permit-designated treated effluent discharges and storm water drainage points for NPDES permit constituents.
	Federal Facilities Compliance Agreement Radiological Monitoring	The IEMP describes the routine sampling at the Parshall Flume (PF 4001) for radiological constituents.

**Note:** Soil and sediment at the Fernald Preserve have been certified, with the exception of those areas identified in Figures 2-1 and 2-2. Therefore, it is not expected that FRL exceedances will occur in association with uncontrolled runoff.

## 4.3 Program Expectations and Design Considerations

### 4.3.1 Program Expectations

The expectations for the surface water and treated effluent monitoring program are to:

- Provide an ongoing assessment of the potential for cross-medium impacts from surface water to the underlying Great Miami Aquifer at locations near the point where the protective glacial overburden has been breached by site drainages.
- Document whether the sporadic exceedances of FRLs in various site drainages (noted in IEMP reports) continue to occur at key on-site locations, at the property boundary on Paddys Run, and in the Great Miami River outside the mixing zone, and determine if monitoring can be reduced based on surface water data results.

## **UNCONTROLLED IF PRINTED**

- Provide an assessment of impacts to surface water due to uncontrolled runoff.
- Provide additional data at background locations on Paddys Run and the Great Miami River to refine the ability to distinguish site impacts from background.
- Continue to fulfill monitoring and reporting requirements associated with the site NPDES permit.
- Continue to fulfill monitoring and reporting requirements associated with the FFCA and OU5 ROD.
- Continue to fulfill DOE Order 450.1A requirements to maintain an environmental monitoring plan for surface water.
- Continue to address the concerns of the community regarding the magnitude of the Fernald Preserve's discharges to surface water (i.e., to Paddys Run and the Great Miami River).

The expectations for the sediment monitoring program are to:

- Continue monitoring sediment in the Great Miami River to confirm that the river is not being impacted by Fernald Preserve effluent discharges.
- Confirm that remediation of sediment in the Great Miami River is unnecessary and fulfill the OU5 Feasibility Study conclusion/recommendation.

The following section provides the design considerations required to fulfill these expectations.

### **4.3.2 Design Considerations**

This section provides the IEMP surface water, treated effluent, and sediment monitoring program design considerations. The nonradiological discharge monitoring and reporting related to the NPDES permit has been incorporated into the IEMP. The radiological discharge monitoring related to the FFCA and OU5 ROD has been incorporated into the IEMP.

#### **4.3.2.1 Constituents of Concern**

A comprehensive list of surface water COCs is presented in Table 4-2. The following is a description of information provided in Table 4-2.

- Column 1, Constituent: This column represents the constituents for which an FRL was established in the OU5 ROD.
- Column 2, Final Remediation Levels: This column represents the human/health protective remediation levels for surface water that were established in the OU5 ROD.
- Column 3, FRL Basis: This column is the basis for establishment of the FRL as defined in the OU5 Feasibility Study.
- Column 4, Background Values in Surface Water: This column represents updated background values for Paddys Run and the Great Miami River based on data collected for the IEMP through 2006. The IEMP provides this information for purposes of comparison.

**UNCONTROLLED IF PRINTED**

Table 4-2. Surface Water Selection Criteria Summary

Constituent	FRL <sup>a</sup>	FRL Basis <sup>a</sup>	95th Percentile Background Level in Surface Water <sup>b,c</sup>			
			Paddys Run		Great Miami River	
			Original	Revised	Original	Revised
<b>General Chemistry (mg/L)</b>						
Fluoride	2.0	A	0.22	0.091	0.9	0.504
Nitrate/Nitrite	2400	R	1.7	4.90	6.6	7.87
<b>Inorganics (mg/L)</b>						
Antimony	0.19	A	ND	0.0012	ND	0.00175
Arsenic	0.049	R	ND	0.00616	0.0036	0.0139
Barium	100	R	0.053	0.0545	0.1	0.100
Beryllium	0.0012	A	ND	0.0003	ND	0.0009
Cadmium	0.0098	B	ND	0.00075	0.01	0.00375
Chromium (VI)	0.010	D	ND	0.00943	ND	0.00991
Copper	0.012	A	ND	0.00652	0.012	0.0141
Cyanide	0.012	A	ND	0.00367	0.005	0.00412
Lead	0.010	B	ND	0.00568	0.010	0.00958
Manganese	1.5	R	0.035	0.229	0.08	0.113
Mercury	0.00020	D	ND	0.000126	ND	0.000175
Molybdenum	1.5	R	ND	0.00328	0.02	0.00902
Nickel	0.17	A	ND	0.00792	0.023	0.0116
Selenium	0.0050	A	ND	0.00254	ND	0.00293
Silver	0.0050	D	ND	0.000706	ND	0.000348
Vanadium	3.1	R	ND	0.0188	ND	0.00671
Zinc	0.11	A	ND	0.0361	0.045	0.0463

**UNCONTROLLED IF PRINTED**

Table 4-2 (continued). Surface Water Selection Criteria Summary

Constituent	FRL <sup>a</sup>	FRL Basis <sup>a</sup>	95th Percentile Background Level in Surface Water <sup>b,c</sup>			
			Paddys Run		Great Miami River	
			Original	Revised	Original	Revised
<b>Radionuclides (pCi/L) and Uranium</b>						
Cesium-137	10	R	3.1	4.74	ND	3.16
Neptunium-237	210	R	—	0.054	ND	0.083
Lead-210	11	R	—	2.97	—	2.45
Plutonium-238	210	R	ND	ND	ND	0.038
Plutonium-239/240	200	R	0.09	0.093	ND	0.01
Radium-226	38	R	0.35	0.844	0.41	0.728
Radium-228	47	R	2.1	1.98	2.2	3.85
Strontium-90	41	R	0.96	1.09	ND	1.14
Technetium-99	150	R	ND	4.65	ND	7.65
Thorium-230	830	R	ND	0.238	0.62	0.234
Thorium-232	3500	R	ND	0.543	0.36	0.789
Uranium-235	270	R	ND	0.213	ND	0.231
Uranium, Total (µg/L)	530	R	1.0	1.29	1.0	2.13
<b>Pesticide/PCBs (µg/L)</b>						
Alpha-Chlordane	0.31	R	—	ND	—	0.003
Aroclor-1254	0.20	D	—	ND	—	ND
Aroclor-1260	0.20	D	—	ND	—	ND
Dieldrin	0.020	D	—	ND	—	0.0095
<b>Semivolatiles (µg/L)</b>						
Benzo(a)anthracene	1.0	D	—	ND	—	ND
Benzo(a)pyrene	1.0	D	—	ND	—	ND
Bis(2-chloroisopropyl)ether	280	R	—	ND	—	ND
Bis(2-ethylhexyl)phthalate	8.4	A	—	2	—	2.5
Dibenzo(a,h)anthracene	1.0	D	—	ND	—	1.9
3,3'-Dichlorobenzidine	7.7	R	—	ND	—	ND

**UNCONTROLLED IF PRINTED**

Table 4-2 (continued). Surface Water Selection Criteria Summary

Constituent	FRL <sup>a</sup>	FRL Basis <sup>a</sup>	95th Percentile Background Level in Surface Water <sup>b,c</sup>			
			Paddys Run		Great Miami River	
			Original	Revised	Original	Revised
<b>Semivolatiles (µg/L) (Cont.)</b>						
Di-n-butylphthalate	6000	R	-	5.09	-	5.5
Di-n-octylphthalate	5.0	D	-	1.75	-	ND
p-Methylphenol	2200	R	-	ND	-	0.6
4-Nitrophenol	7,400,000	R	-	ND	-	ND
<b>Volatiles (µg/L)</b>						
Benzene	280	R	-	ND	-	0.35
Bromodichloromethane	240	R	-	ND	-	ND
Bromomethane	1300	R	-	ND	-	ND
Chloroform	79	A	-	0.782	-	0.3
1,1-Dichloroethene	15	R	-	ND	-	ND
Methylene chloride	430	A	-	1	-	ND
Tetrachloroethene	45	R	-	0.367	-	ND
1,1,1-Trichloroethane	1.0	D	-	ND	-	ND
1,1,2-Trichloroethane	230	R	-	ND	-	ND
<b>Other Constituents</b>						
Ammonia	-	-	-	0.14	-	0.176
Carbon disulfide	-	-	-	ND	-	0.35
Cobalt	-	-	-	-	-	0.00799
Trichloroethene	-	-	-	0.2	-	ND

<sup>a</sup>Derived from OU5 ROD, Table 9-5.

A = ARAR values

B = background concentrations

D = analytical detection limit

R = human health risk

<sup>b</sup>ND = not detected

- = not applicable/not available

<sup>c</sup>For small data sets (less than or equal to seven samples), the maximum detected concentration is used as the 95th percentile.

<sup>d</sup>FRL based on chromium (VI); however, the analytical results are for total chromium.

## UNCONTROLLED IF PRINTED

Sediment samples will be collected from the two locations on the Great Miami River: one downstream from the outfall line and one background location, and analyzed for uranium as identified in Table 4-2. Samples will be collected in 2009 and then every 5 years thereafter. The sediment FRL for uranium is 210 mg/kg.

### 4.3.2.2 Surface Water Cross-Medium Impact

To assess the cross-medium impact that contaminated surface water has on the underlying Great Miami Aquifer, the following design considerations are necessary:

- Samples should be collected at points near where the glacial overburden has been breached by site drainages (Figure 4-1). At these locations (i.e., STRM 4005, SWP-02, SWD-02, SWD-03, SWD-04, SWD-05, SWD-07, and SWD-08) a direct pathway exists for surface water and associated contaminants to reach the underlying sand and gravel Great Miami Aquifer.
- During remediation and restoration efforts, new wetlands and ponds were created within the site perimeter. Some of these water bodies have little or no underlying glacial overburden. Therefore, five additional surface water locations (SWD-04, SWD-05, SWD-06, SWD-07, and SWD-08) were selected to assess the possible impacts of surface water infiltrating into the aquifer. Sampling at these locations will occur semiannually for uranium for 2 years to evaluate potential impacts. Data will be evaluated to determine the need for further sampling following the initial 2-year period. Location SWD-05 was selected specifically to monitor any impact on the underlying groundwater from surface water where elevated uranium concentrations have been discovered. This area is a small watershed draining south to this location where surface water then dissipates via infiltration or evaporation. It appears from a study conducted in March 2007 that the soil leachability characteristics in this area differ from those of the surrounding area. A maintenance activity was implemented in the summer of 2007 to remove a limited amount of soil from the area. To monitor how the area has responded to this maintenance activity, another location (SWD-09) upgradient of SWD-05 is also being monitored.
- Constituents analyzed should represent those area-specific COCs identified in the OU5 Feasibility Study and subsequent fate and transport modeling as having the potential for cross-medium impact to groundwater via the surface water pathway.

### 4.3.2.3 Sporadic Exceedances of FRLs

Sample locations should be (1) on-property locations downstream of historical FRL exceedances, (2) at the point where Paddys Run flows off the Fernald Preserve property, and (3) at the Parshall Flume (PF 4001), where treated effluent is discharged from the Fernald Preserve to the Great Miami River. (Refer to Figure 4-2 for IEMP surface water and treated effluent sample locations).

To determine the concentration of the treated effluent constituents outside the mixing zone in the Great Miami River, a conservative calculation using the 10-year, low-flow conditions is necessary and requires that flow conditions at the Hamilton Dam gauge be periodically reviewed.

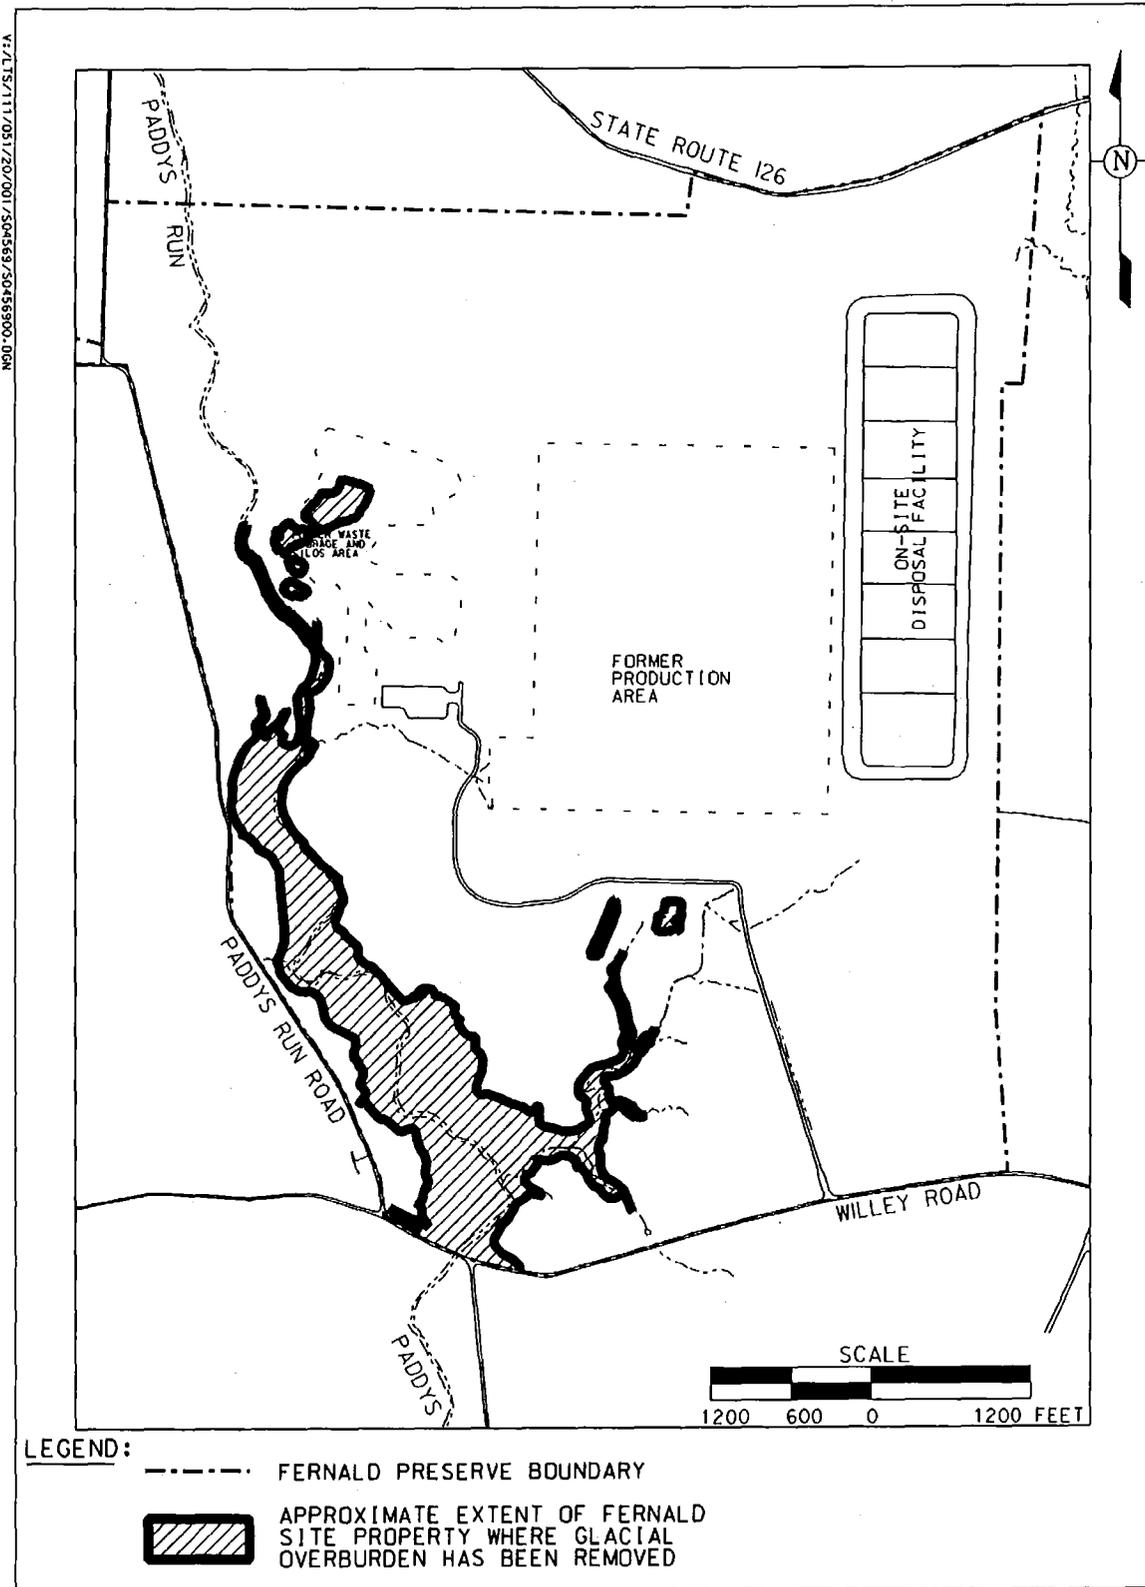


Figure 4-1. Area where Glacial Overburden Has Been Removed

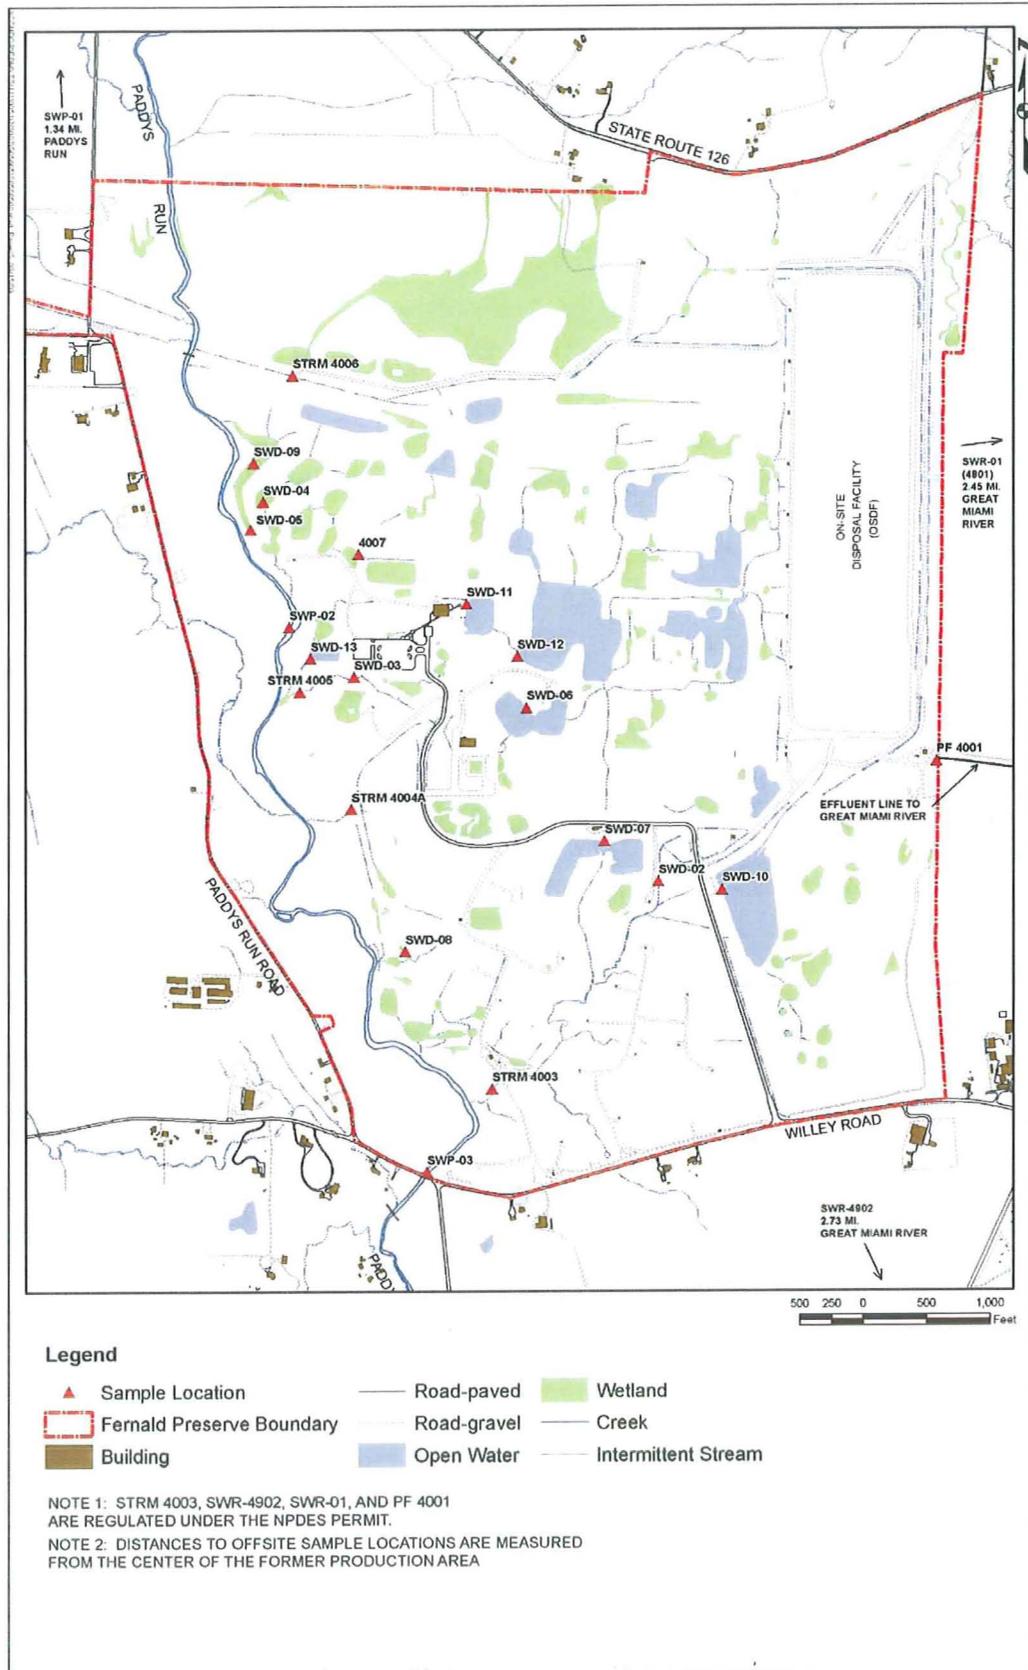


Figure 4-2. IEMP Surface Water, NPDES, and Treated Effluent Sample Locations

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

To assist in the development of the scope and focus of the IEMP surface water, treated effluent, and sediment program, a review of the IEMP monitoring data is conducted periodically. The last such review was based on data collected under the IEMP program from August 1997 through December 2008. The recommended parameters and locations for monitoring are indicated in Table 4-3 (i.e., IEMP Characterization). To provide surveillance monitoring for FRL exceedances, samples will be collected and analyzed for those constituents and associated monitoring frequencies identified in Table 4-3.

*Table 4-3. Summary of Surface Water, Treated Effluent, and Sediment Sampling Requirements by Location*

<b>Location</b>	<b>Constituent<sup>a</sup></b>	<b>IEMP Characterization Requirements (reason for selection)<sup>b,c</sup></b>	<b>NPDES Requirements<sup>c</sup></b>
SWR-01 (SWR-4801 for NPDES only) (Great Miami River Background)	<b>General Chemistry:</b>		
	Total hardness	-	Quarterly
	<b>Inorganics:</b>		
	Beryllium	Semiannually (B)	-
	Cadmium	Semiannually (B)	-
	Chromium, Total	Semiannually (B)	-
	Copper	Semiannually (B)	-
	Cyanide, Total	Semiannually (B)	-
	Manganese	Semiannually (B)	Quarterly
	Mercury	Semiannually (B)	Quarterly
	Silver	Semiannually (B)	-
	Zinc	Semiannually (B)	-
	<b>Radionuclides and Uranium:</b>		
Uranium, Total	Semiannually(B)	-	
SWP-01 (Paddys Run Background)	<b>Inorganics:</b>		
	Beryllium	Semiannually (B)	-
	Cadmium	Semiannually (B)	-
	Chromium, Total	Semiannually (B)	-
	Copper	Semiannually (B)	-
	Cyanide, Total	Semiannually (B)	-
	Manganese	Semiannually (B)	-
	Mercury	Semiannually (B)	-
	Silver	Semiannually (B)	-
	Zinc	Semiannually (B)	-
	<b>Radionuclides and Uranium:</b>		
Uranium, Total	Semiannually (B)	-	
SWP-02 (Paddys Run)	<b>Radionuclides and Uranium:</b>		
	Radium-226	Annually	-
	Radium-228	Annually	-
	Technetium-99	Annually	-
	Thorium-228	Annually	-
	Thorium-230	Annually	-
	Thorium-232	Annually	-
	Uranium, Total	Semiannually (PC)	-
SWP-03 (Paddys Run at Downstream Property Boundary) (continued on next page)	<b>Inorganics:</b>		
	Beryllium	Semiannually (S)	-
	Cadmium	Semiannually (S)	-
	Chromium, Total	Semiannually (S)	-
	Copper	Semiannually (S)	-
	Cyanide, Total	Semiannually (M)	-
	Manganese	Semiannually (S)	-
	Mercury	Semiannually (M)	-

**UNCONTROLLED IF PRINTED**

Table 4-3 (continued). Summary of Surface Water and Treated Effluent Sampling Requirements by Location

Location	Constituent <sup>a</sup>	IEMP Characterization Requirements (reason for selection) <sup>b,c</sup>	NPDES Requirements <sup>c</sup>
SWP-03 (Paddys Run at Downstream Property Boundary) - continued	Silver	Semiannually (M)	-
	Zinc	Semiannually (M)	-
	<b>Radionuclides and Uranium:</b>		
	Radium-226	Annually	-
	Radium-228	Annually	-
	Technetium-99	Annually	-
	Thorium-228	Annually	-
	Thorium-230	Annually	-
Thorium-232	Annually	-	
Uranium, Total	Semiannually (PC)	-	
SWD-02 (Storm Sewer Outfall Ditch)	<b>Radionuclides and Uranium:</b> Uranium, Total	Semiannually (PC)	-
SWD-03 (Waste Storage Area)	<b>Radionuclides and Uranium:</b>		
	Radium-226	Annually	-
	Radium-228	Annually	-
	Technetium-99	Annually	-
	Thorium-228	Annually	-
	Thorium-230	Annually	-
	Thorium-232	Annually	-
Uranium, Total	Semiannually (PC)	-	
PF 4001 (Parshall Flume—Treated Effluent)	<b>General Chemistry:</b>		
	Carbonaceous biochemical oxygen demand	-	2/Week
	Fluoride	-	Monthly
	Nitrate/nitrite	-	Monthly
	Oil and grease	-	2/Week
	Total dissolved solids	-	Monthly
	Total phosphorus as P	-	Weekly
	Total suspended solids	-	Daily
	<b>Inorganics:</b>		
	Cyanide, free	-	Monthly
	Manganese	-	2/Week
	Mercury (low level)	-	Monthly
	<b>Radionuclides and Uranium:</b>		
	Radium-226	Semiannually (M)	-
	Radium-228	Semiannually	-
	Technetium-99	Semiannually (M)	-
	Uranium, Total	Semiannually (PC)	Daily <sup>d</sup>
<b>Semivolatiles:</b>			
Bis (2-ethylhexyl) phthalate	-	Quarterly	
<b>Other:</b>			
Flow rate	-	Daily	
STRM 4003 (Drainage to Paddys Run)	<b>General Chemistry:</b>		
	Total suspended solids	-	Semiannually
	<b>Inorganics:</b>		
	Mercury (low level)	-	Semiannually
	<b>Radionuclides and Uranium:</b>		
Uranium, Total	Semiannually (PC)	-	
<b>Other:</b>			
Flow rate	-	Semiannually	
STRM 4004 <sup>o</sup> (Drainage to Paddys Run)	<b>Radionuclides and Uranium:</b> Uranium, Total	Semiannually (PC)	-
STRM 4005 (Drainage to Paddys Run)	<b>Radionuclides and Uranium:</b> Uranium, Total	Semiannually (PC)	-
STRM 4006 (Drainage to Paddys Run)	<b>Radionuclides and Uranium:</b> Uranium, Total	Semiannually (PC)	-

**UNCONTROLLED IF PRINTED**

Table 4-3 (continued). Summary of Surface Water, Treated Effluent, and Sampling Requirements by Location

Location	Constituent <sup>a</sup>	IEMP Characterization Requirements (reason for selection) <sup>b,c</sup>	NPDES Requirements <sup>c</sup>
4007 (Biowetland Emergency Overflow to Paddys Run)	Flow rate	-	Daily during overflow
SWD-04 <sup>f</sup> , SWD-05 <sup>f</sup> , SWD-06 <sup>f</sup> , SWD-07 <sup>f</sup> , SWD-08 <sup>f</sup>	<b>Radionuclides and Uranium:</b> Radium-226 Radium-228 Technetium-99 Thorium-228 Thorium-230 Thorium-232 Uranium, Total	Annually Annually Annually Annually Annually Annually Semiannually	- - - - - - -
SWD-09	<b>Radionuclides and Uranium:</b> Uranium, Total	Semiannually	-
SWD-10, SWD-11, SWD-12, SWD-13	<b>Radionuclides and Uranium:</b> Uranium, Total	Annually	-
SWR-4902 (Downstream of Fernald Preserve Effluent)	<b>General Chemistry:</b> Total Hardness <b>Inorganics</b> Manganese Mercury	- - - -	Quarterly Quarterly Quarterly
G10 (Great Miami River—downstream sediment)	Uranium, Total	Every five years	-
G2 (Great Miami River—sediment background )	Uranium, Total	Every five years	-

<sup>a</sup>Field parameter readings, taken at each location, include temperature, specific conductance, pH, and dissolved oxygen.

<sup>b</sup>B = background evaluation; M = based on modeling; PC = primary COC; S = sporadic exceedances of FRLs; WP = Waste Pits Excavation Monitoring

<sup>c</sup>"-" indicates the constituent is not included in the sample program.

<sup>d</sup>This constituent is sampled under the OU5 ROD.

<sup>e</sup>New location STRM 4004A has been identified as an alternative sample location for STRM 4004. STRM 4004A will be sampled for the constituents if no flow is observed at STRM 4004 or it is otherwise not accessible.

<sup>f</sup>Sampling will be conducted for 2 years to determine if sampling should continue. Locations are based on sampling from Residual Risk Assessment Analysis and lack of glacial overburden.

## **UNCONTROLLED IF PRINTED**

Constituents are monitored at SWP-03 because it is the last location that surface water is monitored on Paddys Run prior to leaving the site, and all area-specific constituents are monitored at this location in order to be conservative. Appendix B in previous years' IEMPs provided maps detailing surface water locations with historical FRL exceedances, including those exceedances at background locations.

### **4.3.2.4 Impacts to Surface Water due to Storm Water Runoff**

With remediation completed, there are no areas where storm water runoff is controlled, with the exception of the footprint of the CAWWT tanks located on a controlled pad. However, IEMP surface water monitoring will continue at points of storm water runoff entry into receiving waters or within main site drainage ditches (in addition to ambient monitoring for background quantification purposes). Figure 4-3 shows a comparison of average total uranium concentrations at Paddys Run at sample location SWP-03. Important distinctions regarding uranium in storm water runoff from the site to Paddys Run, based on the data in Figure 4-3, include:

- Average concentrations have been far below the human health protective surface water FRL of 530 µg/L each year since 1981, including 9 years that the site was in production.
- Annual average monthly concentrations have been consistently below the human health protective groundwater FRL of 30 µg/L each year since 1986.

### **4.3.2.5 Ongoing Background Evaluation**

Because the remedial investigation/feasibility study background data set for Paddys Run and the Great Miami River surface water was limited by the number of samples and temporal variability represented by the samples, monitoring for surface water background has been performed from the initiation of the IEMP through 2004 for all 55 surface water FRL constituents identified in Table 4-2. Although there are only 17 area-specific surface water constituents (i.e., constituents identified as being FRL concerns and monitored under the IEMP characterization program), the extensive list of 55 constituents was monitored at background to establish a robust data set. The more extensive list was monitored at background so that if soil sampling indicated the need to expand the list of 17 area-specific surface water constituents, there would be corresponding background data.

Because soil sampling did not indicate a need to add constituents to the list of 17 area-specific surface water constituents, and an abundance of background data are available, the list of surface water constituents monitored at the background locations was reduced to coincide with the 17 area-specific constituents monitored for surface water FRLs beginning in 2005. In 2008, the list was reduced from 17 to 10 based on monitoring data results and agencies' approvals.

In 2007, the background values were recalculated using data from August 1997 through 2006. The revised values are provided in Table 4-2. Refer to Table 4-3 for background monitoring requirements; refer to Figure 4-2 for background surface water sample locations.

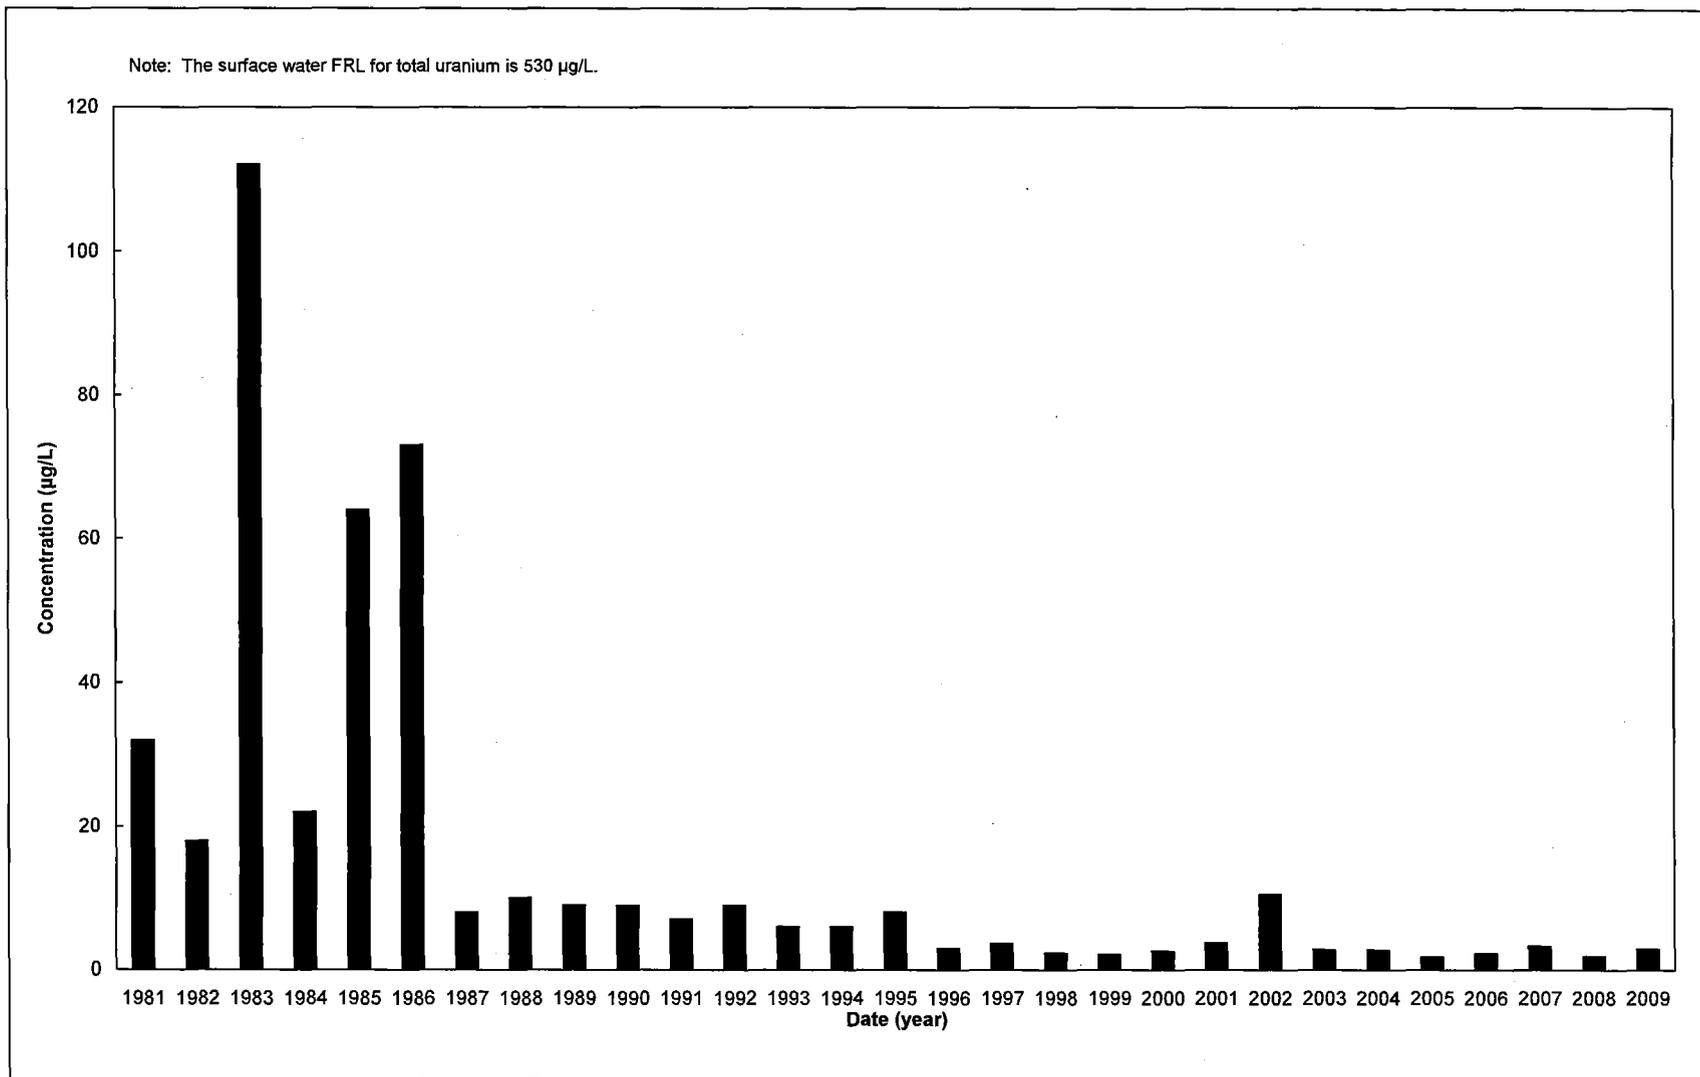


Figure 4-3. Comparison of Average Total Uranium Concentrations in Paddys Run at Willey Road Sample Location SWP-03

## **UNCONTROLLED IF PRINTED**

### **4.3.2.6 Fulfill NPDES Requirements**

As noted in Section 4.2.2, treated effluent and storm water discharges from the Fernald Preserve are regulated under the State-administered NPDES program. OEPA Permit 11O00004\*HD took effect on April 1, 2009, and will remain in effect until March 31, 2014. Figure 4-2 identifies the NPDES permit sample locations.

### **4.3.2.7 Fulfill Federal Facilities Compliance Agreement and OU5 ROD Requirements**

The design considerations provided in Section 4.3.2 are sufficient to meet or exceed the current FFCA sampling and reporting requirements as summarized in Section 4.2.2. The sampling requirements include sampling at the Parshall Flume (PF 4001) and the South Plume extraction wells. In addition to these sampling requirements, an estimate of the amount of uranium reaching Paddys Run via uncontrolled storm water runoff is calculated. Section 3.2.2 discusses sampling of the South Plume extraction wells. As discussed in Section 6.0, monitoring data required by the FFCA have been incorporated into the comprehensive IEMP reporting structure.

### **4.3.2.8 Fulfill DOE Order 450.1A Requirements**

The design considerations provided in Section 4.3.2, are sufficient to meet or exceed the requirements of DOE Order 450.1A as summarized in Section 4.2.2.

### **4.3.2.9 Address Concerns of the Community**

In addition to the monitoring described in Section 4.3.2.4, four surface water sampling locations (SWD-10, SWD-11, SWD-12, and SWD-13) have been indentified for annual total uranium analysis. This sampling will be sufficient to address the concerns of the community. These concerns focus on limiting the amount of Fernald Preserve-related contamination entering Paddys Run and the Great Miami River. This monitoring will provide a comprehensive monitoring program in bodies of water near public access areas, in Paddys Run at the site boundary, and in the treated effluent destined for the Great Miami River.

## **4.4 Medium-Specific Plan for Surface Water, Treated Effluent, and Sediment Sampling**

This section serves as the medium-specific plan for implementation of the sampling, analytical, and data management activities associated with the IEMP surface water, treated effluent, and sediment sampling program. The activities described in this medium-specific plan were designed to provide data of sufficient quality to meet the program expectations as stated in Section 4.3.1. The program expectations, along with the design considerations presented in Section 4.3.2, were used as the framework for developing the monitoring approach presented in this plan. All sampling procedures and analytical protocols described or referenced in this IEMP are consistent with the requirements of the FPQAPP.

#### 4.4.1 Sampling

To fulfill the requirements of the integrated surface water, treated effluent, and sediment monitoring program, surface water and treated effluent samples shall be collected from locations shown in Figure 4-2, and sediment samples shall be collected from locations shown in Figure 4-4.

Sample analysis will be performed either on site or at off-site contract laboratories, depending on analyses required, laboratory capacity, turnaround time, and performance of the laboratory. The laboratories used for analytical testing have been audited to ensure that DOECAP or equivalent process requirements have been met as specified in FPQAPP. These criteria include meeting the requirements for performance evaluation samples, pre-acceptance audits, performance audits, and an internal quality assurance program.

##### 4.4.1.1 Sampling Procedures

Surface water, treated effluent, and sediment will be sampled using the requirements specified in the FPQAPP, which have been incorporated into the *Fernald Preserve Environmental Monitoring Procedures* (DOE 2009b).

Tables 4-4 and 4-5 identify the sample preservative, volume, and container requirements for each constituent.

##### Surface Water Sampling

Surface water samples will be collected from locations identified in Figure 4-2. A qualitative assessment of flow conditions (i.e., base flow, storm flow, or between storm and base flow) will be documented at the time of sample collection at each of these locations. Sampling personnel will ensure that access to the sample locations will not result in the inadvertent introduction of foreign materials into the water sample. Additional precautions will be taken to avoid the introduction of floating organic material such as leaves or twigs during sample collection. Samples will be collected without disturbing bottom sediment. Sample technicians shall approach sample locations from downstream of the location; if sample locations are accessed by way of a bridge, samples shall be collected on the upstream side of the bridge.

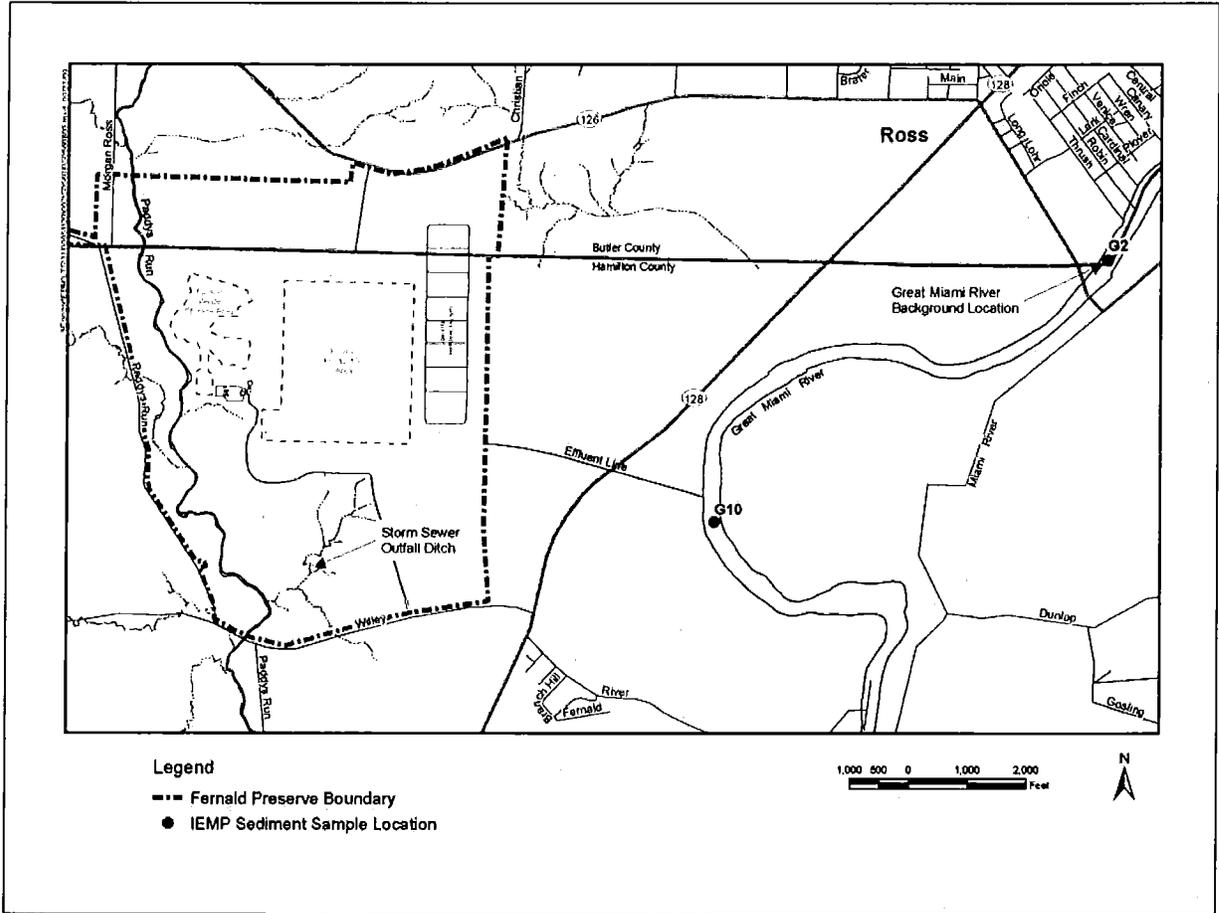


Figure 4-4. Sediment Sample Locations

**UNCONTROLLED IF PRINTED**

*Table 4-4. Surface Water Analytical Requirements for Constituents at Sample Locations SWD-02, SWD-03, SWD-04, SWD-05, SWD-06, SWD-07, SWD-08, SWD-09, SWD-10, SWD-11, SWD-12, SWD-13, SWP-01, SWP-02, SWP-03, and SWR-01*

<b>Constituent<sup>a</sup></b>	<b>Analytical Method</b>	<b>ASL</b>	<b>Holding Time</b>	<b>Preservative</b>	<b>Container</b>
<b>Inorganics:</b>					
Beryllium Cadmium Chromium, Total Copper Manganese Silver Zinc	7000A <sup>b</sup> , 3500 <sup>c</sup> , 6020 <sup>b</sup> , 6010B <sup>b</sup> or 200.2,7,8 <sup>d</sup>	D	6 months	HNO <sub>3</sub> to pH <2	Plastic or glass
Mercury	7470A <sup>b</sup>	D	28 days	HNO <sub>3</sub> to pH <2	Plastic or glass
Cyanide, Total	9010B <sup>b</sup> , 9012 <sup>b</sup> , 335.2 <sup>d</sup> , or 335.3 <sup>d</sup>	D	14 days	Cool 4°C, NaOH to pH >12	Plastic or glass
<b>Radionuclides and Uranium:</b>					
Radium-226 Radium-228 Technetium-99 Thorium-228 Thorium-230 Thorium-232 Uranium, Total	EML HASL 300 <sup>e</sup>      6020 <sup>b</sup>	D	6 months	HNO <sub>3</sub> to pH <2	Plastic or glass
<b>Field Parameters<sup>f</sup>:</b>	FPQAPP <sup>g</sup>	A	NA <sup>h</sup>	NA <sup>h</sup>	NA <sup>h</sup>

Note: The analytical site-specific contract identifies the specific method.

<sup>a</sup>Sample locations are analyzed for a subset of these constituents (summarized in Table 4-3).

<sup>b</sup>Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (EPA 1998)

<sup>c</sup>Standard Methods for the Examination of Water and Wastewater (APHA 1989)

<sup>d</sup>Methods for Chemical Analysis of Water and Wastes (EPA 1983)

<sup>e</sup>Procedures Manual of the Environmental Measurements Laboratory.

<sup>f</sup>Field parameters are temperature, specific conductance, pH, and dissolved oxygen.

<sup>g</sup>The FPQAPP provides field methods.

<sup>h</sup>NA = not applicable

**UNCONTROLLED IF PRINTED**

*Table 4-5. Surface Water, Treated Effluent, and Sediment Analytical Requirements for Constituents at Sample Locations PF 4001, STRM 4003, STRM 4004, STRM 4005, STRM 4006, SWR-4801, SWR-4902, G2, and G10*

<b>Constituent<sup>a</sup></b>	<b>Analytical Method<sup>b</sup></b>	<b>Sample Type<sup>c</sup></b>	<b>ASL<sup>b</sup></b>	<b>Holding Time<sup>b</sup></b>	<b>Preservative<sup>b</sup></b>	<b>Container<sup>b</sup></b>
<b>General Chemistry:</b>						
Carbonaceous biochemical oxygen demand	5210B <sup>e</sup>	Composite	D	48 hours	Cool 4°C	Plastic or glass
Fluoride	300.0 <sup>d</sup> , 340.2 <sup>d</sup> , 4500C <sup>e</sup>	Composite	D	28 days	None	Plastic or glass
Nitrate/nitrite	353.1 <sup>d</sup> , 353.2 <sup>d</sup> , 353.3 <sup>d</sup> , 4500D <sup>e</sup> , or 4500E <sup>e</sup>	Composite	D	28 days	Cool 4°C, H <sub>2</sub> SO <sub>4</sub> to pH <2	Plastic or glass
Oil and grease	1664A <sup>d</sup> or 5520B <sup>e</sup>	Grab	D	28 days	Cool 4°C, H <sub>2</sub> SO <sub>4</sub> to pH <2	Glass
Total dissolved solids	160.1 <sup>d</sup> or 2540C <sup>e</sup>	Grab	D	7 days	Cool 4°C	Plastic or glass
Total hardness	2340C <sup>e</sup>	Grab	D	28 days	Cool 4°C, H <sub>2</sub> SO <sub>4</sub> to pH <2	Plastic
Total phosphorus	365.1 <sup>d</sup> , 365.2 <sup>d</sup> , 365.3 <sup>d</sup> , or 4500B <sup>e</sup>	Composite	D	28 days	Cool 4°C, H <sub>2</sub> SO <sub>4</sub> to pH <2	Plastic
Total suspended solids	160.2 <sup>d</sup> or 2540D <sup>e</sup>	Composite	D	7 days	Cool 4°C	Plastic or glass
<b>Inorganics:</b>						
Manganese	6020 <sup>h</sup> , 7000A <sup>h</sup> , 3500 <sup>e</sup> , 6010B <sup>h</sup> , 200.8 <sup>l</sup> , 220.2 <sup>d</sup> , or 272.2 <sup>d</sup>	Composite or Grab <sup>f</sup>	D	6 months	HNO <sub>3</sub> to pH <2	Plastic or glass
Mercury	7470A <sup>h</sup>	Grab	D	28 days	HNO <sub>3</sub> to pH <2	Plastic or glass
Mercury (low level)	1631 <sup>d</sup>	Grab	D	14 days	None	Amber glass
Cyanide, Free	335.1 <sup>d</sup> or 4500-G <sup>e</sup>	Grab	D	14 days	Cool 4°C, NaOH to pH >12	Plastic or glass

**UNCONTROLLED IF PRINTED**

*Table 4-5 (continued). Surface Water, Treated Effluent, and Sediment Analytical Requirements for Constituents at Sample Locations PF 4001, STRM 4003, STRM 4004, STRM 4005, STRM 4006, SWR-4801, SWR-4902, G2, and G10*

Constituent <sup>a</sup>	Analytical Method <sup>b</sup>	Sample Type <sup>c</sup>	ASL <sup>b</sup>	Holding Time <sup>b</sup>	Preservative <sup>b</sup>	Container <sup>b</sup>
<b>Radionuclides and Uranium:</b>						
Radium-226	EML HASL 300 <sup>j</sup>	Grab	D	6 months	HNO <sub>3</sub> to pH <2	Plastic or glass
Radium-228						
Technetium-99						
Uranium, Total	6020 <sup>n</sup> , D5174-91 <sup>k</sup>	Composite <sup>l</sup>	D		HNO <sub>3</sub> to pH <2	Plastic or glass
Uranium, Total <sup>q</sup>	6020 <sup>n</sup>	Grab <sup>p</sup>	D	6 months	None	500 mL plastic or glass
<b>Semivolatiles:</b>						
Bis(2-ethylhexyl)phthalate	625 <sup>m</sup>	Grab	D	7 days to extraction 40 days from extraction to analysis	Cool 4°C	Glass (amber with teflon-lined cap)
<b>Other:</b>						
Flow rate	NA	24 hour total	NA	NA	NA	NA
<b>Field Parameters<sup>n</sup></b>	FPQAPP <sup>o</sup>	Grab	A	NA	NA	NA

Note: The analytical site-specific contract identifies the specific method.

<sup>a</sup>This represents a comprehensive list of constituents taken from the indicated list of surface water and treated effluent monitoring locations. Each location will be analyzed for a subset of these constituents (summarized in Table 4-3).

<sup>b</sup>NA = not applicable

<sup>c</sup>For composite samples at PF 4001, a flow-weighted composite sample collected over a 24-hour period; for STRM 4003, STRM 4004, STRM 4005, and STRM 4006, composite samples shall consist of four samples collected at intervals of at least 30 minutes but not more than 2 hours.

<sup>d</sup>Methods for Chemical Analysis of Water and Wastes

<sup>e</sup>Standard Methods for the Examination of Water and Wastewater

<sup>f</sup>Grab samples are collected at locations SWR-4801 and SWR-4902 for this constituent.

<sup>g</sup>Method 1664, Revision A: N-Hexane Extractable Material (HEM; Oil and Grease) and Silica Gel Treated N-Hexane Extractable Material (SGT-HEM; Non-Polar material) by Extraction and Gravimetry.

<sup>h</sup>Test Methods for Evaluating Solid Waste, Physical/Chemical Methods

<sup>i</sup>Methods for the Determination of Metals in Environmental Samples

<sup>j</sup>Procedures Manual of the Environmental Measurements Laboratory.

<sup>k</sup>American Society for Testing and Materials (ASTM)

<sup>l</sup>Total uranium is a grab sample at STRM 4003, STRM 4004, STRM 4005, and STRM 4006 and a composite sample at all other locations.

<sup>m</sup>40 CFR 136, Appendix A

<sup>n</sup>Field parameters include dissolved oxygen, pH, specific conductance, and temperature.

<sup>o</sup>The FPQAPP provide field analytical methods.

<sup>p</sup>Grab sample for sediment is collected at locations G2 G10 for this constituent.

<sup>q</sup>Covers sediment only.

## **UNCONTROLLED IF PRINTED**

### Treated Effluent Sampling

Treated effluent samples will be collected by means of flow-proportional samplers at the Parshall Flume. After every 24 hours of operation, the collected liquid is removed from the automatic sampler to provide a daily flow-weighted sample of the treated effluent. A portion of each daily sample is analyzed to determine the estimate of total uranium discharged to the Great Miami River for the day. The Parshall Flume (PF 4001) will be analyzed for the constituents listed in Table 4-3.

### Sediment Sampling

Sampling is typically performed in summer or fall in order to take advantage of the abundance of fresh sediment deposited during flood conditions that commonly occur after winter and spring seasons. Only recently deposited surface sediment shall be collected, typically from deposition locations such as areas with a slow flow rate (e.g., obstructions in the stream bed that allow sediment to be deposited).

The locations of the sediment sample points are approximate and may change based on where stream flow has deposited sufficient material for sampling. Samples shall be collected from the top 2 inches and consist of fine-grained material. Any free water shall be drained from the sample and any non-sediment materials shall be discarded, then the sediment material shall be placed in the sample container.

#### 4.4.1.2 Quality Control Sampling Requirements

Quality control samples will be taken according to the frequency recommended in the FPQAPP. These samples will be collected and analyzed to evaluate the possibility that some controllable practice, such as sampling technique, may be responsible for introducing bias into the project's analytical results. Quality control samples will be collected as follows:

- One field duplicate sample shall be collected each quarter at a randomly selected surface water sample location.
- One field duplicate will be collected from the G10 sediment location in the Great Miami River.
- Trip blanks will be prepared for each sampling team on each day of sampling when organic compounds are included in the respective analytical program. They will be prepared before the sampling containers enter the field and will be taken into the field and handled along with the collected samples. Trip blanks will not be opened in the field.

For low-level mercury, all field sampling equipment will be sent to the off-site laboratory for decontamination. The off-site laboratory shall document certification of cleanliness via equipment rinsate blank analysis. In addition, trip blanks and field blanks will be supplied by the off-site laboratory and shall accompany the samples from collection to receipt at the laboratory.

#### 4.4.1.3 Decontamination

In general, decontamination of equipment is minimized because reusable equipment is not used during sample collection. However, if decontamination is required, then it will be performed between sample locations to prevent the introduction of contaminants or cross contamination into the sampling process. The decontamination requirements are identified in the FPQAPP.

## **UNCONTROLLED IF PRINTED**

Sampling bailers used in sampling for mercury at NPDES permit locations will be decontaminated at a contract laboratory.

### **4.4.1.4 Waste Disposition**

Contact waste that is generated by the field technicians during field sampling activities is collected, maintained, and disposed of as necessary.

## **4.5 IEMP Surface Water, Treated Effluent, and Sediment Monitoring Data Evaluation and Reporting**

This section describes the methods for analyzing data generated by the IEMP surface water, treated effluent, and sediment monitoring program and summarizes the data evaluation process and actions associated with various monitoring results. The planned reporting structure for IEMP-generated surface water, treated effluent, and sediment data, including specific information to be reported in the annual SER, is also provided.

### **4.5.1 Data Evaluation**

Data resulting from the IEMP surface water, treated effluent, and sediment program will be evaluated to meet the program expectations identified in Section 4.3.1. Based on these expectations, the following questions will be answered through the surface water, treated effluent, and sediment data evaluation process, as indicated:

- Are surface water contaminant concentrations such that cross-medium impacts to the underlying aquifer could be expected?

Data from sample locations near areas where the glacial overburden is breached by site drainages will be compared to surface water and groundwater FRLs to assess potential impacts to the Great Miami Aquifer. Basic statistics, such as the minimum, maximum, and mean, will be generated annually. The data generated from individual sampling events will be trended by sample location over time via graphical and, if necessary, statistical methods when sufficient data become available. If trends above the historical ranges or above FRLs are observed, actions shown in Figure 4–5 will be implemented.

The personnel responsible for the restoration of the Great Miami Aquifer will be informed so that any potential adverse cross-medium impacts can be factored into the site groundwater remedy. Decision-making process described in Figure 4–5 can be implemented as necessary.

- Do the sporadic exceedances of FRLs continue to occur? Are concentrations decreasing or increasing?

Data evaluation will consist of direct comparison of data to FRLs. It is likely that the list of constituents monitored with respect to FRLs can be reduced (i.e., IEMP Characterization Monitoring).

- Has storm water runoff caused an undue adverse impact to the surface water or treated effluent?

Trend analyses of data will be used to identify trends that may require further investigation of activities occurring within the drainage basin (or basins).

UNCONTROLLED IF PRINTED

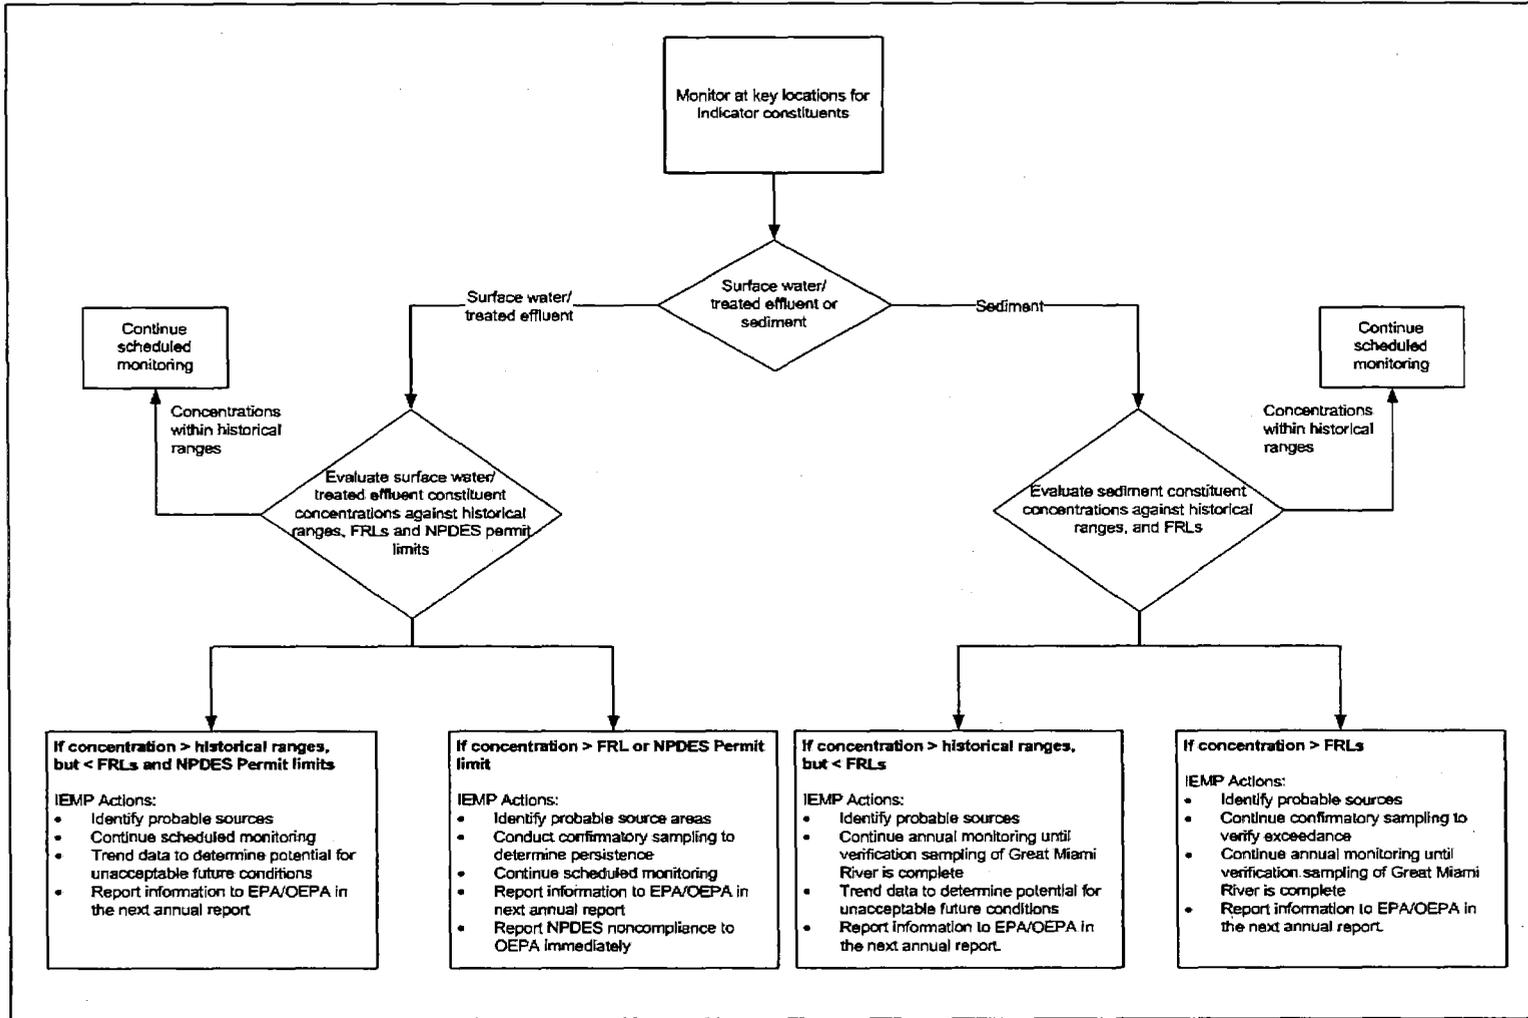


Figure 4-5. IEMP Surface Water and Sediment Data Evaluation and Associated Actions

## **UNCONTROLLED IF PRINTED**

- Are the requirements of the NPDES permit being fulfilled?

Data collected to fulfill the site NPDES permit requirements will be evaluated for compliance with the NPDES permit provisions. This evaluation will serve to identify whether immediate reporting of noncompliance to OEPA is necessary and to determine the appropriate corrective actions to address the noncompliance.

- Are the FFCA and OU5 ROD reporting requirements being fulfilled?

Radiological discharges to the Great Miami River and Paddys Run are regulated by the FFCA and OU5 ROD. Reporting requirements have been incorporated into the IEMP reporting structure and include a cumulative summary of pounds of total uranium discharged and the monthly average total uranium concentration discharged to the Great Miami River.

- Have the residual contaminant concentrations detected in sediment samples from the Great Miami River changed as a result of runoff and treated effluent from the site?

Data evaluation will consist of comparison to historical data, background levels, and FRLs. This evaluation will identify long-term trends of targeted radiological constituents in sediment to determine if the potential exists for an FRL exceedance in the future.

- Should the sediment program be refined in scope?

Data evaluation to determine if the IEMP sediment program should be revised will be based on the comparison to historical ranges and the sediment FRLs. Data evaluation to address any remaining expectations identified in Section 4.3.1 is encompassed in the data evaluation techniques described above.

- Are the program and reporting requirements of DOE Order 450.1A being met?

DOE Order 450.1A requires that DOE implement and report on an environmental protection program for the Fernald Preserve. The surface water and treated effluent monitoring program is one component of the sitewide IEMP monitoring program. This IEMP and the annual SER fulfill the requirements of this DOE order.

- Are community concerns being met through the surface water, treated effluent, and sediment IEMP program?

The IEMP fulfills the needs of the Fernald Preserve community by presenting surface water and treated effluent environmental results in the annual SER. DOE makes these reports available to the public at the Public Environmental Information Center. The specific community concern of the magnitude of Fernald Preserve discharges to Paddys Run and the Great Miami River is addressed in the annual SER in the surface water and treated effluent section.

### **4.5.2 Reporting**

The IEMP surface water, treated effluent, sediment, and semiannual FFCA data will be reported in the annual SER and on the LM website at <http://www.lm.doe.gov/ferald/Sites.aspx>.

Data on the LM website will be in the format of searchable data sets and downloadable data files. Additional information on IEMP data reporting is provided in Section 6.0.

## **UNCONTROLLED IF PRINTED**

The annual SER will be issued each June. This comprehensive report will discuss a year of IEMP data previously reported on the LM website. The annual SER will include the following:

- An annual summary of data from the IEMP surface water, treated effluent, and sediment monitoring program.
- Constituent concentrations for each sample location.
- Statistical analysis summary for constituents, as warranted by data evaluation.
- Status of FFCA and OU5 ROD Great Miami River effluent limits, to be presented graphically showing status of compliance with the 30- $\mu\text{g}/\text{L}$  and 600-pound total uranium limits.
- Status of regulatory compliance with provisions of the NPDES permit.
- Actions taken to mitigate unacceptable surface water conditions revealed by the IEMP surface water sampling program.
- Observed trends and results of the data comparison to FRLs.

Because the IEMP is a living document, a structured schedule of annual reviews and 5-year revisions has been instituted. The annual review cycle provides the mechanism for identifying and initiating any surface water, treated effluent, and sediment program modifications (i.e., changes in constituents, locations, or frequencies) that are necessary. Any program modifications that may be warranted prior to the annual review will be communicated to EPA and OEPA.

## **5.0 Dose Assessment Program**

Section 5.0 discusses the reasons for eliminating the air particulate monitoring, the monitoring strategy for direct radiation, and the technical approach for conducting and reporting the annual sitewide radiological dose assessment to meet the intentions of DOE Order 5400.5 and monitoring requirements of DOE Order 450.1A. The sources associated with air monitoring requirements were removed in 2006; however, limited monitoring occurred through 2009, as identified in previous IEMP revisions, to ensure that all air monitoring requirements were met and levels were acceptable from a closure standpoint. With agency approval, air particulate monitoring will cease with this revision of the LMICP.

### **5.1 Integration Objectives for the Dose Assessment Program**

The IEMP dose assessment-program objectives for 2010 are consistent with program objectives in previous IEMP revisions. The objectives include assessing the annual effective radiation dose to a human receptor to demonstrate compliance with the requirements of DOE orders. A reporting plan is provided in Section 6.0 to define the integration and reporting strategy for all media.

### **5.2 Background, Regulatory Drivers, and Requirements**

Past assessments were prepared to confirm that radiological doses to the public from routine operations and emissions comply with the dose limits set by EPA and DOE regulations and orders. With the completion of remedial activities in October 2006, operational sources for the emission of particulates to the air pathway no longer exist. Therefore, NESHAPs (40 CFR 61) compliance is no longer applicable, and the annual dose assessment will only address the requirements of DOE Order 5400.5.

Before 1998, yearly dose assessments were based on computer modeling results generated with measured and estimated releases of airborne radioactive materials from significant sources. Since 1998, radiological dose assessments have been based on environmental monitoring results. Environmental monitoring results were collected from a limited number of monitors (five boundary monitors and one background monitor) through December 2009. Beginning in 2010, dose assessments for DOE Order 5400.5 will use the post-remediation air-monitoring data from 2007 through 2009 to calculate the air dose.

### **5.3 Analysis of Regulatory Drivers, DOE Policies, and Other Fernald Preserve Site-Specific Agreements**

This section identifies the pertinent regulatory requirements, including ARARs and to-be-considered requirements, for the scope and design of the dose assessment program. These requirements were used to confirm that the program satisfied the regulatory obligations for monitoring (activated by the RODs) and achieved the intentions of other pertinent criteria (such as DOE orders and the Fernald Preserve existing agreements) that had a bearing on the scope of dose assessment.

## **UNCONTROLLED IF PRINTED**

### **5.3.1 Approach**

The analysis of additional regulatory drivers and policies for dose assessments was conducted by identifying the suite of ARARs and to-be-considered requirements in the approved CERCLA RODs and legal agreements that contain specific dose assessment requirements. This subset was further divided to identify requirements with sitewide implications (i.e., those within the scope of the IEMP [DOE 1997d]). Sections 5.11 and 6.0 outline the plan for complying with the reporting requirements invoked by the IEMP regulatory drivers.

### **5.3.2 Air Requirements**

The air monitoring program described in previous IEMPs was developed with full consideration of the regulatory drivers and policies. Table 5-1 lists the air-monitoring drivers, the previous monitoring conducted to comply with them, and results for the path forward. The results indicate that 3 years of post-remediation monitoring for air particulates have provided sufficient data to discontinue future monitoring of particulate levels.

### **5.3.3 Dose Requirements**

A sitewide radiological dose assessment is required to demonstrate compliance with DOE Order 5400.5. Table 5-2 lists the sitewide dose tracking and annual assessment tasks. The dose assessment described here and in Appendix C of previous IEMPs was developed with full consideration of the regulatory drivers and policies, as discussed in previous IEMPs.

The exposure to all radiation sources, as a consequence of routine activities at a DOE site, shall not cause an effective dose equivalent of greater than 100 millirem (mrem) per year (yr) to any member of the public. The annual effective dose equivalent is a weighted summation of doses to various organs of the body, which is incorporated in the derived concentration guidelines (DCGs) used to assess dose from the air and water pathways. For the Fernald Preserve, it is defined as the sum of external-radiation exposure plus the dose derived from the air and surface water pathways. These pathways are the only potential exposures to the public that could exceed 1 percent (1 mrem) of the 100-mrem/yr limit.

Exposure to direct radiation (gamma, X-ray and beta) is assessed quarterly using optically stimulated luminescence (OSL) dosimeters placed along the site trails and boundary (Section 5.8.1). Previous monitoring for direct radiation was performed using thermoluminescent dosimeters (TLDs), which had a nominal energy response of 0.03 to 1.25 million electron volts (MeV). OSL dosimeters have a wider energy-response range (0.005 to 20 MeV). DOE Order 5400.5 is not prescriptive on the monitoring devices that must be used to assess the direct radiation dose, but analytical integrity must be maintained, and the yearly dose to members of the public, from all pathways, must be less than 100 mrem above background.

For the air pathway, public exposure to radioactive particulate released to the atmosphere from activities at a DOE site shall not result in an effective dose equivalent greater than 10 mrem/yr. This will be demonstrated using air monitoring data obtained between 2007 and 2009. Because radium-226 sources were removed from the site, there is no significant source for radon-222, and doses caused by radon-222 and its decay products are not included in the assessment.

**UNCONTROLLED IF PRINTED**

*Table 5-1. Air Monitoring Regulatory Drivers, Required Actions, and Results*

<b>IEMP</b>		
<b>DRIVER</b>	<b>REQUIRED ACTION</b>	<b>RESULTS</b>
<p>DOE Order 450.1A, Environmental Protection Program Environmental Monitoring Plan for all media</p>	<ul style="list-style-type: none"> <li>• Requires DOE facilities that use, generate, release, or manage significant pollutants or hazardous materials to develop and implement an environmental monitoring plan</li> <li>• The previous IEMPs described effluent and surveillance monitoring as required by DOE Order 450.1A.</li> </ul>	<p>The final year of soil remediation at the Fernald Preserve was 2006. By the end of October 2006, all major sources of airborne contamination were removed from the site or placed in the OSDF. In recognition of the removal of emissions sources from the site, the number of air monitoring stations was decreased from 17 to 11 in April 2006 (DOE 2006c and from 11 to 6 in November of 2006 (DOE2006d). Three years of continued monitoring have shown that no additional air particulate monitoring is required for airborne contamination.</p>
<p>DOE Order 5400.5, Proposed 10 CFR 834 Radiation Protection of the Public and Environment</p>	<ul style="list-style-type: none"> <li>• Establishes radiological dose limits and guidelines for the protection of the public and environment. Under this requirement, the exposure to members of the public associated with activities from DOE facilities from all pathways must not exceed, in 1 year, an effective dose equivalent of 100 mrem.</li> <li>• For radiological dose due to airborne emissions only, the DOE order requires compliance with the 40 CFR 61 Subpart H limit of an effective dose equivalent of 10 mrem/year to a member of the public. Demonstration of compliance with this standard is to be based on an air monitoring approach.</li> <li>• The DOE order also provides guidelines for radionuclide concentrations in air (known as Derived Concentration Guides).</li> <li>• Provides radon concentration limits for interim storage of sources during remediation.</li> </ul>	<ul style="list-style-type: none"> <li>• In 2008, the maximally exposed individual, standing at the eastern boundary monitor with the highest above-background reading, could receive a dose of 6 mrem. The contributions to the estimated dose are 0.017 mrem from air inhalation and 6 mrem from direct radiation. This dose is 6 percent of the adopted DOE limit, which is 100 mrem/yr above background (exclusive of radon), as established by the International Commission on Radiological Protection.</li> <li>• Three years of post-monitoring data have demonstrated that the Fernald Preserve no longer has the potential to expose members of the public to an effective dose equivalent of 100 mrem/yr.</li> <li>• The final year of soil remediation at the Fernald Preserve was 2006. By the end of October 2006, all major sources of airborne contamination were removed from the site or placed in the OSDF. Three years of post-monitoring data have demonstrated that the Fernald Preserve no longer has the potential to expose members of the public to an effective dose equivalent of 10 mrem/yr.</li> </ul>

**UNCONTROLLED IF PRINTED**

Table 5-1 (continued). Air Monitoring Regulatory Drivers, Required Actions, and Results

<b>IEMP</b>		
<b>DRIVER</b>	<b>REQUIRED ACTION</b>	<b>RESULTS</b>
(DOE Order 5400.5, Proposed 10 CFR 834 Radiation Protection of the Public and Environment, continued)	Previous IEMPs described on-site and off-site monitoring for radon and other radionuclides, and monitoring to determine annual dose from the air pathway.	Present radon sources at the Fernald Preserve are limited to residual radium-226 concentrations in the soil and waste material disposed of in the OSDF. Waste materials in the OSDF are covered with a polyethylene liner and several feet of stone and soil, which provides an effective radon barrier. Two years of continued monitoring demonstrated that no additional monitoring is required for radon. Radon monitoring was discontinued in 2009.
Federal Facility Agreement Control and Abatement of Radon-222 Emissions	<ul style="list-style-type: none"> <li>• Ensures that DOE takes all necessary actions to control and abate radon-222 emissions at the Fernald Preserve</li> <li>• Previous IEMPs included radon monitoring.</li> </ul>	Waste material generated from uranium extraction processes performed decades ago contained radium-226, which produces radon. This waste material is no longer a source for radon at the site because the last of this material was shipped off site in 2006. Present radon sources at the Fernald Preserve are limited to residual radium-226 concentrations in the soil (near-background levels) and waste material disposed of in the OSDF. Waste materials in the OSDF are covered with a polyethylene liner and several feet of stone and soil, which provides an effective radon barrier. Two years of continued monitoring demonstrated that no additional monitoring is required for radon. Radon monitoring was discontinued in 2009.
DOE Order 435.1, Radioactive Waste Management	<ul style="list-style-type: none"> <li>• RODs are filed with HQs</li> <li>• Be in compliance with DOE 5400.5 Radiation Protection of the Public and Environment.</li> <li>• Requires low-level radioactive waste disposal facilities to perform environmental monitoring.</li> <li>• Previous IEMPs boundary monitoring included air monitoring at locations adjacent to the OSDF.</li> </ul>	Waste materials in the OSDF are covered with a polyethylene liner and several feet of stone and soil, which provides an effective radon barrier. Three years of continued monitoring have shown that no additional air monitoring is required.
CERCLA Remedial Design Work Plan (DOE 1996c)	Monitoring will be conducted as required following the completion of cleanup to assess the continued protectiveness of the remedial actions.	Three years of continued monitoring have shown the protectiveness of the remedial actions, and thus no additional monitoring is required.

## UNCONTROLLED IF PRINTED

Table 5–2. Sitewide Dose Tracking and Annual Assessment Tasks

IEMP	Tasks
Evaluate planned activities and conditions at beginning of the year	Annual Sitewide Planning
Conduct routine OSL monitoring at background, Trail, and site boundary locations; collect surface-water samples	Routine Site Monitoring
Directly compare routine monitoring results to annual dose benchmarks; report and evaluate any exceedances	Preventive Tracking/Feedback
Based on monitoring data, calculate annual doses at monitoring locations.	DOE Order 5400.5 Compliance Demonstration
Prepare summaries and the annual dose assessment report	Reporting

Public exposure due to the ingestion of a DOE drinking water source shall not result in an effective dose equivalent greater than 4 mrem/yr. Although there is no DOE drinking water source at the Fernald Preserve, an on-site visitor may illegally wade in the ponds and incidentally ingest the surface water. This scenario will be treated as a member of the public drinking from a DOE drinking water supply.

DOE Order 5400.5 states that the absorbed dose to native aquatic organisms shall not exceed 1 rad per day from exposure to the radioactive material in liquid wastes discharged to natural waterways. DOE has issued a technical standard entitled *A Graded Approach for Evaluating Radiation Doses to Aquatic and Terrestrial Biota* (DOE 2002a), and supporting software (RAD-BCG) for use in the evaluation and reporting of biota dose limits. A biota dose assessment divides the radionuclide concentration in surface water by a biota concentration guide (BCG) and sums the BCGs for all radionuclides. If the resulting sum is less than 1.0, compliance with the biota dose limit is achieved. Since 1999, the sum has been below 0.06, and in 2007 (the first year after closure) the sum dropped to 0.009 (DOE 2008b). There is no reasonable basis to assume that post-closure discharges in future years will exceed the 0.06 sum observed during active remediation. Therefore, dose calculations for aquatic organisms have been discontinued.

## 5.4 Program Expectations and Design Considerations

### 5.4.1 Program Expectations

The IEMP dose assessment program is required by DOE Order 5400.5 and will meet the following expectations for 2010:

- Post-remediation air-monitoring results (2007 through 2009) are as low as reasonably achievable (ALARA) and will be used to assess the inhalation dose.
- Direct radiation exposure will be measured using OSL dosimeters to support the annual dose calculation.
- Incidental ingestion of surface water will be assessed as part of the annual dose calculation.
- Provide a program that promotes the continued confidence of the public and is responsive to concerns raised by stakeholders.

### 5.4.2 Design Considerations

The assessment of air dose in previous years relied on a monitoring design that included collection of particulate samples, readings from continuous radon monitors, and TLD measurements. Particulate samples will be discontinued in 2010 because post-remediation data from 2007 through 2009 indicate that radionuclide levels are similar to background. Radon monitoring was discontinued in 2009. The direct-radiation component of the monitoring program will continue.

The direct-radiation component of the monitoring program is designed to assess the external environmental dose from gamma ray, X-ray, and beta radiation. This is accomplished using 12 OSL dosimeters: six are collocated with the former air-particulate monitors and six are placed along the hiking trails (Figure 5-1). At each location, three OSL devices are placed approximately one meter above the ground to assess the precision of the data. The OSL devices are processed quarterly at a DOE-approved laboratory.

The OSL devices deployed in 2009 replace the TLDs used in previous years. OSL dosimeters have a superior energy-response range (0.005 to 20 MeV), relative to TLDs (0.03 to 1.25 MeV), and the stored energy can be measured many times (without losing the exposure record) because the radiation dose is measured using a light-emitting diode, rather than the thermal annealing process used to read TLDs. Thermal annealing erases the exposure record held in the TLD.

The monitoring plan meets the following criteria:

- Provide quarterly analysis to evaluate direct radiation levels.
- Account for the annual dose from direct radiation to support the annual dose assessment required by DOE Order 5400.5.

Table 5-3 summarizes the sampling and analysis plan for the direct radiation monitoring program.

*Table 5-3. Analytical Summary for Direct Radiation*

Analyte	Sample Matrix	Sample Frequency	ASL
Gamma and Beta Radiation	OSL	Quarterly	B

## 5.5 Plan for External-Radiation Monitoring

This plan is for implementation of the sampling, analytical, and data-management activities associated with external-radiation monitoring. The program expectations and design presented in Section 5.4 were used as the framework for developing the monitoring approach presented in this section. The activities described here were designed to provide environmental data of sufficient quality to meet the intended data use. All sampling procedures and analytical protocols described or referenced in this plan are consistent with the requirements of the FPQAPP.

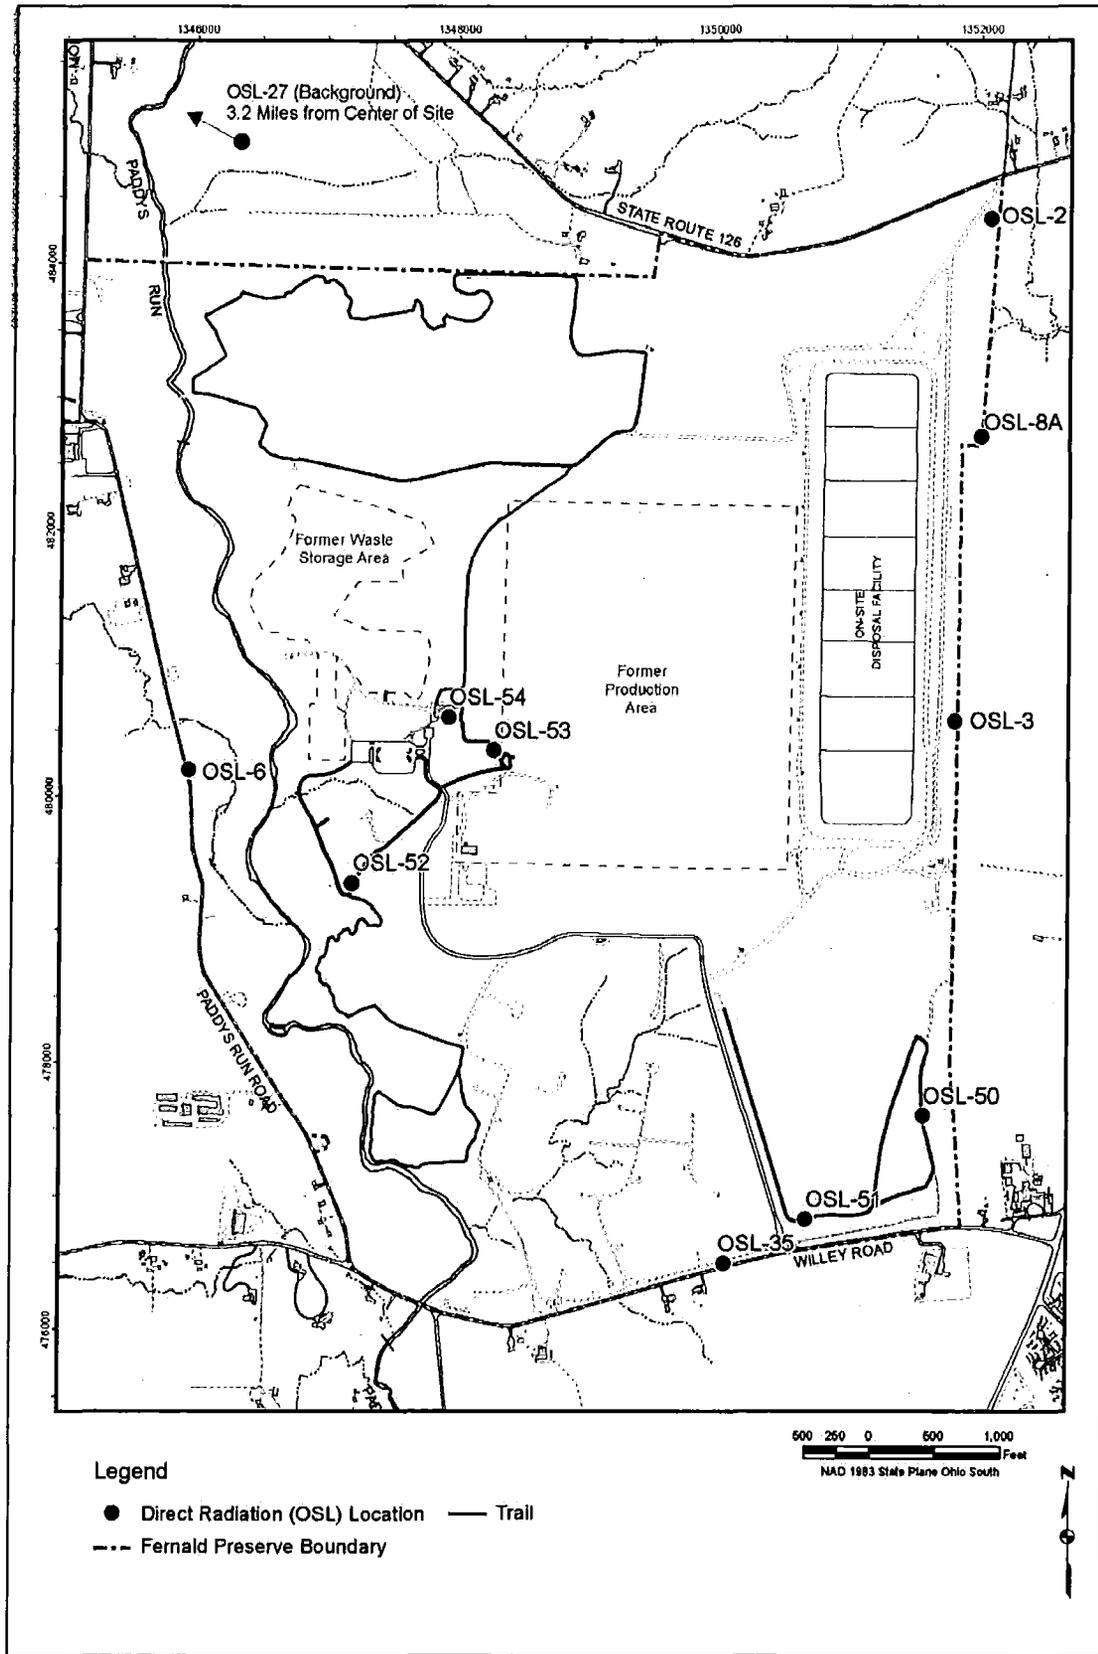


Figure 5-1. OSL Dosimeter Locations

### **5.5.1 Sampling Program**

Sample analysis will be performed at off-site contract laboratories. Laboratories will be selected based on analyses required, laboratory capacity, turnaround time, and performance of the laboratory. The laboratories used for analytical testing will meet DOECAP requirements, as specified in FPQAPP. These criteria include performance evaluation samples, pre-acceptance audits, performance audits, and an internal quality assurance program.

#### **5.5.1.1 Sampling Procedures**

External-radiation monitoring will be performed following the requirements specified in the FPQAPP, which have been incorporated into the *Fernald Preserve Environmental Monitoring Procedures* (DOE 2009b).

Table 5-3 provides a sample and analytical summary for the external-radiation monitoring program. Environmental dosimeters must meet the following criteria, according to DOE guidance:

- Environmental dosimeters shall be mounted at 1 meter above ground.
- The frequency of exchange should be based on predicted exposure rates from site operations.
- The exposure rate should be long enough (typically one calendar quarter) to produce a readily detectable dose.
- Calibration, readout, storage, and exposure periods used should be consistent with the American National Standard Institute standard recommendations.

All OSL dosimeters placed in the field are tracked via a field-tracking log that tells when and where dosimeters were deployed as well as scheduled collection dates.

#### **5.5.1.2 Quality Control Sampling Requirements**

Triplicate OSL dosimeters will be placed at each location and collected and analyzed to evaluate precision in the external-radiation measurement. Quarterly data from the three dosimeters at each location must agree within 15 percent, or the results will be considered suspect and invalid.

### **5.6 Data Evaluation**

This section provides the methods to be used in analyzing the data generated by the external-radiation monitoring in 2010. It summarizes the data evaluation process and actions associated with various monitoring results. The planned reporting structure for data provided in the annual SER is also discussed.

Data produced from the external-radiation monitoring will be evaluated to meet the program expectations identified in Section 5.4.1. Based on these expectations, the following questions will be answered:

- Are the program and reporting requirements of DOE Order 450.1A being met?

## **UNCONTROLLED IF PRINTED**

DOE Order 450.1A requires that DOE implement and report on an environmental protection program for the Fernald Preserve. External-radiation monitoring is one component of the sitewide IEMP monitoring program. The IEMP and the annual SER fulfill the requirements of this DOE order.

- Are the program goals in line with ALARA?

The external-radiation monitoring provides a quarterly assessment of exposure for the site and background locations, and this is used to evaluate ALARA.

- Are community concerns being met through the external-radiation monitoring?

The IEMP fulfills the needs of the Fernald Preserve community by presenting monitoring results in the annual SER.

Data generated from individual OSL dosimeter locations will be trended over time. Historical TLD and OSL dosimeter monitoring data will be used to assess whether current trends are similar, increasing, or decreasing, relative to previous years.

Measurements from the external-radiation monitoring, historical air particulate results (2007 through 2009), and surface water ingestion dose will be evaluated with respect to the program expectations (Section 5.4.1) and design (Section 5.4.2). Data evaluation consists of answering the following question:

- Do external radiation levels, inhalation dose from particulate, and water dose indicate an exceedance of the 100-mrem/year limit (DOE Order 5400.5)?

### **5.7 General Technical Approach**

This section presents the general technical approach for dose tracking and the annual dose assessment, including an explanation of exposure pathways, surveillance and characterization of these pathways, and the dose calculation procedure.

#### **5.7.1 Exposure Pathways**

According to past dose assessments at the Fernald Preserve, human receptors may be exposed through two primary pathways: the air pathway, which includes inhalation and ingestion; and the external radiation pathway. The radioactive source for these exposure pathways is the remediated soil. A surface-water pathway is also possible because the site is open to the public, and unescorted hiking is permitted on designated trails. Although wading and swimming are prohibited in the site ponds, incidental ingestion of surface water is a viable exposure pathway for visitors that do not follow the rules.

#### **5.7.2 Potential Receptors**

Hypothetical receptors represent conservative, but reasonable, exposure scenarios and locations. An off-property resident is assumed to live at the fence line, receive external radiation from the adjacent site soil, and inhale fugitive dust that is emitted when wind transports fine particles from bare patches of remediated soil. The on-site visitor is exposed via external radiation, air inhalation and ingestion of suspended particulate, and ingestion of surface water. Compliance with DOE Order 5400.5 will be based on the higher dose calculated for the two receptors.

## **UNCONTROLLED IF PRINTED**

### **5.7.3 Routine Surveillance of Pathways**

Remediated soil is the source for external radiation and inhalation of particles, while surface water serves as an additional source of radionuclide ingestion for the on-site visitor. External radiation is monitored quarterly with OSL dosimeters placed at the fence line, the Visitors Center, and along hiking trails. Particulate concentrations in the air and radionuclide concentrations in the particulate are derived from air monitoring samples collected at the fence line between 2007 and 2009. Radionuclide concentrations in the surface water are obtained annually (semiannually for uranium) from ponds and wetland locations (Table 4-3).

## **5.8 Dose Assessment Approach**

### **5.8.1 External Radiation**

OSL dosimeters will be used to monitor external radiation along the fence line (five locations), at the visitor center (one location) and along the hiking trails (five locations). The five fence-line locations (Figure 5-1) used for the 2007, 2008 and 2009 SERs will continue to be used in outyears. Two of the five hiking locations will be on the Lodge Pond Trail, one on the Biowetland Trail, and one on the Weapons to Wetlands Trail. Trail locations will be determined based on the highest residual radionuclide concentrations in the certified soil.

### **5.8.2 Air Pathway**

Radionuclide concentrations in air particulate obtained from fence-line samples collected between 2007 and 2009 (See Figure 5-1 in previous year's IEMP) will be used to assess the 10 mrem/yr limit. Monitoring for air particles in outyears is unnecessary because the most conservative case is the first 3 years after cessation of soil remediation, when vegetation is reestablished. That is, the maximum post-remediation particulate concentration observed in air is contained within the data collected between 2007 and 2009, and this maximum concentration will be used in the dose assessment.

### **5.8.3 Surface-Water Pathway**

Samples collected from ponds and wetlands (Figure 4-2) will be used to assess the internal dose to a visitor that illegally wades in the pond and incidentally ingests surface water. The sample with the highest radionuclide concentrations will be selected to evaluate DOE Order 5400.5, which requires that the dose due to ingestion of water be kept below 4 mrem/yr.

## **5.9 Frequency of Analysis and Analytical Results**

The frequency of analysis and laboratory quality assurance/quality control must be sufficient to maintain program integrity and confidence in the assessment of the 100 mrem/yr dose. Quarterly results for external radiation and semiannual samples for surface water are reasonable frequencies for an LM site. All environmental sample collection and analysis conducted at the Fernald Preserve are subject to the quality assurance requirements of the FPQAPP.

### **5.9.1 OSL Dosimeters and Surface-Water Samples**

OSL dosimeters will be collected, measured, and replaced on a quarterly basis to assess gamma radiation from residual radionuclide concentrations. Quarterly dose measurements for each

## UNCONTROLLED IF PRINTED

location will be summed to obtain the annual external dose due to gamma radiation. The highest gamma dose will be used to assess the 100 mrem/yr limit for all pathways. Fence line locations for the OSL dosimeters are shown on Figure 5-1.

Ponds and wetlands sampled semiannually for total uranium and annually for isotopes of thorium, radium, and technetium will provide the data to assess the site dose for a visitor that illegally wades and incidentally ingests surface water. Figure 4-2 provides the surface water sample locations.

### 5.9.2 Consideration of Decay-Chain Daughter Products

Uranium-238, thorium-232, and uranium-235 are initial radionuclides in the uranium, thorium, and actinide decay chains, respectively. The majority of uranium and thorium received and processed at the former Feed Material Production Center (FMPC) did not contain decay-chain daughters. Considering the half-lives of the daughters and the 40-year production history of the FMPC, a number of the daughters with half-life greater than a few hours (thorium-234, protactinium-234, radium-228, actinium-228, thorium-228, radium-224, and thorium-231) will be present at an activity equal to that of the parent, and this activity will be used in the dose assessment.

### 5.9.3 Managing Analytical Results

The analysis of environmental samples may result in reported contaminant concentrations that are at or below the minimum detectable concentration (MDC). Contaminant concentrations that are at or below the MDC are statistically indistinguishable from concentrations found in a blank sample. Therefore, results that are reported at or below the MDC will be set to zero for the dose assessment.

All MDCs must meet the limits established in the FPQAPP. Detectable contaminant concentrations will be converted to net concentrations by subtracting the background concentration from the measured result.

## 5.10 All-Pathway Dose Calculations

This section describes the calculations for demonstrating compliance with the 100-mrem/yr, all-pathway dose limit in DOE Order 5400.5. Estimates of annual dose are based on the background-corrected concentration of a contaminant in each environmental medium.

The general form of the dose assessment equation is:

$$D = C_{i,m} \times I_m \times DCF_i$$

where:

D = Dose (mrem/year)

$C_{i,m}$  = Background-corrected concentration of radionuclide "i" in medium "m"  
(pCi/kg or pCi/L)

$I_m$  = Intake (ingestion) rate for medium (kg/year or L/year)

$DCF_i$  = Dose conversion factor for radionuclide "i" (mrem/pCi)

## UNCONTROLLED IF PRINTED

In general, external radiation, air inhalation, and surface water doses will be calculated separately and then combined into the DOE all-pathway annual dose.

Quarterly OSL dosimeters results are reported as mrem per quarter, and the 4 quarters will be added together to obtain the yearly dose for external radiation.

The air dose will be calculated with the results of the particulate samples collected between 2007 and 2009 that yield the highest radionuclide concentrations. According to DOE Order 5400.5, the intake will be set to 8,400 m<sup>3</sup>/yr, and DCGs tabulated in Chapter III of the DOE order will be used to calculate the dose for each nuclide. Nuclides will be summed to obtain the total air dose, and this sum will be compared to the 10 mrem/yr criterion to evaluate compliance with the order.

DOE Order 5400.5 states that DOE sources of drinking water must maintain EPA drinking water standards, and radionuclide concentrations must be low enough to ensure that an internal dose is less than 4 mrem/yr. Although the 4 mrem/yr standard applies to drinking water, it will be used to assess the dose to an on-site visitor that illegally enters the ponds and incidentally ingests the surface water. Surface water samples will be screened to obtain the sample with the highest uranium value, and the volume of surface water ingested will be set to the value used for the Fernald Preserve visitor in the *Interim Residual Risk Assessment for the Fernald Closure Project* (DOE 2007), which is 0.6 liter per year. Water DCGs in Chapter III of DOE Order 5400.5 are based on an internal exposure of 100 mrem/yr and a person consuming drinking water at a rate of 730 liters per year. Therefore, the DCGs must be adjusted to account for the 4 mrem/yr limit and much lower intake attributed to incidental ingestion of surface water ( $DCG \times 4/100 \times 730/0.6$ ). The dose from each isotope will be summed to obtain the total surface water dose, and this sum will be compared to the 4 mrem/yr criterion to evaluate compliance with DOE Order 5400.5.

### 5.11 Reporting

OSL dosimeter data, surface water monitoring data, and the annual dose assessment will be reported according to the schedule in Section 6.0. The annual dose assessment will summarize monitoring results and calculated doses from the external radiation, historical air particulate data, and surface water pathways. Calculated doses will be compared to the regulatory limits to evaluate compliance with DOE Order 5400.5.

## **6.0 Program Reporting**

### **6.1 Introduction**

This section summarizes how the reporting discussions in Sections 3.0 through 5.0 are integrated and provides an overview of the entire environmental data reporting strategy.

### **6.2 IEMP Monitoring Summary**

The IEMP monitoring scope for groundwater, surface water, sediment, and dose has been described in detail in Sections 3.0 through 5.0. The summary that follows is intended to provide the basis for each medium's monitoring program. Evaluation of each program will form the basis for any IEMP program modifications in the future.

**Groundwater:** The groundwater monitoring program for the Great Miami Aquifer provides for monitoring water quality and water levels in monitoring wells distributed over the aquifer restoration area, along the Fernald Preserve's downgradient property boundary, and at a few private well locations. These wells provide a monitoring network to track the progress of the aquifer restoration and to monitor groundwater quality in the area of the OSDF. The analytical requirements for this monitoring program are based on the FRLs documented in the ROD for Remedial Actions at OU5.

**Surface Water:** The surface water and treated effluent monitoring program is designed to assess the impacts on surface water. The nonradiological discharge monitoring and reporting related to the NPDES permit have been incorporated into the IEMP.

**Sediment:** The IEMP sediment sampling program determines whether substantial changes to current residual contaminant conditions occur in the sediment along the Great Miami River. Sediment sampling will continue every 5 years at the Great Miami River sample points for uranium to verify that no adverse impacts have occurred to sediment.

**Dose:** The dose assessment program is designed to assess the annual effective radiation dose to a human receptor to demonstrate compliance with the requirements of DOE orders. There are 12 OSL dosimeters located at the Fernald Preserve: six are collocated with the former air particulate monitors and six are placed along the hiking trails. The air monitoring data collected between 2007 and 2009 and the surface water data are used to assess the annual sitewide radiological dose from these pathways.

The IEMP will be reviewed and revised each September. Revisions will identify any program modifications and any changes to existing regulatory agreements or requirements applicable to sitewide monitoring.

In addition to the IEMP-sponsored review and revision obligations, an independent review and assessment mechanism exists through the Cost Recovery Grant reached between OEPA and DOE. The Cost Recovery Grant provides a way for OEPA to conduct an independent review of

## **UNCONTROLLED IF PRINTED**

DOE environmental monitoring programs. OEPA's role, as defined in the Cost Recovery Grant, is to independently verify the adequacy and effectiveness of DOE's environmental monitoring programs through program review and independent data collection. Any environmental data collected independently by OEPA are provided to DOE. Modifications to the scope or focus of the IEMP as a result of OEPA's activities will be incorporated as necessary via the annual LMICP review process.

### **6.3 Reporting**

As stated in Section 1.0, a primary objective of the IEMP is to successfully integrate the numerous routine environmental reporting requirements under a single comprehensive framework. The IEMP centralizes, streamlines, and focuses sitewide environmental monitoring and associated reporting under a single controlling document.

The IEMP reporting frequency will be annual with a continued emphasis on timely data reporting in the form of electronic files (i.e., the LM website). The annual SER will continue to be submitted by June 1 to provide a comprehensive evaluation of IEMP data for both the regulatory agencies and the public, and electronic data will be made available to the regulatory agencies as soon as data have been reviewed.

#### LM Website

The LM website (<http://www.lm.doe.gov/Fernald/Sites.aspx>) allows the regulatory agencies and members of the public to access Fernald Preserve data in a timely manner. The data are available after analysis and entry into the SEEPro environmental database. The OSL dosimeter data, OSDF Leachate Collection System and Leak Detection System volumes, and groundwater operational data are available upon request. Groundwater, surface water, and sediment data are available through user-defined queries that use the Geospatial Environmental Mapping System (GEMS). GEMS is a Web-based application that provides the ability to query LM environmental data. Once the user is on the GEMS website, the environmental data can be queried by selecting Environmental Reports from the menu. A tutorial is available under Help, which is also on the menu. The use of the LM website for reporting IEMP data provides the agencies with access to IEMP data sooner than through the annual reports. In addition to the environmental media addressed in the IEMP, water quality and water accumulation rate data from the OSDF are included on the LM website.

Based on the objective of the dose assessment described in Section 5.0, the dose assessment results will be presented via two reporting mechanisms: regulatory interfaces and annual reporting.

**UNCONTROLLED IF PRINTED**

Annual Site Environmental Reports

The annual SER will continue to be submitted to EPA and OEPA on June 1 of each year. It will continue to document the technical monitoring approach and to summarize the data for each environmental medium. The report will also include water quality and water accumulation rate data from the OSDF monitoring program. The summary report serves the needs of both the regulatory agencies and the public. The accompanying detailed appendixes are a compilation of the information reported on the LM website and are intended for a more technical audience, including the regulatory agencies.

Table 6-1 identifies the media that are being reported under the IEMP and the associated reporting schedule.

*Table 6-1. IEMP Reporting Schedule for 2010*

	2010											
	First Quarter			Second Quarter			Third Quarter			Fourth Quarter		
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
<b>Groundwater/OSDF<sup>a</sup></b>	*	*	*	*	*	* •	*	*	*	*	*	*
<b>Surface Water<sup>b</sup></b>	*	*	*	*	*	* •	*	*	*	*	*	*
<b>NPDES Permit Compliance</b>	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
<b>Dose</b>						•						

- \*= LM website Data Reporting
- =Annual Reporting
- ◆=Monthly Reporting

<sup>a</sup>Encompasses aquifer restoration operational assessment, aquifer conditions, and OSDF groundwater monitoring.

<sup>b</sup>Encompasses NPDES and IEMP characterization monitoring.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 7.0 References

10 CFR 834. U.S. Department of Energy, "Radiation Protection of the Public and Environment," Draft, *Code of Federal Regulations*.

40 CFR 58. U.S. Environmental Protection Agency, "Ambient Air Quality Surveillance," *Code of Federal Regulations* July 1, 2008.

40 CFR 61. U.S. Environmental Protection Agency, "National Emission Standards for Hazardous Air Pollutants," *Code of Federal Regulations*, July 1, 2008.

40 CFR 192. U.S. Environmental Protection Agency, "Health and Environmental Protection Standards for Uranium and Thorium Mill Tailings," Section 32, "Standards," *Code of Federal Regulations*, July 1, 2008.

40 CFR 264. U.S. Environmental Protection Agency, "Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities," Subpart F, "Releases from Solid Waste Management Units," *Code of Federal Regulations*, July 1, 2008.

40 CFR 265. U.S. Environmental Protection Agency, "Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities," Subpart F, "Ground Water Monitoring," *Code of Federal Regulations*, July 1, 2008.

APHA (American Public Health Association), 1989. *Standard Methods for the Examination of Water and Wastewater*, 17th edition, Washington, DC.

DOE Manual 435.1 Change 1, *Radioactive Waste Management Manual*, June 19, 2001.

DOE Order 450.1A, *Environmental Protection Program*, June 4, 2008.

DOE Order 5400.5 Change 2, *Radiation Protection of the Public and the Environment*, January 7, 1993.

DOE (U.S. Department of Energy), 1991. *Environmental Regulatory Guide for Radiological Effluent Monitoring and Environmental Surveillance*, DOE/EH 0173T, Assistant Secretary for Environment, Safety and Health, Washington, DC, January.

DOE (U.S. Department of Energy), 1993. *South Plume Groundwater Recovery System Design, Monitoring, and Evaluation Program Plan*, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1995a. *Feasibility Study Report for Operable Unit 5*, Final, Fernald Environmental Management Project, Cincinnati, Ohio, June.

DOE (U.S. Department of Energy), 1995b. *Final Operable Unit 5 Proposed Plan*, 6865 U 007 405.3, Final, Fernald Environmental Management Project, Cincinnati, Ohio, May 1.

**UNCONTROLLED IF PRINTED**

DOE (U.S. Department of Energy), 1995c. *Remedial Investigation Report for Operable Unit 5*, Final, Fernald Environmental Management Project, Cincinnati, Ohio, March.

DOE (U.S. Department of Energy), 1995d. *Fernald Site Environmental Monitoring Plan*, PL 1002, Revision 2, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1995e. *Proposed Plan for OU5*, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1996a. *Record of Decision for Remedial Actions at Operable Unit 5*, 7478 U 007 501.4, Final, Fluor Fernald, Cincinnati, Ohio, January.

DOE (U.S. Department of Energy), 1996b. *Remedial Design Work Plan for Remedial Actions at Operable Unit 5*, Final, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1996c. *CERCLA Remedial Design Work Plan*, Final, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1997a. *Baseline Remedial Strategy Report, Remedial Design for Aquifer Restoration (Task 1)*, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1997b. *Procedures Manual of the Environmental Measurements Laboratory*, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1997c. *Restoration Area Verification and Sampling Program*, Project Specific Plan, Final, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 1997d. *Integrated Environmental Monitoring Plan*, 2505 WP 0022, Revision 0, Final, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 2000. *Conceptual Design for Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas*, Final, Fernald Environmental Management Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 2001. *Design for Remediation of the Great Miami Aquifer in the Waste Storage and Plant 6 Areas*, Revision A, Draft Final, Fernald Environmental Management Project, Cincinnati, Ohio, April.

DOE (U.S. Department of Energy), 2002a. *A Graded Approach for Evaluating Radiation Doses to Aquatic and Terrestrial Biota*, Final Technical Standard, Project No. ENVR-0011, Washington, D.C.

DOE (U.S. Department of Energy), 2002b. *Design for Remediation of the Great Miami Aquifer, South Field (Phase II) Module*, Revision A, Draft Final, Fernald Environmental Management Project, Cincinnati, Ohio, May.

**UNCONTROLLED IF PRINTED**

DOE (U.S. Department of Energy), 2004. *Groundwater Remedy Evaluation and Field Verification Plan*, Fernald Closure Project, Cincinnati, Ohio, June.

DOE (U.S. Department of Energy), 2005a. *Addendum to the Waste Storage Area (Phase II) Design Report*, 52424 RP 0004, Revision A, Draft Final, Fernald Closure Project, Cincinnati, Ohio, June.

DOE (U.S. Department of Energy), 2005b. *Storm Sewer Outfall Ditch*, Revision 0, Final, Fernald Closure Project, Cincinnati, Ohio, June.

DOE (U.S. Department of Energy), 2005c. *Waste Storage Area (Phase II) Design Report*, 52424 RP 0004, Revision A, Draft Final, Fernald Closure Project, Cincinnati, Ohio, June.

DOE (U.S. Department of Energy), 2006a. *Fernald Groundwater Certification Plan*, 51900-PL-0002, Revision 1, Final, Fluor Fernald, Cincinnati, Ohio, April.

DOE (U.S. Department of Energy), 2006b. *Fernald Project Health and Safety Plan*, LMS/FER/S02018, prepared by S.M. Stoller Corporation for the U.S. Department of Energy, Grand Junction, Colorado.

DOE (U.S. Department of Energy), 2006c. Approval for removing Phase 1 – TLD, Radon and Particulate Monitors (AMS-04, AMS-05, AMS-07, AMS-23, AMS-25 and AMS-28), received at weekly conference call on 11 April 2006.

DOE (U.S. Department of Energy), 2006d. Phase II Site Boundary Air Monitor Reductions, approval letter received from EPA on November 29, 2006.

DOE (U.S. Department of Energy), 2007. *Interim Residual Risk Assessment for the Fernald Closure Project*, 50000-RP-0012, Rev 1.

DOE (U.S. Department of Energy), 2008a. *Remedial Design Work Plan and DOE Order 450.1A*, Fernald Closure Project, Cincinnati, Ohio.

DOE (U.S. Department of Energy), 2008b. *2007 Sitewide Environmental Report*, Rev 0., S.M. Stoller Corporation, Grand Junction, Colorado, May.

DOE (U.S. Department of Energy), 2009a. *Fernald Preserve Quality Assurance Project Plan*, LMS/FER/S04774-4.0, prepared by S.M. Stoller Corporation for the U.S. Department of Energy Office of Legacy Management, Grand Junction, Colorado.

DOE (U.S. Department of Energy), 2009b. *Fernald Preserve Environmental Monitoring Procedures*, Revision 0, prepared by S.M. Stoller Corporation for the U.S. Department of Energy Office of Legacy Management, Grand Junction, Colorado.

EPA (U.S. Environmental Protection Agency), 1983. *Methods for Chemical Analysis of Water and Wastes*, EPA/600/4-79-020, Washington, DC, March.

**UNCONTROLLED IF PRINTED**

EPA (U.S. Environmental Protection Agency), 1991. *Handbook of Suggested Practices for the Design and Installation of Groundwater Monitoring Wells*, EPA/600/489034, Office of Research and Development, Washington, DC, March.

EPA (U.S. Environmental Protection Agency), 1992. *General Methods for Remedial Operation Performance Evaluations*, EPA/600/R 92/002, Robert S. Kerr Environmental Research Laboratory, Ada, Oklahoma, January.

EPA (U.S. Environmental Protection Agency), 1998. *Test Methods for Evaluating Solid Waste, Physical/Chemical Methods*, SW 846, Revision 5, Washington, DC, April.

OEPA (Ohio Environmental Protection Agency), 1993. "Ohio EPA Director's Final Findings and Orders, in the Matter of: U.S. Department of Energy, Fernald Environmental Management Project," P.O. Box 398704, Cincinnati, Ohio 45239, Columbus, Ohio, September 10.

OEPA (Ohio Environmental Protection Agency), 2000. "Ohio EPA Director's Final Findings and Orders, in the Matter of: U.S. Department of Energy, Fernald Environmental Management Project," P.O. Box 398704, Cincinnati, Ohio 45239, Columbus, Ohio, September 7.

**UNCONTROLLED IF PRINTED**

**Appendix A**

**Natural Resource Monitoring Plan**

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## Contents

Acronyms and Abbreviations .....	iii
1.0 Introduction and Objectives .....	1
2.0 Analysis of Regulatory Drivers .....	1
2.1 Threatened and Endangered Species .....	1
2.2 Wetlands/Floodplains .....	1
2.3 Cultural Resource Management.....	2
2.4 The CERCLA Natural Resource Trusteeship Process.....	3
2.5 National Environmental Policy Act.....	3
3.0 Program Expectations and Design Considerations .....	4
4.0 Natural Resource Monitoring Plan .....	4
4.1 Threatened and Endangered Species .....	4
4.1.1 Sloan’s Crayfish.....	4
4.1.2 Indiana Brown Bat .....	7
4.1.3 Running Buffalo Clover.....	7
4.1.4 Spring Coral Root .....	8
4.2 Wetlands/Floodplains .....	8
4.3 Cultural Resource Management.....	8
4.4 Restored Area Monitoring .....	11
4.4.1 Implementation-Phase Monitoring .....	11
4.4.2 Functional Monitoring .....	12
4.5 Natural Resource Data Evaluation and Reporting .....	13
5.0 References.....	13

## Figures

Figure 1. Priority Natural Resource Areas.....	5
Figure 2. Cultural Resource Survey Areas .....	9

## Table

Table 1. Fernald Site Natural Resource Monitoring.....	2
--	---

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

**UNCONTROLLED IF PRINTED**

**Acronyms and Abbreviations**

CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CFR	<i>Code of Federal Regulations</i>
DOE	U.S. Department of Energy
LM	DOE Office of Legacy Management
EPA	U.S. Environmental Protection Agency
FQAI	Floristic Quality Assessment Index
IEMP	Integrated Environmental Monitoring Plan
NEPA	National Environmental Policy Act
NRMP	Natural Resource Monitoring Plan
NRRP	Natural Resource Restoration Plan
OEPA	Ohio Environmental Protection Agency
U.S.C.	<i>United States Code</i>

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 1.0 Introduction and Objectives

The purpose of the Natural Resource Monitoring Plan (NRMP) is to outline a comprehensive plan for monitoring natural resources at the Fernald Preserve. Monitoring requirements related to natural resources include the following: (1) monitoring the status of several priority natural resource areas to maintain compliance with applicable regulations; (2) monitoring of completed restoration projects as specified in the Natural Resource Restoration Plan (NRRP), which is Appendix B of the *Consent Decree Resolving Ohio's Natural Resource Damage Claim against DOE* (State of Ohio 2008); and (3) monitoring impacts to natural resources from site activities. The results of this monitoring will be used to inform the U.S. Environmental Protection Agency (EPA), Ohio Environmental Protection Agency (OEPA), and the Fernald Natural Resource Trustees of the status of natural resources at the Fernald Preserve. Monitoring results will be reported in the annual Site Environmental Reports.

## 2.0 Analysis of Regulatory Drivers

As shown in Table 1, regulatory drivers for the management of natural resources and associated impact monitoring include six areas: endangered species protection; wetlands/floodplain regulations; cultural resource management; the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) natural resource trusteeship process; the National Environmental Policy Act (NEPA); and the NRRP.

### 2.1 Threatened and Endangered Species

The federal laws and regulations listed below mandate that any action authorized, funded, or carried out by the U.S. Department of Energy (DOE) cannot jeopardize the continued existence of any threatened or endangered (i.e., listed) species or result in the destruction or adverse modification of the constituent elements essential to the conservation of a listed species within a defined critical habitat. Additional requirements may apply if it is determined that a proposed activity could adversely affect these species or their habitat. These laws and regulations include the Endangered Species Act (Title 16 *United States Code* [U.S.C.] §1531 et seq.) and its associated regulations (Title 50 *Code of Federal Regulations* Part 17 [50 CFR 17] and 50 CFR 402).

State law also protects endangered species by prohibiting the taking or destruction of any state-listed endangered species. These laws are found in *Ohio Revised Code* §1518 and §1531, as well as in *Ohio Administrative Code* §1501.

### 2.2 Wetlands/Floodplains

Executive Order 11990, *Protection of Wetlands*, and Executive Order 11988, *Protection of Floodplains*, which are implemented by 10 CFR 1022, "Compliance with Floodplain and Wetland Environmental Review Requirements," specify the requirement for a Floodplain/Wetland Assessment in cases where DOE is responsible for providing federally undertaken, financed, or assisted construction and improvements that may impact floodplains or wetlands. This regulation further requires that DOE exercise leadership to minimize the destruction, loss, or degradation of wetlands; and preserve and enhance the natural and beneficial values of wetlands.

## UNCONTROLLED IF PRINTED

Table 1. Fernald Site Natural Resource Monitoring

Driver	Action
Endangered Species Act Ohio Endangered Species Regulations	The IEMP describes management of existing habitat and follow-up surveys.
Clean Water Act Section 404	The IEMP describes the monitoring of mitigation wetlands.
National Historic Preservation Act	The IEMP describes the monitoring of cultural resources.
Native American Graves Protection and Repatriation Act	
Archaeological Resources Protection Act	
CERCLA	The IEMP describes the CERCLA Natural Resources Trusteeship process.
Executive Order 12580	
National Contingency Plan	
NEPA	The IEMP discusses the substantive requirements of NEPA for protecting sensitive environmental resources.
NRRP	The IEMP discusses restored area monitoring.

Pursuant to Section 404 of the Clean Water Act and 33 CFR 323.3, any activity that results in the discharge of dredged or fill material out of or into a wetland or water of the United States requires permit authorization by the Army Corps of Engineers. These permits can be in the form of either nationwide permits (33 CFR 330) or individual permits (33 CFR 323), depending on the nature of the activity.

Section 401 of the Clean Water Act and 33 CFR 325.2(b)(1)(ii) also require that a Section 401 State Water Quality Certification be obtained to authorize discharges of dredged and fill material under a Section 401 permit. In Ohio, the Section 401 State Water Quality Certification program is administered by OEPA pursuant to Chapter 3745-32 *Ohio Administrative Code*.

### 2.3 Cultural Resource Management

Management of cultural resources, particularly archeological sites, is mandated by the National Historic Preservation Act (16 U.S.C. §470), the Native American Graves Protection and Repatriation Act (25 U.S.C. 3001 et seq.), and the Archeological Resources Protection Act (16 U.S.C. §470aa-470ll). The associated regulations for the above laws are found in 36 CFR 800, 43 CFR 10, and 43 CFR 7, respectively. These laws and regulations ensure that archeological resources on federal land are appropriately managed. Section 106 of the National Historic Preservation Act ensures that DOE considers the effect of its undertakings on properties eligible for listing on the National Register of Historic Places. The Native American Graves Protection and Repatriation Act and 43 CFR 10 require that the rightful control of Native American cultural items discovered on federal land be relinquished to the appropriate culturally affiliated tribe. Federal land is defined as "land that is owned or controlled by a federal agency." Cultural items are defined as "human remains, associated funerary objects, unassociated funerary objects, sacred objects, and objects of cultural patrimony." The Archeological Resources Protection Act and 43 CFR 7 ensure that competent individuals carry out archeological excavations in a scientific manner.

## **UNCONTROLLED IF PRINTED**

DOE signed a Programmatic Agreement with the Advisory Council on Historic Preservation and the Ohio Historic Preservation Office that streamlines the National Historic Preservation Act Section 106 consultation process. Monitoring provisions will be included as part of this agreement to ensure that appropriate management is implemented for any eligible properties at the Fernald Preserve.

### **2.4 The CERCLA Natural Resource Trusteeship Process**

CERCLA, Executive Order 12580, and the National Contingency Plan require certain federal and state officials to act on behalf of the public as trustees for natural resources. Natural Resource Trustees for the Fernald Preserve are the Secretary of DOE; the Secretary of the U.S. Department of the Interior; and officials of the OEPA, appointed by the governor of Ohio.

The role of the Natural Resource Trustees is to act as guardians for public natural resources at or near the Fernald Preserve. The trustees are responsible for determining if natural resources have been injured as a result of a release of a hazardous substance or oil spill from the site, and if so, how to restore, replace, or acquire the equivalent natural resources to compensate for the injury. As the responsible party, DOE is potentially liable for costs related to natural resource injury.

The Fernald Natural Resource Trustees began meeting in June 1994 to evaluate and determine the feasibility of integrating the trustees' concerns with site remediation activities. The trustees identified their desire to resolve DOE's liability by integrating restoration activities with the Fernald Site's remediation.

DOE and OEPA signed a Consent Decree in November 2008 that settles a long-standing natural resource damage claim under Section 107 of CERCLA. As a result, the Fernald Natural Resource Trustees (DOE, OEPA, and the U.S. Department of Interior) have finalized the NRRP, which is Appendix B of the *Consent Decree Resolving Ohio's Natural Resource Damage Claim against DOE* (State of Ohio 2008). The NRRP specifies an enhanced monitoring program for ecologically restored areas at the site. The Natural Resource Trustees will collectively evaluate restored areas by conducting field walkdowns and reviewing monitoring data. In addition, an enhanced wetlands mitigation monitoring program will be developed, along with the resumption of functional-phase monitoring in restored areas. As stated in Section 1.0, this monitoring will be summarized in the annual Site Environmental Reports. Detailed results of restoration monitoring will be provided annually in the appendix to the Site Environmental Report.

### **2.5 National Environmental Policy Act**

In addition to the regulatory drivers summarized above, aspects of natural resource management and monitoring are mandated through the incorporation of substantive NEPA requirements into remedial action planning. In June 1994, DOE issued a revised secretarial policy on NEPA compliance. This policy called for the integration of NEPA requirements into the CERCLA decision-making process. Therefore, requirements for the protection of sensitive environmental resources, including threatened and endangered species and cultural resources, are to be considered throughout legacy management activities.

### 3.0 Program Expectations and Design Considerations

The expectations of the monitoring and reporting as outlined in the NRMP are as follows:

- Provide a mechanism to monitor the status of the Fernald Site's natural resources to remain in compliance with applicable laws and regulations.
- Monitor restored areas to ensure that requirements of the NRRP are being met and that restored areas continue to develop and function as designed.

The results of the monitoring outlined in this NRMP will be compiled and reported to EPA and OEPA. Results will be reviewed to ensure that ecologically restored areas are performing as designed. If results indicate that a restored area is not functioning as intended, DOE's Office of Legacy Management (LM), in consultation with EPA, OEPA, and the Natural Resource Trustees, will decide the appropriate corrective actions.

### 4.0 Natural Resource Monitoring Plan

Monitoring was implemented during remediation activities to identify impacts to natural resources at the Fernald Site with particular emphasis placed on meeting regulatory requirements for NEPA, threatened or endangered species, wetlands/floodplains, and cultural resources. To accommodate natural resource monitoring, priority natural resource areas have been established across the Fernald Preserve (Figure 1).

#### 4.1 Threatened and Endangered Species

The state-listed threatened Sloan's crayfish (*Orconectes sloanii*) and the federally endangered Indiana brown bat (*Myotis sodalis*) are the only threatened or endangered species to have a known population at the Fernald Preserve. However, there is the potential for other state-listed and federally listed threatened or endangered species to have habitat ranges that encompass or occupy the Fernald Preserve. Monitoring will continue to track the status of the Indiana brown bat populations and their habitat. If activities at the Fernald Preserve could potentially impact the Sloan's crayfish habitat, active monitoring of those areas will resume. Monitoring for several other listed species that may be present at the Fernald Preserve will take place if potential habitat would be impacted by site activities.

##### 4.1.1 Sloan's Crayfish

The state-listed threatened Sloan's crayfish is a small crayfish found in the streams of southwest Ohio and southeast Indiana. It prefers streams with constant (though not necessarily fast) current flowing over rocky bottoms. A large, well-established population of Sloan's crayfish is found at the Fernald Site in the northern reaches of Paddys Run. In dry periods, the crayfish retreat to the deeper pools that remain, primarily upstream of the former rail trestle, located approximately at the boundary between Hamilton and Butler counties. A significant population of Sloan's crayfish also resides in an off-property section of Paddys Run at New Haven Road.

This species resides with one other competing species of crayfish (*Orconectes rusticus*) that is generally considered more aggressive. In addition, the Sloan's crayfish is sensitive to siltation in streams.

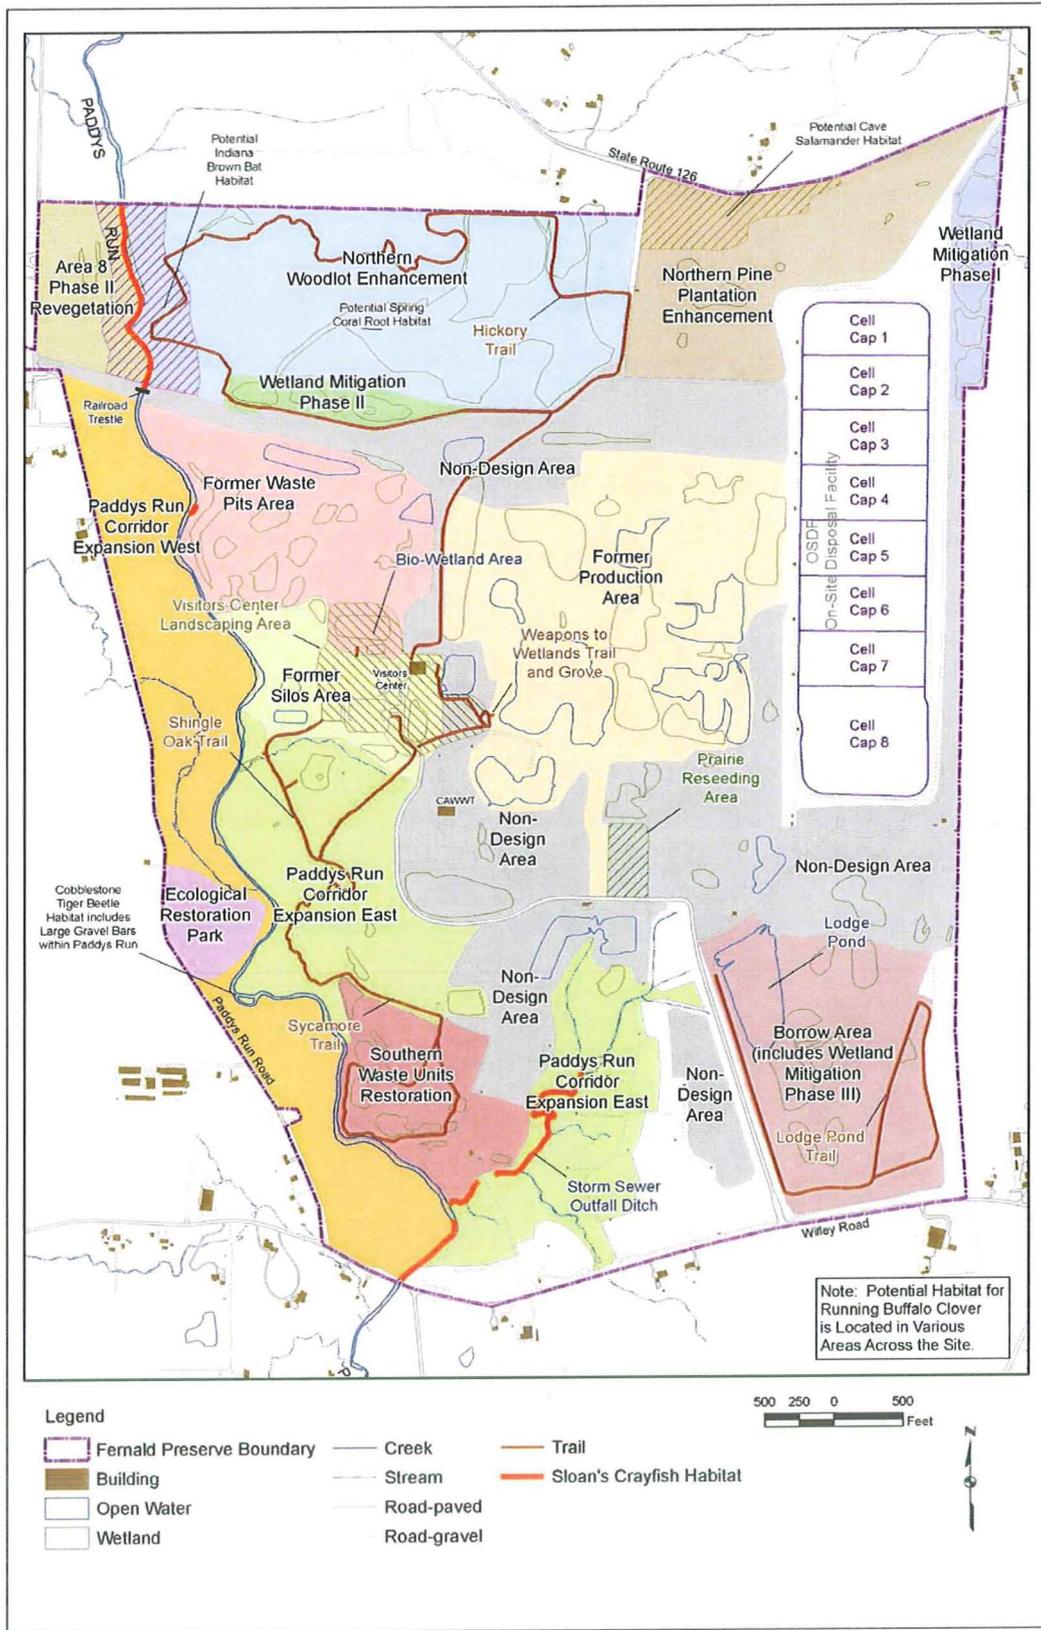


Figure 1. Priority Natural Resource Areas

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## **UNCONTROLLED IF PRINTED**

Impacts on Sloan's crayfish are similar to those on other aquatic organisms in Paddys Run. Impacts of concern would include excavation and alteration of the streambed along with increased siltation and runoff into Paddys Run. With the majority of on-site soil disturbance now complete, habitat impacts are not expected. A survey of Sloan's crayfish was conducted in 2008 to assess the post-closure status of the on-site population. If the potential for impacts does return, a Sloan's crayfish management plan will be put in place. This plan would detail monitoring and contingency plans to mitigate impacts.

### **4.1.2 Indiana Brown Bat**

Good to excellent summer habitat for the federally listed endangered Indiana brown bat (*Myotis sodalis*) has been identified north of the former rail trestle along Paddys Run. The habitat provides an extensive mature canopy from older trees and the presence of water throughout the year. In 1999, one adult female was captured along Paddys Run and released. Potential impacts to Indiana brown bat habitat would include tree removal and stream alteration in the northern on-property sections of Paddys Run. Because the bats use loose-bark trees for their maternal colonies, removal of trees would impact this species by eliminating its summer habitat.

The habitat of the Indiana brown bat was monitored during remediation activities to identify any unanticipated impacts during remediation. A follow-up survey was conducted in the summer of 2002 as a result of remediation activities north of the train trestle along Paddys Run. No Indiana brown bats were found during this survey.

DOE and the agencies agreed to keep the former rail trestle in place after a thorough review of the impacts that would result from its removal. The trestle was modified to promote use by bats.

Monitoring methods for the Indiana brown bat would consist of visual observations of that activity and mist netting in areas suitable as bat flyways and where canopy occurs. Mistnetting would occur between May 15 and August 15, because some bats begin to disperse for winter shelter in late August. Data recorded at each sampling site would include type of habitat, water depth and permanence, type of bottom, tree species and size, and presence of hollow trees or trees with loose bark in the vicinity.

In addition to mistnets, bat detectors (which indicate bat activity) would be used during all sampling to detect echolocation calls near the net. The number of calls on the detector would be recorded to indicate the effectiveness of the nets in relation to bat activity. Bat detectors can also be used to sample areas of marginal habitat to determine if netting should be attempted.

One such sampling event took place in the summer of 2007. While several species of bats were collected, no Indiana brown bats were captured. Visual monitoring for bat activity was conducted through 2008. At this time, no further monitoring is required. If disturbances to the trestle or any other portion of the Indiana brown bat habitat area are required during the summer breeding season, additional monitoring activities will be necessary.

### **4.1.3 Running Buffalo Clover**

Surveys conducted in 1994 of the federally listed endangered running buffalo clover (*Trifolium stoloniferum*) found no individuals of this species at the Fernald Site. However, because running buffalo clover is found nearby in the Miami Whitewater Forest, the potential exists for this species to establish at the Fernald Site. The running buffalo clover prefers habitat with

## UNCONTROLLED IF PRINTED

well-drained soil, filtered sunlight, limited competition from other plants, and periodic disturbance. This plant is a perennial that forms long stolons, rooting at the nodes. The plant is also characterized by erect flowering stems, typically 3 to 6 inches tall, with two leaves near the summit topped by a round flower head. If surveys are necessary, they would be conducted between May and June, which is the optimal time frame for blooms. An appropriate number of transects would be walked in suspected areas to identify the running buffalo clover. If populations are discovered, then best management practices will be used to minimize any impending impacts.

### 4.1.4 Spring Coral Root

The state-listed threatened spring coral root (*Corallorhiza wisteriana*) is a white-and-red orchid that blooms in April and May and grows in partially shaded areas of mesic deciduous woods, such as forested wetlands and wooded ravines. Although surveys conducted in 1994 and 1995 indicated that no individuals were present, suitable habitat exists in portions of the northern woodlot.

A floristic analysis for the northern woodlot and associated northern forested wetland was conducted in 1998. This analysis showed that no spring coral root was present in the northern woodlot.

## 4.2 Wetlands/Floodplains

Approximately 11.87 acres of on-property wetlands adjacent to the former production area were impacted as a result of contaminated soil excavation. The 26-acre northern forested wetland area and associated drainage characteristics were avoided and protected during remediation activities. A mitigation ratio of 1.5:1 (i.e., 1.5 acres of wetlands replaced for every one acre of wetland disturbed) was negotiated between DOE and the appropriate agencies (i.e., EPA, OEPA, U.S. Fish and Wildlife Service, and Ohio Department of Natural Resources). As a result of this agreement, 17.8 acres of new wetlands was established to compensate for the impacts during remediation.

To ensure compliance with this requirement, an enhanced wetland mitigation monitoring program has been established. On-site created wetlands are evaluated pursuant to existing OEPA performance standards and monitoring protocols. A wetland mitigation monitoring plan is being developed by the Fernald Natural Resource Trustees (DOE, OEPA, and the U.S. Department of Interior) that establishes the site wetland monitoring requirements.

## 4.3 Cultural Resource Management

All field personnel must comply with the *Procedure for Unexpected Discovery of Cultural Resources* (DOE 2009) if cultural resources are uncovered during ground-disturbing activities. If ground-disturbing activities must occur during legacy management, limited monitoring will occur in all areas that have been surveyed to identify any unexpected discoveries of human remains (Figure 2). More intensive field monitoring will take place only in areas known to have a high potential for archaeological sites as determined by previous investigations. In most instances, discovery of human remains in previously surveyed areas will require data recovery work. Disturbance of previously unsurveyed areas will require at least a Phase I investigation. An annual summary of all cultural resource field activities is provided separately from the IEMP

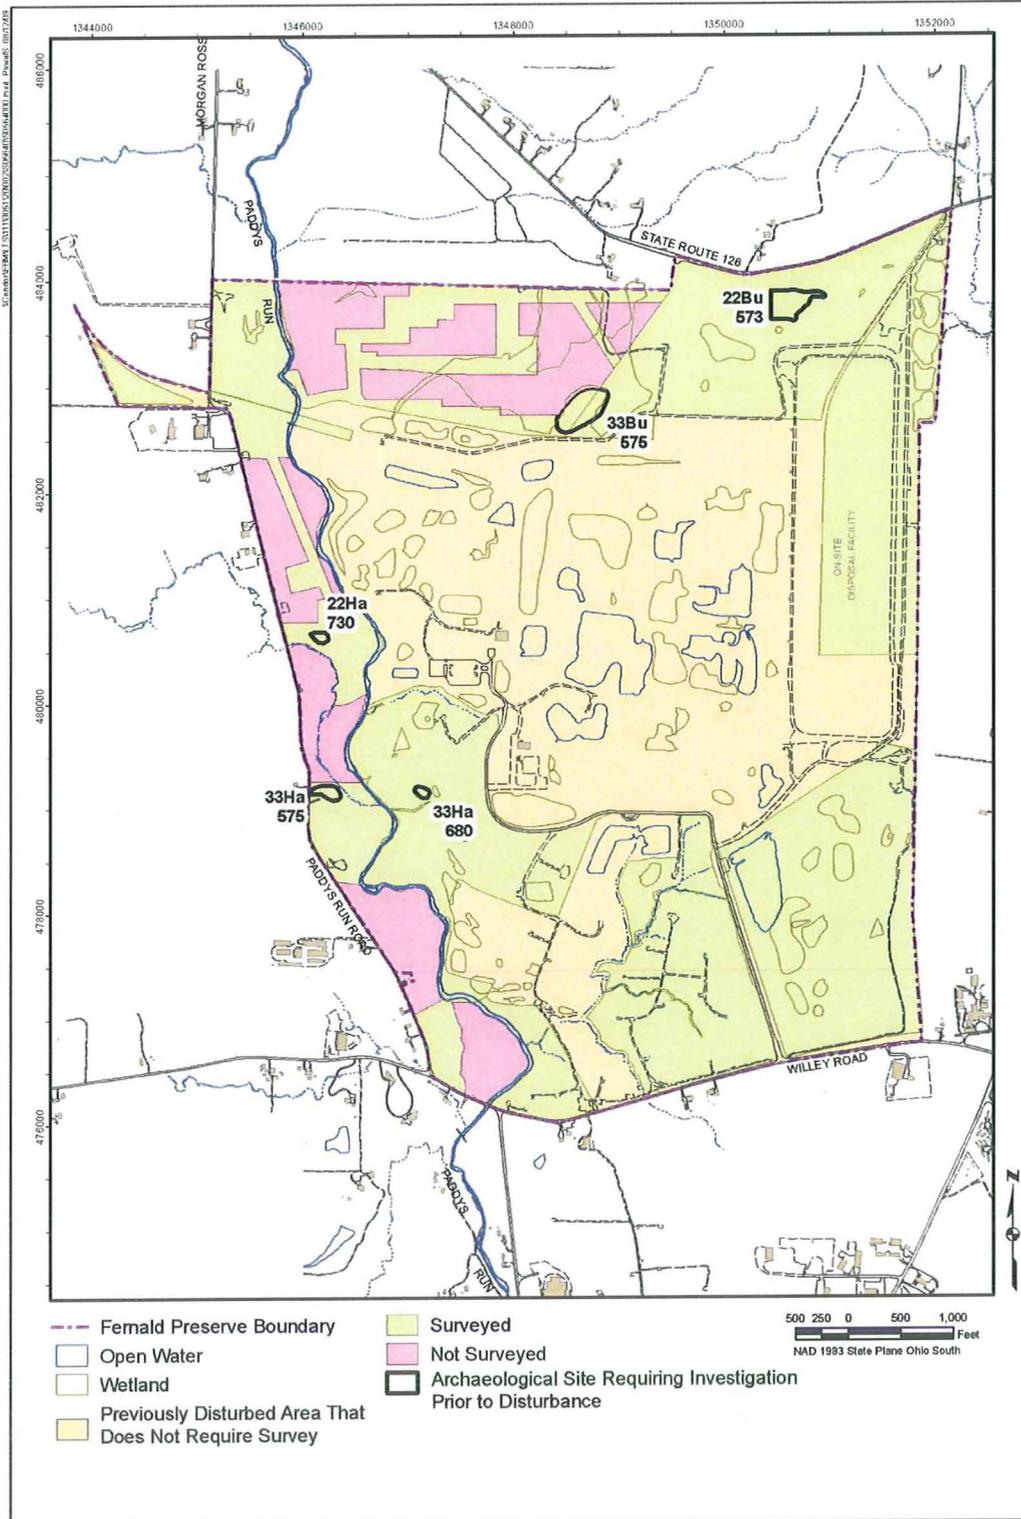


Figure 2. Cultural Resource Survey Areas

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **UNCONTROLLED IF PRINTED**

under the Programmatic Agreement for Archeological Activities at the Fernald Site. Monitoring of cultural resource areas will continue during legacy management to ensure that the areas are not being disturbed, as is described in the Institutional Controls Plan.

### **4.4 Restored Area Monitoring**

Restored area monitoring is required following the completion of natural resource restoration work. Monitoring of restored areas involved two phases: implementation-phase monitoring and functional-phase monitoring.

Implementation-phase monitoring is conducted to ensure that restoration projects are completed pursuant to their NRRP and to determine vegetation survival and herbaceous cover. Planted vegetation must have 80 percent survival in any restored area, determined by mortality counts. Any seeded area must have 90 percent cover, with 50 percent being native species.

Functional-phase monitoring is conducted to evaluate the progress of a restored community against pre-restoration baseline conditions and an ideal reference site. Woody and herbaceous vegetation species are evaluated for species richness, density, and frequency. Size of woody vegetation was also recorded. Functional monitoring was conducted through the fall of 2005. With finalization of the NRRP in November 2008, functional-phase monitoring resumed in 2009 and will continue through 2011.

#### **4.4.1 Implementation-Phase Monitoring**

To determine vegetation survival, mortality counts are conducted at the end of the first growing season. Each container-grown tree and shrub is inspected and assigned one of four categories: alive, resprout, vitality, or dead. Trees and shrubs will be considered "alive" when their main stem and/or greater than 50 percent of the lateral stems are viable. "Resprout" trees and shrubs will have a dead main stem, with one or more new shoots growing from the stem or the root mass. Plants will be categorized as "vitality" when less than 50 percent of its lateral branches are alive. "Dead" trees will have no signs of life at all.

For seeded areas within a restoration project, the Natural Resource Trustees agreed to a 90 percent cover survival rate for cover crops (necessary for slope stabilization and erosion control) and 50 percent survival rate for native species at the end of the implementation monitoring period as a goal.

All seeded areas are evaluated within each restoration project. Depending on the size of the restoration project, seeded areas may be grouped into habitat-specific subareas. For each distinct area, at least three 1-meter-square quadrats are randomly distributed and surveyed. Field personnel estimate the total cover and list all species present within each quadrat. The data collected will be used to determine total cover, percent native species composition, and relative frequency of native species, as described below.

For total cover, the quadrat-specific cover estimates are averaged. Percent native species composition is calculated by dividing the total number of species surveyed into the total number of native species present. The relative frequency of native species is determined by first recording the number of times each species appears in a quadrat. Next, the number of times a species appears in each quadrat is divided by the total number of quadrats surveyed. Finally, the frequencies of all native species is summed and divided by the total of all frequencies within a given area.

## **UNCONTROLLED IF PRINTED**

By collecting the information described above, DOE will evaluate implementation-phase success of seeded areas based on two criteria. First, 90 percent cover must be met by the end of the first growing season. Second, the goal of 50 percent native species composition or relative frequency must be obtained by the end of the implementation monitoring period. These criteria address both erosion control and native community establishment, which are the two primary goals of seeding in restored areas.

Implementation-phase monitoring for all restoration projects was completed in 2007. However, additional monitoring may be required in future years to ensure adequate herbaceous cover and vegetation survival.

### **4.4.2 Functional Monitoring**

Functional monitoring focuses on an entire habitat (e.g., prairie, wetland, forest) instead of an individual project. Functional monitoring helps determine if restored habitats at the Fernald Preserve are progressing when compared to baseline conditions and established reference sites. Functional monitoring has a longer duration (2003 to 2011) and a lower frequency of data collection (e.g., every 3 years). Functional monitoring will quantitatively evaluate progress of restored habitat against a baseline and toward an established reference site.

Functional monitoring is not a pass/fail determination like implementation-phase monitoring. Instead, functional monitoring is a means of evaluating the progress of the restored community against pre-restoration baseline conditions and target reference sites already achieving high ecological function. Vegetation indices will be used for comparisons, as well as several wildlife-based evaluations. Evaluation of woody and herbaceous vegetation is the main focus of functional monitoring. Floristic Quality Assessment Index (FQAI) is the primary monitoring parameter that has been and will continue to be used in functional monitoring.

Baseline conditions were measured at the Fernald Preserve in 2001 and 2002. To establish the needed reference site data, DOE teamed with the University of Dayton and collected the data outlined above from reference sites agreed upon by the Natural Resource Trustees in 2002. Restored habitats on the Fernald Closure Project were grouped together as wetlands, prairies/savannas, or forest/riparian. Functional monitoring data on site wetlands were collected in 2003, data on prairies/savannas were collected in 2004, and data on woodlands were collected in 2005.

Information collected during baseline and reference site characterizations include species richness, density, and frequency. Woody vegetation size was also recorded. From these parameters, sites are evaluated through FQAI, the extent of native species present, and the extent of hydrophytic species present (for wet areas).

DOE teamed with the University of Dayton to conduct reference site characterizations and refine sampling methodologies. From these efforts, the Natural Resource Trustees agreed that the final monitoring parameters summarized above will best represent the extent of native species establishment, development of hydric conditions, and quality of vegetation communities restored at the Fernald Preserve.

## UNCONTROLLED IF PRINTED

Several wildlife evaluations have been conducted in addition to vegetation surveys. These include amphibian and macroinvertebrate sampling and migratory waterfowl observations. Casual wildlife observations have also been recorded in each study area. Amphibian and macroinvertebrate sampling was conducted by the OEPA and is outside the scope of this Monitoring Plan.

Specific parameters measured include species richness, density, and frequency. Woody vegetation size is also recorded. From these parameters, sites are evaluated through FQAI, the extent of native species present, and the extent of hydrophytic species present (for wet areas). The success of functional monitoring depends on the collection of the same data on baseline sites, reference sites, and restored areas of the Fernald Preserve so that progress of the restoration can be evaluated.

The schedule for functional monitoring at the Fernald Preserve is as follows:

Baseline Data Collection	2001/2002
Reference Site Data Collection	2002
Wetlands	2003 and 2009 <sup>a</sup>
Prairies/Savannas	2004 and 2010
Woodlands	2005 and 2011

<sup>a</sup>Wetland mitigation data collected in 2009 serve as the functional monitoring for wetlands.

The data collected during functional monitoring will provide a comparison of restored habitats with baseline and reference sites. Functional monitoring data will be evaluated by the Natural Resources Trustees to determine if any corrective action is needed. Any corrective actions identified by the NRTs will be jointly agreed upon using the "Adaptive Management" concept identified in the NRRP. Following completion of the functional monitoring in 2011, the Natural Resource Trustees will jointly determine whether to continue further monitoring.

### 4.5 Natural Resource Data Evaluation and Reporting

The results of natural resource monitoring will be integrated with the annual reporting, a commitment in the IEMP. Annual Site Environmental Reports will provide appropriate updates on unexpected impacts to natural resources and the results of specific natural resource monitoring that have been implemented (e.g., monitoring of crayfish, cultural resources). The annual Site Environmental Report will include a summary of the findings. A detailed discussion and evaluation of the available data will be presented in an appendix to the Site Environmental Report. Significant findings as a result of natural resource monitoring will be communicated to EPA and OEPA as needed.

## 5.0 References

**Note:** Tasks associated with this plan are performed under the most current revision of plans, procedures, and documents.

DOE (U.S. Department of Energy), 2009. *Procedure for Unexpected Discovery of Cultural Resources*, Revision 0, Office of Legacy Management, Grand Junction, Colorado.

**UNCONTROLLED IF PRINTED**

State of Ohio, 2008. *Consent Decree Resolving Ohio's Natural Resource Damage Claim against DOE*, State of Ohio v. United States Department of Energy, et al., Civil Action No. C-1-86-0217, Judge Spiegel.

**UNCONTROLLED IF PRINTED**

**Attachment E**  
**Community Involvement Plan**

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## Contents

Acronyms and Abbreviations .....	iii
1.0 Introduction.....	1-1
2.0 Site Description and Background .....	2-1
3.0 Regulatory Framework .....	3-1
4.0 Community Profile.....	4-1
4.1 History of Community Involvement.....	4-2
4.2 Interested Community Members and Local, City, and State Elected Officials ....	4-4
4.3 Roles and Responsibilities .....	4-5
5.0 Public Participation Activities .....	5-1
5.1 Meetings.....	5-1
5.1.1 Public Meetings .....	5-1
5.1.2 Briefings for Local, State, and Federal Elected Officials .....	5-1
5.1.3 Meetings with Citizens Groups.....	5-1
5.2 Visitors Center .....	5-3
5.3 On-Site Education Facility.....	5-3
5.4 Public Access to Information.....	5-3
5.5 Site Tours.....	5-3
5.6 Documents for Public Review and Comment.....	5-3
5.7 News Releases and Editorials .....	5-4
5.8 Publications.....	5-4
5.9 Public Outreach Presentations .....	5-4
5.10 Emergency Contacts .....	5-4
5.11 Mailing Lists .....	5-4

## Figure

Figure 4-1. Fernald Location Map .....	4-1
--	-----

## Table

Table 5-1. Matrix of Public Participation Activities .....	5-2
--	-----

## Appendix

Appendix A. Information Contacts
----------------------------------

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

## **Acronyms and Abbreviations**

CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
DOE	U.S. Department of Energy
EM	U.S. Department of Energy Office of Environmental Management
LM	U.S. Department of Energy Office of Legacy Management
FCAB	Fernald Citizens Advisory Board
FFCA	Federal Facilities Compliance Agreement
FRESH	Fernald Residents for Environmental Safety and Health
LMICP	Legacy Management and Institutional Controls Plan
LSO	Local Stakeholder Organization
LTS&M	long-term surveillance and maintenance
NPL	National Priorities List
OU	Operable Unit
SARA	Superfund Amendments and Reauthorization Act of 1986
EPA	U.S. Environmental Protection Agency

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **1.0 Introduction**

The Fernald Preserve (Fernald), located northwest of Cincinnati, Ohio, is currently managed by the U.S. Department of Energy (DOE) Office of Legacy Management (LM). DOE established LM in December 2003 to manage the nation's legacy waste that remained at the conclusion of the nuclear weapons program after World War II and the Cold War. The mission of LM is to manage legacy land, structures, and facilities in a way that is protective of human health and the environment.

Since the early 1990s, DOE has made it a priority to gather community opinion as part of its decision-making process. Involvement by stakeholders who possess local knowledge and diverse areas of expertise was instrumental to the success of the Fernald cleanup project. Stakeholders were involved in site cleanup activities, have assisted in addressing technical and management challenges, and have guided the decision-making process. The Fernald cleanup, including plans for long-term management of the site, benefited from early dialogue among state and federal regulators, stakeholder organizations, elected officials, and members of the general public. Long-term site management goals included informing future generations and new residents about the site, ensuring the effectiveness of institutional controls, and maintaining community support for the site remedy. LM established a Visitors Center on site and will cooperate to the extent possible in helping the community make this a viable entity. The Visitors Center was completed in August 2008.

This Community Involvement Plan is a follow-on document to existing public affairs plans for the site and public involvement efforts described in the Federal Facilities Compliance Agreement (FFCA). All community relations activities, including this Community Involvement Plan, continue to follow U.S. Environmental Protection Agency (EPA) and DOE guidance on public participation and comply with public participation requirements in the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA, also known as Superfund), as amended by the Superfund Amendments and Reauthorization Act (SARA) of 1986. This Community Involvement Plan documents how DOE will ensure that the public has appropriate opportunities for involvement in post-closure site monitoring and maintenance.

This Community Involvement Plan outlines the methods of communication and addresses plans for public involvement. The plan will be updated as appropriate to address post-closure public involvement activities. Updates will be made as needed, but no more frequent than annually. Significant changes in public participation activities, changes in land reuse plans, and remedy failures are examples of scenarios under which updates would be considered. DOE will collaborate with stakeholder organizations in effect at that time to update the plan. Notification of any changes to the Legacy Management and Institutional Controls Plan (LMICP) or the Community Involvement Plan will be through regularly scheduled meetings and the Fernald Stakeholder Relations web page (<http://www.lm.doe.gov/Fernald/Sites.aspx>).

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## **2.0 Site Description and Background**

In 1951, construction of the uranium processing plant began on a 1,050-acre parcel of land near Cincinnati, Ohio. During the Cold War, the Fernald plant, originally named the Feed Materials Production Center, produced 500 million pounds of high-purity uranium metal products for the nation's weapons production program. The products were shipped to other sites within the nuclear weapons complex. Some sites used the products as fuel for nuclear reactors to produce plutonium.

In the late 1980s, when Fernald shut down because of declining demand for Fernald's product and increasing environmental concerns, 31 million net pounds of nuclear product, 2.5 billion pounds of waste, and 2.5 million cubic yards of contaminated soil and debris remained on site. The mission of producing uranium metal ceased, and the focus shifted to environmental restoration and waste management.

To manage the cleanup more effectively, DOE organized the entire site into five study areas called operable units (OUs). Each OU had similar physical characteristics, waste inventories, regulatory requirements, and anticipated remedial action technologies. The OUs were as follows:

- OU1 included six waste pits, a Burn Pit, and Clearwell.
- OU2 included a solid waste landfill, lime sludge ponds, inactive fly ash pile, active fly ash pile, and the South Field area.
- OU3 included all processing facilities located in a 136-acre area.
- OU4 included K-65 Silos 1 and 2, which contained radium-bearing radioactive wastes dating back to the 1940s; Silo 3, which contained dried uranium-bearing wastes; and Silo 4, which was always empty.
- OU5 encompassed the environmental media on the Fernald property and surrounding areas that were impacted by the facility. Environmental media included the groundwater, surface water, soils, sediments, vegetation, and wildlife throughout the Fernald facility and surrounding areas. OU5 also included the South Plume, an area of off-property groundwater contamination.

Cleanup of OU1 through OU4 was a requirement for site closure. Aquifer restoration in OU5 will continue under LM.

In 1996, Fernald completed a 10-year environmental investigation to determine contamination levels and develop cleanup plans. The significant investigation resulted in Records of Decision, or final cleanup plans, for the five OUs. After completing the engineering designs, DOE organized the site's cleanup program into seven major projects to integrate fieldwork and improve safety and efficiency. Those project areas included:

- Aquifer Restoration.
- Building Demolition.
- Soil and Disposal Facility.
- Silos 1 and 2.
- Silo 3.

**UNCONTROLLED IF PRINTED**

- Waste Pits.
- Waste Management/Nuclear Material Disposition.

The final mission of the Fernald Closure Project was to clean up the site in compliance with Fernald's approved Records of Decision. In 1999, DOE issued the Final Land Use Environmental Assessment that addressed recommendations and feedback received from the public. To ensure appropriate future use, the site will remain under federal ownership in perpetuity. In support of public use of the site, DOE has restored natural resources on 904 acres to compensate for natural resources that were destroyed or damaged by site operations and cleanup.

### **3.0 Regulatory Framework**

In response to growing concern about health and environmental risks posed by hazardous waste sites, Congress established CERCLA in 1980 (Title 42 *United States Code* § 9601 et seq.) and SARA in 1986 (Public Law 99-499). EPA administers CERCLA in cooperation with individual states and tribal governments. The National Priorities List (NPL) is a list of top-priority hazardous waste sites that are eligible for extensive, long-term cleanup under CERCLA. EPA placed Fernald on the NPL in November 1989 as the Feed Materials Production Center. All cleanup activities at Fernald must satisfy the requirements of CERCLA, as amended by SARA, and Subpart E of the National Oil and Hazardous Substances Pollution Contingency Plan, found in Title 40 *Code of Federal Regulations* Part 300.400, "Hazardous Substance Response."


In July 1986, DOE and EPA signed the FFCA, which established a procedural framework and schedule for developing appropriate response actions and facilitated cooperation and exchange of information. The FFCA initiated the Remedial Investigation/Feasibility Study, a comprehensive environmental investigation conducted in and around Fernald to identify the nature and extent of contamination and to determine the best cleanup solutions.

**UNCONTROLLED IF PRINTED**

This page intentionally left blank

## 4.0 Community Profile

The Fernald Preserve is located in southwest Ohio, approximately 18 miles northwest of Cincinnati, and straddles the boundary between Butler and Hamilton counties (Figure 4-1). The site is located near the unincorporated communities of Ross (northeast), Shandon (northwest), Fernald (south), New Baltimore (southeast), and New Haven (southwest). The site encompasses portions of Crosby, Ross, and Morgan townships.

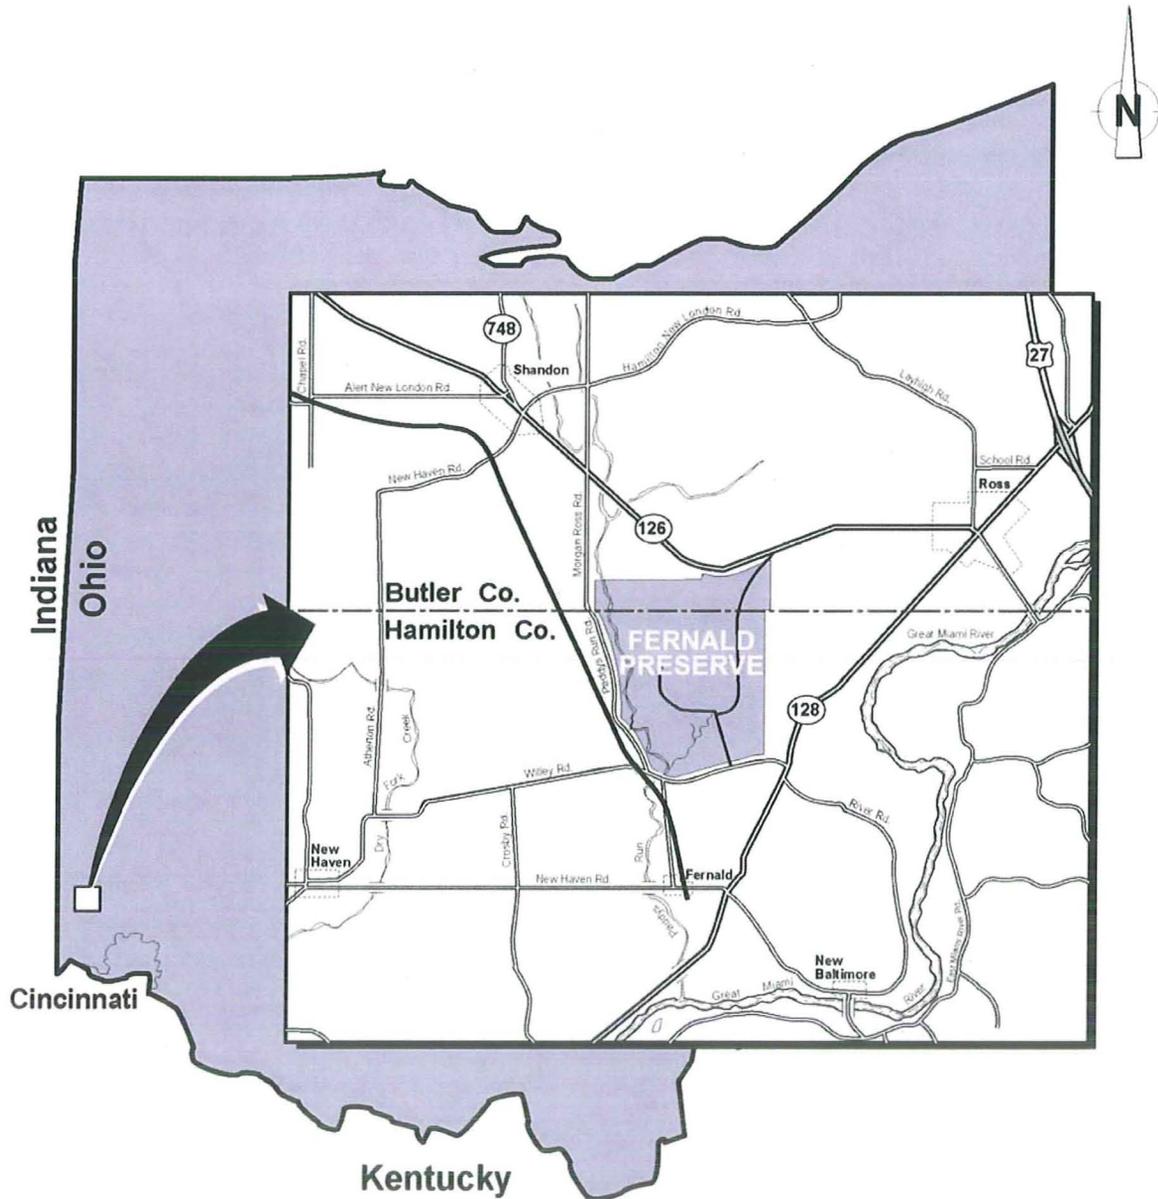

The Fernald site covers about 1,050 acres (425 hectares).

Figure 4-1. Fernald Location Map

## **UNCONTROLLED IF PRINTED**

Hamilton County is in the southwest corner of Ohio and covers an area of 414 square miles. The county is the economic nucleus of the 13-county Cincinnati metropolitan area. As of 2008, the population of Hamilton County was 851,494, which is a slight increase since 2003. Within the county are 37 municipalities, including 21 cities, 16 villages, and 12 townships.

Butler County is directly north of Hamilton County and covers an area of 467 square miles. Although Butler County contains more wide-open spaces and is less densely populated, the county is showing a growth trend. In 2008, the population estimate was 360,765, which is up 5 percent since 2003.

Most of the Fernald Preserve lies within Crosby Township, which has a population of 2,794. Ross Township has a population of 7,764, and Morgan Township has a population of 6,311. All three townships are expecting population growth in the near term.

The Great Miami River is located to the east of the Fernald Preserve. Land use in the area consists primarily of residential, agricultural, and gravel-excitation operations. Some land near the Fernald Preserve is dedicated to housing developments, light industry, and parks. Local history also includes settlement of the area by Native Americans. DOE agreed to make land available for the reinterment of Native American remains with the following understandings:

- The land remains under federal ownership.
- DOE will not take responsibility for, or manage, the reinterment process. Maintenance and monitoring will not be funded or implemented by DOE.
- The remains must be culturally affiliated with a modern day tribe. The National Park Service had no objections to the reinterment process as long as the “repatriation associated with the reburials comply with the Native American Graves Protection and Repatriation Act as applicable.”
- Records must be maintained for all repatriated items reinterred under this process. DOE is not responsible for these records.

Thus far, several federally recognized tribes have been contacted regarding this offer of land for reinterment purposes. To date, only one response has been received from a modern-day tribe with repatriated remains under the Native American graves Protection and Repatriation Act. The Miami Tribe of Oklahoma has informed DOE that they are not interested in use of the site. DOE has received no other responses from modern-day tribes and is no longer pursuing the effort. The proposal may be reconsidered in the future if other modern day tribes with repatriated remains come forward.

DOE consulted with appropriate stakeholders, including site labor unions, retirees, other former employees, the Crosby Township Historical Society, and Fernald Living History Inc. to create a Cold War garden located on the Fernald property. This memorial was dismantled and is now located near the Visitors Center on the Fernald Preserve.

### **4.1 History of Community Involvement**

During most of the production era, little thought was given to public participation or community involvement. When public concerns about contamination problems peaked in the 1980s, site

## **UNCONTROLLED IF PRINTED**

management was unprepared to handle these concerns. There were no public forums to discuss concerns and issues, and there were no site contacts for people to call if they had questions. In 1985, the first public relations professional was hired at Fernald. During the first few years, the new Public Affairs department focused primarily on establishing contacts with the community and creating public information channels so people could learn about the site operations. DOE opened several reading rooms to make site documents available to the public, and management started holding community meetings to begin a dialogue with interested members of the public.

Within a few years, a new strategy for public participation was developed, exceeding the textbook style found in the regulations. In November 1993, Fernald adopted its public involvement program. The basic precepts of this program were:

- People have a fundamental desire to participate in decisions that affect their lives.
- Many people working together can often find better solutions to difficult problems.
- Fernald management is responsible for including public involvement in decision making.

With the new emphasis on public involvement, the public became more aware of the scope of the site's contamination, and changes began to occur. The public insisted on a greater role in cleanup decisions, and project managers began to realize that the public could help them find answers to difficult questions, such as, "How clean is clean?" Citizen groups such as the Fernald Citizens Advisory Board, the Fernald Community Reuse Organization, the Fernald Health Effects Subcommittee, Fernald Living History Inc., and Fernald Residents for Environmental Safety and Health were formed to provide avenues for citizen participation in the two-way communication path that was established. Stakeholders have been instrumental in the cleanup progress at Fernald.

The Fernald Envoy Program was initiated to promote one-on-one communication between Fernald personnel and representatives of local community groups interested in Fernald-related cleanup activities, issues, and progress. Approximately 30 Fernald employees served as messengers to local neighbors, business leaders, educators, environmental groups, regulatory agencies, and elected officials. Fernald envoys built close relationships with community groups interested in Fernald-related activities and supplied them with detailed information. They also listened to ideas, suggestions, concerns, and questions from people and then provided feedback to those making decisions about Fernald cleanup activities.

Fernald also established support programs for both charitable causes and education. Created in 1996, the Fernald Community Involvement Team was a volunteer task force composed of employees, their family members, and friends who were active in social service projects within the local community. In addition, Fernald sponsored educational programs for local students and teachers by establishing strong partnerships with area schools.

Now that site activities have shifted to the long-term surveillance and maintenance phase, so too has the community involvement focus shifted. Community awareness of the remaining contamination is vital to the continued protection of human health and the environment at the Fernald Preserve. Ensuring community awareness of the site's history and maintaining environmental controls will require outreach to new residents and future generations. DOE remains committed to its public involvement program.

## **UNCONTROLLED IF PRINTED**

The Public Environmental Information Center, located at the Delta Building, 10995 Hamilton-Cleves Highway, Harrison, Ohio 45030, provides easy public access to documents about the cleanup and is a resource center for anyone who wants to conduct research on the Fernald Preserve.

### **4.2 Interested Community Members and Local, City, and State Elected Officials**

DOE recognizes that stakeholders may be any affected or interested party, including, but not limited to:

- Local elected officials.
- Fernald Citizens Advisory Board (FCAB).
- Fernald Residents for Environmental Safety and Health (FRESH).
- Fernald Community Alliance.
- Fernald Community Health Effects Committee.
- Current and retired Fernald contractor employees.
- Citizens of Hamilton and Butler Counties.
- State and local government agencies, including Ohio EPA.
- Elected State of Ohio officials.
- Federal agencies, including EPA.
- Congressional delegations for Ohio and part of Indiana.
- Local media.
- Local elementary and secondary schools.
- Environmental organizations.
- Business owners.
- Service organizations.
- Other interested individuals.

The FCAB was originally established in August 1993 as the Fernald Citizens Task Force. In 1997, the task force changed its name to the Fernald Citizens Advisory Board to coincide with citizen advisory boards at other DOE sites. The FCAB was a DOE site-specific advisory board chartered by the Federal Advisory Committee Act to advise DOE on activities pertaining to the remediation and future use of the Fernald Preserve. The board consisted of members of the public, including local residents, labor representatives, local government, academia, business representatives, and ex-officio members from DOE, EPA, OEPA, and the Agency for Toxic Substances and Disease Registry. The FCAB was disbanded in September 2006.

## **UNCONTROLLED IF PRINTED**

FRESH is an environmental activist group that was formed in 1984 to monitor Fernald activities. The stated purposes of the organization were to ensure that the Fernald site was cleaned up, to communicate and educate the surrounding communities about the site, and to advocate responsible environmental restoration and human health and safety. FRESH was a member of the Alliance for Nuclear Accountability (formerly known as the Military Production Network) and the Ohio Environmental Council and Environmental Community Organization. The group's motto was "Making a Difference Since 1984." FRESH held its last public meeting in November 2006.

Fernald Living History Inc. is dedicated to ensuring that knowledge of the history of Fernald, its importance to the Cold War effort, the facilities that existed at the site, and its cultural significance is available for future generations. This organization has played an important role in establishing institutional controls as a means of protecting the cleanup remedy at Fernald. The group has changed its name to the Fernald Community Alliance to reflect a change in mission and emphasis.

The organizations described above have played integral roles in the cleanup and legacy management planning of Fernald. The Ronald W. Reagan National Defense Authorization Act for fiscal year 2005 includes language that specifies the development of local stakeholder organizations (LSOs) at three closure sites, including Fernald. The purpose of the LSOs is to provide a formal mechanism for local communities to continue to be involved in DOE's decision-making process as it relates to the sites' post-closure care. LM met with stakeholder groups representing each of these three closure sites to gather input on the potential LSO membership and transition to LSOs. LM has developed policies and processes for establishing and managing these organizations.

Public meetings to discuss the formation of a Fernald LSO were held on August 31, 2005; November 16, 2005; and February 8, 2006. Local stakeholders decided to defer formation of an LSO.

### **4.3 Roles and Responsibilities**

DOE's Office of Environmental Management (EM) was responsible for completing cleanup and closure of Fernald. This cleanup and closure included the decontamination and decommissioning of 255 former production plants, support structures, and associated components; the shipment of all radioactive waste off site; remediation of five OUs; removal of waste from three silos; extraction and treatment of contaminated groundwater; transfer of excess government property to state and local agencies; and preparation of the property for long-term management by LM.

LM is responsible for the long-term care of legacy liabilities at former nuclear weapons production sites, following completion of the EM cleanup effort. The primary goals are to:

- Protect human health and the environment through effective and efficient long-term surveillance and maintenance.
- Manage legacy land assets, emphasizing safety, reuse, and disposition.
- Maintain the remedy, including the continuing groundwater remediation.

## **UNCONTROLLED IF PRINTED**

- Mitigate community impacts resulting from the cleanup of legacy waste and changing DOE missions.
- Administer post-closure benefits for former contractor employees.
- Manage site records.

Following the cleanup and closure of Fernald, as an EM site, responsibility for maintaining the CERCLA remedies transferred to LM. LM is responsible for compliance with the legacy management requirements and protocols that are documented in the site specific LMICP. At other DOE sites, the LMICP is known as the Long-Term Surveillance and Maintenance (LTS&M) Plan. Fernald's post-closure LTS&M requirements fall into three categories: operation and maintenance of the remedy, legacy management in restored areas, and public involvement.

Legacy management activities related to the maintenance of the remedy include monitoring and maintaining the on-site disposal facility, ensuring that site access and use restrictions are enforced, continuing the active groundwater remediation, and managing records. Maintaining institutional controls, safeguards that effectively protect human health and the environment, will be a fundamental component of LTS&M at Fernald and will include ensuring that no residential, agricultural, hunting, swimming, camping, fishing, or other prohibited activities occur on the property. In addition, appropriate wildlife management techniques and processes may also be necessary.

Legacy management in restored areas will include ensuring that natural and cultural resources will be protected in accordance with applicable laws and regulations. Wetlands and threatened and endangered species are examples of natural resources that will be monitored.

Legacy management activities related to public involvement include continued communication with the public regarding the continuing groundwater remediation, legacy management activities, and the future of the Fernald Preserve. Emphasis will also be placed on education of the public regarding the site's former production activities, the site's remediation, and land use restrictions. Education will include displays and programs at the Visitors Center and outreach programs at local schools and organizations.

## **5.0 Public Participation Activities**

Public participation is an important part of the CERCLA process. As a testament to that fact, the Community Involvement Plan is included in Volume II, the enforceable portion of the LMICP. DOE will offer opportunities for public involvement beyond those required by regulations. Public participation activities are conducted in support of the DOE goal of actively informing the public about the Fernald Preserve and to provide opportunities for open, ongoing, two-way communication between DOE and the public.

DOE has been conducting public participation activities to meet citizen expectations for involvement in the decision-making process for areas not specified by statutes and regulations. In such cases, DOE has successfully used the consultation process by inviting the general public, special interest groups, and the local government to participate early in the decision-making process and the prioritization of Fernald activities. The consultation process supplements the public involvement activities required by law. By engaging the community early in decision-making processes, DOE is better able to integrate community values into its decisions and build trust among stakeholders.

The following are general descriptions of post-closure public participation activities LM has planned. As activities at the site decrease, DOE anticipates a corresponding reduction in topics that warrant communication to stakeholders. Table 5-1 shows the planned public participation activities.

### **5.1 Meetings**

LM provides briefings, workshops, and presentations on site activities in a variety of public forums.

#### **5.1.1 Public Meetings**

LM has had an on-site manager as of January 2006. LM held public meetings quarterly for the first year after closure and will hold meetings at least annually thereafter to address post-closure issues of importance to stakeholders. These meetings will provide information about LTS&M activities being conducted at the site and will present the results of annual site inspections.

#### **5.1.2 Briefings for Local, State, and Federal Elected Officials**

LM will brief elected officials as needed to discuss new data trends or the evaluation of post-Record of Decision changes.

#### **5.1.3 Meetings with Citizens Groups**

LM will meet with post-closure stakeholder groups to discuss topics of interest and concern.

**UNCONTROLLED IF PRINTED**

*Table 5-1. Matrix of Public Participation Activities*

<b>Activity</b>	<b>Post-closure</b>
<b>Meetings</b>	
<b>Public Meetings</b>	<ul style="list-style-type: none"> <li>• LM placed an on-site manager January 2006.</li> <li>• Quarterly public meetings for the first year following closure and annually thereafter.</li> <li>• Address post-closure issues, including LTS&amp;M activities and annual inspection results.</li> </ul>
<b>Briefings for Elected Officials</b>	<ul style="list-style-type: none"> <li>• Continue briefings.</li> <li>• Discuss new data trends or evaluation of post-Record of Decision changes.</li> </ul>
<b>Meetings With Citizens Groups</b>	<ul style="list-style-type: none"> <li>• LM will meet with stakeholders.</li> <li>• Local stakeholders decided to defer formation of an LSO.</li> </ul>
<b>Administrative Record and Public Reading Room</b>	<ul style="list-style-type: none"> <li>• Maintain the Public Reading Room.</li> </ul>
<b>On-Site Education Facility</b>	<ul style="list-style-type: none"> <li>• The Visitors Center is located on site.</li> <li>• The educational and information function serves an institutional control.</li> <li>• The Cold War Memorial has been constructed at the Fernald Preserve.</li> </ul>
<b>Internet Website</b>	<ul style="list-style-type: none"> <li>• LM will maintain a webpage for the Fernald Preserve and will include CERCLA documents prepared after closure.</li> <li>• Administrative Record will be available electronically through the Internet.</li> </ul>
<b>Site Tours</b>	<ul style="list-style-type: none"> <li>• LM will conduct site tours as requested.</li> </ul>
<b>Documents for Public Review and Comment</b>	<ul style="list-style-type: none"> <li>• CERCLA requirements will be followed for public comment.</li> <li>• Stakeholders will be consulted on review of nonregulatory documents.</li> <li>• Anticipate minimal number of documents created.</li> <li>• Post-closure changes required to significant cleanup documents will be discussed with stakeholders.</li> </ul>
<b>News Releases</b>	<ul style="list-style-type: none"> <li>• LM will continue to issue news releases after closure.</li> </ul>
<b>Publications</b>	<ul style="list-style-type: none"> <li>• LM will prepare fact sheets as needed.</li> <li>• Distributed through mailings and posted on website.</li> </ul>
<b>Public Outreach Presentations</b>	<ul style="list-style-type: none"> <li>• Public outreach presentations will be given as requested.</li> </ul>
<b>Emergency Contacts</b>	<ul style="list-style-type: none"> <li>• In case of an emergency, dial 911.</li> <li>• Established contacts will be notified in emergency situations.</li> <li>• Signs with toll-free number will be posted around the site.</li> <li>• 24-hour emergency number is (970) 248-6070 or (877) 695-5322.</li> </ul>
<b>Mailing Lists</b>	<ul style="list-style-type: none"> <li>• LM is responsible for maintaining Fernald Preserve contacts.</li> </ul>

## **5.2 Visitors Center**

LM has established a Visitors Center on site. The Visitors Center contains information and documents about remediation of the Fernald Preserve, including information on site restrictions, ongoing maintenance and monitoring, and residual risk data. The Visitors Center provides educational information, meeting accommodations, and storage for historical information and photographs. A primary goal of the Visitors Center is to fulfill an informational and educational function within the surrounding community. The information made available at the Visitors Center serves as an institutional control for the site.

## **5.3 On-Site Education Facility**

LM will continue to work with interested stakeholders who desire to preserve and tell the story of Fernald. The established Visitors Center serves as an on-site education facility for school and community groups. LM will support community efforts to develop and provide historical preservation programs.

## **5.4 Public Access to Information**

LM will continue to make available to the public documents pertaining to the Fernald Preserve. A public reading room is located at the Delta Building, 10995 Hamilton-Cleves Highway, Harrison, Ohio, 45030. Selected documents about the Fernald Preserve and public computer access will be available at the Visitors Center. The CERCLA Administrative Record will be available in both hard-copy and electronic formats.

An index of the CERCLA Administrative Record documents for the Fernald Preserve is available on the LM website (<http://www.lm.doe.gov/CERCLA/SiteSelector.aspx>). The index includes document number, document date, and document title. Instructions for ordering Administrative Record documents can also be found on the LM website.

## **5.5 Site Tours**

Tours provide an important forum to help the community understand post-closure site conditions and the controls in place to protect human health and the environment. Official visits or tours are scheduled in response to specific requests and can focus on environmental restoration activities and ongoing operations. Access to the On-Site Disposal Facility is limited to authorized personnel only. LM will continue stakeholder and media tours as requested.

## **5.6 Documents for Public Review and Comment**

LM will provide opportunities for stakeholders to review and comment on post-closure documents as required by CERCLA regulations, including 5-year reviews. For documents not specified by statutes and regulations, LM will consult with stakeholders to address citizen expectations for involvement in public reviews and comments. LM anticipates the number of post-closure documents developed to be minimal.

## **UNCONTROLLED IF PRINTED**

The LMICP explains how LM will fulfill its LTS&M obligations at the site. The public has been provided an opportunity to comment on the LMICP and will continue to have the opportunity to comment on revisions to the plan. Changes required after closure to significant site documents will be discussed with stakeholders.

### **5.7 News Releases and Editorials**

LM will continue to issue news releases and community advisories to announce public meetings regarding LM documents or significant post-closure activities.

### **5.8 Publications**

LM will prepare fact sheets and newsletters as needed to describe post-closure activities. These fact sheets will be provided to stakeholders on the mailing list and will be posted on the LM website.

### **5.9 Public Outreach Presentations**

LM will continue with public outreach presentations on Fernald as requested.

### **5.10 Emergency Contacts**

In the event of an emergency, LM will notify established points of contact, regulators, local elected officials, and community officials. Congressional offices will be informed promptly if an emergency situation arises. The 911 service will be used to request emergency assistance on or near the site. Signs with a toll-free number for citizens to register concerns about the site will be posted at visible locations around the site. The public may use the 24-hour security telephone numbers monitored at the DOE office in Grand Junction, Colorado, to notify LM of site concerns. The 24-hour security telephone numbers will be posted at site access points and other key locations on the site. The 24-hour emergency number is (877) 695-5322.

### **5.11 Mailing Lists**

LM maintains a contact database of all stakeholders associated with any legacy management site. LM is responsible for maintaining the list of Fernald stakeholders after closure.

**UNCONTROLLED IF PRINTED**

**Appendix A**

**Information Contacts**

**UNCONTROLLED IF PRINTED**

**This page intentionally left blank**

**UNCONTROLLED IF PRINTED**

<b>Emergency Contact</b>	
Grand Junction 24-hour Monitored Security Telephone Number (877) 695-5322	
<b>U.S. Department of Energy (DOE)</b>	
<b>DOE Office of Legacy Management</b>	
Jane Powell Office of Legacy Management Fernald Preserve Manager U.S. Department of Energy 10995 Hamilton-Cleves Highway Harrison, OH 45030-9728 (513) 648-3148 E-mail: Jane.Powell@lm.doe.gov	
<b>U.S. Environmental Protection Agency</b>	<b>Ohio Environmental Protection Agency</b>
Tim Fischer Remedial Project Manager U.S. Environmental Protection Agency 77 W. Jackson Blvd. Chicago, IL 60604-3507 (312) 886-5787 E-mail: Fischer.Timothy@epamail.epa.gov	Fernald Project Coordinator Ohio Environmental Protection Agency 401 East 5 <sup>th</sup> Street Dayton, OH 45402-2911 (937) 285-6357 Website: www.epa.state.oh.us
<b>Federal Elected Officials</b>	
<b>Ohio</b>	
The Honorable Sherrod Brown Senator 455 Russell Senate Office Building Washington, DC 20510 (202) 223-2315 Email: Contact via Web Form ( <a href="http://brown.senate.gov/contact/">http://brown.senate.gov/contact/</a> )	The Honorable George V. Voinovich Senator United States Senate 317 Hart Senate Office Building Washington, DC 20510 (202) 224-2315 E-mail: senator_voinovich@voinovich.senate.gov
The Honorable Steve Driehaus Representative U.S. House of Representatives 441 Vine St., Suite 3003 Cincinnati, OH 45202 (513) 684-2723 E-mail: driehaus.house.gov/	The Honorable John Boehner Representative U.S. House of Representatives 1011 Longworth House Office Building Washington, DC 20515-3501 (202) 225-6205 E-mail: johnboehner.house.gov/contact
<b>Indiana</b>	
The Honorable Richard Lugar Senator United States Senate 306 Hart Senate Office Building Washington, DC 20510 (202) 224-4814 E-mail: senator.lugar@lugar.senate.gov	The Honorable Evan Bayh Senator United States Senate 464 Russell Senate Office Building Washington, DC 20510 (202) 224-5623 <a href="http://bayh.senate.gov/contact">http://bayh.senate.gov/contact</a>

**UNCONTROLLED IF PRINTED**

<b>State Elected Officials</b>	
<b>State of Ohio</b>	
<p>The Honorable Ted Strickland                      Governor of Ohio                      77 S. High Street, 30th Floor                      Columbus, OH 43215-6117                      (614) 466-3555                      E-mail: <a href="mailto:jesse.taylor@governor.ohio.gov">jesse.taylor@governor.ohio.gov</a></p>	<p>The Honorable Robert Schuler                      Senator                      Ohio Senate                      Statehouse                      Room 221                      Columbus, OH 43215                      (614) 466-9737                      E-mail: <a href="mailto:SD07@mailr.sen.state.oh.us">SD07@mailr.sen.state.oh.us</a></p>
<p>The Honorable Patricia Clancy                      Senator                      Ohio Senate                      Senate Building                      Room 143                      Columbus, OH 43215                      (614) 466-8068                      E-mail: <a href="mailto:SD08@mailr.sen.state.oh.us">SD08@mailr.sen.state.oh.us</a></p>	<p>The Honorable Tyrone Yates                      Representative                      Ohio House of Representatives                      77 S. High Street, 11th Floor                      Columbus, OH 43215-6111                      (614) 466-1308                      E-mail: <a href="mailto:district33@ohr.state.oh.us">district33@ohr.state.oh.us</a></p>
<p>The Honorable Gary Cates                      Senator                      Ohio Senate                      Senate Building                      Room 042                      Columbus, OH 43215                      (614) 466-8072                      E-mail: <a href="mailto:SD04@mailr.sen.state.oh.us">SD04@mailr.sen.state.oh.us</a></p>	<p>The Honorable Denise Driehaus                      Representative                      Ohio House of Representatives                      77 S High Street, 10th Floor                      Columbus, OH 43215                      (614) 466-5786                      E-mail: <a href="mailto:district31@ohr.state.oh.us">district31@ohr.state.oh.us</a></p>
<p>The Honorable Peter Stautberg                      Representative                      Ohio House of Representatives                      77 S. High Street, 11th Floor                      Columbus, OH 43214                      (614) 644-6886                      E-mail: <a href="mailto:district34@ohr.state.oh.us">district34@ohr.state.oh.us</a></p>	<p>The Honorable Courtney Combs                      Representative                      Ohio House of Representatives                      77 S. High Street, 14th Floor                      Columbus, OH 43215-6111                      (614) 644-6721                      E-mail: <a href="mailto:district54@ohr.state.oh.us">district54@ohr.state.oh.us</a></p>
<p>The Honorable Louis W. Blessing                      Representative                      Ohio House of Representatives                      77 S. High Street, 13th Floor                      Columbus, OH 43215-6111                      (614) 466-9091                      E-mail: <a href="mailto:district29@ohr.state.oh.us">district29@ohr.state.oh.us</a></p>	<p>The Honorable Timothy Derickson                      Representative                      Ohio House of Representatives                      77 S. High Street, 11th Floor                      Columbus, OH 43214                      (614) 466-5094                      E-mail: <a href="mailto:district53@ohr.state.oh.us">district53@ohr.state.oh.us</a></p>
<b>State of Indiana</b>	
<p>The Honorable Mitch Daniels                      Governor of Indiana                      Statehouse                      Indianapolis, IN 46204                      (317) 232-4567  <a href="http://www.state.in.us/gov/contact">www.state.in.us/gov/contact</a></p>	

<b>Local Elected Officials</b>	
<p>Mr. Todd Portune Hamilton County Administration Building 138 East Court Street, Room 603 Cincinnati, OH 45202 (513) 946-4401 E-mail: todd.portune@hamilton-co.org</p>	<p>Mr. Charles R. Furmon Butler County Government Services Center 315 High St., 4th floor Hamilton, OH 45011 (513) 887-3247 E-mail: furmonc@butlercountyohio.org</p>
<p>Mr. Warren Strunk Crosby Township 9129 New Haven Road Harrison, OH 45030 (513) 367-6556 No e-mail address available</p>	<p>Ms. Nancy Poe Morgan Township Trustees P.O. Box 189 Okeana, OH 45053 (513) 738-2270 No e-mail address available</p>
<p>Mr. Dennis Conrad, Jr. Reily Township 6376 Peoria-Reilly Oxford, OH 45056 (513) 757-4113 No e-mail address available</p>	<p>Mr. Tom Willsey Ross Township 2941 Layhigh Road Hamilton, OH 45013 (513) 738- 2543 E-mail: rosstwp@aol.com</p>
<b>County Health Departments</b>	
<p>Hamilton County General Health District 250 William Howard Taft, 2nd Floor Cincinnati, OH 45219 (513) 946-7800</p>	<p>Butler County Health Department 301 South 3rd Street Hamilton, OH 45011-2913 (513) 863-1770</p>
<b>Environmental/Interest Groups</b>	
<p><b>Fernald Community Health Effects Committee</b> Sue Verkamp Chair 7763 Willey Road Harrison, OH 45030 (513) 738-8020 www.fernaldchecc.com/</p>	<p><b>Fernald Residents for Environmental Safety and Health</b> Lisa Crawford President [Redacted] E-mail: [Redacted]</p>
<p><b>Fernald Community Alliance</b> Graham Mitchell President [Redacted] E-mail: [Redacted]</p>	

7234

**UNCONTROLLED IF PRINTED**

This page intentionally left blank