



Draft Preliminary Data Quality Objectives Industrial Area Sampling and Analysis Plan



February 2000
ADMIN RECORD

1/35

TABLE OF CONTENTS

1.0	INTRODUCTION	1
1.1	DATA QUALITY FILTER	1
2.0	DATA QUALITY OBJECTIVES	3
2.1	CHARACTERIZATION AND REMEDIATION OF IHSS, PAC, AND UBC SITES.....	4
2.1.1	The Problem.....	4
2.1.2	Identification of Decisions.....	5
2.1.3	Inputs to the Decisions.....	5
2.1.4	Decision Boundaries	7
2.1.5	Decision Rules	7
2.1.6	Tolerable Limits on Decision Errors.....	8
2.1.7	Optimization of Plan Design.....	8
2.2	CONFIRMATION SAMPLING AND ANALYSIS	9
2.2.1	The Problem.....	9
2.2.2	Identification of Decisions.....	10
2.2.3	Inputs to the Decisions.....	10
2.2.4	Decision Boundaries	11
2.2.5	Decision Rules	12
2.2.6	Tolerable Limits on Decision Errors.....	13
2.2.7	Optimization of Plan Design.....	13
2.3	FINAL CHARACTERIZATION OF THE INDUSTRIAL AREA FOR THE COMPREHENSIVE RISK ASSESSMENT.....	14
2.3.1	The Problem.....	14
2.3.2	Identification of Decisions.....	14
2.3.3	Inputs to the Decisions.....	15
2.3.4	Decision Boundaries	16
2.3.5	Decision Rules	17
2.3.6	Tolerable Limits on Decision Errors.....	18
2.3.7	Optimization of Plan Design.....	18

List of Figures

Figure 1. Data Quality Filter for the Industrial Area Sampling and Analysis Plan and Comprehensive Risk Assessment

List of Attachments

Attachment 1. Description of Existing Data Sets

Acronyms

AL	Action Level
ALF	Action Levels and Standards Framework for Surface Water, Ground Water, and Soils
Am	americium
AOC	Area of Concern
AST	Analytical Services Toolkit
CDPHE	Colorado Department of Public Health and Environment
COC	contaminant of concern
CRA	comprehensive risk assessment
DQO	data quality objective
EDD	electronic data deliverable
EDDIE	Environmental Data Dynamic Information Exchange
EPA	U.S. Environmental Protection Agency
ERA	Ecological Risk Assessment
EU	exposure unit
FY	Fiscal Year
GIS	Geographic Information System
IA	Industrial Area
IASAP	IA Sampling and Analysis Plan
IGD	Implementation Guidance Document
IHSS	Individual Hazardous Substance Site
IMP	Integrated Monitoring Plan
ISEDS	Integrated Sitewide Environmental Data System
MARSSIM	Multi-Agency Radiation Survey and Site Investigation Manual
mrem	millirem
NFA	No Further Action
NLR	no longer representative
PA	Protected Area
PAC	Potential Area of Concern
PCOC	potential contaminant of concern
PMJM	Preble's meadow jumping mouse
Pu	plutonium
QA	quality assurance
RCRA	Resource Conservation and Recovery Act
RFCA	Rocky Flats Cleanup Agreement
RFEDS	Rocky Flats Environmental Database System
RFETS	Rocky Flats Environmental Technology Site
RFI/RI	RCRA Facility Investigation/Remedial Investigation
RMRS	Rocky Mountain Remediation Services, LLC
SME	subject matter expert
SWD	Soil/Water Database
U	uranium
UBC	under building contamination
UCL	upper confidence limit

Acronyms (continued)

V&V	validation and verification
WSRIC	Waste Stream Residue Identification and Characterization

1.0 INTRODUCTION

Data quality objectives (DQOs) for the Rocky Flats Environmental Technology Site (RFETS) Industrial Area (IA) Sampling and Analysis Plan (IASAP) provide key IA characterization and remediation decision rules. These DQOs are based on U.S. Environmental Protection Agency (EPA) Guidance for the Data Quality Objectives Process, QA/G-4, 1994 (EPA/600/R-96/055). DQOs have been established to review existing IA data, identify data gaps, and define additional sampling and analysis. Data developed under these DQOs will :

1. Establish the nature and extent of contamination within Individual Hazardous Substance Sites (IHSSs), Potential Areas of Concern (PACs), and Under Building Contamination (UBC) sites and determine appropriate actions where Rocky Flats Cleanup Agreement (RFCA) Action Levels (ALs) are exceeded.
2. Confirm that remediation within IHSSs, PACs, and UBC sites was successful, and that No Further Action (NFA) can be justified.
3. Determine whether post-closure uses are protective based on the baseline risk assessment, referred to as the Comprehensive Risk Assessment (CRA), for final remedy selection.
4. Support final remedy selection analysis.


The IASAP DQOs apply to surface and subsurface soil encountered during characterization and remediation. A significant goal of the IASAP is to maximize resources by conducting sampling programs that support all appropriate decisions including whether remediation is required, whether remediation objectives have been achieved, if an NFA can be justified, and to provide data for the CRA. Therefore, to the extent possible, an area will be sampled only once, unless circumstances otherwise warrant.

The IASAP DQOs complement those used in the RFETS Integrated Monitoring Plan (IMP). The IMP and its set of DQOs focus on air, surface water, groundwater, and ecology, and will be used to support remediation decisions and the CRA. Project-specific IMP air, surface water, and groundwater monitoring data from stations surrounding remediation project locations will be used to identify additional areas that may require evaluation.

1.1 DATA QUALITY FILTER

All data sets used for decisions will be assessed for quality (i.e., the quality criteria inherent within the data and any limitations of the data relative to their use). The quality criteria are generally illustrated on Figure 1, Data Quality Filter. Details of the data quality will be addressed in the IASAP. Data quality assessments will include evaluation of distributional

**Figure 1. Data Quality Filter
for the Industrial Area Sampling and Analysis Plan
and Comprehensive Risk Assessment**

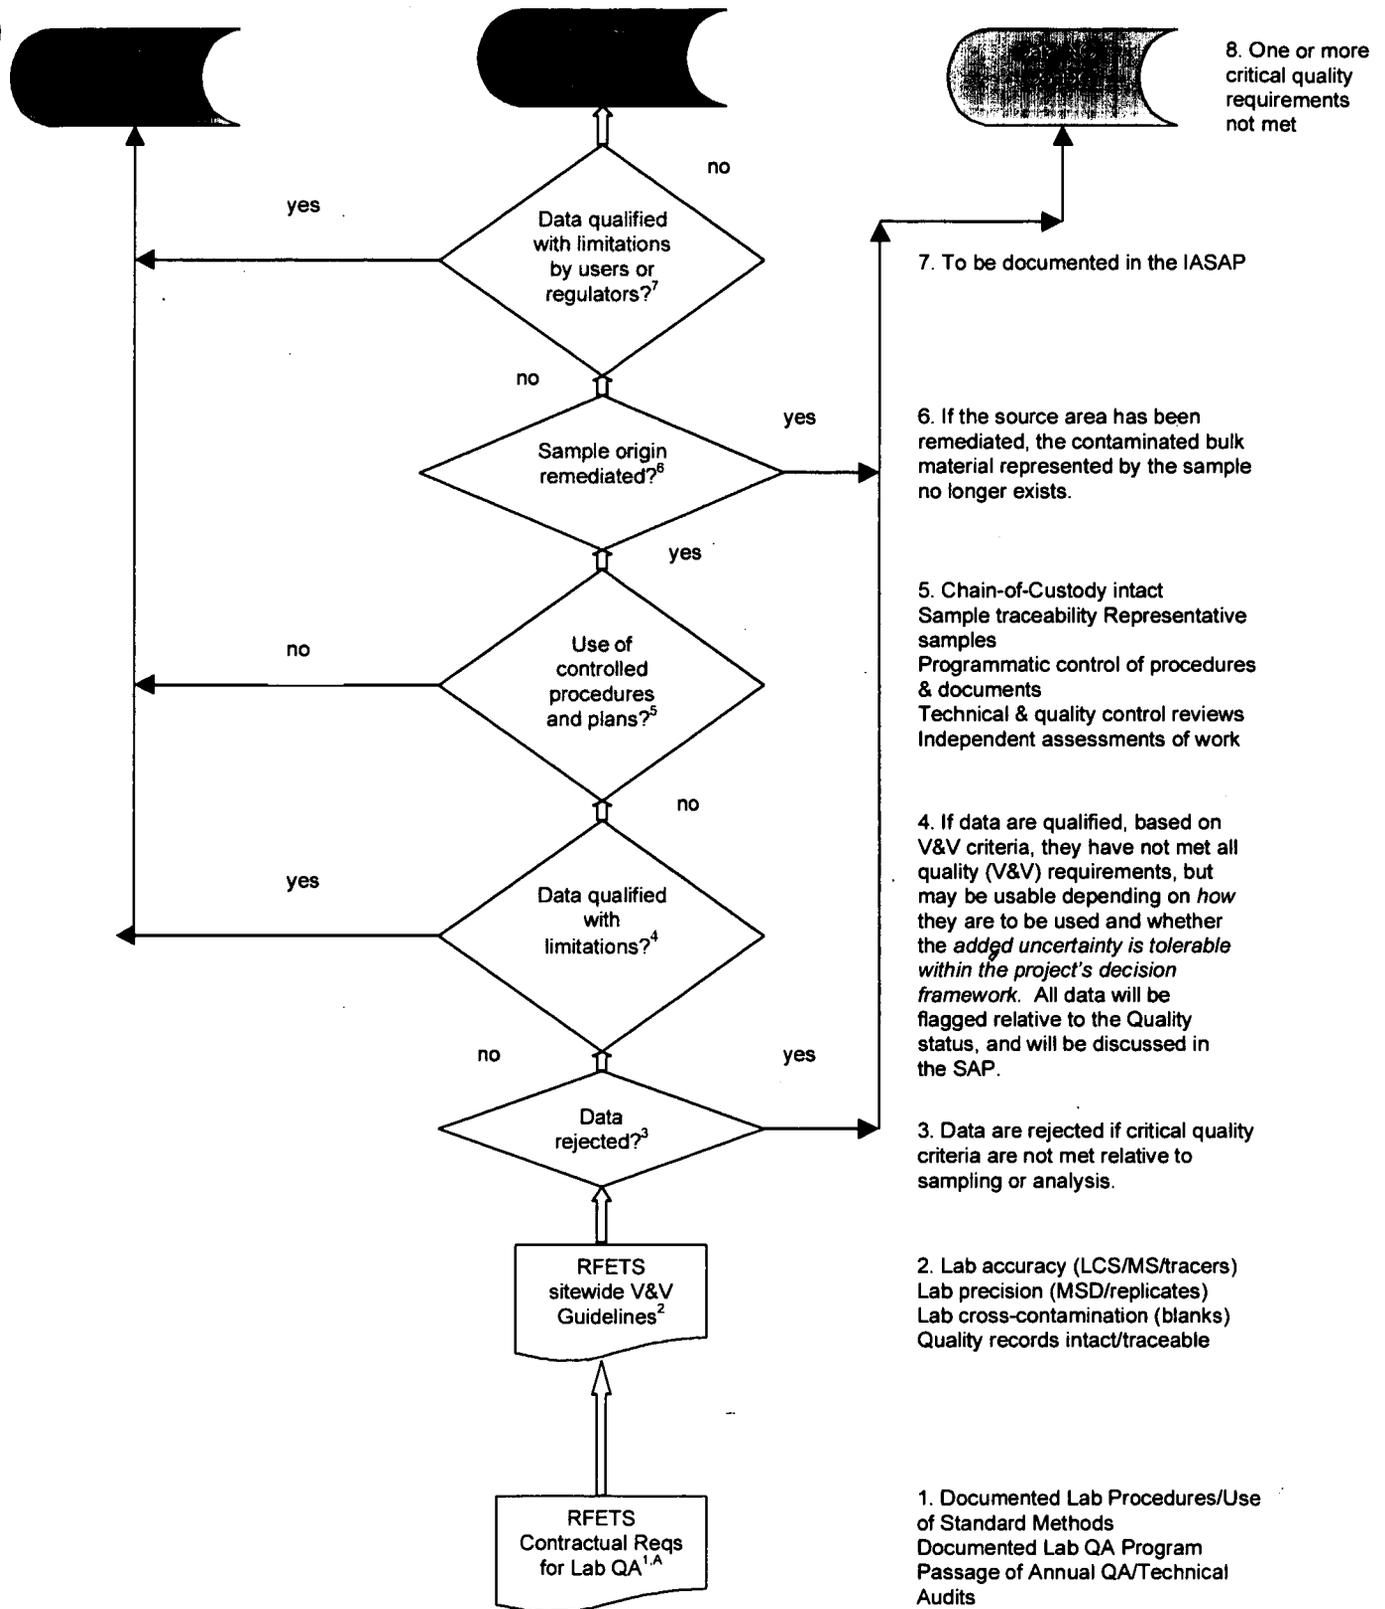

[^]Note: Quality requirements for ecological data will be addressed separately in the IASAP.

1

characteristics, variability, descriptive statistics, sampling adequacy, and uncertainty in measurements and decisions.

In-depth and detailed validation and verification of historical data (of potential use in the IA) will not be performed; however the data will be qualified. For example, individual sample results lacking validation qualifiers will be evaluated to determine whether adequate association exists between the data in question and acceptable IASAP data to render the data valid. Types of information that will be evaluated include, but are not limited to, the following:

- In what time frame was the sample collected?
- Did the associated analytical laboratory produce valid data for the same analyte(s) during the same timeframe?
- Were standard quality controls in place during collection of the sample?

Specific criteria such as these will be itemized and systematically evaluated through research, database queries, and included in the IASAP. All data will be individually "flagged", by record, in the digital data sets used to support the IASAP.

A description of existing data sets that will be reviewed for usability is included in Attachment 1. Data will be stored in a subset of project-approved data within the Soil/Water Database (SWD) and will become part of the Administrative Record. Data will be maintained pursuant to RFETS quality assurance (QA) requirements.

2.0 DATA QUALITY OBJECTIVES

The DQO process is a series of planning steps based on the scientific method designed to ensure that the type, quantity, and quality of environmental data used in decision-making are appropriate for the intended purpose. EPA has issued guidelines to help data users develop site- and project-specific DQOs (EPA 1994). The DQO process is intended to:

- Clarify the study objective;
- Define the most appropriate type of data to collect;
- Determine the most appropriate conditions under which to collect the data; and
- Specify acceptable levels of decision errors that will be used as the basis for establishing the quantity and quality of data needed to support the design.

The DQO process specifies project decisions, the data quality required to support those decisions, specific data types needed, data collection requirements, and analytical techniques necessary to generate the specified data quality. The DQO process consists of seven steps.

Each step influences choices that will be made later in the process. These steps are as follows:

- Step 1: State the problem;
- Step 2: Identify the decision;
- Step 3: Identify the inputs to the decision;
- Step 4: Define the study boundaries;
- Step 5: Develop a decision rule;
- Step 6: Specify tolerable limits on decision errors; and
- Step 7: Optimize the design.

During the first six steps of the DQO process, the planning team develops decision performance criteria (i.e., DQOs) for the data collection design. All decision rules need to be considered, as appropriate. The final step of the process involves developing the data collection design based on the DQOs. The data collection design will be presented in the IASAP.

The DQOs will be refined and expanded as the IASAP is developed. For example, specific decision limits, null hypotheses, statistical tests, and methods to determine sample numbers and locations will be added. The three sets of DQOs that are discussed below include the following:

- 1) Characterization and remediation of IHSS, PAC, and UBC sites;
- 2) Confirmation sampling and analysis; and
- 3) Final characterization of the IA for the CRA.

2.1 CHARACTERIZATION AND REMEDIATION OF IHSS, PAC, AND UBC SITES

The IA will be assessed with respect to RFCA requirements to ensure that human health and the environment are protected on an IHSS, PAC, and UBC site basis. Data collected will define the nature and extent of contamination within IHSSs, PACs, and UBC sites, and will be compared with the RFCA Tier I and Tier II ALs to determine whether action is required.

2.1.1 The Problem

The nature and extent of contamination must be known with adequate confidence to make remedial decisions. An AL comparison, as specified in the RFCA Implementation Guidance

Document (IGD), will be performed to assess whether an IHSS, PAC, or UBC site needs remediation or management.

2.1.2 Identification of Decisions

The characterization and remediation questions that will be resolved are listed below.

- 1) Is each potential contaminant of concern (PCOC) and its nature and extent associated with an IHSS, PAC, or UBC site known with adequate confidence?
- 2) Is remediation necessary within an IHSS, PAC, or UBC site based on comparison of the characterization data to the RFCA Tier I ALs as specified in the IGD?
- 3) Is evaluation, management, or remediation of an IHSS, PAC, or UBC site required because of exceedance of RFCA Tier II ALs as specified in the IGD?

2.1.3 Inputs to the Decisions

Information needed to resolve the decision statements in Section 2.1.2 is listed below:

- 1) PCOCs (analytes as listed in the referenced analytical Line Item Codes, in parentheses)
Target Compound List (Organics):
 - ≥33 volatile organic compounds (SS01B002 or -003)
 - ≥64 semi volatile organic compounds (SS02B002)
 - 21 pesticides (SS03B002)
 - 7 arochlors (PCBs; SS03B002)
 - 12 herbicides (SW8151A)Target Analyte List:
 - ≥22 metals (SS05C039)
 - cyanideRadionuclides:
 - RFETS-specific - $^{233/234}\text{U}$, ^{235}U , ^{238}U , ^{241}Am , $^{239,240}\text{Pu}$ (RC01B003), $^{230/232}\text{Th}$ (RC01B023), ^{228}Th (RC01B025), and H^3 (RC02B002);
- 2) Method detection limits (below RFCA Tier II ALs)/practical quantitation limits;
- 3) Background concentrations for each inorganic and radionuclide PCOC;
- 4) RFCA Tier I and Tier II ALs for surface soil and subsurface soil as listed in the Action Level and Standards Framework for Surface Water, Ground Water, and Soils (ALF) (Attachment 5, RFCA). Comparison criteria include the following:
 - a) Each soil data value will be compared to the appropriate AL;
 - b) Each soil data value will be compared to the background mean plus two standard deviations;

- c) Tier I exceedance
 - Ratio of each soil data value to the Tier I AL is > 1 , or
 - Sum of the ratios for either non-radionuclides or radionuclides is > 1 ;
- d) Tier II exceedance
 - Ratio of each soil data value to the Tier II AL is > 1 , or
 - Sum of the ratios for either non-radionuclides or radionuclides is > 1 ;
- e) Below Tier II and above background
 - Ratio of each soil data value to the Tier II AL is < 1 , or
 - Sum of the ratios for either non-radionuclides or radionuclides is < 1 ;
- f) Determine spatial extent of the Area of Concern (AOC) with respect to Tier I and Tier II ALs and aggregate data for sites with soil data values exceeding Tier I ALs. There is no lower limit on the size of an AOC, but no single AOC shall exceed 10 acres. The processes for determining the extent of the AOC and for comparison of analytical results is the following:
 - Compare data for inorganics and radionuclides to background mean plus two standard deviations,
 - Compare data for organics to detection limits,
 - Establish AOCs based on the spatial distribution of data,
 - Average data over the AOC, as appropriate, and
 - Compare the 95 percent upper confidence limit (UCL) of the mean for each PCOC to the Tier I and Tier II ALs;
- 5) Process knowledge and historical data, including information and data contained in technical memoranda, Resource Conservation and Recovery Act (RCRA) Facility Investigation/Remedial Investigation (RFI/RI) reports, remedial action reports, IMP reports, the *Historical Release Report, Reconstruction of Historical Rocky Flats Operations and Identification of Release Points*, and other relevant documents; and
- 6) IASAP-generated characterization data.

Existing data, which meet usability criteria and pass the Data Quality Filter (Section 1.1), will be used to assess the variability of PCOC concentrations and determine whether further sampling is necessary and the number of samples needed.

2.1.4 Decision Boundaries

Characterization and remediation decision boundaries that define when and where data will be collected are listed below.

- 1) IHSS, PAC, and UBC site boundaries are listed in Table 2 and shown on Plates 1 and 2 of the *Industrial Area Characterization and Remediation Strategy (DOE, 1999)*. The actual boundary of an AOC will be determined from the spatial distribution of the sampling data (Section 2.1.3. 4f). "White Spaces" (areas in between IHSS, PAC, or UBC site boundaries) will be addressed after IHSS, PAC, and UBC site remediation (Sections 2.2 and 2.3).
- 2) The decisions listed in Section 2.1.2 will be applied to each IHSS, PAC, and UBC site located in the IA.
- 3) Soil will be assessed generally from the land surface to the top of the saturated zone or the top of bedrock, as appropriate.
- 4) Temporal boundaries will be consistent with IA project schedules. Temporal boundaries will be refined as the IASAP is developed.

2.1.5 Decision Rules

The characterization and remediation decision rules describe how the data will be evaluated and are listed below.

- 1) If each PCOC has been adequately documented with respect to concentrations and three-dimensional locations within the IHSS, PAC, or UBC site boundaries of interest, then the nature and extent are adequately defined. Otherwise, PCOCs have not been adequately characterized, and additional sampling and analysis are necessary.
- 2) If all analytical results are non-detections, then the PCOC will be disqualified from further consideration; otherwise, the PCOC will be retained.
- 3) If all data values are below the background mean plus two standard deviations, then no action is necessary.
- 4) If a single data point is below the Tier II AL and the sum of the ratios of a single soil data value to its respective Tier II ALs for both non-radionuclides and radionuclides are below 1, then no evaluation, management, or remediation of the AOC is necessary.
- 5) If a single data point is above the Tier II AL or the sum of the ratios of a single soil data value to its respective Tier II ALs for either non-radionuclides or radionuclides are above 1, then evaluation, management, or remediation of the AOC is necessary.

- 6) If a single PCOC data point is above the Tier I AL or the sum of the ratios of a single soil data value to its respective Tier I ALs for either non-radionuclides or radionuclides are above 1, the PCOC becomes a contaminant of concern (COC) and additional data evaluation is necessary. Additional evaluation is described in decision rules 7,8, and 9.
- 7) If the ratio of the 95% UCL of the mean concentration for a single COC to its Tier I AL or the sum of the ratios of the 95% UCL of the mean concentrations for all COCs to their respective Tier I ALs for both radionuclides and non-radionuclides within an AOC are below 1, then the soil does not need to be remediated. Otherwise, the Tier I AL has been exceeded, and the soil needs to be remediated in accordance with RFCA requirements.
- 8) If the ratio of the 95% UCL of the mean concentration for a single COC to its respective ALs and the sum of the ratios of the 95% UCL of the mean concentrations for all COCs to their respective ALs for both radionuclides and non-radionuclides are above 1 for Tier II ALs and below 1 for Tier I ALs, then further evaluation of the site is required in accordance with RFCA requirements.
- 9) If the ratio of the 95% UCL of the mean concentration for a single COC to its Tier II AL and the sum of the ratios of the 95% UCL of the mean concentrations for all COCs to their respective Tier II ALs for both radionuclides and non-radionuclides are below 1, then the soil does not need to be further evaluated or managed per RFCA requirements. Otherwise, the soil needs to be further evaluated, managed, or remediated in accordance with RFCA requirements.

2.1.6 Tolerable Limits on Decision Errors

Areas and associated PCOCs disqualified from further characterization or remediation based on process knowledge have no associated quantifiable decision error. Sample data requirements will be based on uncertainties of 10 percent or less for alpha (false positive) errors and 20 percent or less for beta (false negative) errors. The null hypothesis is that the AOC is contaminated.

2.1.7 Optimization of Plan Design

Optimization of the data collection and remediation decision process will be conducted in consultation with the Colorado Department of Public Health and Environment (CDPHE) and EPA during development of the IASAP. Consistent with the iterative approach of the DQO process, decisions without adequate confidence will be revisited until enough data are gathered to make a decision. Existing data sets may be checked for sampling adequacy based on comparison with the EPA G-4 model (EPA 1994). Sampling requirements and densities will be based on the AOC as determined in Section 2.1.5.

The following documents will be used as guidance in optimizing sampling and analysis requirements and QA in support of characterization activities:

- DOE, 1999, Industrial Area Characterization and Remediation Strategy, September.
- EPA, 1989, Risk Assessment Guidance for Superfund, Volume I, Human Health Evaluation Manual (Part A), EPA/540/1-89/002, December.
- EPA, 1992, Guidance for Data Usability in Risk Assessment (Parts A&B), 9285.7-09A&B, April/May.
- EPA, 1994, Guidance for the Data Quality Objective Process, EPA QA/G-4, EPA/600/R-96/055, September.
- EPA, 1996, Soil Screening Guidance: Technical Background Document, EPA/540/R-95/128, May.
- EPA, 1997, Multi-Agency Radiation Survey and Site Investigation Manual (MARSSIM), NUREG-1575, EPA 402-R-97-016, December.
- EPA, 1998, Guidance for the Data Quality Assessment Process: Practical Methods for Data Analysis, EPA QA/G-9 EPA/600/R-96/084, January.
- EPA, 1999, Guidance on Environmental Data Verification and Validation, Peer Review Draft, EPA QA/G-8 August.

2.2 CONFIRMATION SAMPLING AND ANALYSIS

If an IHSS, PAC, UBC site, or White Space requires remediation, confirmation samples will be collected to ensure that remediation has reduced COC concentrations to below the Tier I and/or Tier II ALs. Sampling objectives will take into account the requirements for CRA sampling. This DQO supports the sampling and analysis required to confirm that remediation at an IHSS, PAC, UBC site, or White Space has been successful, and that an NFA can be justified using criteria contained in RFCA, Attachment 6, and the IGD.

2.2.1 The Problem

Following remediation of any contaminated area, the concentrations of remaining contaminants are not known with adequate confidence to conclude that remediation was complete and successful.

Due to the nature of some remediation technologies, such as soil excavation and hauling with heavy equipment, the possibility exists that limited contaminated media could be released outside the remediation boundaries during field activities. IMP monitoring results will be evaluated to ensure that any releases of contamination from the remediation area are appropriately managed and controlled.

2.2.2 Identification of Decisions

The confirmation sampling and analysis questions that will be resolved include the following:

- 1) Has contamination within an AOC been successfully remediated based on RFCA ALs and other mutually agreed-upon cleanup criteria?
- 2) Did any releases of contamination occur outside the remediation activity boundaries during the remediation activity (based on IMP monitoring)?

2.2.3 Inputs to the Decisions

Information needed to resolve the decision statements in Section 2.2.2 are as follows.

- 1) COCs as determined by the AL screen in Section 2.1.5;
- 2) Post-remediation sampling locations based on RFCA and CRA requirements;
- 3) Monitoring results concurrent with remediation;
- 4) Method detection limits (below RFCA Tier II ALs and CRA requirements)/practical quantitation limits;
- 5) Confirmation sample results (post-remediation concentrations);
- 6) RFCA Tier I and Tier II ALs for surface soil and subsurface soil as listed in the ALF (Attachment 5, RFCA). Comparison criteria include the following:
 - a) Each soil data value will be compared to the appropriate AL;
 - b) Each soil data value will be compared to the background mean plus two standard deviations;
 - c) Tier I exceedance
 - Ratio of each soil data value to the Tier I AL is > 1 , or
 - Sum of the ratios for either non-radionuclides or radionuclides is > 1 ;
 - d) Tier II exceedance
 - Ratio of each soil data value to the Tier II AL is > 1 , or
 - Sum of the ratios for either non-radionuclides or radionuclides is > 1 ;
 - e) Below Tier II and above background
 - Ratio of each soil data value to the Tier II AL is < 1 , or
 - Sum of the ratios for either non-radionuclides or radionuclides is < 1 ; and

- f) For sites with soil data values exceeding Tier I ALs, determine spatial extent of the AOC with respect to Tier I and Tier II ALs and aggregate data. There is no lower limit on the size of an AOC, but no single AOC shall exceed 10 acres. The process for determining the extent of the AOC and for comparison of analytical results includes the following:
- Compare data for inorganics and radionuclides to background mean plus two standard deviations,
 - Compare data for organics to detection limits,
 - Establish AOCs based on the spatial distribution of the data,
 - Average data over the AOC, as appropriate, and
 - Compare the 95% UCL of the mean for each PCOC to the Tier I and Tier II ALs; and
- 7) Other mutually agreed-upon cleanup criteria.

Data will be reviewed and evaluated against usability criteria and must pass the Data Quality Filter (Section 1.1).

2.2.4 Decision Boundaries

Decision boundaries that determine when and where data will be collected are listed below.

- 1) Identified IHSS, PAC, and UBC site boundaries are listed in Table 2, and shown on Plates 1 and 2 of the *Industrial Area Characterization and Remediation Strategy* (DOE, 1999). The actual boundary of an AOC will be determined from the spatial distribution of the sampling data, as specified in the IGD. The AOCs determined under Section 2.2.2 will be used as areas for confirmation sampling and analysis immediately after remediation.
- 2) White Spaces will be sampled and addressed when there is little potential that contamination spread during the remediation of adjacent sites. Otherwise White Spaces will be addressed as part of the CRA.
- 3) COCs determined under Section 2.2.2 for each AOC will be compared to ALs or other mutually agreed-upon cleanup criteria.
- 4) Confirmation sampling will cover the area remediated.
- 5) Soil will be assessed generally from the land surface to the top of the saturated zone or the top of bedrock, as appropriate.

- 6) Temporal boundaries will be consistent with IA project schedules. Temporal boundaries will be refined as the IASAP is developed and IA remediation proceeds. Confirmation sampling will be conducted after remediation based on AL comparisons. Data from this confirmation sampling will be used to support the CRA (Section 2.3).

2.2.5 Decision Rules

The confirmation sampling and analysis decision rules that describe how the data will be evaluated and are listed below.

- 1) The concentration and distribution of each COC, after the remedial action has been performed, must be adequately documented within the AOC boundaries of interest to evaluate the remediation using the following decision rules. Otherwise, post-remediation COCs have not been adequately characterized, and additional sampling and analysis are necessary.
- 2) If all data values are below the background mean plus two standard deviations, no further action is necessary.
- 3) If a single data point is below the Tier II AL and the sum of the ratios of each soil data value to its respective Tier II ALs for both non- radionuclides and radionuclides are below 1, then no further action is necessary.
- 4) If a single data point is above the Tier II AL or the sum of the ratios of each soil data value to its respective Tier II ALs for either non- radionuclides or radionuclides are above 1, then evaluation, management, or further remediation of the AOC is necessary.
- 5) If a single data point is above the Tier I AL or the sum of the ratios of each soil data value to its respective Tier I ALs for either non- radionuclides or radionuclides are above 1, then additional evaluation of the data is necessary as described in decision rules 6, 7, and 8.
- 6) If the ratio of the 95% UCL of the mean concentration for a single COC to its respective ALs and the sums of the ratios of the 95% UCL of the mean concentration for all COCs within an AOC are above 1 for Tier II ALs and below 1 for Tier I ALs, then further evaluation of the site is required in accordance with RFCA requirements.
- 7) If the ratio of the 95% UCL of the mean concentration for a single COC to its respective Tier II AL and the sum of the ratios of the 95% UCL of the mean concentration for all COCs to their respective Tier II ALs are below 1, then no further action is required. Otherwise, the soil needs to be further evaluated or managed in accordance with RFCA requirements.
- 8) If the ratio of the 95% UCL of the mean concentration for a single COC to its respective Tier I ALs and the sum of ratios of the 95% UCL of the mean

concentrations for all COCs to their respective Tier I ALs for both non-radionuclides and radionuclides within an AOC are above 1, then further evaluation, management, or remediation is necessary in accordance with RFCA requirements.

- 9) If IMP monitoring (e.g., air monitoring or surface water sampling) corresponding with the IA remediation activity produces results that exceed ALs stated in the IMP, then the potential release of contaminants resulting from the respective remediation activity will be evaluated. Otherwise, the remediation activity was adequately controlled to prevent release of contaminants outside the immediate remediation boundaries.

2.2.6 Tolerable Limits on Decision Errors

Areas and associated COCs disqualified from further characterization or remediation based on process knowledge have no associated quantifiable decision error. Sample data requirements will be based on uncertainties of 10 percent or less for alpha errors and 20 percent or less for beta errors. The null hypothesis is that the AOC is contaminated.

2.2.7 Optimization of Plan Design

Optimization of the post-remediation data collection and decision process will be performed in consultation with CDPHE and EPA during development of the IASAP. Consistent with the iterative approach of the DQO process, decisions without adequate confidence will be revisited until enough data are gathered to make a decision. Existing data sets may be checked for sampling adequacy by comparison with the EPA G-4 model or MARSSIM.

Sampling requirements and densities will be based on the AOC as determined in Section 2.2.5 and on CRA considerations.

The following documents will be used as guidance in optimizing sampling and analysis requirements and QA in support of remediation and risk assessment activities:

- DOE, 1999, Industrial Area Characterization and Remediation Strategy, September.
- EPA, 1989, Risk Assessment Guidance for Superfund, Volume I, Human Health Evaluation Manual (Part A), EPA/540/1-89/002, December.
- EPA, 1992, Guidance for Data Usability in Risk Assessment (Parts A&B), EPA Publication 9285.7-09A&B, April/May.
- EPA, 1994, Guidance for the Data Quality Objective Process, QA/G-4 EPA/600/R-96/055, September.
- EPA, 1997, Multi-Agency Radiation Survey and Site Investigation Manual (MARSSIM), NUREG-1575, EPA 402-R-97-016, December.

- EPA, 1996, Soil Screening Guidance: Technical Background Document, EPA/540/R-95/128, May.
- EPA, 1998, Guidance for the Data Quality Assessment Process: Practical Methods for Data Analysis, QA/G-9 EPA/600/R-96/084, January.
- EPA, 1999, Guidance on Environmental Data Verification and Validation, Peer Review Draft, QA/G-8, August.

2.3 FINAL CHARACTERIZATION OF THE INDUSTRIAL AREA FOR THE COMPREHENSIVE RISK ASSESSMENT

The IA must be assessed to ensure that the post-remediation state is protective of human health and the environment based on post-closure uses. Data will be collected to ensure that the nature and extent of any remaining contamination is known, so that a CRA can be performed to ensure post-closure uses are protective.

The nature and extent of contamination within AOCs, established in the IA during the characterization and remediation phases, will have been determined under Sections 2.1 and 2.2 of this document. The nature and extent of contamination in most White Space areas will be unknown. The concentrations of COCs in all areas within the IA must be determined with adequate confidence to be protective of post-closure uses.

2.3.1 The Problem

Human and ecological receptors can be expected to randomly contact soil from any or all parts of the IA. The previous DQOs address selected areas of known contamination, however there are areas within the IA for which no data are available. The post-remediation state of the IA must be assessed to determine whether it is adequately protective of the post-closure uses.

2.3.2 Identification of Decisions

The CRA questions that will be resolved are listed below.

- 1) Has each COC and its nature and extent within AOCs and White Space areas been identified with adequate confidence, based on site history (process knowledge) and analytical data?
- 2) Are long-term risks to receptors in an exposure unit (EU) acceptable, based on post-closure uses?
- 3) Are long-term risks to on-site and off-site receptors through the air and surface water pathways acceptable, based on post-closure uses?
- 4) Does residual contamination within an Ecological Risk Assessment (ERA) EU represent an acceptable ecological risk due to direct contact with abiotic media?

2.3.3 Inputs to the Decisions

The information needed to resolve the CRA decision statements in Section 2.3.2 is listed below.

- 1) Characterization data from remedial investigations, RFI/RI reports, corrective measure studies, remedial action reports, the IMP reports, pre-demolition survey reports, and other projects and data sets, including IASAP-generated, historical, and IMP data (e.g., concentrations of COCs in surface and subsurface soil, surface water, groundwater, air, and biota) will be used as inputs to the decisions. IASAP data will include data collected for pre- and post-remediation AL comparisons (Sections 2.1 and 2.2).
- 2) All available historical information, sampling data, and risk assessment requirements, as documented in the CRA Methodology (to be determined), will be used to determine sampling locations and densities for White Space to support CRA decisions.
- 3) These data will be processed using one or more numerical methods to provide a decision context. These methods may include:
 - a) PCOC filter (algorithm);
 - b) Monte Carlo methods;
 - c) Air dispersion modeling output;
 - d) Surface water, groundwater, or erosion modeling;
 - e) CRA modeling; and
 - f) ALF comparisons on an EU basis.
- 4) COCs as determined from sampling and remediation efforts.
- 5) Pre- and post-remediation sample locations.
- 6) Method detection limits (below RFCA Tier II Als and CRA requirements)/practical quantitation limits.
- 7) Acceptable human health and ecological risk levels for post-closure uses.

All characterization (unless remediated) and confirmation data for environmental media in the IA that pass the Data Quality Filter will be used in the CRA. This will include data from historical investigations and actions, IA characterization, remediation confirmation, IMP

monitoring, and additional samples to complete the nature and extent determination. All appropriate modeling results will be used in the assessment.

CRA data will meet at least one of the following criteria:

- Data must pass the Data Quality Filter (Section 1.1);
- Data must meet IMP DQO requirements; or
- Data used for CRA modeling must meet Actinide Migration Evaluation DQO requirements or be from a regulatory agency approved modeling study.

Data will be stratified using appropriate statistical methods to account for possible higher density sampling and higher levels of contamination in AOCs than in White Spaces.

2.3.4 Decision Boundaries

Decision boundaries to determine when and where data will be collected are listed below.

- 1) The AOCs determined under Section 2.1.2 and 2.2.2 and White Space areas will be incorporated into EUs as designated in the CRA Methodology (to be determined).
- 2) EU sizes and factors will be documented in a CRA Methodology document to be produced during Fiscal Year (FY)00 and FY01. The size of the EUs will be based on the potential land uses identified in Figure 1 of Attachment 5 to RFCA. The EUs will contain IHSSs, PACs, UBC sites, and White Space, as appropriate.
- 3) For ecological characterization, the minimum grid spacing for selecting random samples within an ERA EU will be based on the average home range of the Preble's meadow jumping mouse (PMJM) (3.5 hectares in a linear-ovate configuration). Other grid spacing will be used in habitats not frequented by the PMJM.
- 4) AL comparisons will be performed on aggregated data (Sections 2.1.3 and 2.2.3) for the COCs contained in an EU to account for direct exposure, including contact with multiple contaminants.
- 5) Aggregate human health risks and doses, and ecological risks will be assessed for projected land uses in accordance with RFCA, and for adjacent areas, including those downwind and downstream, as specified in the CRA Methodology (to be determined).
- 6) Soil will be assessed generally from the land surface to the top of the saturated zone or the top of bedrock, as appropriate.
- 7) Temporal boundaries will be consistent with IA project schedules. Temporal boundaries will be refined as the IASAP is developed and IA remediation proceeds (e.g., to consider the optimal season for various sample types).

- 8) The CRA modeling effort will include several out-year land use scenarios as defined in the CRA Methodology (to be determined).
- 9) The CRA will use characterization and confirmation data as appropriate from IHSSs, PACs, UBC sites, and White Spaces.

2.3.5 Decision Rules

The decision rules that describe how the data will be evaluated are listed below.

- 1) If the nature and extent of chemicals, metals, and radionuclides are known for an EU with sufficient certainty, so that human health risks and doses, and ecological risks can be adequately quantified, then additional sampling and analysis will not be performed. Otherwise, additional sampling and analysis will be performed.
- 2) If human health risks and doses, and ecological risks are acceptable for the entire IA, then an NFA Corrective Action Decision/Record of Decision will be developed. Otherwise, further evaluation, management, or remediation will be required.
- 3) The following criteria will be used to determine whether the human health risks and doses, and ecological risks are acceptable:
 - a) Are human health carcinogenic risks for direct contact with chemicals, metals, and radionuclides (as determined by the AL screen) in soil in the EU and from air and surface water pathways due to contact, ingestion, or inhalation as determined by a forward risk assessment, greater than 10^{-4} for the appropriate land use? If yes, then evaluation, management, or remediation is necessary. If no, no further action is necessary.
 - b) Do human health non-carcinogenic risks from chemicals and metals (as determined by the AL screen) in soil in the EU and air and surface water pathways due to contact, ingestion, or inhalation as determined by a forward risk assessment, have a hazard index greater than 1 for the appropriate land use (e.g., open space or industrial land use)? If yes, then evaluation, management, or remediation is necessary. If no, no further action is necessary.
 - c) Is radiation dose to an individual, from direct contact with radionuclides (as determined by the AL screen) in soil in the EU and air and surface water pathways due to contact, ingestion, inhalation, or external irradiation as determined by a forward risk assessment, greater than the acceptable annual radiation dose limit of 15 millirems (mrem) for open space or industrial land use or of 85 mrem for a hypothetical future resident, whichever is lower? If yes, then evaluation, management, or remediation is necessary. If no, no further action is necessary.

- d) Is radiation dose to an individual from radionuclides in air and surface water due to contact, ingestion, or inhalation as determined by a forward risk assessment, greater than the acceptable annual radiation dose limit of 15 mrem for the offsite resident? If yes, then evaluation, management, or remediation is necessary. If no, no further action is necessary.
- e) Is the 95% UCL of the mean concentration of a single COC within the ERA EU greater than the corresponding ecological risk level? If yes, then evaluation, management, or remediation is required to reduce the concentration. If the 95% UCL of the mean concentration is equal to or less than the corresponding risk level, then no further action is required.

2.3.6 Tolerable Limits on Decision Errors

Areas and associated COCs disqualified from further characterization or remediation based on process knowledge have no associated quantifiable decision error. Sample data requirements will be based on uncertainties of 10 percent or less for alpha errors and 20 percent or less for beta errors. The null hypothesis is that the AOC is contaminated.

Sources of uncertainties in the risk assessments will be identified and minimized.

2.3.7 Optimization of Plan Design

Optimization of the post-remediation data collection and sampling requirements will be based on the EU for the appropriate land use, in consultation with CDPHE and EPA during development of the CRA Methodology.

The following documents will be used as guidance in defining the sampling and analysis requirements for the CRA:

- EPA, 1989, Risk Assessment Guidance for Superfund, Volume I, Human Health Evaluation Manual (Part A), EPA/540/1-89/002, December.
- EPA, 1992, Guidance For Data Usability in Risk Assessment (Parts A&B), 9285.7-09A&B, April/May.
- EPA, 1996, Soil Screening Guidance: Technical Background Document, EPA/540/R-95/128, May
- EPA, 1997, Multi-Agency Radiation Survey and Site Investigation Manual (MARSSIM), NUREG-1575, EPA 402-R-97-016, December.

ATTACHMENT 1

DESCRIPTION OF EXISTING DATA SETS

AIR MONITORING SYSTEMS DATABASE (AIR MANAGEMENT DATA SYSTEM)

Points of Contact

Carol Patnoe, Kaiser-Hill, x2440
Bob Nininger, Kaiser-Hill, x4663
Joann Euler, Radian, x6338

Platform and Location

Current: Version 2, in FoxPro, on Joann Euler's hard drive
In the near future: Version 3, in Oracle and on network
Data are now delivered as environmental data deliverables (EDDs) (only recently).

Content

Routine: Data from effluent and ambient samplers, a tritium bubbler in the Building 776 stack, and meteorological stations. Effluent samplers are in a number of radionuclide-process building stacks. Ambient samplers are around the Site perimeter, in the buffer zone, near and in the Protected Area (PA), and near the 903 Pad. Samples are collected on oil impactor pads and fiberglass filters. Perimeter samples are collected monthly, and select on-site samples are collected weekly; all are screened for gross alpha. Weekly samples from the select stations are composited every 4 or 5 weeks and analyzed for isotopic concentrations of plutonium (Pu), americium (Am), and uranium (U).

Ambient data are presented in concentration reports, by size fraction and location. Effluent data are presented by concentration and total isotopic release reports, by location, and isotope. All reports include propagated analytical uncertainties.

Amount and type of data collected has changed over the years, as well as the number of stations used and the frequency that samples have been collected and analyzed.

Special Projects: Data for individual projects (e.g., Trench -1) are not in the database. They are stored on spreadsheets.

Quarterly interpreted data sets for ambient and effluent air concentrations and meteorological summaries are being stored and stacked in the Integrated Sitewide Environmental Data System (ISEDS). Quarterly data summaries are on Environmental Data Dynamic Information Exchange (EDDIE) on the Internet.

Time Period Covered

System includes all data types and months since January 1997. Pre-1997 data are on spreadsheets. The plan is to migrate data to database for a select, presently undefined, earlier period.

Quality Assurance

Validation and Verification (V&V) codes are assigned to data from off-site laboratory. No V&V codes were assigned prior to Fiscal Year (FY)99, however all data have been reviewed/qualified since analysis was conducted off-site (i.e., since April 1997).

Some pre-1997 data may have been qualified; however, there is some concern regarding documentation.

Starting to receive EDDs with qualifiers.

Data from special projects are qualified.

Other qualifiers are present in the database based on subject matter expert (SME) investigation regarding suspect traceability issues.

SITEWIDE ECOLOGY DATABASE

Points of Contact

Steve Nesta, Kaiser-Hill, x6386
Michelle Fink, Exponent, x4084

Platform and Location

Data are entered in an Access '97 database and stored in a data file on a Windows NT file server.

Content

Routine: Database contains data from all ecological monitoring activities (all contractors). Monitoring activities include vegetation, Preble's Meadow Jumping Mouse, and other small mammal, aquatic, bird, and wildlife surveys. Data are mostly observational.

The database contains only raw data. Data are interpreted in various reports. However, key interpretations, such as vegetation coverages, and mouse coverages are available in the site Geographic Information System (GIS) (maintained by Rocky Mountain Remediation Services, LLC [RMRS]) and the GIS maintained by Kaiser-Hill/Exponent. Typically, once the work is final, the interpreted map of vegetation or species distribution is filed in the Site GIS files with RMRS. Although the Ecology Group owns the data, the final interpreted data sets/GIS coverages are available to users for analysis purposes. Documentation of the data is kept in the RMRS GIS system according to their established filing system.

Special Projects: Some project-specific monitoring is conducted (e.g., to evaluate re-seeding performance associated with the Trench-1 cover, or assess impacts of the plume barrier projects). Results are entered into the database and copies are provided to the RMRS GIS system.

Time Period Covered

FY91 - present

Quality Assurance

Only data of a certain quality are stored in the database. The quality screen started in FY 99, but data from 1991 - 1998 were also screened. Criteria include the following:

- Qualified field professional sign-off (1 = yes, 0 = no, counts for 2 points)
- Methods documented in plan, report, or procedure (1 = yes, 0 = no, counts for 1 point)

- Data proofreader sign-off (1 = yes, 0 = no, counts for 2 points)
- QA procedures documented in plan, report, or procedure (1 = yes, 0 = no, counts for 1 point)
- Original datasheets available (1 = yes, 0 = no, counts for 1 point)
- Data quality qualifier equals sum of points assigned to each criterion. (Best = 7)

SOIL/WATER DATABASE

Points of Contact

Marian Carr, Kaiser-Hill, x4488
Wendell Cheeks, RMRS, x7707
Adron Robertson, RMRS, x8397

Platform and Location

In Oracle and on a DEC Alpha (Unix-based) server. Data (EDDs) come into the Analytical Services Toolkit (AST) for verification and billing purposes, and are then transferred to Soil/Water Database (SWD) once cursory computer checking has been accomplished on EDD format. Some data from Building 559 laboratory may also be included, but is hand entered or imported from Excel spreadsheets. Schedules currently exist for EDDs from Building 559 laboratory for the various analytical suites. These EDDs will be delivered to the AST system and sent to the SWD SRT just like any other offsite laboratory customer.

The original hard copy data are located at the Federal Center. None of the analytical data in SWD is the "original and legal copy" of the data. All original analytical data resides in hard copy with the Analytical Services Division either on site or in the Federal Center. The original field data are in logbooks (hard copy) and the field data in SWD are copies of the information in the logbooks.

Content

Primarily, SWD contains analytical and field data on soil (surface and subsurface), sediment, soil gas, surface water (analytical quality and flow data), and groundwater (quality and hydrogeology). There are some data on wastes and air quality. There is a Data Package file, which is connected to a permanent analytical results table and a pending analytical results table. There are approximately 4 million pieces of data – more than 3.5 million in the permanent analytical results table, and fewer than 0.5 million in the pending analytical results table.

Data in the pending table are there for various quality reasons that need to be resolved before the data can be delivered to the permanent tables. Some issues involve missing fields from old Rocky Flats Environmental Database System (RFEDS) data, and some are more recent "errors" in current EDDs. Staff have been known to use both data sets for reporting. There is also a field event file, which is connected to a "bottle" (sample) file and field measurement file. Detailed diagrams are available that show file/table relationships.

During FY00, a modified interface for AST and FieldCap (the SWD field data entry module) is being developed to eliminate known duplicate data entry issues that have the potential to impact both data quality and user efficiency.

Data from the RFEDS were transferred into SWD (refer to RFEDS below).

Time Period Covered

SWD was completed during October 1997 and first received EDDs from AST during April 1998. SWD contains all historical RFEDS data, going back to 1989 and possibly as far back as 1986. A "dead" copy of RFEDS (retired) exists for historical tracking purposes, but is no longer in use.

Quality Assurance

The SWD has quality assurance (QA) qualifiers available, including validation and laboratory result qualifiers. However, not all data in SWD have been qualified.

Data in the pending table are to be assessed and qualified, and then moved to the permanent table. Some data will be labeled as no longer representative (NLR). Current efforts by Analytical Services Division are underway to incorporate missing validation qualifiers on data sets from 1995 to 1998. Validation has already been performed on the data, however qualifiers were never entered.

Validation approaches, including data qualification criteria, have varied over time, and older criteria may not be accepted today (GRRASP criteria used through 1997). For example, some validated radiological data may not include laboratory control sample data. There are anecdotal stories of some data being "approved" that should have received qualifiers limiting their use. These issues need to be defined, and documentation of the validation criteria used needs to be incorporated with the data sets to ensure that only appropriate data are used for decision making.

ROCKY FLATS ENVIRONMENTAL DATA SYSTEM

Points of Contact

Wendell Cheeks, RMRS, x7707

Platform and Location

Retired in FY99. Exists as historical reference copy on CD-ROM only. Hard copy data are archived at the Federal Center.

Content

Contained data on soil (surface and subsurface), sediment, surface water, and groundwater. Most transferred to SWD. Some data did not meet SWD quality requirements, and therefore, did not get transferred to the permanent SWD table (may still be in the SWD pending table). Some data may be missing (i.e., no longer in RFEDS and not in SWD; only in hard copy and archived at the Federal Center). The "missing data" are not well defined. There is a possibility that (1) RFEDS "expected" data but was incorrect (i.e., someone thought an EDD was expected but it never existed), and (2) data were sent in EDD on disks to the Interlocken offices. During the move from Interlocken and downsizing, data disks may have been sent to the Federal Center and were never entered into the database. There is also a possibility that "private databases" exist with these "missing" EDDs. A scoping meeting is planned to evaluate the issue and identify solutions.

RFEDS still contains sample and data tracking information; however, additional programming would be required to meaningfully retrieve information. This effort is funded for FY00 and is called "recover RFEDS tracking data."

Time Period Covered

1989 – April 1997; may include data as old as 1986.

Quality Assurance

Variable. Some data were verified and validated; some were not. Some data reviewed by QA; some were not. Validation protocols need to be defined in SWD to ensure that users understand the approach used and the meaning of the validation qualifier codes.

ACTINIDE MIGRATION EVALUATION STUDY

Point of Contact

Chris Dayton, Kaiser-Hill, x9887
Mike Peters, Rocky Mountain Compliance, x5884

Platform and Location

Available as Word documents in EDDIE. The data set is small and not stored in any database.

Content

The data set consists of actinide transport rates; related soil, water and air transport rates; results from solubility and other transport experiments, and some soil and water data. More data will be collected during FY00 and FY01. Many of the data are results from modeling, which uses data from other data sets (e.g., air quality and SWD).

Time Period Covered

1997 - present

Quality Assurance

Results are verified and validated. Qualifier codes are not used. The quality of model results depends on the quality of data used from other data sets, validity of the model assumptions, and representativeness of the model input parameters.

ENVIRONMENTAL QUALITY INFORMATION SYSTEMS (EQuIS) DATABASE

Points of Contact

Steve Singer, RMRS x3387
Bob Koehler, RMRS x2461

Platform and Location

Data entered in Environmental Quality Information Systems (EQuIS) Geology Database.

Content

EQuIS is a Site-wide borehole and well log database containing subsurface and geologic descriptions and conditions. The database contains only raw data interpreted from various reports. Information from surface soils or shallow borings and excavations are not included. EQuIS may also contain data from special projects if boreholes were logged.

Time Period Covered

1986 to Present

Quality Assurance

The Colorado Department of Public Health and Environment (CDPHE) converted data from existing Logger logs and from data entry. Most historic logs underwent quality control prior to the conversion process. The quality of the deliverable has not yet been evaluated and is therefore unknown.

GEOGRAPHIC INFORMATION SYSTEMS (GIS) DATABASE

Points of Contact

Wendell Cheeks, RMRS x7707
Brian Blaser, DRI for RMRS x7068

Platform and Location

NT Server operating system located on GIS server

Content

The Geographic Information System software used RFETS is ARC/INFO from ESRI. GIS is an organized collection of computer hardware, software, geographic data, and personnel designed to efficiently capture, store, update, manipulate, analyze, and display all forms of geographically referenced data.

Time Period Covered

1991 to Present

Quality Assurance

MISCELLANEOUS

Points of Contact

Subject Matter Experts (SMEs) (e.g., Steve Singer, RMRS, groundwater data, x3387; Bill Burdelik, RMRS, surface water data, x5126; Nick Demos, RMRS, soil data, x4605)
Project Managers
Laura Tyler, RMRS, Administrative Record, x4580
Source One

Platform and Location

- SME Spreadsheets
- Project Reports (e.g., data summaries, Resource Conservation and Recovery Act (RCRA) Facility Investigation/Remedial Investigation (RFI/RI) reports, remediation reports, reports to regulators [monthly, quarterly and/or annual surface water, groundwater and air])
- Project Files
- Administrative Record
- Historical Release Reports
- RCRA Operating Record (release data)
- Waste Stream Residue Identification and Characterization (WSRIC) (release data)
- Incidental Water Sampling Results Database
- Spill Cleanup Records
- Records Archived at the Federal Center
- EquIS Geology Database

Content

Raw and interpreted data, including data collected after RFEDS was defunded and before SWD started receiving data (e.g., surface and subsurface soil, sediment, surface water, and groundwater).

Time Period Covered

Since environmental protection and restoration data were collected. Meaningful/useful data could be as old as 10 to 15 years, or more.

Quality Assurance

Variable. Some data were verified and validated; some were not. Some data were reviewed by QA; some not. Also, QA criteria used likely varied.