INFORMATION ONLY





RF/ER-96-0020

ADMIN RECORD

Field Sampling Plan for the Source Removal at Trenches T-3 and T-4 IHSSs 110 and 111.1



DOCUMENT CLASSIFICATION REVIEW WAIVER PER CLASSIFICATION OFFICE May 29, 1996 Revision 3

TABLE OF CONTENTS

Sect	on			Page		
10	INTRODUCTION					
20	SAM	PLING A	ND DATA QUALITY OBJECTIVES	5		
30	SAM	PLE COI	LLECTION AND ANALYSIS	7		
	3 1	EXCA	VATION BOUNDARY SAMPLING	7		
	3 2	PROC	ESS VERIFICATION SOIL/DEBRIS SAMPLING	9		
		321	Sampling Frequency to Establish Baseline Conditions	10		
		322	Sampling Frequency After Baseline Conditions are Established	11		
	33	QC SA	AMPLING	12		
	3 4	SAMP	LES COLLECTED FOR RADIOLOGICAL ANALYSIS	13		
		3 4 1	Radiological Screening Samples	13		
			Radiological Verification of Soils Returned to the Excavation	13		
	3 5		IS SAMPLING	15		
			Initial VOC Evaluation	15		
			Sampling Potentially VOC Free Debris	16		
			Sampling After Treating Debris	17		
			Sampling of Debris for Other than VOCs	17		
	3 6	SAMP	LING BELOW CONTAMINATED FEED STOCKPILES	17		
4 0	SAMI	PLE DES	SIGNATION	19		
50	SAMI	PLING E	QUIPMENT AND PROCEDURES	20		
	5 1	SAMP	LE HANDLING AND PROCEDURES	20		
	5 2	DOCU	IMENTATION	21		
60	PRO	JECT OF	RGANIZATION	22		
70	REFE	RENCE	es es	23		

ACRONYMS

ASTM American Society for Testing Materials

BFB Bromofluorobenzene

CCR Colorado Code of Regulations

CLP Contract Lab Program

COC Chain of Custody

EPA Environmental Protection Agency

EMD Environmental Management Department

DCA Dichloroethane
DCE Dichloroethene

FIDLER Field Instrument for the Detection of Low Energy Radiation

FSP Field Sampling Plan HCl Hydrochloric acid

HPGE High Purity Germanium Spectroscopy
IHSS Individual Hazardous Substance Site

LLW Low-level Waste

MCLs Maximum Concentration Levels

OU Operable Unit

PAM Proposed Action Memorandum

PCE Tetrachloroethene

PPRGs Programmatic Preliminary Remediation Goals

PQLs Practical Quantitation Limits

QA Quality Assurance QC Quality Control

RFCA Rocky Flats Cleanup Agreement

RFEDS Rocky Flats Environmental Database System
RFETS Rocky Flats Environmental Technology Site

ROI Radiological Operating Instruction

SOPs Standard Operating Procedures

SOW Statement of Work
TCA Trichloroethane
TCE Trichloroethene

TCLP Toxicity Characteristic Leaching Procedure

TDU Thermal Desorption Unit

TICs Tentatively Identified Compounds

UCLs Upper Confidence Limits
VOA Volatile Organic Analysis

VOCs Volatile Organic Compounds

WAC Waste Acceptance Criteria

yd³ Cubic Yard

LIST OF STANDARD OPERATING PROCEDURES (SOPs)

IDENTIFICATION NUMBER. PROCEDURE TITLE.

5-21000-OPS-FO 03 General Equipment Decontamination

5-21000-OPS-FO 13 Containerization, Preserving, Handling and

Shipping of Soil and Water Samples

5-21000-OPS-FO 14 Field Data Management

FO = Environmental Management Division (EMD) Operating Procedures Volume I Field Operations

1.0 INTRODUCTION

This Field Sampling Plan (FSP) supports the Source Removal at Trenches T-3 and T-4, Individual Hazardous Substance Sites (IHSSs) 110 and 111 1, at the Rocky Flats Environmental Technology Site (RFETS), which are contributing to the degradation of groundwater in the area This FSP meets the requirements of a sampling and analysis plan. This source removal project is described in the Proposed Action Memorandum (PAM) for the Source Removal at Trenches T-3 and T-4, including details on project scope, contamination levels, and regulatory concerns Information presented in this FSP is intended to be brief and provide the information necessary to understand the sampling approach for the project

Based on historical aerial photographs and records, Trench T-3, (IHSS 110), is approximately 134 feet long, 20 feet wide, and 10 feet deep. The trench was used from approximately October 1964 through April 1966. Trench T-4, (IHSS 111 1), is approximately 125 feet long, 20 feet wide, and 10 feet deep. The trench was used from approximately April 1966 through April 1967. Both trenches were used to dispose of sanitary sewage sludge contaminated with uranium and plutonium. Crushed drums also contaminated with uranium and plutonium were disposed in the trenches. There are no reports of metallic nuclear materials deliberately buried in the trenches. Furthermore, analysis of characterization soil samples indicates radionuclide concentrations are below the action levels currently being developed by the Rocky Flats. Cleanup Agreement (RFCA) Working Group and are, therefore, not a factor in the need for a source removal at these trenches. Tables summarizing the existing data for the trenches are given in Appendix 1.

Groundwater samples were taken from wells up-gradient (24393, 25093, and 3091) and downgradient (24193, 24993, and 3687) of the trenches The results of these analyses are summarized in Table 1-1 and indicate an increase in volatile organic compounds (VOCs) in the groundwater after passing under the trenches Radionuclide contamination was not detected at significant levels in the groundwater samples


The proposed action entails excavating VOC-contaminated soil and material from Trenches T-3 and T-4 and processing the excavated material to remove the VOCs using thermal desorption. The project will be a source removal to prevent further degradation of the surrounding soils and groundwater. The trench boundaries, as shown in Figures 1 and 2, will be staked prior to excavation, and the material within the trench boundaries will be excavated. Sampling and analysis will be used to ascertain which soils need to be removed that may extend beyond the


Field Sampling Plan	Document Number	RF/ER-96-0020			
for the Source Removal at Trenches T-3 and T-4	Revision	3			
IHSS 110, 111 1	Page	2 of 42			

boundaries of the trenches The concentration of VOCs in the soils will be compared with the soil cleanup standards developed for RFETS and identified in the PAM Following verification that the thermal desorption unit (TDU) has removed the VOC contamination, the trenches will be backfilled with treated soils and the area will be re-vegetated to return the trenches to a comparable undisturbed condition

TABLE 1-1 T-3 AND T-4 GROUNDWATER SAMPLING RESULTS SUMMARY

	Maximum Concentrations (μg/l)							
	Upgradient Wells			Downgradient Wells			Federal Drinking	
Contaminant	T-3 24393	T-3 12191	T-3 2991	T-4 3091	T-3 24993	T-4 3687	T-4 12691	Water MCLs
Carbon tetrachlonde	240	180	560	450	4,100	3,673	4,500	5
Tetrachloroethene	250	200	140	39	1,600	4,654	1,000	5
Trichloroethene	40	40	66	51	110	221,860	560	5
Toluene	5	10	2	8	30	3,100	25 3	1,000

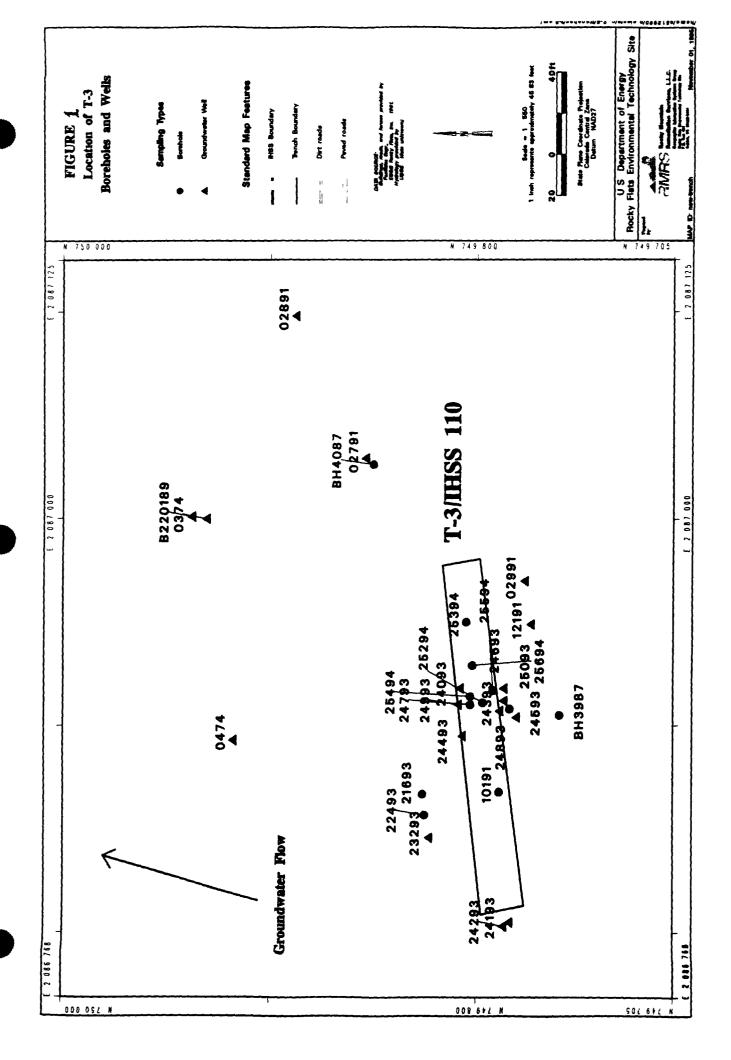

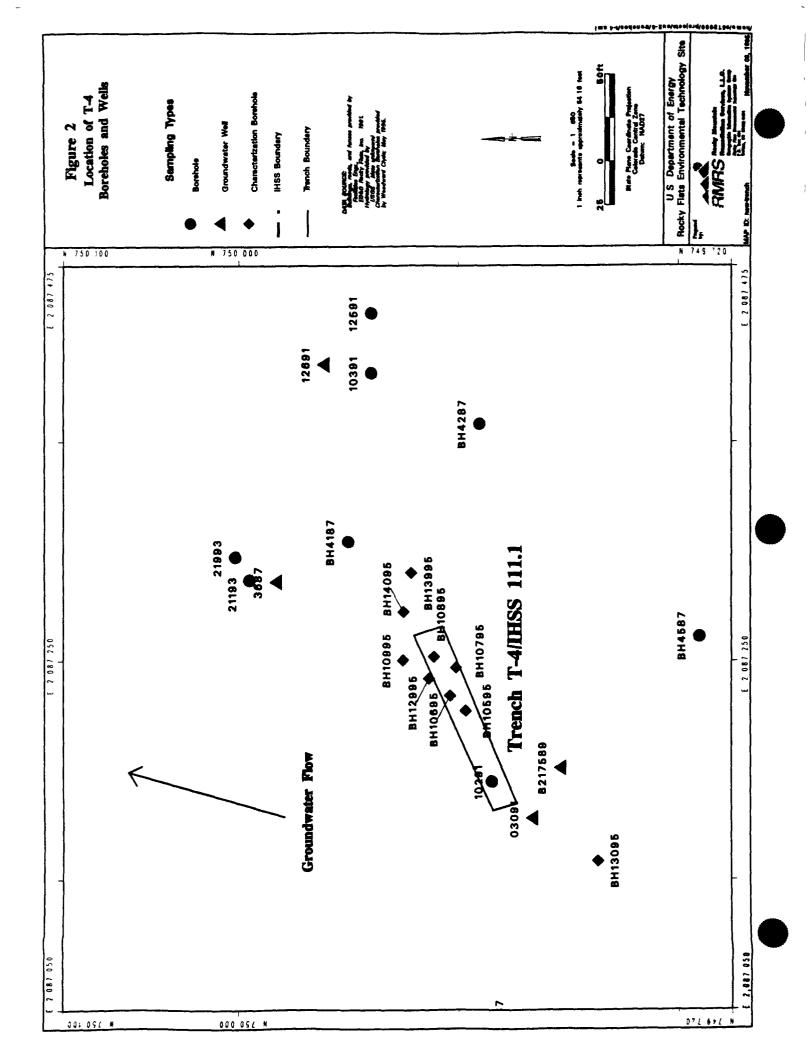

2.0 SAMPLING AND DATA QUALITY OBJECTIVES

The purpose of this sampling effort is multi-fold and is described below

- Samples will be collected to evaluate/verify that excavation cleanup standards stated in the PAM are met. These samples may also be used to document the conditions remaining in the excavation for a future RFETS Site-wide Risk Assessment and to supply data for evaluating any future impacts on groundwater from the remaining soils in the trenches
- Samples will be collected to evaluate/verify that post-processing performance standards stated in the PAM are met. These samples may also be used to document the concentration of VOCs in soils returned to the trench after processing
- Samples will be collected to verify existing radiological data from soils within the trenches, and to confirm the determination that these soils can be returned to the trenches
- Samples will be collected to support various waste classifications and determinations for off-site shipment of debris
- Samples will be collected to evaluate/verify that residual contamination has been removed from the soil below the contaminated soil and debris feed stockpiles

After excavation, samples will be collected along the base and sides of the excavations and analyzed using a screening technique (described in Appendix 2) for the contaminants of concern (all VOCs) to establish the post-action condition of the trenches. The screening technique was developed such that the action levels required by the PAM are within the linear range of the calibration of the screening equipment, a gas chromatograph/mass spectrometer. Excavation will continue until excavation boundary sample results are below the excavation cleanup standards specified in the PAM or until groundwater or bedrock is encountered, or the limits of the excavation equipment are reached.

Following processing through the TDU, treated soils will be sampled and tested for process verification using the screening technique for VOCs to verify compliance with the performance standards stated in the PAM. The sampling frequency used for this verification is described in Section 3.2, and the statistical analysis supporting the sampling frequency is given in Appendix 3. Since the existing characterization data indicates that metals and semivolatile organics are not a concern in the trenches, no further analyses will be done for those constituents.

An extensive amount of sampling data has been collected regarding radiological contamination in the trench soils. Data collected to date indicate very low levels of radiological contamination within the trenches. However, because of uncertainties associated with potential contamination from debris, additional radiological screening and sampling will be conducted to further evaluate soils prior to replacement back in the trenches. Only those treated soils that are at or below the agreed-on replacement levels for radionuclides (put-back levels) for subsurface soils will be returned to the trench. These action levels are currently being developed by the RFCA. Working Group and will be available for use by the project this summer. The logic behind the statistical evaluation of radionuclides is described in Appendix 4 of this FSP.

If large volumes of debris are encountered that do not appear to be contaminated with VOCs (e.g., are not covered with oils), it may be prudent to sample and evaluate this material so that uncontaminated materials are not unnecessarily treated in the TDU. This evaluation will include an initial visual and field screening evaluation, followed by confirmatory sampling. The approach to this is detailed in Section 3, and was developed to support the off-site disposal of radiologically contaminated debris.

Sampling efforts will be conducted according to the *Rocky Mountain Remediation Services*, *Quality Assurance Program Plan* The screening technique (method) used for most of the VOC evaluation for the project is detailed in Appendix 2 and was derived from SW-846 Methods 8240, 8260 and the Contract Laboratory Program (CLP) Statement of Work (SOW) Due to the rapid turn-around time requirements for VOC analysis, the number of samples required for this project, and the cost of laboratory analysis using control samples and preparation of full CLP data packages, a high quality screening technique has been chosen for the majority of VOC analyses

Data Quality Objectives allow samples to be analyzed at levels comparable to the action levels required for the project (see Appendix 2). Low detection limits are not required for this project, and would prohibit the rapid analysis required to evaluate soil treatment. Split samples, analyzed using SW-846 Method 8240 or 8260, will be sent to an independent off-site laboratory for verification of the screening results. However, screening results will be used to make decisions in the field and will be of sufficient quality to calculate residual risks posed by the soils left in place, and to determine if contaminant levels in treated soils are below performance standards prior to replacing the soils back in the excavation

Document Number Revision Page

RF/ER-96-0020 3 7 of 42


3.0 SAMPLE COLLECTION AND ANALYSIS

A number of different sampling events will be conducted to support this project. These events include excavation boundary soil sampling for VOCs, post-process soil sampling for VOCs, radiological verification sampling of the treated soil and sampling to determine if some of the debris within the trenches requires treatment. The sampling scheme for each type of event is described in the following sections.

3.1 EXCAVATION BOUNDARY SAMPLING

In order to determine the number of samples required in each trench to evaluate attainment of excavation performance standards specified in the PAM, the suggested guidelines from *Soil Sampling Quality Assurance User's Guide* published by the U.S. Environmental Protection Agency were used. The number of samples required in each trench is 16. The perimeter of the grid boundaries will be staked prior to sampling. Trench-3 is approximately 134 feet long, while Trench-4 is approximately 125 feet long. The trenches will be divided into approximately seven, equal-length sections along the bottom axis of each trench. As an example, this would allow for a 19-foot lengthwise grid dimension along the axes of Trench-3 and an 18-foot lengthwise dimension along the axes of Trench-4. The grid dimensions are dependent upon the final excavation, and the actual grid dimensions will be described in the field logbook. Individual grids will represent approximately equal areas. However, the two grid locations representing only the sidewalls of the trench (grids 8 and 9) will be made up of smaller areas because they lack a trench bottom component. The grid layout will be oriented so that grid 8 represents the western portion of the trench, while grid 9 represents the eastern portion of the trench (see Figure 3-1).

FIGURE 3-1 T-3 AND T-4 EXCAVATION BOTTOM SAMPLING SCHEME

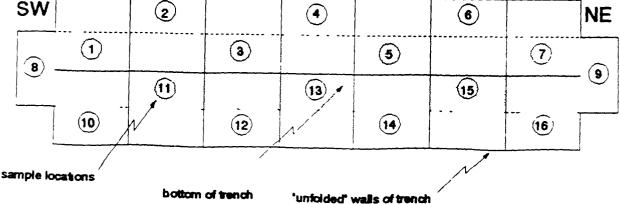

8 of 42

After the limits of the excavation are reached, or field screening described in the Field Implementation Plan indicates that VOCs have been excavated from the trench soils, then the excavation boundary sampling described in this section will begin. One sample will be collected from each grid area specified in Figure 3-1 during the excavation boundary sampling. Grids represented by odd numbers will have samples collected from the center of the bottom portion of grid. Grids represented by even numbers will have samples collected from the center of the sidewall portion of the grid. An exception to this approach is that the sample collected from grid 9 will be collected from the end sidewall of the trench (see figure 3-1). Table 3-1 shows the number and types of regular and quality control samples required for each trench to evaluate attainment of excavation performances standards, and to document the undisturbed boundaries of the excavation.

Because of the hazards associated with entry into steep-sided, unsupported excavations, field personnel will not enter the excavation. Each sample will be collected from the excavation by means of a backhoe/excavator or other equipment. The excavated soil contained in the backhoe bucket will be elevated from inside the trench to the ground surface. Sufficient quantities of soil will be transferred from the bucket to adequately fill the sample containers using a stainless steel spatula, or similar piece of equipment. Soils for volatile organic analysis will be collected directly into the sampling jar to minimize loss of VOCs. Samples will be collected from soils that are not directly in contact with the backhoe/excavator blade.

If the limits of the excavation have not been reached and sampling results indicate that the excavation performance standards specified in the PAM have not been met, then additional excavation will be performed at the direction of the field supervisor. Following the additional excavation, a second phase of excavation boundary sampling will be performed on any grids exceeding the standards stated above. During the second phase of sampling, four samples will be collected from each grid except for the two smaller grids (grids 8 and 9) in which only two samples will be collected. The larger grids will be divided into quarters and the two smaller grids will be divided in half to facilitate a more intensive second phase verification sampling event.

TABLE 3-1 EXCAVATION BOUNDARY SAMPLES PER TRENCH

Post Excavation Analysis per Trench					
Analysis Method	Excavation Samples	QC Samples per Trench	Total Samples per Trench	Container, Preservation, Holding Time	
Total VOAs by Appendix 2 Screening Method (on-site)	16	1 field duplicate	17	4 oz. glass with Teflon liner at 4°C for 14 days	
Rinsates Blanks by Appendix 2 Screening Method (on-site)		1	1	2-40 ml glass vial, Teflon- lined septa lid, HCl pH<2, 4°C for 14 days	
Total VOAs by SW846 Method 8240/8260 (off-site)		1 split	1	4 oz glass with Teflon liner at 4°C for 14 days	
Trip Blanks by SW846 Method 8240/8260 (off-site)		1/cooler for off- site VOC samples	1	40 ml glass vial, Teflon-lined septa lid, HCl pH<2, 4°C for 14 days	
Radiological Screen (@ Building 881) to support off- site shipping requirements		1 per off-site shipment	1	40 mi glass vial, 6 months Note substitute a 250 ml wide-mouth plastic jar when using a Nomad portable gamma spectroscopy system	

3 2 PROCESS VERIFICATION SOIL/DEBRIS SAMPLING

Following TDU treatment of soils and debris, samples will be collected from each batch of treated soil or soil commingled with debris. A batch is defined as the material within a processing run of 6 full TDU treatment ovens. Each oven will contain approximately 5 yd³ of soil and/or debris. Therefore, a batch will be approximately 30 yd³. These samples will be collected to document attainment of treatment performance goals as stated in the PAM. Most of the samples collected will be analyzed using the screening technique described in Appendix 2. Additional QC samples (splits) will be collected for analysis using more rigorous SW-846 methods (see Section 3.3).

Process verification soil samples are expected to be collected at two frequencies. Samples will first be collected at a high frequency, to establish baseline conditions of the TDU. If the results of baseline sampling indicate that treatment performance standards are being met (e.g. by evaluating mean and variance values from samples), then the sampling frequency may be reduced.

3.2.1 Sampling Frequency to Establish Baseline Conditions

To establish baseline conditions, samples will be collected at a greater frequency in the initial processing phase of the project. The initial baselining samples will be used to calculate average and variance concentrations of VOCs from each oven during the processing of the first two batches (e g, 60 yd³) of treated soil. The samples will be collected at the rate of 1 regular sample per oven on the first two batches of soil to be processed. Assuming that the average and variance values indicate a 95% probability of attaining the post-treatment performance standards, the system will be judged to be in control and samples may then be collected at the reduced frequency established in the following subsection. This determination will be made after the analytical results from the second batch of treated soil are evaluated by the project quality assurance manager and field supervisor. Table 3-2 lists the sample types and frequency to be collected to establish the baseline. The samples used to establish baseline conditions will be collected using the same approach used for collection of samples after baseline conditions have been established. This approach is detailed in the following subsection.

TABLE 3-2 SOIL SAMPLING FOR BASELINE ESTABLISHMENT

	Soil Sampling for Process Verification Baseline Establishment					
Analysis Method	Process Verification Samples	QC Samples	Container, Preservation, Holding Time			
Total VOAs by Appendix 2 Screening Method (on-site)	1 per oven per batch	1 field duplicate	4 oz glass with Teflon liner at 4°C for 14 days			
Rinsates Blanks by Appendix 2 Screening Method (on-site)		1	2-40 ml glass vial, Teflon-lined septa lid, HCl pH<2, 4°C for 14 days			
Total VOAs by SW846 Method 8240/8260 (off-site)		1 split	4 oz glass with Teflon liner at 4°C for 14 days			
Trip Blanks by SW846 Method 8240/8260 (off-site)		1/cooler for off-site VOC samples	40 ml glass vial, Teflon-lined septa lid, HCl pH<2, 4°C for 14 days			
Radiological Screen (@ Building 881) to support off-site sample shipping requirements		1 per off-site shipment	40 ml glass vial, 6 months Note substitute a 250 ml wide-mouth plastic jar when using a Nomad portable gamma spectroscopy system			
Total Expected Number of samples	12 regular samples	1 field duplicate 1 rinsate 1 split 1 trip blank 1 rad screen				

3.2.2 Sampling Frequency After Baseline Conditions are Established

If baseline samples indicate that the treatment process is in control, samples will be collected at a reduced frequency. An evaluation of the confidence level associated with the sampling frequency is given in Appendix 3. This reduced frequency is expected to consist of one representative grab sample per batch, contrasted to one sample per oven as required by the initial baselining evaluation. The number and types of samples expected to be required are described in Table 3-3. A sample will be collected as a grab from a single oven during each batch processing run. During successive batch processing runs, the ovens being sampled will be alternated, so that during 6 runs, all 6 ovens are sampled at least once. The grab sample will be collected from the center (approximate) of the equipment bucket used to unload the TDU ovens. The bucket sampled (sampling position) within the oven will be systematic and representative, in that successive samples will be collected from buckets removing soil from a corner, from a side, and from the center of the ovens. All sample locations within the ovens will be noted in the sampling logbook. Detrimental anomalies in process controls, feed stock composition, and waste type may require additional sampling to determine any effects that the anomalies may have on VOC concentrations in the treated soil

TABLE 3-3 PROCESS VERIFICATION SOIL SAMPLING

		Process Verification Soil Sampling				
Analysis Method	Process Verification Samples	QC Samples per 20 Batches	Container, Preservation, Holding Time			
Total VOAs by Appendix 2 Screening Method (on-site)	1 per batch	1 field duplicate	4 oz glass with Teflon liner at 4°C for 14 days			
Rinsates Blanks by Appendix 2 Screening Method (on-site)		1	2-40 ml glass vial, Teflon-lined septa lid, HCl pH<2, 4°C for 14 days			
Total VOAs by SW846 Method 8240/8260 (off-site)		I split	4 oz glass with Teflon liner at 4°C for 14 days			
Trip Blanks by SW846 Method 8240/8260 (off-site)		1/cooler for off-site VOC samples	40 ml glass vial, Teflon-lined septa lid, HCl pH<2, 4°C for 14 days			
Radiological Screen (@ Building 881) to support off-site sample shipping requirements		l per off-site shipment	40 ml glass vial, 6 months Note substitute a 250 ml wide-mouth plastic jar when using a Nomad portable gamma spectroscopy system			
Total Expected Number of samples	100 regular samples	5 field duplicates 5 rinsates 5 splits 5 trip blanks 5 rad screens				

3.3 QC SAMPLING

Because only 16 sampling locations exist in each trench, and QC samples are desired from each trench, one complete set of QC samples will be collected from each trench during the excavation boundary sampling described in Section 3.1. One complete set of QC samples will be collected during the initial TDU process baselining investigation described in Section 3.2.1 Finally, QC samples will be collected at the rate of 1 complete set of QC samples per 20 regular samples during the process verification VOC soil sampling (Section 3.2.2)

All duplicate/split samples will be collected using the same pieces of sampling equipment used for collection of the regular samples. There is no need to decontaminate equipment while collecting regular and QC samples from the same location. The following types of QC samples are being collected to support the T-3 and T-4 remediation.

- Duplicates Duplicate (collocated) samples will be collected in the same manner and analyzed by the same screening methods, in the same laboratory as the regular grab samples described in Sections 3.1 and 3.2. These samples will be submitted blind to the laboratory
- Equipment rinsate blanks These samples will be prepared by collecting distilled water, poured over decontaminated sampling equipment, between collection of regular samples These blanks will be submitted to the on-site laboratory for screening along with the regular samples These samples will be preserved to a pH<2 with hydrochloric acid (HCl)
- Splits Splits (triplicates) will be collected in the same manner as the duplicate samples described above. These samples will be sent off-site as a QC check on the internal screening method used for the majority of samples. The split samples will be analyzed under a more stringent analytical protocol (SW846, method 8240/8260, or equivalent), than the screening samples analyzed on-site.
- Trip blanks A trip blank sample will be shipped with every cooler sent off-site containing samples being analyzed for VOCs. This trip blank will be pre-prepared by the laboratory performing the analysis. The trip blank will be prepared using carbon filtered water and will be preserved to a pH<2 with HCl.

All VOC samples sent off-site as QC splits will be analyzed according to the U S Environmental Protection Agency's (EPA) SW846 method 8240 or 8260

3.4 SAMPLES COLLECTED FOR RADIOLOGICAL ANALYSIS

Samples will be collected for radiological analysis to support the following tasks

- Off-site shipments of samples
- Evaluation of radiological controls for the on-site analytical laboratory (Building 881)
- Determining if radionuclide levels in soils are below the Soil Action Levels currently being developed by the RFCA Working Group

3.4.1 Radiological Screening Samples

A radiological screening sample will be taken whenever samples are being collected for off-site analysis. These samples will be analyzed for gross alpha/beta in Building 881. Results of these samples will be used to evaluate shipping requirements. In addition, at the discretion of Building 881 laboratory management and radiological engineering personnel, additional radiological screening samples may be collected for internal laboratory monitoring purposes. An interoffice memorandum prepared by Building 881 Radiological Engineering personnel (AEM-025-96) suggests collection of radiological screening samples at the following rate

- One radiological screen per day during the first week of TDU processing and laboratory analysis
- One radiological screen per week, thereafter

Radiological Engineering personnel require that samples be collected randomly and that results are reported to Radiological Engineering, as the individual analysis is completed

At the discretion of the field supervisor, samples analysis using a high purity germanium gamma spectroscopy (HPGE) system may substitute for radiological screens. This HPGE analysis is described in the following subsection.

3.4.2 Radiological Verification of Soils Returned to the Excavation

As soils are being excavated from the trenches they will be screened with a Field Instrument for the Detection of Low Energy Radiation (FIDLER) The determination of what to screen will be based on visual characteristics indicative of contamination such as staining, metallic debris, free product and direction given by Radiological Engineering Any material indicating screening values exceeding 3 times background will be segregated and may require additional, more detailed (on a volume basis), isotopic characterization, than soils having screening values less than 3 times background This determination will be made by Radiological Engineering, and will be documented in the field logbook

14 of 42

Soils indicating FIDLER readings less than three times background will be sampled for isotopic characterization, after the soils are treated. Only those treated soils that are at or below the agreed-on replacement levels for radionuclides (put-back levels) for subsurface soils will be returned to the trench These action levels are currently being developed by the RFCA Working Group and will be available for use by the project this summer


Following treatment of soils in the TDU, the soils indicating radiological screening values less than 3 times background screen will be stockpiled in the treated soil staging area. The stockpile is expected to be divided into equal volume grids representing approximately 100 yd³/grid Stakes, or equivalent marking devices, will be used to denote sampling grids. The stockpile is expected to be divided as represented by Figure 3-2 One composite sample will be collected from each 100 yd³ grid volume. The composite sample will be made up of 4 subsample grabs collected from near the "corners" of the staked out sampling grids, as represented by Figure 3-2 Each subsample will be approximately the same volume and will be collected from the surface of the stockpile with a scoop or similar device. There is no need to decontaminate the scoop between subsample locations, however decontamination will be required when sampling between grids

Samples collected to verify that the radiological parameters stated above are not exceeded will be analyzed using a HPGE system This HPGE analysis is expected to take place in the field using Radiological Engineering Procedure 14 01, Operation of the Nomad Portable Gamma Spectroscopy System Samples will be collected in 250 ml wide-mouth plastic jars which the Nomad System is calibrated for

Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	15 of 42

Page

Figure 3-2 Stockpile and Sampling Layout for Radiological Verification Samples

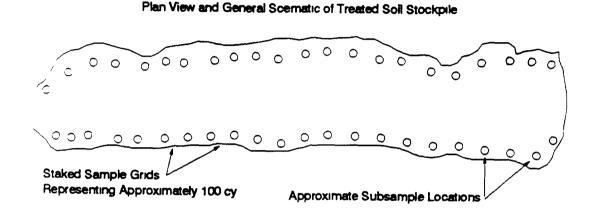

3.5 **DEBRIS SAMPLING**

IHSS 110, 111 1

A significant amount of characterization data exists for the soils in T-3 and T-4 However, very little information exists regarding volume, type, and chemical characterization of the debris within the trenches The possibility exists that some of the debris is not contaminated with VOCs As the excavation proceeds, if it appears from field organic vapor screening and visual observations that much of the debris is not contaminated, then per RFETS waste management policies, efforts will be made to segregate this apparently "clean" debris from the debris which is obviously contaminated with VOCs Segregated debris, thought to be "clean" would then be more rigorously sampled to evaluate if it is contaminated with VOCs above hazardous waste standards If the debris exceeds VOC hazardous waste standards, it will be treated If sampling results indicate that VOC hazardous waste standards were not exceeded, then the debris would not require processing in the TDU This evaluation process is described in the following subsections

Initial VOC Evaluation 3.5.1

As the debris is removed from the excavation, the field supervisor will have the option to segregate the debris into two basic waste types. One waste type will be debris that is obviously contaminated with VOCs, or in which a representative sample could not be collected to assure the debris is VOC free. This debris pile will be processed in the TDU

Another waste type will consist of debris that is not expected to contain significant VOC contamination. Depending on field conditions and field supervisor judgement, this wastestream may be further segregated by the type of debris. For instance, if various types of debris wastestreams (e.g., crushed drums, asphalt planking, and/or construction materials) are excavated, they may be segregated by type to assist in the collection of representative samples. The criteria used to **initially** segregate the waste as potentially VOC free, will be

- No organic vapor detections above background using industrial hygiene monitoring equipment
- No visible evidence of contaminant staining
- Based on the field supervisor's professional judgement, considering location within the trench, closeness to other VOC free debris, and a likelihood that the debris in question would be VOC free

3.5.2 Sampling Potentially VOC Free Debris

Debris which the field supervisor believes to be VOC free will be sampled for verification Efforts will be made to segregate this waste stream by type (i.e., asphalt planking or construction rubble). Furthermore, to minimize sampling costs, efforts will be made to accumulate sufficient volume for a single sample per potential shipment volume, such as one sample per 20 yd³. The 20 yd³ volume is representative of the volume of a typical roll-off container used for off-site waste shipments.

Each sample will be made up of various subsample grabs. The collection of these subsample grabs must spatially represent the material being characterized. The sample container will be opened only when adding the subsample grabs. This sample will be analyzed for VOCs using a total concentration (either the screening method listed in Appendix 2 or SW-846 Method 8240/8260). If the individual total VOC concentrations are at levels which could not exceed a characteristic hazardous waste standard as defined in 6 Code of Colorado Regulations (CCR) 1007-3, Section 261.24, then the debris would not be considered hazardous for VOCs. This evaluation will be based on the commonly accepted "20 times rule" in which the total concentration is divided by 20 and compared to the toxicity characteristic leaching procedure (TCLP) standards specified in the regulation stated above. Due to dilutions in the analytical methods, total concentrations in soils (measured in mg/kg) which are less than 20 times the TCLP standards (measured in mg/L) are accepted not to exceed the actual TCLP standards. Debris exceeding these standards would be processed in the TDU unit

17 of 42

3.5.3 Sampling After Treating Debris

After debris is processed in the TDU, the debris itself will not be sampled to show attainment of performance goals. Rather, in accordance with EPA guidance, samples will be collected from soil residues commingled with the processed debris. These soil "residues" will be analyzed for total VOCs using either the screening method listed in Appendix 2 or SW-846 Method. 8240/8260. These samples will be collected from commingled soil which is expected to be "caked on" to some of the debris. Sample results will be evaluated against the VOC action levels listed in 6 CCR 1007-3, Section 261.24 (the TCLP standards), to support proper disposition of the waste.

3.5.4 Sampling of Debris for Other than VOCs

A hazardous waste determination will be required for all debris. In some instances, this determination may be able to be made without the need for the collection of additional samples, based on the type of debris, and its prior use before becoming a waste. However, in other situations, information will not be available to make a determination without the aid of appropriate analytical results. Therefore, flexibility will be given to the field supervisor in making these determinations. It is expected that the field supervisor will work with the RFETS Waste Management Organization in determining analysis requirements (other than for VOCs) for debris slated for off-site disposal. Any additional sampling will be fully documented in the sample logbook.

Appendix 5 describes additional debris sampling and analytical requirements for any debris destined for disposal at the Envirocare of Utah, Inc., facility

3.6 SAMPLING BELOW CONTAMINATED FEED STOCKPILES

After completing the treatment of soils from both trenches, contaminated soil will be scraped off the contaminated soil and debris feed stockpiles and treated as necessary. Soil will be scraped off and treated such that remaining soil below the stockpiles will have no residual contamination remaining above the trench bottom cleanup values listed in Table 3.2 of the approved PAM. Soils treated as part of this operation will meet the treatment performance standards specified in Table 3.4 of the PAM.

Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	18 of 42

Following removal of soil suspected to be contaminated with residual VOCs, each stockpile (40° x 40°) will be divided into 4, approximately equal area squares (20° x 20°) One grab sample will be collected from the center of each square, approximately 0-2" below the surface, and analyzed for VOCs using the screening method described in Appendix 2

In addition to these samples, the field supervisor and project manager may evaluate and collect samples from other areas which have a potential for residual VOC contamination, from incidental spills during operations, etc. As appropriate, this determination will be fully documented in the project logbook

4.0 SAMPLE DESIGNATION

Each sample will be assigned a unique nine digit number The first two digits will be

TR -- for trench samples taken after verification to confirm that the excavation is complete,

PT -- for pre-treatment samples,

PV -- for process verification samples (including any debris run through the thermal desorption units),

DB -- for debris samples taken before treatment or after the debris is taken out of the thermal desorption unit, and

SS -- for treated soil stockpile samples taken after treatment and samples taken from the contaminated soil and debris feed stockpiles after all the stockpiled soils have been removed and the area scraped clean

The next five digits in the sample number will be sequential numbers representing the individual samples. The last two digits of the sample number will represent the company responsible for the sampling, e.g., "RM" representing RMRS

In addition to the unique sample number, discrete location codes will be used They are as follows

TDU1 - TDU6 -- refers to oven number that the sample came from, used for PV and PT samples,

TR3 or TR4 -- refers to the trench number, used for TR and DB samples, and

TR3SP or TR4SP -- refers to the stockpile from Trench 3 or 4, used for SS samples only

5.0 SAMPLING EQUIPMENT AND PROCEDURES

This FSP lists the procedures used to conduct the sampling program, and the procedures list the required task specific sampling equipment. If conditions are encountered in the field which make the use of a procedure unsafe or inappropriate for the task at hand, the procedures specified below may be modified or replaced as long as the modification or replacement procedure is detailed in the field logbook and the justification for its use is explicitly stated

5.1 SAMPLE HANDLING AND PROCEDURES

Samples collected for laboratory analysis will follow Environmental Management Department (EMD) Operating Procedures Volume I Field Operations 5-21000-OPS-FO 13, Containerization, Preserving, Handling, and Shipping of Soil and Water Samples All water samples will be collected without the use of filters Packaging of samples in paint cans required by the procedure for medium level samples (e.g., samples with VOC concentration above 10 ppm) will not be adhered to for this project. Other modifications to the procedure include

Section 6 2, page 8 The outside of sample containers will be wiped clean. Due to the rapid nature of the collection and submittal of samples, the samples will be placed in coolers with blue ice and/or transferred to on-site refrigeration as soon as possible. However, it is recognized that samples collected out of the TDU ovens will be warm, and that the cooler temperature will not be able to be maintained at 4° C. In addition, because the samples may be carried directly to the on-site laboratory for analysis they may still be warm.

Section 6.5, page 14 Samples will not be placed in plastic bags

When reusable sampling equipment is used, the equipment will be decontaminated in accordance with EMD Operating Procedure 5-21000-OPS-FO 03, General Equipment Decontamination, Section 5 3, Cleaning Procedures for Stainless Steel or Metal Sampling Equipment

52 DOCUMENTATION

Data shall be acquired, manually or automatically, and documented on the forms developed for this project. The originator shall authenticate (legibly sign and date) each completed hardcopy of the data. A peer reviewer, someone other than the originator, shall perform a peer review on each hardcopy of data. The peer reviewer shall authenticate (legibly sign and date) each hardcopy completed by the originator. Any modifications shall be lined-through, initialed, and dated by the reviewer (in ink)

Data planned for computerized reduction and analysis shall be uploaded on a personal computer using commercially available software. Following data entry (uploading), a hardcopy of the uploaded data shall be printed and compared with the original quality record. Any modifications shall be lined-through, initialed, and dated by the reviewer (not the originator), and subsequently corrected on the computer. All hardcopies will also display the following information in addition to all data contained within the digital file.

- generic title describing the data,
- filename, and,
- date

The corrected hardcopies of uploaded data will be filed as Quality Records in the project files
Digital data shall be backed-up weekly and stored separately from the master files

At project closeout, the original quality records (i.e., hardcopies and digital files) will be submitted to the RMRS Records Center (note digital files must be labelled with indelible ink, and communicate at least the file name(s), hardware and software platforms)

· -		
Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	22 of 42

6.0 PROJECT ORGANIZATION

Figure 6-1 represents the organization structure for this project. The Project Manager is responsible for ensuring that all data are collected, verified, transmitted and stored in a manner consistent with relevant operating procedures. The Project Manager, or designee, will obtain from the RFEDS as directed by the Analytical Projects Office (APO), sample numbers and location codes. The User System Manager will verify any transmitted record for accuracy and completeness and ensure the data is preserved, retrievable, and traceable.

The sample crew personnel will be responsible for field data collection. Their data management tasks will include completing all appropriate data management forms and completing the chain-of-custody form. The sample crew will deliver screening samples destined for on-site analysis with completed chains-of custody to personnel in the 881 lab, where the chemist or sample receiving personnel will sign for receipt of the samples. QC samples being sent off-site for analysis will be coordinated through APO personnel.

The Sample Manager/Data Manager is responsible for verifying that the chains-of-custody are complete and accurate before the samples are shipped to the laboratory. The Data Manager's duties include data entry into Datacap, and transmitting field information, sample collection data, and chain-of-custody tracking data to RFEDS. All QA records for the analytical portion of this project will be stored in the APO.

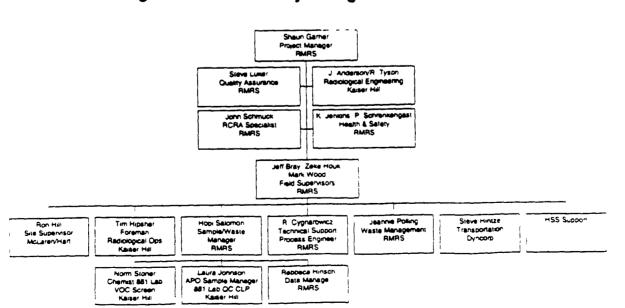


Figure 6-1 T-3/T-4 Project Organizational Structure

Document Number Revision Page RF/ER-96-0020 3 23 of 42

7.0 REFERENCES

RMRS, 1995 Quality Assurance Program Plan (QAPP) 95-QAPP-001 Golden, Colorado October 1995

RMRS, 1996 Proposed Action Memorandum for the Source Removal at Trenches T-3 and T-4 (IHSSs 110 and 111.1) Revision 2 March 1996

RMRS, 1996 Field Implementation Plan for Trenches T-3 and T-4 Source Removal Draft April 1996

United States Environmental Protection Agency, 1991 <u>USA EPA-CLP Statement of Work for Organics Analysis, Multi-Media, Multi-Concentration</u> Document number OLM 01 1, Rev OLM 01 8 August 1991

Field Sampling Plan	Document Number	RF/ER-96-0020			
for the Source Removal at Trenches T-3 and T-4	Revision	3			
IHSS 110, 111 1	Page	24 of 42			

Appendix 1

Summary of Existing Analytical Data for T-3 and T-4

TABLE A1-1
ANALYTES DETECTED IN SUBSURFACE SOILS AT TRENCH T-3

Analyte	Background Mean plus 2 Standard Deviations ⁽⁵⁾	Number of Samples	Number of Detections ⁽⁴⁾	Percent Detections	Concentration or Activity Range ⁽¹⁾
Volatile Organic Compounds (mg/kg) ⁽⁵⁾					
1,1,1-Trichloroethane	NA	36 4	8	36 4	0 006-27 ^(J)
Acetone	NA	21	8	38 1	0 036-5100 ^(B)
Carbon tetrachloride	NA	22	10	45 5	0 004 ^(J) -700
Chloroform	NA	22	6	27 3	0 001 ⁽¹⁾ -8 8
Ethylbenzene	NA	22	1 00	4 5	0 009
Methylene chloride	NA	22	16	72 7	0 003 ^(J) -2400 ^(B)
Tetrachloroethene	NA	22	20	90 9	0 002 ^(J) -13,000 ^(D)
Toluene	NA	22	13	59 1	0 022-7 6 ^(J)
Trichloroethene	NA	22	5	22.7	0 002 ^(J) -120

- (1) In this column, the J qualifier represents estimated results, the D qualifier represents dilution results, the B qualifier for organics indicates analyte was detected in blank sample, and the B qualifier for metals represents estimated result
 - (2) For metals and radionuclides, only potential chemicals of concern (PCOCs) were reviewed and presented in this table
 - (3) Radionuclide activities less than or equal to zero are considered to be non-detections
 - (4) Radionuclide and metal results less than the background mean plus two standard deviations are considered to be non-detections
 - (5) Background concentrations do not exist and are not applicable for organic compounds

Field Sampling Plan	Document Number	RF/ER-96-0020			
for the Source Removal at Trenches T-3 and T-4	Revision	3			
IHSS 110, 111 1	Page	25 of 42			

TABLE A1-1 (continued) ANALYTES DETECTED IN SUBSURFACE SOILS AT TRENCH T-3

Analyte	Background Mean plus 2 Standard Deviations ⁽⁵⁾	Number of Samples	Number of Detections ⁽⁴⁾	Percent Detections	Concentration or Activity Range(1)
Semivolatile Organic Compounds (mg/kg) ⁽⁵⁾					
2-Methylnaphthalene	NA	12	2	16 7	8 0 ^(E) -9 3 ^(E)
2-Methylphenol	NA	12	2	16 7	0 45-0 5 ^(DJ)
4-Methylphenol	NA	12	2	16 7	2 9-3 6 ^(D)
Bis(2-ethylhexyl)phthalate	NA	11	9	818	0 051 ^(J) -6 3 ^(D)
Dı-n-butyl phthalate	NA_	12	2	16 7	1 3-1 7 ^(D)
Hexachlorobutadiene	NA	12	1	8 3	0 17 ^(f)
Hexachloroethane	NA	12	2	16 7	0 37-1 1
Naphthalene	NA	12	2	16 7	0 96-2
Phenanthrene	NA	12	2	16 7	2 5-2 7

- (1) In this column, the J qualifier represents estimated results, the D qualifier represents dilution results, the B qualifier for organics indicates analyte was detected in blank sample, and the B qualifier for metals represents estimated result
- (2) For metals and radionuclides, only potential chemicals of concern (PCOCs) were reviewed and presented in this table
- (3) Radionuclide activities less than or equal to zero are considered to be non-detections
- (4) Radionuclide and metal results less than the background mean plus two standard deviations are considered to be nondetections
- (5) Background concentrations do not exist and are not applicable for organic compounds

Document Number	RF/ER-96-0020
Revision	3
Page	26 of 42
	Document Number Revision

TABLE A1-1 (continued) ANALYTES DETECTED IN SUBSURFACE SOILS AT TRENCH T-3

Analyte	Background Mean plus 2 Standard Deviations	Number of Samples	Number of Detections ⁽⁴⁾	Percent Detections	Concentration or Activity Range ⁽¹⁾
PCOC Metals above background (mg/kg) ⁽²⁾					
Arsenic	13 2	11	11	100	1 4 ^(B) -9 2 ^(B)
Barium	289	11	11	100	21 9 ^(B) -251
Cadmium	1 7	11	4	36 4	0 74-0 88
Lead	24 9	11	11	100	3 1-86 4
Manganese	901 6	11	11	100	1 3 ^(B) -1440 ^(B)
Silver	24 6	11	7	63 6	96 50

- (1) In this column, the J qualifier represents estimated results, the D qualifier represents dilution results, the B qualifier for organics indicates analyte was detected in blank sample, and the B qualifier for metals represents estimated result
- (2) For metals and radionuclides, only potential chemicals of concern (PCOCs) were reviewed and presented in this table
- (3) Radionuclide activities less than or equal to zero are considered to be non-detections
- (4) Radionuclide and metal results less than the background mean plus two standard deviations are considered to be nondetections
- (5) Background concentrations do not exist and are not applicable for organic compounds

Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	27 of 42

TABLE A1-1 (continued) ANALYTES DETECTED IN SUBSURFACE SOILS AT TRENCH T-3

Analyte	Background Mean plus 2 Standard Deviations	Number of Samples	Number of Detections ⁽⁴⁾	Percent Detections	Concentration or Activity Range(1)
PCOC Radionuclides above background (pCi/g) ⁽²⁾⁽³⁾					
Americium-241	0 012	12	12	100	0 0007-0 598
Plutonium-239/240	0 018	12	12	100	0 009-3 12
Strontium-89/90	0 747	12	9	75	0 008 ^(J) -0 748 ^(J)
Tritium (pCi/l)	395 211	12	12	100	0 536-333 ^(I)
Uranıum-233/234	2 643	12	12	100	0 551-14 4
Uranium-235	0 114	12	12	100	0 0097 ^(J) -0 751
Uranium-238	1 485	12	12	100	0 628-26 4

- (1) In this column, the J qualifier represents estimated results, the D qualifier represents dilution results, the B qualifier for organics indicates
 - analyte was detected in blank sample, and the B qualifier for metals represents estimated result
- (2) For metals and radionuclides, only potential chemicals of concern (PCOCs) were reviewed and presented in this table
- (3) Radionuclide activities less than or equal to zero are considered to be non-detections
- (4) Radionuclide and metal results less than the background mean plus two standard deviations are considered to be non-detections
- (5) Background concentrations do not exist and are not applicable for organic compounds

Field Sampling Plan
for the Source Removal at Trenches T-3 and T-4
IHSS 110, 111 1
Document Number
RF/ER-96-0020
Revision
3
Page
28 of 42

TABLE A1-2
ANALYTES DETECTED IN SUBSURFACE SOILS AT TRENCH T-4

Analyte	Background Mean plus 2 Standard Deviations	Number of Samples	Number of Detections ⁽⁴⁾	Percent Detections	Concentration or Activity Range ⁽¹⁾
Volatile Organic Compounds (mg/kg) ⁽⁵⁾					
1,1,1-Trichloroethane	NA	18	4	22 2	0 002 ^(J) -2 3 ^(E)
1,1-Dichloroethene	NA	18	1	5 6	0 009
Acetone	NA	18	3	16 7	0 026 ^(J) -120
Carbon tetrachloride	NA	18	1	5 6	0 35 ^(E)
Chloroform	NA	18	2	11 1	0 004 ^(J) -0 77 ^(E)
Ethylbenzene	NA	18	3	16 7	0 012-0 87 ^(D J)
Methylene chloride	NA	18	3	16 7	0 19 ^(BJ) -8 2 ^(B J)
Tetrachloroethene	NA	18	11	61 1	0 001 ^(J) -37
Toluene	NA	18	10	55 6	0 003 ^(J) -0 67 ^(J)
Trichloroethene	NA	18	8	44 4	0 02-680

- (1) In this column, the J qualifier represents estimated results, the D qualifier represents dilution results, the B qualifier for organics indicates analyte was detected in blank sample, and the B qualifier for metals represents estimated result
- (2) For metals and radionuclides, only potential chemicals of concern (PCOCs) were reviewed and presented in this table
- (3) Radionuclide activities less than or equal to zero are considered to be non-detections
- (4) Radionuclide and metal results less than the background mean plus two standard deviations are considered to be non-detections
- (5) Background concentrations do not exist and are not applicable for organic compounds

Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	29 of 42

TABLE A1-2 (continued) ANALYTES DETECTED IN SUBSURFACE SOILS AT TRENCH T-4

Analyte	Background Mean plus 2 Standard Deviations ⁽⁵⁾	Number of Samples	Number of Detections ⁽⁴⁾	Percent Detections	Concentration or Activity Range ⁽¹⁾
Semivolatile Organic Compounds (mg/kg) ⁽⁵⁾					
2-Methylnaphthalene	NA	16	3	18 8	0 051 ^(J) -0 29 ^(J)
Bis(2-ethylhexyl)phthalate	NA	16	8	50 0	0 038 ^(J) -0 76 ^(B)
Naphthalene	NA	16	2	12 5	0 052 ^(J) -0 15 ^(J)
Phenanthrene	NA	16	4	25 0	0 13 ⁽ⁿ⁾ - 57

- (1) In this column, the J qualifier represents estimated results, the D qualifier represents dilution results, the B qualifier for organics
- indicates analyte was detected in blank sample, and the B qualifier for metals represents estimated result

 (2) For metals and radionuclides, only potential chemicals of concern (PCOCs) were reviewed and presented in this table
- (3) Radionuclide activities less than or equal to zero are considered to be non-detections
- (4) Radionuclide and metal results less than the background mean plus two standard deviations are considered to be nondetections
- (5) Background concentrations do not exist and are not applicable for organic compounds

Field Sampling Plan
for the Source Removal at Trenches T-3 and T-4
IHSS 110, 111 1
Document Number
RF/ER-96-0020
Revision
3
Page
30 of 42

TABLE A1-2 (continued) ANALYTES DETECTED IN SUBSURFACE SOILS AT TRENCH T-4

Analyte	Background Mean plus 2 Standard Deviations	Number of Samples	Number of Detections ⁽⁴⁾	Percent Detections	Concentration or Activity Range ⁽¹⁾
PCOC Metals above background (mg/kg) ⁽³⁾					
Arsenic	13 2	16	15	93 8	3 6-11 5
Barıum	289	16	16	100	34 4-153
Cadmium	1 7	12	6	50 0	0 35 ^(B) -10 5
Lead	24 9	16	16	100	3 6-59 5
Manganese	901 6	16	16	100	66 5-944
Silver	24 6	14	10	71 4	0 91 ^(B) -68 5

- (1) In this column, the J qualifier represents estimated results, the D qualifier represents dilution results, the B qualifier for organics
 - indicates analyte was detected in blank sample, and the B qualifier for metals represents estimated result
- (2) For metals and radionuclides, only potential chemicals of concern (PCOCs) were reviewed and presented in this table
- (3) Radionuclide activities less than or equal to zero are considered to be non-detections
- (4) Radionuclide and metal results less than the background mean plus two standard deviations are considered to be nondetections
- (5) Background concentrations do not exist and are not applicable for organic compounds

Field Sampling Plan
for the Source Removal at Trenches T-3 and T-4
IHSS 110, 111 1

Document Number
RF/ER-96-0020
Revision
3
H2
31 of 42

TABLE A1-2 (continued) ANALYTES DETECTED IN SUBSURFACE SOILS AT TRENCH T-4

Analyte	Background Mean plus 2 Standard Deviations	Number of Samples	Number of Detections ⁽⁴⁾	Percent Detections	Concentration or Activity Range ⁽¹⁾
PCOC Radionuclides above background (pCi/g) ⁽²⁾⁽³⁾					
Americium-241	0 012	16	16	100	0 002 ^(J) -5 91
Plutonium-239/240	0 018	16	16	100	0 003 ^(J) -16 6
Strontium-89/90	0 747	10	10	100	0 002 ^(J) -0 586 ^(J)
Tritium (pCi/l)	395 211	10	10	100	57 8 ⁽ⁿ -211 ⁽ⁿ⁾
Uranium-233/234	2 643	16	16	100 00	0 449-191 7
Uranium-235	0 114	16	16	100	0 008 ^(J) -11 5
Uranium-238	1 485	16	16	100 00	0 543-113 1

- (1) In this column, the J qualifier represents estimated results, the D qualifier represents dilution results, the B qualifier for organics indicates analyte
 - was detected in blank sample, and the B qualifier for metals represents estimated result
- (2) For metals and radionuclides, only potential chemicals of concern (PCOCs) were reviewed and presented in this table
- (3) Radionuclide activities less than or equal to zero are considered to be non-detections
- (4) Radionuclide and metal results less than the background mean plus two standard deviations are considered to be non-detections
- (5) Background concentrations do not exist and are not applicable for organic compounds

Field Sampling Plan for the Source Removal at Trenches T-3 and T-4 IHSS 110, 111 1 Document Number Revision RF/ER-96-0020

Page

32 of 42

Appendix 2

T-3 & T-4 Volatile Screen QA/QC Requirements

The scope of this method is to outline the QA/QC requirements for VOC screening of soil and water samples obtained in support of the T-3/T-4 excavation and soil treatment. The procedures from which this method was derived are described in detail in SW-846 Methods 8240 and 8260, and the CLP SOW. Due to the rapid time constraints for screening samples, laboratory control samples and full CLP data packages are not required for this project. Data Quality Objectives allow samples to be analyzed at levels comparable to the action levels required for the project. Low detection limits are not required for this project, and would prohibit the rapid analysis required to evaluate soil treatment. Split samples are expected to be sent to an independent laboratory for verification of the analytical results. The split samples will be analyzed under methods capable of being fully validated.

Screening Method

Holding Times:

Samples shall be analyzed within 14 days of sampling The soil samples will be analyzed on the same day they are extracted with Purge and Trap grade Methanol The nature of this project requires next-day/same-day reporting, and holding times should not be exceeded

Preparation:

The soil samples will be analyzed as Medium Level Soils. This procedure includes extraction of 4 grams of the soil into 10 mL methanol, and purging up to 100 uL of this extract in a 5 mL sparge volume. The samples will not require percent moisture determinations, and will be reported on an "as received" basis. The field/equipment rinsate samples will not be prepared, and will be analyzed at 5 mL.

Initial and Daily Calibrations:

A bromofluorobenzene (BFB) tune will be performed prior to the initial calibration. A three or five point initial calibration to determine linear range will be performed prior to analysis of samples. Practical Quantitation Limits (PQLs) provided in SW-846 and the CLP SOW are referenced and required to meet the action levels for this project. The requested linear range is approximately 0.6 mg/Kg to 25 mg/Kg. This initial calibration will also be used for the rinsate sample with the requested linear range of 5 ug/L to 200 ug/L. This initial calibration will be used to compare daily calibrations, and will be of methanol extract matrix (100 uL equivalent of methanol in each standard)

A BFB tune followed by the daily calibration standard will be evaluated each day or 12 hours, which ever is more frequent during sample analysis. A mid-level methanol matrix standard will be used for quantitation purposes, and daily calibrations. All calibrations will be compared to CLP or SW-846 calibration requirements for acceptability. Calibrations shall include, at a minimum, all target analytes required for quantitation. Surrogates and internal standards shall be used in all analyses.

Field Sampling Plan
for the Source Removal at Trenches T-3 and T-4
IHSS 110, 111 1
Document Number
RF/ER-96-0020
Revision
3
Page
33 of 42

Blanks:

A method blank of methanol matrix (100 uL methanol) shall be analyzed daily, or every 20 samples, which ever is more frequent, during sample analysis. The blank shall be analyzed after the initial or daily calibration, and prior to sample analysis. Blank subtraction is not permissible. All analytes present in the blank will be reported. A water matrix blank will be analyzed for the rinsate sample.

Surrogates and Internal Standards:

Surrogates and internal standards shall be used in all analyses. Surrogate recoveries will be compared to CLP or SW-846 requirements. Internal standard areas shall be within -50% to +100% of the mid level standard of the day.

Matrix Spikes/Laboratory Control Samples:

Matrix spikes/laboratory control samples are not required for screen samples

Tentatively Identified Compounds (TICs):

TICs are not required for screen samples Electronic data shall be maintained so that TICs may be retrieved at a later date

Retention Times:

Retention times shall be monitored for shifts Corrective action is required for shifts greater than 30 seconds from the daily calibration or mid-level initial calibration performed the day of sample analysis

Dilutions:

Dilutions should not be required for screen samples If the sample exceeds the linear range, the Project Manager will be notified immediately, and a result of greater than the upper linear range will be reported for the sample If dilutions are requested by the Project Manager, serial dilutions shall be performed

Forms:

CLP or equivalent forms are requested Faxed Form I of the blank and samples are required Full CLP data packages are not required

Target Compounds for T-3/T-4 Remediation Project:

The following list of VOCs, are the essential target compounds used to evaluate the attainment of both excavation performance and processing performance

Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	34 of 42

Contaminant	Excavation Cleanup Standard (ppm)	PAM Required TDU Performance Standards (ppm)	Subcontractor Required TDU Performance Standard (ppm)
1,1,1-TCA	378	60	2
1,1-DCE	11 9	60	2
1,2-DCA	6 33	60	-
1,2-DCE	9 51	-	-
Benzene	-	10	-
Acetone	-	160	80
Carbon tetrachloride	11	60	2
Chloroform	152	60	2
Ethylbenzene	1760	10	2
Methylene chloride	-	30	15
PCE	11 5	60	2
Toluene	2040	10	2
TCE	9 27	60	2

Sequence of Analyses:

- A Analyzing Initial Calibration
 - 1 BFB
- 2 Initial Calibration--analyzed at start of project and repeated only as necessary
- B Analyzing samples immediately after initial calibration
- 1 BFB
- 2 Initial Calibration--analyzed at start of project and repeated only as necessary
- 3 Blank
- 4 Samples
- C Daily Analysis
 - 1 BFB
- 2 Daily Calibration--comparison to initial calibration performed previously
- 3 Blank
- 4 Samples

Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	35 of 42

Appendix 3

Optimizing the Number of VOC Samples Collected from Baseline Processing

Given adequate process control, the number of samples required to be collected through the thermal desorption remediation process is a function of the performance of the TDU. The lower the mean value of remaining VOC concentrations within the soils (as established by the initial baselining processing runs), the fewer samples required after the baseline has been established. Conversely, the higher the mean value of remaining VOC concentrations during baselining, the more samples required after baselining. An example of the type curve used for establishing the number of samples is given in Figure A3-1. As the figure indicates, if the mean VOC concentration of concern (e.g., PCE) is 3 mg/kg, than 3 samples will be required per batch for a 95% confidence. If the mean concentration is 2 mg/kg, then one sample will be required per batch. Assuming, that baseline sampling will establish a mean concentration of 2 mg/kg or less, one sample would be collected per batch after baseline conditions have been established.

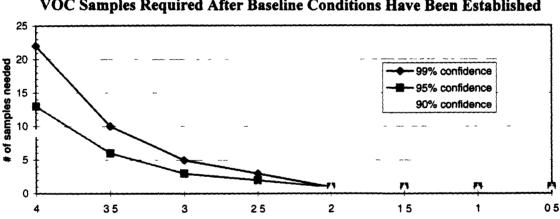


Figure A3-1 Type Curve for the Number of After-Process Verification VOC Samples Required After Baseline Conditions Have Been Established

Figure A3-1 was derived by using equations from ASTM (1979¹) A standard deviation of 67% of the mean VOC concentration was assumed (consistent with a normal distribution of data), while the maximum error allowable was set to insure that the average concentrations of limiting VOCs would not exceed regulatory thresholds (in the T-3/T-4 case, 6 mg/kg for limiting VOCs) Calculations were performed at several potential concentrations, and at several confidence levels, as seen by the data points on the type-curves A confidence of 95% or better will be achieved by using these curves to select the number of samples from a "batch" of soil

concentration of VOCs (ppm)

ASTME122 XLS

References for statistical analysis

¹ASTM E 122 - 72, 1979 "Standard Recommended Practice for Choice of Sample Size to Estimate the Average Quality of a Lot or Process"

Document Number Revision

Page

RF/ER-96-0020

36 of 42

Appendix 4 Radiological Evaluation of T-3 and T-4 Soils

Several different methods were used to determine the optimum number of samples needed to adequately estimate an average value for radioisotopes of concern within the T-3/T-4 soils The radioisotopes are ^{239/240}Pu, ²⁴¹Am, ^{233/234}U, ²³⁵U, and ²³⁸U Based on the radionuclide concentrations in soil and liquid samples already taken from the trenches, the number of samples needed to estimate an average value is well below the number of samples that have already been collected Estimates as presented in this appendix were calculated with a 95 percent confidence or better that the true mean value of radionuclides is less than the proposed preliminary remediation goal [PPRG] Typically, a confidence of 95% or greater is adequate for decisionmaking with respect to environmental and risk assessment scenarios² Table A4-1 provides the results of the statistical analyses of radionuclide concentrations in the T-3/T-4 soils The second column of the table presents the number of samples already taken (the number of T-3 samples is conservative, as investigation derived materials within drums are not included) Based on statistical analysis of the data represented by the samples already collected, the fourth through seventh columns indicate the number of samples needed (calculated) based on the types of methods noted in the column header, and as further defined in the reference section at the end of this Appendix The number of samples needed are rounded up to the nearest whole number The tenth and eleventh columns indicate the upper confidence limits (UCLs) for average radionuclide concentrations, and the last column contains the PPRGs for a construction worker in subsurface soils

Given the number of samples already collected, which is greater than the number needed (calculated) for acceptable confidence in the decision, the UCL, at the 95% level for all radionuclides also indicates concentrations well below the PPRGs and the action levels currently being developed by the RFCA Working Group The only exception is ²³⁸U, which exceeds the PPRG value of 60 pCi/g by 3 pCi/g. It should be noted that this ²³⁸U activity is still far below the present Rocky Flats Cleanup Agreement (RFCA) draft Soil Action Levels for ²³⁸U of 543 9 pCi/g using a direct exposure to surficial soils in a residential scenario

Table A4-1 Statistical Analysis of Radionuclide Concentrations in T-3/T-4 Soils

samples CTUAL 10		ASTM samples	t-statistic (Gilbert) samples		column 7 EPA DEFT samples				lognormal UCL 95%		PPRGs
10 10		ASTM samples	t-statistic (Gilbert) samples	t statistic (Gilbert) samples	DEFT samples						PPRGs
10 10		ASTM samples	(Gilbert) samples	(Gilbert) samples	DEFT samples						PPRGs
10 10		samples	samples	samples	samples			IICI 95%	UCL 95%		PPRGs
10 10											
10 10		NEEDED 1	MEEDED	NEEDED	NEEDED				(pCVg)		(pCi/g)
10		1			3			070			219
				2				0 15	0.50		164
10		1	1		3 (est)	 					1546
10		1	1								12 5
10		1	1	1	3 (est)	L					60 1
10		1	1	2	4		ļ	0.04	10 00		
				L							
					L			+			
					<u> </u>		L	I			
				log-trans							
		1	t-statistic	t-statistic	EPA			1	ļ	1	
		ASTM	(Gilbert)	(Gilbert)	DEFT		I				
malae					samples	1		UCL 95%			PPRGs
					NEEDED			(pCVg)			(pCVg)
		1	INELULU			 		0 83	56 24	L	219
		 				1	 	-0 38	5 96	il	16
		+ ;			<u> </u>	1		2 42	38 97	1	154
				+		1	+	0 25	1 61		12.
8		1					 	3 04	63.31	1	60
	10 10	10 10 10 10 10 10 10 10 10 10 10 10 10 1	10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	10	10	10	10	10	10	10

T3RADSL5.XLS

	,	
Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	37 of 42
	*********	3 37 of 42

Notwithstanding the statistical confidences derived above, the subjective uncertainty associated with potential "hotspots" in the trench (missed in prior sampling) are compelling enough to warrant limited sampling of soils AFTER excavation and BEFORE returning the treated soils to their respective trenches

Soils will be monitored for radionuclides with a FIDLER during the excavation and periodically during the treatment per Radiological Operating Instruction (ROI) - 6 6, Operation of the Bicron FIDLER The volumes of material so screened will be based on a graded approach Material with the greatest chance of being radiologically contaminated (e.g., soil commingled with debris, or having visual characteristics such as staining) will be screened more rigorously than soils that do not appear to be contaminated

So that additional radiological controls can be evaluated and put in place, soil that exhibits readings greater than three times ambient background will be segregated from the other material. Three times ambient background correlates to approximately 6600 counts on the FIDLER detector. This FIDLER screening value was obtained by making very conservative assumptions regarding the isotopes present in the soil and their associated ratios. The assumptions are given below

- 235U is 0.7% of the total uranium isotope present
- 241Am ingrowth is 18% of the total value of 239Pu This is based on a thirty year age of plutonium
- FIDLER correction factor is 12 pC1/g, per 100 corrected counts. The three times background would then convert to approximately 800 pC1/g total activity
- Since the most limiting put-back values are for ²³⁵U and ²⁴¹Am, all indicated activity on the FIDLER is assigned to plutonium and then to uranium and the values for ²⁴¹Am are calculated. This process assumes the worst case scenario and calculates the highest possible values for these two limiting isotopes.

Soils having FIDLER readings less than three times background will be sampled for isotopic characterization at the rate of approximately 1 composite sample per 100 yd³, after the soils are treated. Any segregated material (soils having radionuclide content greater than three time background) may require additional, more detailed (on a volume basis), isotopic characterization, than soils having screening values < 3 time background. This determination will be made by Radiological Engineering, and will be documented in the field logbook.

The isotopic characterization will be performed using a high purity germanium gamma spectroscopy system per Radiological Engineering Procedure 14 01, Operation of the Nomad Portable Gamma Spectroscopy System This system will provide quantitative analysis of the radioisotopes, and will provide confirmation that Soil Action Levels being developed by the RFCA Working Group have not been exceeded

References for statistical analysis

¹ASTM E 122 - 72, 1979 "Standard Recommended Practice for Choice of Sample Size to Estimate the Average Quality of a Lot or Process"

Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	38 of 42

²DOE, 5/95 "Phase II RFI/RI Report 903 Pad, Mound, and East Trenches Area, Operable Unit 2", Vol 15, Appdx H, Baseline Health Risk Assessment, Rocky Flats Environmental Technology Site, Golden, CO

³EPA QA/G-4, 1994 "Guidance for Planning for Data Collection in Support of Environmental Decision Making Using the Data Quality Objective Process", Interim Final

⁴Gilbert, R.O., 1978 Statistical Methods for Environmental Pollution Monitoring", Van Nostrand Reinhold, New York

Document Number Revision

RF/ER-96-0020

39 of 42

Appendix 5 FIELD SAMPLING PLAN ADDENDUM TO SUPPORT THE FINAL DISPOSITION OF DEBRIS FROM THE T-3/T-4 SOURCE REMOVAL PROJECT

1.0 INTRODUCTION

This Appendix of the FSP was developed to support the proper characterization and disposition of debris excavated from trenches T-3 and T-4, also known as IHSS's 110, and 1111, at RFETS The debris from T-3 and T-4 is expected to contain low levels of radionuclide contamination, and is not expected to be allowed to be disposed at RFETS. It is expected that this debris will be disposed as low level waste at a facility operated by Envirocare of Utah, Inc. A detailed description of the site background is given in Section 1.0 of the main body of this FSP.

2.0 SAMPLING OBJECTIVES

The purpose of this sampling effort is to collect data to verify attainment of off-site facility Waste Acceptance Criteria (WAC) for the expected disposal facility (Envirocare of Utah, Inc.)

The debris being characterized by this plan is expected to be classified as low-level radioactive waste. Data collected to support off-site radiological shipments to Envirocare of Utah, Inc., must meet three main requirements

- Representative sample results must be below Envirocare of Utah, Inc , WAC levels, specified by their facility license
- Representative samples must cover the full suite of analyses required by the Envirocare of Utah, Inc., Qualification Process for Radioactive Material
- Representative samples must be analyzed by a Utah Department of Health, Division of Laboratory Services, certified Laboratory (Note this is not required for geotechnical or all radioisotopic analyses)

Analyses required for low level waste (LLW) disposal by Envirocare of Utah, Inc , are

- Gamma Spectrometry (Natural & Man-made isotopes)
- Uranium & Thorium isotopic analyses, if present
- TCLP (8 metals/32 organics) plus Copper & Zinc

- Hydrogen Sulfide (Reactive Sulfide)
- Hydrogen Cyanide (Reactive Cyanide)
- Soil pH (if any)
- Standard Proctor Test if soils are present (ASTM D-698)
- Gradation of Material if soils are present (Sieve analysis ASTM C-136 and C-117) If just debris is present, a visual approximation of the gradation of the debris is appropriate This should be documented in the sample logbook
- Moisture Content if soils are present (average and range, ASTM-D2216)

In addition, Envirocare of Utah, Inc, requires that at least 5, 2-pound diverse, representative samples be collected per wastestream (all the debris is expected to be considered one wastestream) for internal verification purposes

Except for the samples collected for Envirocare internal verification purposes, facility personnel have suggested that it is appropriate to collect one grab sample and analyze it for each suite of analysis, when the wastestream is considered relatively homogeneous. Since the debris wastestream is not expected to be homogeneous, an attempt will be made to segregate debris into relatively homogeneous piles to facilitate the collection of the minimum number of representative samples. Therefore, it is expected that as few as one sample will be collected from each similar type of debris for each of the analyses or analytical suites listed in the previous bullets. However, the field supervisor or project manager may increase this frequency, when uncertainty exists concerning homogeneity of the segregated, "like-debris"

3.0 SAMPLE LOCATION AND FREQUENCY

As stated in Section 2 0, at least one complete set of samples will be collected from each debris wastestream

In addition, as required by the Envirocare WAC, at least 5 diverse, representative samples will be collected from the debris wastestream. One sample will be collected from each type of debris. If less than five types of debris are present, the remaining samples will be collected as a mixture of debris types. These samples will be collected for internal evaluation by Envirocare. To the extent practicable, the sampling coordinator will collect like material, e.g., portions of crushed drums in one sample, portions of asphalt planking, etc., in another sample, as appropriate. There are no holding time constraints with these samples and the samples need not be preserved when collected. These samples will be stored until needed by Envirocare. Full chain of custody must be maintained while these samples are in extended storage.

Field Sampling Plan	Document Number	RF/ER-96-0020
for the Source Removal at Trenches T-3 and T-4	Revision	3
IHSS 110, 111 1	Page	41 of 42

All samples taken to meet Envirocare WAC will be placed in the appropriate containers and analyzed within the specified holding times as shown in Table A5-1

4.0 SAMPLE DESIGNATION

Each sample will be assigned a unique nine digit number as described in Section 4 0 of the main body of the FSP

5.0 SAMPLING EQUIPMENT AND PROCEDURES

Sampling equipment will consist of stainless steel scissors, cutters, scoops and/or spoons All other equipment will include standard items, such as general decontamination equipment, chain of custody seals and forms, logbooks, etc

Pieces of debris (coupons) will be cut from larger pieces of debris and placed in the appropriate sample bottles. Care will be taken to cut or collect pieces small enough to be placed inside sample bottles. The selection of sampling sites from each grouping of "like debris" will be representative and documented in a field logbook.

6 0 SAMPLE HANDLING AND ANALYSIS

Sample collection will follow Environmental Management Department (EMD) Operating Procedures Volume I Field Operations 5-21000-OPS-FO 13, Containerization, Preserving, Handling, and Shipping of Soil and Water Samples, in accordance with the Section 5 1 of the main body of the FSP When metallic, reusable sampling equipment is used, the equipment will be decontaminated in accordance with EMD Operating Procedure 5-21000-OPS-FO 03, General Equipment Decontamination, Section 5 3, Cleaning Procedures for Stainless Steel or Metal Sampling Equipment

Field data will be recorded and operations conducted in accordance with Section 5 2 of the main body of this FSP

Field Sampling Plan for the Source Removal at Trenches T-3 and T-4 IHSS 110, 111 1

Document Number Revision Page

RF/ER-96-0020

42 of 42

50
7
Ž
<u>_</u>
Σ
=
<u>:</u> 2
Ξ
-
Ë
\triangleleft
Ď
ž
2
ŏ
SS
⋖
Ö
=
83
2
,5
T
le Tyl
uple Tyl
ample Tyl
Sample Tyl
il Sample Tyl
Soil Sample Tyl
e Soil Sample Tyl
ate Soil Sample Tyl
mate Soil Sample Tyl
rimate Soil Sample Tyl
oximate Soil Sample Tyl
proximate Soil Sample Tyl
pproximate Soil Sample Tyl
Approximate Soil Sample Tyl
1 Approximate Soil Sample Ty
5-1 Approximate Soil Sample Tyl
A5-1 Approximate Soil Sample Tyl
le A5-1 Approximate Soil Sample Ty
ble A5-1 Approximate Soil Sample Tyl
Table A5-1 Approximate Soil Sample Ty

	Danie A-CA Juni	Almate De	on Samp	rabic 53-1 Approximate boil bampic 1) pes and Associated Analytical Melhous	TICH Allany	
Analytical Method	Analytes	# of Samples	Utak cert required	Container	Preservative	Holding Time
Gamma Spectrometry	gamma emitting radiosaolopes	1.5	Yes	TBD-enough for 1000 g of sample	None	6 months
Isotopic analysis	Uranium thorium, americium and plutonium isotopes	1.5	Yes	250-ml wide mouth glass jar	None	6 months
TCLP SW 846 1311 (extraction)	8 TCLP metals + Cu Zn (Method 6010A except Hg. Method 7470)	S 1	Ya	500-ml wide mouth glass jar as appropriate	Cool 4 C	180 days from extraction 180 days from extraction to analysis, except Hg 28 days to extraction 28 days from extraction to analysis
	TCLP Semivolatiles (Method 8270/8270A)					14 days to TCLP extraction 7 days to preparative extraction 40 days from preparative extraction to analysis
	TCLP Chlonnated Herbicides (Method 8150)					14 days to TCLP extraction 7 days to preparative extraction 40 days from preparative extraction to analysis
	TCLP Organochlorine Pesticides (Method 8080)					14 days to TCLP extraction 7 days to preparative extraction 40 days from preparative extraction to analysis
	TCLP Volatiles (Method 8240A/8260)					14 days to extraction 14 days from extraction to analysis
SW846 Method 8240A/8260	Volatiles	1 trıp blank	yes	2 x 40 ml VOA vials Teflon lined septa lids	Cool 4 C HCl to pH<2	14 days
SW846 Chapter 7	Reactive Sulfide	1.5	Yes	combine with TCLP jar above	Cool 4 C	7 days
	Reactive Cyanide					14 days
Determined by Envirocare	Envirocare evaluation samples	Ş₹	٧×	2 pound as required	None	None